

CYCLO DRIVE WARRANTY 2 YEARS

Sumitomo Drive Technologies
Building Tomorrow Together

CYCLO DRIVE GEAR MOTOR

CNHM CHHM CNVM CVVM

Sumitomo Drive Technologies
CYCLO 6000

Sumitomo Drive Technologies
100 years of the Cyclo® gear

victorysystem@gmail.com
LINE OA: @hipower89

www.victorysystem.co.th
LET'S SUMITOMO GEAR MOTOR

Sumitomo Drive Technologies
Building Tomorrow Together

CYCLO DRIVE GEAR MOTOR

CNHM CHHM

Sumitomo Drive Technologies
CYCLO 6000

Sumitomo Drive Technologies
100 years of the Cyclo® gear

victorysystem@gmail.com
LINE OA: @hipower89

www.victorysystem.co.th
LET'S SUMITOMO GEAR MOTOR

Sumitomo Drive Technologies
Building Tomorrow Together

CYCLO DRIVE GEAR MOTOR

CNVM CVVM

Sumitomo Drive Technologies
CYCLO 6000

Sumitomo Drive Technologies
100 years of the Cyclo® gear

victorysystem@gmail.com
LINE OA: @hipower89

www.victorysystem.co.th
LET'S SUMITOMO GEAR MOTOR

Table of Contents

A. Common

- Features & Benefits
- Product Line-up
- Product Range of CYCLOR DRIVE
- Product Range of Motor

Page

B. Gearmotors

1. How to Select
2. Selection Tables
3. Dimension Tables

B-1~154

B-2

B-13

B-97

C. Speed Reducers

1. How to Select
2. Selection Tables
3. Dimension Tables

C-1~88

C-2

C-11

C-69

D. Gearmotor for Inverters with AF Motor for Inverters

1. How to Select
2. Selection Tables
3. Dimension Tables

D-1~40

D-2

D-11

D-27

E. Gearmotors

with High Efficiency Motor

E-1~6

F. Technical Data

1. Reducer
2. Motor
3. Common

F-1~68

F-2

F-31

F-63

Warranty Standard

G-1

Warning

G-2



Product Range of CYCLO® DRIVE

CYCLO® Frame Size

Table A-1 CYCLO Frame Size

6000SK Series Frame Size	6000 Series							
	Single Reduction				Double Reduction			
	Frame Size	Frame Size	(Output side + Input side)	Frame Size	(Output side + Input side)	Frame Size	(Output side + Input side)	
6070SK	6060	6140	6060DA (6060+6060)	6140DC (6140+6105)	6190DA (6190+6125)			
6075SK	6065	6145	6065DA (6065+6060)	6145DA (6145+6075)	6190DB (6190+6135)			
6080SK	6070	614H	6070DA (6070+6065)	6145DB (6145+6095)	6195DA (6195+6125)			
6085SK	6075	6160	6075DA (6075+6065)	6145DC (6145+6105)	6195DB (6195+6135)			
6090SK	6080	6165	6090DA (6090+6075)	6160DA (6160+6095)	6205DA (6205+6125)			
6095SK	6085	616H	6095DA (6095+6075)	6160DB (6160+6105)	6205DB (6205+6135)			
6100SK	6090	6170	6100DA (6100+6075)	6160DC (6160+6125)	6215DA (6215+6135)			
6105SK	6095	6175	6105DA (6105+6075)	6165DA (6165+6095)	6215DB (6215+6165)			
6110SK	6100	6180	6120DA (6120+6075)	6165DB (6165+6105)	6225DA (6225+6135)			
6115SK	6105	6185	6120DB (6120+6095)	6165DC (6165+6125)	6225DB (6225+6175)			
	610H	6190	6125DA (6125+6075)	6170DA (6170+6095)	6235DA (6235+6165)			
	6110	6195	6125DB (6125+6095)	6170DB (6170+6105)	6235DB (6235+6185)			
	6115	6205	6130DA (6130+6075)	6170DC (6170+6125)	6245DA (6245+6165)			
	6120	6215	6130DB (6130+6095)	6175DA (6175+6095)	6245DB (6245+6185)			
	6125	6225	6130DC (6130+6105)	6175DB (6175+6105)	6255DA (6255+6175)			
	612H	6235	6135DA (6135+6075)	6175DC (6175+6125)	6255DB (6255+6195)			
	6130	6245	6135DB (6135+6095)	6180DA (6180+6105)	6265DA (6265+6195)			
	6135	6255	6135DC (6135+6105)	6180DB (6180+6135)	6275DA (6275+6195)			
		6265	6140DA (6140+6075)	6185DA (6185+6105)				
		6275	6140DB (6140+6095)	6185DB (6185+6135)				

Reduction Ratio

Table A-2 6000 Series

Single Reduction								
6	8	11	13	15	17	21	25	29
35	43	51	59	71	87	119		

Double Reduction indicated in catalog (Upper row: reduction ratio, lower row: output side reduction ratio x input side reduction ratio)										
104 (13 × 8)	121 (11 × 11)	143 (13 × 11)	165 (15 × 11)	195 (15 × 13)	231 (21 × 11)	273 (21 × 13)	319 (29 × 11)	377 (29 × 13)	473 (43 × 11)	559 (43 × 13)
649 (59 × 11)	731 (43 × 17)	841 (29 × 29)	1003 (59 × 17)	1247 (43 × 29)	1479 (87 × 17)	1849 (43 × 43)	2065 (59 × 35)	2537 (59 × 43)	3045 (87 × 35)	3481 (59 × 59)
4437 (87 × 51)	5133 ^{Note 1} (87 × 59)	6177 (87 × 71)	7569 (87 × 87)							

Note 1: Frame size 6205# - 6265# are (59 × 87)

Other Reduction Ratios (Under certain conditions, the following reduction ratios may also be available, please consult us.)

Reduction Ratio	88 (11 × 8)	90 (15 × 6)	102 (17 × 6)	120 (15 × 8)	126 (21 × 6)	136 (17 × 8)	150 (25 × 6)	168 (21 × 8)	169 (13 × 13)	174 (29 × 6)	187 (17 × 11)	200 (25 × 8)	210 (35 × 6)	221 (17 × 13)	225 (15 × 15)	232 (29 × 8)	255 (17 × 15)	258 (43 × 6)	275 (25 × 11)	
Output speed 50Hz r/min 60Hz	16.5 19.9	16.1 19.4	14.2 17.2	12.1 14.6	11.5 13.9	10.7 12.9	9.67 11.7	8.63 10.4	8.58 10.4	8.33 10.1	7.75 9.36	7.25 8.75	6.90 8.33	6.56 7.92	6.44 7.78	6.25 7.54	5.69 6.86	5.62 6.87	5.27 6.36	
Reduction Ratio	280 (35 × 8)	289 (17 × 17)	306 (51 × 6)	315 (21 × 15)	325 (25 × 13)	344 (43 × 8)	354 (59 × 6)	357 (21 × 17)	375 (25 × 15)	385 (35 × 11)	408 (51 × 8)	425 (25 × 17)	426 (71 × 6)	435 (29 × 15)	441 (21 × 21)	455 (35 × 13)	472 (59 × 8)	493 (29 × 17)	522 (87 × 6)	
Output speed 50Hz r/min 60Hz	5.18 6.25	5.02 6.06	4.74 5.72	4.60 5.56	4.46 5.38	4.22 5.09	4.10 4.94	4.06 4.90	3.87 4.67	3.77 4.55	3.55 4.29	3.41 4.12	3.40 4.11	3.33 4.02	3.29 3.97	3.19 3.85	3.07 3.71	2.94 3.55	2.78 3.35	
Reduction Ratio	525 (35 × 15)	561 (51 × 11)	568 (71 × 8)	595 (35 × 17)	609 (29 × 21)	625 (25 × 25)	645 (43 × 15)	663 (51 × 13)	696 (87 × 8)	725 (29 × 25)	735 (35 × 21)	765 (51 × 15)	767 (59 × 13)	781 (71 × 11)	867 (51 × 17)	875 (35 × 25)	885 (59 × 15)	903 (43 × 21)	923 (71 × 13)	
Output speed 50Hz r/min 60Hz	2.76 3.33	2.58 3.12	2.55 3.08	2.44 2.94	2.38 2.87	2.32 2.80	2.25 2.71	2.19 2.64	2.08 2.51	2.00 2.41	1.97 2.38	1.90 2.29	1.89 2.28	1.86 2.24	1.67 2.02	1.66 2.00	1.64 1.98	1.61 1.94	1.57 1.90	
Reduction Ratio	957 (87 × 11)	1015 (35 × 29)	1065 (71 × 15)	1071 (51 × 21)	1075 (43 × 25)	1131 (87 × 13)	1207 (71 × 17)	1225 (35 × 35)	1239 (59 × 21)	1275 (51 × 25)	1305 (87 × 15)	1475 (59 × 25)	1491 (71 × 21)	1505 (43 × 35)	1507 (59 × 29)	1711 (71 × 25)	1775 (51 × 35)	1785 (87 × 21)	1827 (71 × 29)	2059
Output speed 50Hz r/min 60Hz	1.52 1.83	1.43 1.72	1.36 1.64	1.35 1.63	1.35 1.63	1.28 1.55	1.20 1.45	1.18 1.43	1.17 1.41	1.14 1.37	1.11 1.34	0.98 1.19	0.97 1.17	0.96 1.16	0.85 1.02	0.82 0.99	0.81 0.98	0.79 0.96	0.70 0.85	
Reduction Ratio	2175 (87 × 25)	2193 (51 × 43)	2485 (71 × 35)	2523 (87 × 29)	2601 (51 × 51)	3009 (59 × 51)	3053 (71 × 43)	3621 (71 × 51)	3741 (87 × 43)	4189 (71 × 59)	5041 (71 × 71)	Calculation of output speed is based on the following input speed.								
Output speed 50Hz r/min 60Hz	0.67 0.80	0.66 0.80	0.68 0.70	0.57 0.69	0.56 0.67	0.58 0.58	0.48 0.57	0.48 0.48	0.47 0.47	0.40 0.42	0.39 0.42	0.45 0.35	0.29	50Hz: 1450r/min 60Hz: 1750r/min						

Table A-3 6000SK Series (Actual Reduction Ratio)

Frame Size	Nominal Reduction Ratio						
	2.5	3	4	5	6	8	10
6070SK, 6075SK	2.514	2.911	3.985	5.109	5.915	8.097	9.848
6080SK, 6085SK	2.475	2.931	3.878	5.114	6.164	7.660	9.474
6090SK, 6095SK	2.492	2.878	4.100	5.017	5.623	8.169	9.996
6100SK, 6105SK	2.492	2.878	4.100	5.017	5.623	8.169	9.996
6110SK, 6115SK	2.483	3.063	3.859	4.707	5.980	7.738	10.07

*Note that reduction ratio differs for each frame size for 6000SK Series.

Product Range of CYCLO® DRIVE

Table A-6 6000 Series Double Reduction

COMMON

Reduction Ratio	104	121	143	165	195	231	273	319	377	473	559	649	731	841	1003	1247	1479	1849	2065
Output Speed 50Hz	13.9	12.0	10.1	8.79	7.44	6.28	5.31	4.55	3.85	3.07	2.59	2.23	1.98	1.72	1.45	1.16	0.980	0.784	0.702
r/min 60Hz	16.8	14.5	12.2	10.6	8.97	7.58	6.41	5.49	4.64	3.70	3.13	2.70	2.39	2.08	1.74	1.40	1.18	0.946	0.847
0.1 × 4P kW	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
0.2 × 4P kW	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
0.25 × 4P kW	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
0.4 × 4P kW	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
0.55 × 4P kW	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
0.75 × 4P kW	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
1.1 × 4P kW	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
1.5 × 4P kW	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
2.2 × 4P kW	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
3.0 × 4P kW	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
3.7 × 4P kW	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
5.5 × 4P kW	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
7.5 × 4P kW	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
11 × 4P kW	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
15 × 4P kW	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
18.5 × 4P kW	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
22 × 4P kW	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
30 × 4P kW	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
37 × 4P kW	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
45 × 4P kW	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Reduction Ratio	2537	3045	3481	4437	5133	6177	7569
Output Speed 50Hz	0.572	0.476	0.417	0.327	0.282	0.235	0.192
r/min 60Hz	0.690	0.575	0.503	0.394	0.341	0.283	0.231
0.1 × 4P kW	●	●	●	●	●	●	●
0.2 × 4P kW	●	●	●	●	●	●	●
0.25 × 4P kW	●	●	●	●	●	●	●
0.4 × 4P kW	●	●	●	●	●	●	●
0.75 × 4P kW	●	●	●	●	●	●	●
1.5 × 4P kW	●	●	●	●	●	●	●
2.2 × 4P kW	●	●	●	●	●	●	●
3.7 × 4P kW	●	●	●	●	●	●	●
5.5 × 4P kW	●	●	●	●	●	●	●

- Note: 1. Calculation of output speed is based on the following input speed.
- 4P Motor
 - 50Hz: 1450 r/min
 - 60Hz: 1750 r/min
 - 6P Motor
 - 50Hz: 980 r/min
 - 60Hz: 1165 r/min
2. Combination in the table is based on service factor 1.0. Refer to Gearmotor Selection Table for combinations with other service factors.
3. Reduction ratios in 6000SK Series table are nominal ratios. Output speeds are based on these ratios. Refer to "Reduction Ratio" tables in the previous page for actual reduction ratio.
4. The rated current of 6P motor is different from the one of 4P motor even if the power is same.

B

CYCLO® GEARMOTORS

	Page
1. How to Select	
Standard Specifications	B-3
Model Selection	B-4
Selection of Load Factor	B-7
Nomenclature	B-9
2. Selection Tables	B-13
3. Dimension Tables	B-97

Standard Specifications of Gearmotor

Motor

Items	Standard Specification			Standard Specification with Built-in Brake		
Capacity Range	0.1 - 55kW × 4P 15 - 55kW × 6P			0.1 - 11kW × 4P FB Brake (Non-Asbestors) 15kW × 4P CMB Brake 18.5 - 37kW × 4P ESB Brake *For 6P motor with brake, consult us.		
Enclosure	Totally enclosed fan cooled type (0.1kW × 4P totally enclosed non-ventilated)			Totally enclosed fan cooled type (0.1kW × 4P totally enclosed non-ventilated)		
Power Source	0.1 - 3.7kW:	220 - 240V 220V	50Hz 60Hz	0.1 - 3.7kW:	220 - 240V 220V	50Hz 60Hz
	5.5 - 55kW:	380 - 420V 440V	50Hz 60Hz	5.5 - 37kW:	380 - 420V 440V	50Hz 60Hz
Thermal Class	F			F		
Time Rating	Continuous rating			Continuous rating		
Terminal Box Position & Lead Wire Direction	On the left side viewed from the load side. Regarding the draw out hole direction, refer to Table below.			On the left side viewed from the load side. Regarding the draw out hole direction, refer to Table below.		
Lead Wiring	6 Wires	4P	6P	8 Wires	4P	
		0.1~3.7kW (Direct starting) Note: 2 5.5~55kW (λ - Δ starting available)	- Note: 2 15~55kW (λ - Δ starting available)		0.1~3.7kW (Direct starting) Note: 2 5.5~37kW (λ - Δ starting available)	
Standards	According to IEC					

Reducer

Items	Specifications		
Model	CYCLO 6000 Series		CYCLO 6000SK Series
Lubrication Method	Grease lubricated and oil lubricated models available		Grease lubricated models available
Speed Reduction Method	Internal planetary gear mechanism with trochoidal curved tooth profile		Involute gear type
Direction of Output Shaft Rotation	Single reduction	Clockwise rotation	Counter-clockwise rotation *Note that it is different from CYCLO 6000 series single reduction type
	Double reduction	Counter-clockwise rotation	
	As observed from the load side when connected to R-U, S-V, T-W motors.		

Common to Motor and Reducer

Items	Specifications
Installation location	Indoor or outdoor (Minimal dust and humidity)
Ambient Temperature	-10°C ~ 40°C
Ambient Humidity	Under 85%
Elevation	Under 1,000 meters
Atmosphere	Well ventilated location, free of corrosive gases, explosive gases, vapors and dust.
Method of Mounting Note: 3	CHHM Type : slow speed shaft in horizontal direction and with foot CHFM Type : slow speed shaft in horizontal direction and with flange (not for 6000SK Series) CVVM Type : slow speed shaft down in vertical direction and with V-flange *Models with "N" for the second nomenclature symbol (such as CNHM Type) may be mounted in any direction.
Method of Coupling with Driven Machine	Coupling, gears, chain sprocket or belt.
Painting	Type : Acrylic modified phtalic Colour : Equivalent to Munsell 6.5PB 3.6/8.2.

- Note: 1. Refer to the technical section (Page F-31~57) for motor specification other than standard one.
2. Consult us when λ - Δ start is necessary for non-standard voltage.
3. Models for universal mounting (types with N for the second digit of nomenclature) can be manufactured for following frame sizes only. Other frame sizes require indication for mounting direction.

[Frame sizes for universal mounting direction] *□ of the frame size indicates 0, 5, or H.

606□, 607□, 608□, 609□, 610□, 611□, 612□,

606□DA, 607□DA, 608□DA, 609□DA, 610□DA, 612□DA, 612□DB

Direction of Withdrawing Lead Wire

Main frame mounting direction	Standard
Horizontal Type (Slow speed shaft in horizontal direction)	
Vertical Type (Slow speed shaft in vertical direction)	

Note: Whenever not specified, the above direction shall be used. When the direction of withdrawal from the terminal box is other than specified above, refer to Page F-34.

Selection of Load Factor

The Load Factor is rated for the characteristics of the driven machine.

The tabulated ratings are based on a running time of 10 hours per day with uniform load.

For your reference, please see method (1) and (2) shown below.

(1) Recommended Load Factor by the Driven Application.

[Load Factor] U: Uniform load M: Moderate shock H: Heavy shock

Table B-1 Reducer Load Factor

Daily duty	~3 hours/day			~10 hours/day			~24 hours/day		
	U	M	H	U	M	H	U	M	H
Load Factor	0.80	1.00	1.35	1.00	1.20	1.50	1.50	1.35	1.60

Table B-2 Recommended Load Classifications

Type of APPLICATION	Type of LOAD	Type of APPLICATION	Type of LOAD	Type of APPLICATION	Type of LOAD	Type of APPLICATION	Type of LOAD
*Aerator		Elevators		slab conveyor.....	H	suction roll.....	U
Agitators.		bucket - uniform load.....	U	small waste-conveyor-belt.....	U	washers & thickeners.....	M
pure liquids.....	U	bucket - heavy load.....	M	small waste-conveyor-chain.....	M	winders.....	U
liquids & solids.....	M	bucket - cont.....	U	sorting table.....	M	*Printing Presses	
liquids-variable density.....	M	centrifugal discharge.....	U	tipple hoist conveyor.....	M	Pullers	
Blowers		escalators.....	U	tipple hoist drive.....	M	barge haul.....	H
centrifugal.....	U	freight.....	M	transfer conveyors.....	M	Pumps	
lobe.....	M	gravity discharge.....	U	transfer rolls.....	M	centrifugal.....	U
vane.....	U	*man lifts.....	M	tray drive.....	M	proportioning.....	M
Brewing & Distilling		*passenger.....		trimmer feed.....	M	reciprocating single acting, 3 or more cylinders.....	M
bottling machinery.....	U	**Extruders(Plastics)		waste conveyor.....	M	double acting, 2 or more cylinders M	
brew kettles, cont. duty.....	U	blow molders.....	M	Machine Tools		*single acting, 1 or 2 cylinders.....	M
cookers-cont. duty.....	U	coating.....	U	bending roll.....	M	*double acting, single cylinder.....	M
mash tubs-cont. duty.....	U	film.....	U	punch press-gear driven.....	H	rotary-gear type.....	U
scale hopper, frequent starts.....	M	pipe.....	U	*notching press-belt driven.....	M	rotary-lobe, vane.....	U
Can Filling Machines.....	U	pre-plasticizers.....	M	plate planers.....	H	Rubber & Plastics Industries	
*Cane Knives.....	M	rods.....	U	tapping machine.....	H	*crackers.....	H
Car Dumpers.....	H	sheet.....	U	other machine tools		laboratory equipment.....	M
Car Pullers.....	M	tubing.....	U	main drives.....	M	*mixing mills.....	H
Clarifiers.....	U	Fans		auxiliary drives.....	U	*refiners.....	M
Classifiers.....	M	centrifugal.....	U	Metal Mills		*rubber calendars.....	M
Clay Working Machinery		*cooling towers.....	U	draw bench carriage & main drive.....	M	*rubber mill(2 on line).....	M
brick press.....	H	induced draft.....	U	forming machines.....	H	*rubber mill(3 on line).....	U
briquette machine.....	H	*forced draft.....	M	*pinch, dryer & scrubber rolls, reversing.....	M	*sheets.....	M
clay working machinery.....	M	induced draft.....	M	slitters.....	M	*tire building machines.....	M
pug mill.....	M	large(mine, etc.).....	M	table conveyors-non-reversing group drives.....	M	*tire & tube press openers.....	M
Compressors		large(industrial).....	M	individual drives.....	H	*tubers & strainers.....	M
centrifugal.....	U	light(small diameter).....	U	*table conveyors-reversing.....	M	*warming mills.....	M
lobe.....	M	Feeders		wire drawing & flattening machine M		Sand Muller.....	M
reciprocating, multi-cylinder.....	M	apron.....	M	wire winding machine.....	M	Screeners	
reciprocating, single-cylinder.....	H	belt.....	M	Mills, Rotary Type		air washing.....	U
Conveyors-Uniformly Loaded or Fed		disc.....	U	**ball.....	M	rotary-stone or gravel.....	M
apron.....	U	reciprocating.....	H	*cement kilns.....	M	traveling water intake.....	U
assembly.....	U	screw.....	M	**dryers & coolers.....	M	Sewage Disposal Equipment	
belt.....	U	Food industry		kilns.....	M	bar screens.....	U
bucket.....	U	beet slicer.....	M	**pebble.....	M	chemical feeders.....	U
chain.....	U	cereal cooker.....	U	**rod, plain & wedge bar.....	M	collectors, circuline or straightline.....	U
flight.....	U	dough mixer.....	M	tumbling barrels.....	H	dewatering screws.....	M
oven.....	U	meat grinders.....	M	Mixers		grit collectors.....	U
screw.....	U	Generators(not welding).....	U	concrete mixers, cont.....	M	scum breakers.....	M
Conveyors-Heavy Duty Not Uniformly Fed		Hammer mills.....	H	concrete mixers, intermittent.....	M	slow or rapid mixers.....	M
apron.....	M	Hoists		constant density.....	U	sludge collectors.....	U
assembly.....	M	heavy duty.....	H	variable density.....	M	thickeners.....	M
belt.....	M	medium duty.....	M	Oil Industry		vacuum filters.....	M
bucket.....	M	skip hoist.....	M	chillers.....	M	Slab Pushers.....	M
chain.....	M	Laundry Washers		*oil well pumping.....		*Steering Gear	
flight.....	M	reversing.....	M	paraffin filter press.....	M	Stokers.....	U
*live roll.....	U	reversing.....	M	rotary kilns.....	M	Sugar Industry	
oven.....	M	Line Shaft		Paper Mills		*cane knives.....	M
reciprocating.....	H	driving processing equipment.....	M	agitators(mixers).....	M	*crushers.....	M
screw.....	M	light.....	U	barker-auxiliaries-hydraulic.....	M	*mills.....	H
shaker.....	H	other line shafts.....	U	barker-mechanical.....	M	Textile Industry	
Cranes(Except for Dry Dock Cranes)		Lumber Industry		barking drum.....	H	batchers.....	M
main hoists.....		barkers-hydraulic.....	H	beater & pulper.....	M	calendars.....	M
*bridge travel.....		burner conveyor.....	M	bleacher.....	U	cards.....	M
*trolley travel.....		chain saw & drag saw.....	H	calendars.....	M	dry cans.....	M
Crusher		chain transfer.....	H	calendars-super.....	H	dryers.....	M
ore.....	H	craneway transfer.....	H	converting machine, except cutters, platers.....	M	dyeing machinery.....	M
stone.....	H	de-barking drum.....	H	conveyors.....	U	*knitting machines.....	
*sugar.....	M	edger feed.....	M	couch.....	M	looms.....	M
Dredges		gang feed.....	H	cutters-platers.....	H	mangles.....	M
cable reels.....	M	green chain.....	M	cylinders.....	M	nappers.....	M
conveyors.....	M	live rolls.....	H	dryers.....	M	pads.....	M
cutter head drives.....	H	log haul-locline.....	H	Paper Mills		*range drives.....	
jig drives.....	H	log haul-well type.....	H	felt stretcher.....	M	slashers.....	M
maneuvering winches.....	M	log turning device.....	H	felt whipper.....	H	soapers.....	M
pumps.....	M	main log conveyor.....	H	jordans.....	H	spinners.....	M
screen drive.....	H	off bearing rolls.....	M	log haul.....	H	tenter frames.....	M
stackers.....	M	planer feed chains.....	M	presses.....	U	washers.....	M
utility winches.....	M	planer floor chains.....	M	pulp machine reel.....	M	winders.....	M
*Dry Dock Cranes		planer tilting hoist.....	M	stock chests.....	M	*Windlass	
		re-saw merry-go-round conveyor M					
		roll cases.....	H				

Remarks: * Refer to factory. ** To be selected on basis of 24hr. service only.

Note: Table above contains reference value. Names and mechanical characteristics of the actual machine may differ from the table above.

Selection of Load Factor

(2) Recommended Load Factor Modifications for Frequent Start-Stop Operation

Please see table B-3 and B-4.

Table B-3 Number of Starts-Stops and Load Factor

Number of starts-stops (times/hour)	~3 hours/day			~10 hours/day			~24 hours/day		
	I	II	III	I	II	III	I	II	III
~10	0.80	1.00	1.20	1.00	1.10	1.35	1.20	1.25	1.50
~200	0.85	1.10	1.30	1.10	1.30	1.50	1.25	1.50	1.65
~500	0.90	1.20	1.40	1.15	1.45	1.60	1.30	1.60	1.75

The ratio of Moment of Inertia (The ratio of GD^2) = $\frac{\text{Total Moment of Inertia (GD}^2\text{) as seen from the motor shaft}}{\text{Moment of Inertia (GD}^2\text{) of motor}}$

Load Factor

- 1: Allowable ratio of Moment of Inertia (GD^2) ≤ 0.3
- 2: Allowable ratio of Moment of Inertia (GD^2) ≤ 3
- 3: Allowable ratio of Moment of Inertia (GD^2) ≤ 10

Note: 1. The number of starts-stops includes brake or clutch operation times.
 2. Consult us when starting under loaded conditions.
 3. Consult us when start-stop frequency exceeds 500 times/hour. Brake for high frequency use may be necessary.

Table B-4 MOTOR THERMAL RATING (C × Z)

Motor Power kW	Allowable C × Z				Motor moment of inertia kg·m ²		Motor GD ² kgf·m ²	
	(35%ED)	(35%ED-50%ED)	(50%ED-80%ED)	(80%ED-100%ED)	Standard	With brake	Standard	With brake
0.1	3200	3000	2000	1200	0.00033	0.00035	0.0013	0.0014
0.2	2200	2800	2800	2500	0.00050	0.00055	0.002	0.0022
0.25	2200	2800	2800	2500	0.00050	0.00055	0.002	0.0022
0.4	1800	2200	1500	1500	0.00065	0.00068	0.0026	0.0027
0.55	1800	2200	1500	1500	0.00101	0.00111	0.00405	0.00445
0.75	1400	1400	800	500	0.00120	0.00130	0.0048	0.0052
1.1	1400	1400	800	500	0.00185	0.00208	0.0074	0.0083
1.5	1200	1200	500	400	0.00213	0.00235	0.0085	0.0094
2.2	1000	900	400	200	0.00333	0.00373	0.0133	0.0149
3.0	1000	900	400	200	0.00700	0.00810	0.0281	0.0325
3.7	800	800	800	700	0.00848	0.00958	0.0339	0.0383
5.5	300	300	200	150	0.01143	0.01253	0.0457	0.0501
7.5	400	350	300	300	0.02675	0.03025	0.1070	0.121
11	200	200	150	150	0.03750	0.04100	0.1500	0.164

C × Z calculated by below steps (1) ~ (3) must be less than allowable C × Z listed in Table B-4.

(1) Calculate C from formula below.

$$[\text{SI units}] \quad C = \frac{J_M + J_L}{J_M}$$

J_M ; Moment of inertia of motor (kg·m²)
 J_L ; Total moment of inertia (excluding motor) at motor shaft (kg·m²)

$$[\text{Gravitational units}] \quad C = \frac{GD_M^2 + GD_L^2}{GD_M^2}$$

GD_M^2 ; GD^2 of motor (kgf·m²)
 GD_L^2 ; Total GD^2 (excluding motor) at motor shaft (kgf·m²)

Continues to the next page.

Nomenclature

Slow Speed Shaft Direction	
Horizontal, slow speed shaft level	H
Vertical, slow speed shaft down	V
Vertically, slow speed shaft up	W
Universal mounting	N

Mounting style	
Foot	H
V flange	V
Flange	F

Type of Input	
Gearmotor	M
With adaptor	JM

Special Specifications	
Standard specification	blank
Special specification	S

		Motor Capacity Symbol					
4P	Capacity symbol	01	02	03	05	08	1
	kW (HP)	0.1 (1/8)	0.2 (1/4)	0.25 (1/3)	0.4 (1/2)	0.55 (3/4)	0.75 (1)
	Capacity symbol	1H	2	3	4	5	8
	kW (HP)	1.1 (1.5)	1.5 (2)	2.2 (3)	3.0 (4)	3.7 (5)	5.5 (7.5)
	Capacity symbol	10	15	20	25	30	40
	kW (HP)	7.5 (10)	11 (15)	15 (20)	18.5 (25)	22 (30)	30 (40)
6P	Capacity symbol	50	60	75	100		
	kW (HP)	37 (50)	45 (60)	55 (75)	75 (100)		
	Capacity symbol	016	026	036	056	086	16
	kW (HP)	0.1 (1/8)	0.2 (1/4)	0.25 (1/3)	0.4 (1/2)	0.55 (3/4)	0.75 (1)
	Capacity symbol	1H6	26	36	46	56	86
	kW (HP)	1.1 (1.5)	1.5 (2)	2.2 (3)	3.0 (4)	3.7 (5)	5.5 (7.5)
	Capacity symbol	106	156	206	256	306	406
	kW (HP)	7.5 (10)	11 (15)	15 (20)	18.5 (25)	22 (30)	30 (40)
	Capacity symbol	506	606	756	1006	1256	1506
	kW (HP)	37 (50)	45 (60)	55 (75)	75 (100)	90 (125)	110 (150)
Capacity symbol	1756						
kW (HP)	132 (175)						


Shaft specification	
Metric JIS (Standard)	-
Inch size	Y
Metric DIN	G

Suffix		
Standard	-	Low Backlash
Light Heavy Radial	R1	With AF (inverter) motor
High Cap. Brg. Ductile Casing	R2	Servo Motor
Baseplate	BP	DC Motor
HH Type Ceiling	H1	High Efficiency Motor
Modification Left Wall	H2	Torque Limiter
Modification Right Wall	H3	

With or Without Brake	
Without brake	-
With brake	B

Frame size
(Refer to Selection Tables starting from page B-13.)

Nominal ratio

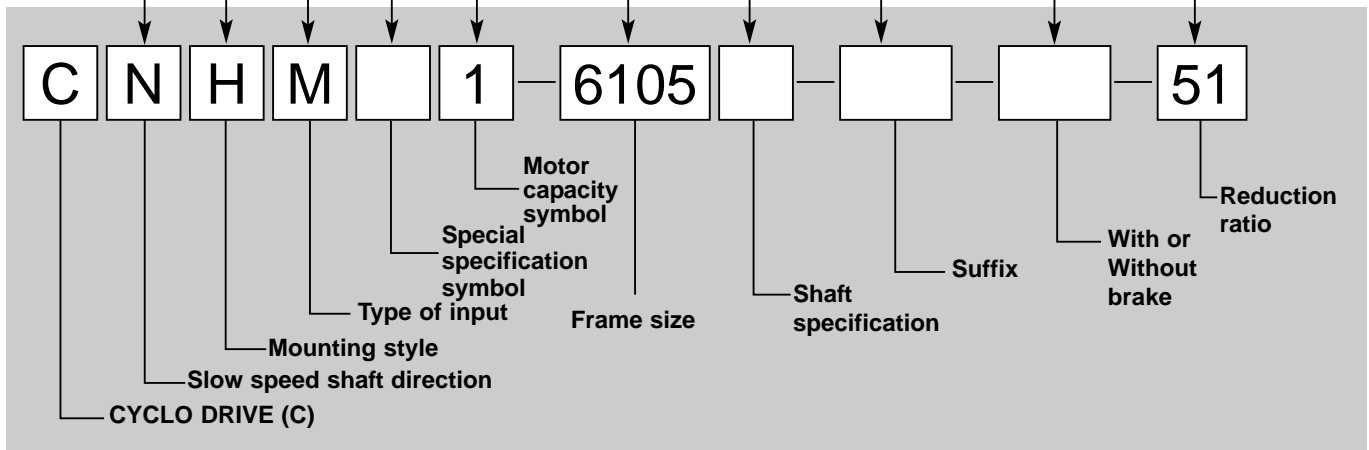

CNHM Foot mount 0.1kW to 3.7 kW
 CHHM Foot mount upper => 3.7 kW

CNVM Flange mount 0.1kW to 3.7 kW
 CVVM Flange mount upper => 3.7 kW

GEARMOTORS
How to Select

Nomenclature and Product Examples

Nomenclature Examples (Gearmotor)

CYCLO DRIVE WARRANTY 2 YEARS

Example 1.

CNHM2 - 6115 - 29

C:	Model	- CYCLO® DRIVE
N:	Slow speed shaft direction	- Universal direction
H:	Mounting style	- Foot
M:	Type of input	- Gearmotor type
2:	Motor capacity	- 1.5kW
6115:	Frame size	- 6115
29:	Reduction ratio	- 29

Example 2.

CVVM5 - 6195DA - B - 377


C:	Model	- CYCLO® DRIVE
V:	Slow speed shaft direction	- Vertical mounting
V:	Mounting style	- V flange
M:	Type of input	- Gearmotor type
5:	Motor capacity	- 3.7kW
6195DA:	Frame size	- 6115
B:	Brake	- With brake
377:	Reduction ratio	- 377

Product and Nomenclature Symbol Examples (Gearmotor)


Standard and various application products of CYCLO GEARMOTOR are classified by their nomenclature symbol as below. Refer to specific catalogs or consult us for details on our application products.

CYCLO® GEARMOTORS


CHHM
(CNHM)




CHFM
(CNFM)




CHVM
(CNVM)




CVHM
(CNHM)




CVFM
(CNFM)




CVVM
(CNVM)




CWHM
(CNHM)




CWFM
(CNFM)



CVVM
(CNVM)




CHHJM
(CNHJM)




With Adaptor

CHFJM
(CNFJM)



With Adaptor


CVVJM
(CNVJM)



With Adaptor


CYCLO® GEARMOTOR Application Products

CHHXM
(CNHXM)




Input Side Hollow Shaft

CHFXM
(CNFXM)




Input Side Hollow Shaft

CVVXM
(CNVXM)




Input Side Hollow Shaft

CHHPM




Top Mount Type

CVVPM




Side Mount Type

CPM




Cyclo Motor Pulley

CHHBM



Beier Cyclo Variator

CHFBM




Beier Cyclo Variator

CVVBM



Beier Cyclo Variator

CHHCM




Cyclo Pack with Clutch Brake

C11WM




Cyclo Capstan

C10CM




Cyclo Wheel

C14VM




Vertical Special Base Mount

C15VM





C17VM



Vertical Special Base Mount

C18VM



Center Post Type

B CYCLO® GEAR MOTORS


2. Selection Tables

Selection Tables Gearmotors

0.1 kW	Hz		50Hz		60Hz		n ₁ : Motor Speed						
	P		4	6	4	6	CHHM/CNHM		CHFM/CNFM	CVVM/CNVVM			
	n ₁	r/min	1450	980	1750	1165							
50Hz			60Hz				Nomenclature			Page of Dimension Sheet			
Output Speed n ₂	Output Torque Tout	Allowable Radial Load Pro	SF	Output Speed n ₂	Output Torque Tout	Allowable Radial Load Pro	SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
r/min	N·m	kgf·m		r/min	N·m	kgf·m					CHHM	CHFM	CVVM
242	3.75	0.383	2.00	292	3.11	0.317	2.00	01 -	6060	- 6	B-100	B-116	B-135
			2.86				2.86	01 -	6065	- 6	B-100	B-116	B-135
181	5.01	0.510	2.00	219	4.15	0.423	2.00	01 -	6060	- 8	B-100	B-116	B-135
			2.86				2.86	01 -	6065	- 8	B-100	B-116	B-135
132	6.88	0.702	2.00	159	5.70	0.581	2.00	01 -	6060	- 11	B-100	B-116	B-135
			2.86				2.86	01 -	6065	- 11	B-100	B-116	B-135
112	8.1	0.83	2.00	135	6.7	0.69	2.00	01 -	6060	- 13	B-100	B-116	B-135
			2.86				2.86	01 -	6065	- 13	B-100	B-116	B-135
96.7	9.4	0.96	2.00	117	7.8	0.79	2.00	01 -	6060	- 15	B-100	B-116	B-135
			2.86				2.86	01 -	6065	- 15	B-100	B-116	B-135
85.3	10.6	1.08	2.00	103	8.8	0.90	2.00	01 -	6060	- 17	B-100	B-116	B-135
			2.82				2.86	01 -	6065	- 17	B-100	B-116	B-135
69.0	13.1	1.34	1.83	83.3	10.9	1.11	2.00	01 -	6060	- 21	B-100	B-116	B-135
			2.28				2.34	01 -	6065	- 21	B-100	B-116	B-135
			1.10				1.10	01 -	6060	- 25	B-100	B-116	B-135
58.0	15.6	1.59	1.66	70.0	13.0	1.32	1.66	01 -	6065	- 25	B-100	B-116	B-135
			2.30				2.30	01 -	6070	- 25	B-100	B-116	B-135
			2.94				2.94	01 -	6075	- 25	B-100	B-116	B-135
			1.10				1.10	01 -	6060	- 29	B-100	B-116	B-135
50.0	18.1	1.85	1.65	60.3	15.0	1.53	1.66	01 -	6065	- 29	B-100	B-116	B-135
			2.26				2.26	01 -	6070	- 29	B-100	B-116	B-135
			2.86				2.86	01 -	6075	- 29	B-100	B-116	B-135
			1.10				1.10	01 -	6060	- 35	B-100	B-116	B-135
41.4	21.9	2.23	1.37	50.0	18.1	1.85	1.43	01 -	6065	- 35	B-100	B-116	B-135
			2.05				2.11	01 -	6070	- 35	B-100	B-116	B-135
			2.72				2.79	01 -	6075	- 35	B-100	B-116	B-135
			2.90				3.29	01 -	6080	- 35	B-100	B-116	B-135
			1.12				1.13	01 -	6065	- 43	B-100	B-116	B-135
33.7	26.9	2.74	1.67	40.7	22.3	2.27	1.70	01 -	6070	- 43	B-100	B-116	B-135
			2.23				2.26	01 -	6075	- 43	B-100	B-116	B-135
			2.50				2.50	01 -	6080	- 43	B-100	B-116	B-135
			2.94				2.94	01 -	6085	- 43	B-100	B-116	B-135
			1.00				1.00	01 -	6070	- 51	B-100	B-116	B-135
28.4	31.9	3.25	1.43	34.3	26.4	2.70	1.43	01 -	6075	- 51	B-100	B-116	B-135
			1.92				1.92	01 -	6080	- 51	B-100	B-116	B-135
			2.41				2.41	01 -	6085	- 51	B-100	B-116	B-135
			1.00				1.00	01 -	6070	- 59	B-100	B-116	B-135
24.6	36.9	3.76	1.36	30.0	30.6	3.12	1.36	01 -	6075	- 59	B-100	B-116	B-135
			1.85				1.85	01 -	6080	- 59	B-100	B-116	B-135
			2.34				2.34	01 -	6085	- 59	B-100	B-116	B-135
			1.20				1.20	01 -	6080	- 71	B-100	B-116	B-135
20.4	44.4	4.53	1.65	24.6	36.8	3.75	1.87	01 -	6085	- 71	B-100	B-116	B-135
			2.52				2.52	01 -	6090	- 71	B-100	B-116	B-135
			2.78				3.01	01 -	6095	- 71	B-100	B-116	B-135
			1.21				1.21	01 -	6085	- 87	B-100	B-116	B-135
16.7	54.4	5.55	2.11	20.0	45.10	4.600	2.11	01 -	6090	- 87	B-100	B-116	B-135
			2.63				3.01	01 -	6095	- 87	B-100	B-116	B-135
	24.0	2.45	1180	120	*1		*1	01 -	6060DA	- 104	B-108	B-124	B-143
	30.0	3.06	1180	120	*1		*1	01 -	6065DA	- 104	B-108	B-124	B-143
	45.0	4.59	1770	180	*1		*1	01 -	6070DA	- 104	B-108	B-124	B-143
			1770	180	0.97		1.17	01 -	6075DA	- 104	B-108	B-124	B-143
	61.6	6.28	3340	340	2.43		2.94	01 -	6090DA	- 104	B-108	B-124	B-143
			3340	340	2.93		3.54	01 -	6095DA	- 104	B-108	B-124	B-143

- Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
- Motor slippage may affect n₁ and n₂. Refer to technical data for details.
- CNHM, CHHM, CNFM, CHFM, CNVM, and CVVM indicate types. Refer to page B-10 for details.
- Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
- "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors



0.1 kW	Hz		50Hz		60Hz		n ₁ : Motor Speed					Nomenclature			Page of Dimension Sheet		
	P		4	6	4	6	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM	CHHM	CHFM	CVVM		
	n ₁	r/min	1450	980	1750	1165											
50Hz	Output Speed n ₂	Output Torque Tout	Allowable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout	Allowable Radial Load Pro		SF							
	r/min	N·m kgf·m	N kgf	N kgf		r/min	N·m kgf·m	N kgf	N kgf								
60Hz	Output Speed n ₂	Output Torque Tout	Allowable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout	Allowable Radial Load Pro		SF							
	r/min	N·m kgf·m	N kgf	N kgf		r/min	N·m kgf·m	N kgf	N kgf								
4.55	24.0	2.45	1180	120	*1	5.49	24.0	2.45	1180	120	*1	01 - 6060DA	- 319	B-108	B-124	B-143	
		30.0	3.06	1180	120		*1	30.0	3.06	1180	120	*1	01 - 6065DA	- 319	B-108	B-124	B-143
		45.0	4.59	1770	180		*1	45.0	4.59	1770	180	*1	01 - 6070DA	- 319	B-108	B-124	B-143
	60.0	6.12	1770	180	*1	5.49	60.0	6.12	1770	180	*1	01 - 6075DA	- 319	B-108	B-124	B-143	
		15.0	15.3	3290	336		*1	15.0	15.3	3290	336	*1	01 - 6090DA	- 319	B-108	B-124	B-143
		3220	328	1.06				3280	334	1.28			01 - 6095DA	- 319	B-108	B-124	B-143
	189	19.3	5400	550	1.32	5.49	157	16.0	5400	550	1.60	5.49	01 - 6100DA	- 319	B-108	B-124	B-143
			5400	550	1.59				5400	550	1.91		01 - 6105DA	- 319	B-108	B-124	B-143
			9810	1000	2.75				9810	1000	3.32		01 - 6120DA	- 319	B-108	B-124	B-143

1. Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
2. Motor slippage may affect n₁ and n₂. Refer to technical data for details.
3. CNHM, CHHM, CNFM, CHFM, CNVM, and CVVM indicate types. Refer to page B-10 for details.
4. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
5. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors


Selection Tables
0.1 kW, 0.2 kW
GEARMOTORS

0.1 kW		n ₁ : Motor Speed				CHHM/CNHM		CHFM/CNFM		CVVM/CNVM							
		Hz		50Hz								60Hz					
		P	r/min	4	6							4	6				
		n ₁	r/min	1450	980	1750	1165										
50Hz					60Hz					Nomenclature			Page of Dimension Sheet				
Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
r/min	N·m	kgf·m	N	kgf		r/min	N·m	kgf·m	N	kgf					CHHM	CHFM	CVVM
0.476	150	15.3	3310	338	*1	0.575	150	15.3	3310	338	*1	01 - 6090DA	- 3045	B-108	B-124	B-143	
	192	19.6	3240	330	*1		192	19.6	3240	330	*1	01 - 6095DA	- 3045	B-108	B-124	B-143	
	250	25.5	5400	550	*1		250	25.5	5400	550	*1	01 - 6100DA	- 3045	B-108	B-124	B-143	
	300	30.6	4780	488	*1		300	30.6	4780	488	*1	01 - 6105DA	- 3045	B-108	B-124	B-143	
	525	53.5	9780	997	*1		525	53.5	9780	997	*1	01 - 6120DA	- 3045	B-108	B-124	B-143	
630	64.2	9560	974	*1	630	64.2	9560	974	*1	01 - 6125DA	- 3045	B-108	B-124	B-143			
0.417	146	14.9	3300	336	*1	0.503	146	14.9	3300	336	*1	01 - 6090DA	- 3481	B-108	B-124	B-143	
	250	25.5	5400	550	*1		250	25.5	5400	550	*1	01 - 6100DA	- 3481	B-108	B-124	B-143	
	296	30.2	5090	519	*1		296	30.2	5090	519	*1	01 - 6105DA	- 3481	B-108	B-124	B-143	
	525	53.5	9810	1000	*1		525	53.5	9810	1000	*1	01 - 6120DA	- 3481	B-108	B-124	B-143	
	630	64.2	9810	1000	*1		630	64.2	9810	1000	*1	01 - 6125DA	- 3481	B-108	B-124	B-143	
0.327	150	15.3	3310	338	*1	0.394	150	15.3	3310	338	*1	01 - 6090DA	- 4437	B-108	B-124	B-143	
	192	19.6	3240	330	*1		192	19.6	3240	330	*1	01 - 6095DA	- 4437	B-108	B-124	B-143	
	250	25.5	5400	550	*1		250	25.5	5400	550	*1	01 - 6100DA	- 4437	B-108	B-124	B-143	
	300	30.6	4780	488	*1		300	30.6	4780	488	*1	01 - 6105DA	- 4437	B-108	B-124	B-143	
	525	53.5	9780	997	*1		525	53.5	9780	997	*1	01 - 6120DA	- 4437	B-108	B-124	B-143	
630	64.2	9560	974	*1	630	64.2	9560	974	*1	01 - 6125DA	- 4437	B-108	B-124	B-143			
0.282	150	15.3	3310	338	*1	0.341	150	15.3	3310	338	*1	01 - 6090DA	- 5133	B-108	B-124	B-143	
	192	19.6	3240	330	*1		192	19.6	3240	330	*1	01 - 6095DA	- 5133	B-108	B-124	B-143	
	250	25.5	5400	550	*1		250	25.5	5400	550	*1	01 - 6100DA	- 5133	B-108	B-124	B-143	
	300	30.6	4780	488	*1		300	30.6	4780	488	*1	01 - 6105DA	- 5133	B-108	B-124	B-143	
	525	53.5	9780	997	*1		525	53.5	9780	997	*1	01 - 6120DA	- 5133	B-108	B-124	B-143	
630	64.2	9560	974	*1	630	64.2	9560	974	*1	01 - 6125DA	- 5133	B-108	B-124	B-143			
0.235	525	53.5	9780	997	*1	0.283	525	53.5	9780	997	*1	01 - 6120DB	- 6177	B-108	B-124	B-143	
	630	64.2	9560	974	*1		630	64.2	9560	974	*1	01 - 6125DB	- 6177	B-108	B-124	B-143	
0.192	525	53.5	9780	997	*1	0.231	525	53.5	9780	997	*1	01 - 6120DB	- 7569	B-108	B-124	B-143	
	630	64.2	9560	974	*1		630	64.2	9560	974	*1	01 - 6125DB	- 7569	B-108	B-124	B-143	

0.2 kW		n ₁ : Motor Speed				CHHM/CNHM		CHFM/CNFM		CVVM/CNVM							
		Hz		50Hz								60Hz					
		P	r/min	4	6							4	6				
		n ₁	r/min	1450	980	1750	1165										
50Hz					60Hz					Nomenclature			Page of Dimension Sheet				
Output Speed n ₂	Output Torque Tout		Alloeeable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout		Alloeeable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
r/min	N·m	kgf·m	N	kgf		r/min	N·m	kgf·m	N	kgf					CHHM	CHFM	CVVM
242	7.51	0.765	798	81.4	1.00	292	6.22	0.634	751	76.6	1.00	02 - 6060	- 6	B-100	B-116	B-135	
			798	81.4	1.43				751	76.6	1.43	02 - 6065	- 6	B-100	B-116	B-135	
			1390	142	1.74				1310	134	1.74	02 - 6070	- 6	B-100	B-116	B-135	
			1390	142	2.04				1310	134	2.04	02 - 6075	- 6	B-100	B-116	B-135	
			1930	197	2.96				1820	185	2.96	02 - 6080	- 6	B-100	B-116	B-135	
181	10.0	1.02	912	93.0	1.00	219	8.29	0.846	859	87.5	1.00	02 - 6060	- 8	B-100	B-116	B-135	
			912	93	1.43				859	88	1.43	02 - 6065	- 8	B-100	B-116	B-135	
			1540	157	1.74				1450	148	1.74	02 - 6070	- 8	B-100	B-116	B-135	
			1540	157	2.04				1450	148	2.04	02 - 6075	- 8	B-100	B-116	B-135	
			2100	214	2.96				1970	201	2.96	02 - 6080	- 8	B-100	B-116	B-135	

1. Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
2. Motor slippage may affect n₁ and n₂. Refer to technical data for details.
3. CNHM, CHHM, CNFM, CHFM, CNVM, and CVVM indicate types. Refer to page B-10 for details.
4. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
5. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors




0.2 kW				n ₁ : Motor Speed					
				Hz		50Hz		60Hz	
				P		4	6	4	6
r/min		1450	980	1750	1165				

50Hz						60Hz						Nomenclature			Page of Dimension Sheet		
Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
	N-m	kgf-m	N	kgf			N-m	kgf-m	N	kgf							
132	13.8	1.40	1180	120	1.00	159	11.4	1.16	1170	119	1.00	102 - 02	- 6060	- 11	B-100	B-116	B-135
			1180	120	1.43				1170	119	1.43						
			1730	176	1.74				1630	166	1.74						
			1730	176	2.04				1630	166	2.04						
			2320	236	2.96				2180	222	2.96						
112	16.3	1.66	1180	120	1.00	135	13.5	1.37	1180	120	1.00	102 - 02	- 6060	- 13	B-100	B-116	B-135
			1180	120	1.43				1180	120	1.43						
			1770	180	1.74				1720	175	1.74						
			1770	180	2.04				1720	175	2.04						
			2500	254	2.96				2350	239	2.96						
96.7	18.8	1.91	1180	120	1.00	117	15.6	1.59	1180	120	1.00	102 - 02	- 6060	- 15	B-100	B-116	B-135
			1180	120	1.43				1180	120	1.43						
			1770	180	1.74				1730	176	1.74						
			1770	180	2.04				1730	176	2.04						
			2560	261	2.96				2420	247	2.96						
85.3	21.3	2.17	1180	120	1.00	103	17.6	1.80	1180	120	1.00	102 - 02	- 6060	- 17	B-100	B-116	B-135
			1180	120	1.41				1180	120	1.43						
			1770	180	1.74				1770	180	1.74						
			1770	180	2.04				1770	180	2.04						
			2560	261	2.96				2540	259	2.96						
69.0	26.3	2.68	1180	120	1.14	83.3	21.8	2.22	1180	120	1.17	102 - 02	- 6065	- 21	B-100	B-116	B-135
			1180	120	1.43				1180	120	1.43						
			1770	180	1.74				1770	180	1.74						
			1770	180	2.04				1770	180	2.04						
			2560	261	2.96				2480	253	2.96						
58.0	31.3	3.19	1180	120	0.83	70.0	25.9	2.64	1180	120	0.83	102 - 02	- 6065	- 25	B-100	B-116	B-135
			1180	120	1.00				1180	120	1.00						
			1770	180	1.47				1770	180	1.47						
			1770	180	1.70				1770	180	1.70						
			2560	261	2.38				2550	260	2.38						
50.0	36.3	3.70	1180	120	0.83	60.3	30.1	3.07	1180	120	0.83	102 - 02	- 6065	- 29	B-100	B-116	B-135
			1180	120	1.00				1180	120	1.00						
			1770	180	1.43				1770	180	1.43						
			1770	180	1.70				1770	180	1.70						
			2560	261	2.34				2560	261	2.34						
41.4	43.8	4.46	1180	120	0.83	50.0	36.3	3.70	1180	120	0.83	102 - 02	- 6070	- 35	B-100	B-116	B-135
			1180	120	1.00				1180	120	1.00						
			1770	180	1.45				1770	180	1.40						
			1770	180	1.64				1770	180	1.65						
			3340	340	3.06				3340	340	3.06						
33.7	53.8	5.49	1180	120	0.83	40.7	44.6	4.54	1180	120	0.83	102 - 02	- 6075	- 43	B-100	B-116	B-135
			1180	120	1.00				1180	120	1.00						
			2560	261	1.47				2560	261	1.25						
			2560	261	1.47				2560	261	1.25						
			3340	340	2.18				3340	340	2.18						
28.4	63.8	6.51	1180	120	1.12	34.3	52.9	5.39	1180	120	1.12	102 - 02	- 6085	- 51	B-100	B-116	B-135
			1180	120	1.47				1180	120	1.47						
			3340	340	2.18				3340	340	2.11						
			3340	340	2.18				3340	340	2.11						
			5400	550	2.80				5400	550	2.80						
24.6	73.8	7.53	1180	120	1.17	29.7	61.2	6.24	1180	120	1.17	102 - 02	- 6085	- 59	B-100	B-116	B-135
			1180	120	1.47				1180	120	1.47						
			3340	340	1.55				3340	340	1.55						
			3340	340	1.68				3340	340	1.87						
			5400	550	2.58				5400	550	2.58						
20.4	88.8	9.06	2380	243	0.83	24.6	73.6	7.50	2380	243	0.83	102 - 02	- 6085	- 71	B-100	B-116	B-135
			1180	120	1.14				1180	120	1.14						
			3340	340	1.26				3340	340	1.26						
			3340	340	1.39				3340	340	1.51						
			5400	550	2.18				5400	550	2.18						

Selection Tables 0.2 kW GEARMOTORS

6. "2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
7. Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
8. "3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
9. Maintain torque load during operation within "Output torque" in the table for models with "1" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables Gearmotors



0.2 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

n₁: Motor Speed


50Hz						60Hz					Nomenclature			Page of Dimension Sheet				
Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM	
	N·m	kgf·m	N	kgf			N·m	kgf·m	N	kgf								CHHM
4.55	200	20.4	3200	326	*1	4.59	200	20.4	3200	326	*1	02 - 6095DA	- 319	B-108	B-124	B-143		
	250	25.5	5400	550	*1		250	25.5	5400	550	*1	02 - 6100DA	- 319	B-108	B-124	B-143		
	300	30.6	5400	550	*1		300	30.6	5400	550	*1	02 - 6105DA	- 319	B-108	B-124	B-143		
	378	38.6	9810	1000	1.38		313	31.9	9810	1000	1.66	02 - 6120DA	- 319	B-108	B-124	B-143		
			9810	1000	1.67				02 - 6125DA	- 319	B-108	B-124	B-143					
			14700	1500	2.06				02 - 6130DA	- 319	B-109	B-125	B-144					
			14700	1500	2.06				02 - 6130DB	- 319	B-109	B-125	B-144					
	14700	1500	2.15	02 - 6135DA	- 319		B-109	B-125	B-144									
	14700	1500	2.49	02 - 6135DB	- 319		B-109	B-125	B-144									
	3.85	200	20.4	3200	326		*1	4.64	200	20.4	3200	326	*1	02 - 6095DA	- 377	B-108	B-124	B-143
250		25.5	5400	550	*1	250	25.5		5400	550	*1	02 - 6100DA	- 377	B-108	B-124	B-143		
300		30.6	5400	550	*1	300	30.6		5400	550	*1	02 - 6105DA	- 377	B-108	B-124	B-143		
447		45.6	9810	1000	1.16	370	37.7		9810	1000	1.40	02 - 6120DA	- 377	B-108	B-124	B-143		
			9810	1000	1.41				02 - 6125DA	- 377	B-108	B-124	B-143					
			14700	1500	1.75				02 - 6130DA	- 377	B-109	B-125	B-144					
			14700	1500	2.10				02 - 6135DA	- 377	B-109	B-125	B-144					
14700		1500	2.10	02 - 6135DB	- 377	B-109	B-125		B-144									
16000		1630	2.15	02 - 6140DA	- 377	B-109	B-125		B-144									
16000		1630	2.74	02 - 6140DB	- 377	B-109	B-125		B-144									
3.07	250	25.5	5400	550	*1	3.70	250	25.5	5400	550	*1	02 - 6100DA	- 473	B-108	B-124	B-143		
	300	30.6	5400	550	*1		300	30.6	5400	550	*1	02 - 6105DA	- 473	B-108	B-124	B-143		
	561	57.2	9810	1000	1.12		465	47.4	9810	1000	1.36	02 - 6125DA	- 473	B-108	B-124	B-143		
			14700	1500	1.39				02 - 6130DA	- 473	B-109	B-125	B-144					
			14700	1500	1.68				02 - 6135DA	- 473	B-109	B-125	B-144					
			16000	1630	2.15				02 - 6140DA	- 473	B-109	B-125	B-144					
	16000	1630	2.18	02 - 6140DB	- 473		B-109	B-125	B-144									
	16000	1630	2.44	02 - 6145DB	- 473		B-109	B-125	B-144									
	2.59	300	30.6	5400	550		*1	3.13	300	30.6	5400	550	*1	02 - 6105DA	- 559	B-108	B-124	B-143
		525	53.5	9810	1000		*1		525	53.5	9810	1000	*1	02 - 6120DA	- 559	B-108	B-124	B-143
663		67.6	9810	1000	0.95	549	56.0		9810	1000	1.15	02 - 6125DA	- 559	B-108	B-124	B-143		
			14700	1500	1.18				02 - 6130DA	- 559	B-109	B-125	B-144					
			14700	1500	1.42				02 - 6135DA	- 559	B-109	B-125	B-144					
			16000	1630	1.85				02 - 6140DA	- 559	B-109	B-125	B-144					
16000		1630	1.85	02 - 6140DB	- 559	B-109	B-125		B-144									
16000		1630	2.07	02 - 6145DA	- 559	B-109	B-125		B-144									
16000		1630	2.07	02 - 6145DB	- 559	B-109	B-125		B-144									
2.23		525	53.5	9810	1000	*1	2.70		525	53.5	9810	1000	*1	02 - 6120DA	- 649	B-108	B-124	B-143
	630	64.2	9810	1000	*1	630		64.2	9810	1000	*1	02 - 6125DA	- 649	B-108	B-124	B-143		
	769	78.4	9810	1000	0.82	638		65.0	9810	1000	0.98	02 - 6135DA	- 649	B-109	B-125	B-144		
			14700	1500	1.19				02 - 6130DA	- 649	B-109	B-125	B-144					
			14700	1500	1.36				02 - 6135DA	- 649	B-109	B-125	B-144					
			16000	1630	1.59				02 - 6140DA	- 649	B-109	B-125	B-144					
	16000	1630	1.78	02 - 6145DA	- 649	B-109		B-125	B-144									
	1.98	525	53.5	9810	1000	*1		2.39	525	53.5	9810	1000	*1	02 - 6120DA	- 731	B-108	B-124	B-143
		630	64.2	9810	1000	*1			630	64.2	9810	1000	*1	02 - 6125DA	- 731	B-108	B-124	B-143
		867	88.3	14700	1500	1.08			718	73.2	14700	1500	1.31	02 - 6135DA	- 731	B-109	B-125	B-144
16000				1630	1.41	02 - 6140DA	- 731				B-109	B-125	B-144					
16000				1630	1.58	02 - 6145DA	- 731				B-109	B-125	B-144					
1.72				520	53.0	9810	1000				*1	2.08	520	53.0	9810	1000	*1	02 - 6120DA
		630	64.2	9810	1000	*1	630		64.2	9810	1000		*1	02 - 6125DA	- 841	B-108	B-124	B-143
		997	102	14700	1500	0.94	826		84.2	14700	1500		1.14	02 - 6130DA	- 841	B-109	B-125	B-144
				16000	1630	1.23				02 - 6135DA	- 841		B-109	B-125	B-144			
				16000	1630	1.37				02 - 6140DA	- 841		B-109	B-125	B-144			
	16000			1630	1.51	02 - 6145DA		- 841		B-109	B-125		B-144					

GEARMOTORS

Selection Tables
0.2 kW

- "*2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- "*3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- Maintain torque load during operation within "Output torque" in the table for models with "*1" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables Gearmotors



CHHM/CNHM

CHF/CNFM

CVVM/CNVM

0.2 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

n₁: Motor Speed


50Hz					60Hz					Nomenclature			Page of Dimension Sheet			
Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
	N-m	kgf-m	N	kgf			N-m	kgf-m	N	kgf						
0.327	848	86.5	14700	1500	*1	0.394	848	86.5	14700	1500	*1	02 - 6130DA	- 4437	B-109	B-125	B-144
	979	99.8	14700	1500	*1		979	99.8	14700	1500	*1	02 - 6135DA	- 4437	B-109	B-125	B-144
	1230	125	16000	1630	*1		1230	125	16000	1630	*1	02 - 6140DA	- 4437	B-109	B-125	B-144
	1250	127	16000	1630	*1		1250	127	16000	1630	*1	02 - 6145DA	- 4437	B-109	B-125	B-144
	1760	179	22100	2250	*1		1760	179	22100	2250	*1	02 - 6160DA	- 4437	B-110	B-126	B-145
	2050	209	21800	2220	*1		2050	209	21800	2220	*1	02 - 6165DA	- 4437	B-110	B-126	B-145
	2530	258	29500	3010	*1		2530	258	29500	3010	*1	02 - 6170DA	- 4437	B-110	B-126	B-145
3150	321	29500	3010	*1	3150	321	29500	3010	*1	02 - 6175DA	- 4437	B-110	B-126	B-145		
0.282	848	86.5	14700	1500	*1	0.341	848	86.5	14700	1500	*1	02 - 6130DA	- 5133	B-109	B-125	B-144
	979	99.8	14700	1500	*1		979	99.8	14700	1500	*1	02 - 6135DA	- 5133	B-109	B-125	B-144
	1230	125	16000	1630	*1		1230	125	16000	1630	*1	02 - 6140DA	- 5133	B-109	B-125	B-144
	1250	127	16000	1630	*1		1250	127	16000	1630	*1	02 - 6145DA	- 5133	B-109	B-125	B-144
	1760	179	22100	2250	*1		1760	179	22100	2250	*1	02 - 6160DA	- 5133	B-110	B-126	B-145
	2050	209	21800	2220	*1		2050	209	21800	2220	*1	02 - 6165DA	- 5133	B-110	B-126	B-145
	2530	258	29500	3010	*1		2530	258	29500	3010	*1	02 - 6170DA	- 5133	B-110	B-126	B-145
3150	321	29500	3010	*1	3150	321	29500	3010	*1	02 - 6175DA	- 5133	B-110	B-126	B-145		
0.235	848	86.5	14700	1500	*1	0.283	848	86.5	14700	1500	*1	02 - 6130DB	- 6177	B-109	B-125	B-143
	979	99.8	14700	1500	*1		979	99.8	14700	1500	*1	02 - 6135DB	- 6177	B-109	B-125	B-144
	1230	125	16000	1630	*1		1230	125	16000	1630	*1	02 - 6140DB	- 6177	B-109	B-125	B-144
	1250	127	16000	1630	*1		1250	127	16000	1630	*1	02 - 6145DB	- 6177	B-109	B-125	B-144
	1760	179	22100	2250	*1		1760	179	22100	2250	*1	02 - 6160DA	- 6177	B-110	B-126	B-145
	2050	209	21800	2220	*1		2050	209	21800	2220	*1	02 - 6165DA	- 6177	B-110	B-126	B-145
	2530	258	29500	3010	*1		2530	258	29500	3010	*1	02 - 6170DA	- 6177	B-110	B-126	B-145
3150	321	29500	3010	*1	3150	321	29500	3010	*1	02 - 6175DA	- 6177	B-110	B-126	B-145		
0.192	848	86.5	14700	1500	*1	0.231	848	86.5	14700	1500	*1	02 - 6130DB	- 7569	B-109	B-125	B-143
	979	99.8	14700	1500	*1		979	99.8	14700	1500	*1	02 - 6135DB	- 7569	B-109	B-125	B-144
	1230	125	16000	1630	*1		1230	125	16000	1630	*1	02 - 6140DB	- 7569	B-109	B-125	B-144
	1250	127	16000	1630	*1		1250	127	16000	1630	*1	02 - 6145DB	- 7569	B-109	B-125	B-144
	1760	179	22100	2250	*1		1760	179	22100	2250	*1	02 - 6160DA	- 7569	B-110	B-126	B-145
	2050	209	21800	2220	*1		2050	209	21800	2220	*1	02 - 6165DA	- 7569	B-110	B-126	B-145
	2530	258	29500	3010	*1		2530	258	29500	3010	*1	02 - 6170DA	- 7569	B-110	B-126	B-145
3150	321	29500	3010	*1	3150	321	29500	3010	*1	02 - 6175DA	- 7569	B-110	B-126	B-145		

GEARMOTORS

Selection Tables
0.2 kW

- "*2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- "*3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- Maintain torque load during operation within "Output torque" in the table for models with "*1" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables Gearmotors



0.25 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

n₁: Motor Speed

50Hz					60Hz					Nomenclature			Page of Dimension Sheet									
Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM					
	N·m	kgf·m	N	kgf			N·m	kgf·m	N	kgf								CHHM	CHF	CVVM		
20.4	111	11.3	3340	340	1.01	24.6	92	9.4	3340	340	1.20	03	6090	- 71	B-100	B-116	B-135					
			3340	340	1.11				3340	340	1.20							03 - 6095	- 71	B-100	B-116	B-135
			5400	550	1.74				5400	550	1.74							03 - 6100	- 71	B-101	B-117	B-136
			5400	550	2.02				5400	550	2.24							03 - 6105	- 71	B-101	B-117	B-136
16.7	136	13.9	3340	340	1.05	20.1	113	11.5	3340	340	1.20	03	6095	- 87	B-100	B-116	B-135					
			5400	550	1.73				5400	550	1.73							03 - 6100	- 87	B-101	B-117	B-136
			5400	550	2.01				5400	550	2.26							03 - 6105	- 87	B-101	B-117	B-136
			3340	340	1.17				3340	340	1.42							03 - 6095DA	- 104	B-108	B-124	B-143
13.9	154	15.7	5400	550	1.62	16.8	128	13.0	5400	550	1.72	03	6100DA	- 104	B-108	B-124	B-143					
			5400	550	1.72				5400	550	1.72							03 - 6105DA	- 104	B-108	B-124	B-143
			3340	340	1.17				3340	340	1.42							03 - 6095DA	- 104	B-108	B-124	B-143
			5400	550	1.62				5400	550	1.72							03 - 6100DA	- 104	B-108	B-124	B-143
12.2	186	19.0	5400	550	1.14	14.7	154	15.7	5400	550	1.14	03	6105	- 119	B-101	B-117	B-136					
			3340	340	0.89				3340	340	1.08							03 - 6095DA	- 121	B-108	B-124	B-143
			5400	550	1.39				5400	550	1.68							03 - 6100DA	- 121	B-108	B-124	B-143
			5400	550	1.72				5400	550	1.72							03 - 6105DA	- 121	B-108	B-124	B-143
12.0	179	18.3	5400	550	1.72	14.5	149	15.1	5400	550	1.72	03	6105DA	- 121	B-108	B-124	B-143					
			9810	1000	2.93				9810	1000	3.53							03 - 6120DB	- 121	B-108	B-124	B-143
			3340	340	*1				3340	340	*1							03 - 6090DA	- 143	B-108	B-124	B-143
			5400	550	1.18				5400	550	1.42							03 - 6095DA	- 143	B-108	B-124	B-143
10.1	212	21.6	5400	550	1.42	12.2	176	17.9	5400	550	1.71	03	6105DA	- 143	B-108	B-124	B-143					
			9810	1000	1.72				9810	1000	1.72							03 - 6120DA	- 143	B-108	B-124	B-143
			9810	1000	2.48				9810	1000	2.99							03 - 6120DB	- 143	B-108	B-124	B-143
			9810	1000	2.97				9810	1000	3.59							03 - 6125DB	- 143	B-108	B-124	B-143
8.79	245	24.9	3340	340	*1	10.6	203	20.7	3340	340	*1	03	6095DA	- 165	B-108	B-124	B-143					
			3340	340	0.82				3340	340	0.98							03 - 6095DA	- 165	B-108	B-124	B-143
			5400	550	1.02				5400	550	1.23							03 - 6100DA	- 165	B-108	B-124	B-143
			5400	550	1.23				5400	550	1.48							03 - 6105DA	- 165	B-108	B-124	B-143
7.44	289	29.5	9810	1000	1.72	8.97	239	24.4	9810	1000	1.72	03	6120DA	- 165	B-108	B-124	B-143					
			9810	1000	2.15				9810	1000	2.59							03 - 6120DB	- 165	B-108	B-124	B-143
			9810	1000	2.58				9810	1000	3.11							03 - 6125DB	- 165	B-108	B-124	B-143
			14700	1500	2.70				14700	1500	3.26							03 - 6130DB	- 195	B-109	B-125	B-144
6.28	342	34.9	3340	340	*1	7.58	284	28.9	3340	340	*1	03	6100DA	- 231	B-108	B-124	B-143					
			4940	504	0.88				5400	550	1.06							03 - 6105DA	- 231	B-108	B-124	B-143
			9810	1000	1.52				9810	1000	1.72							03 - 6120DA	- 231	B-108	B-124	B-143
			9810	1000	1.52				9810	1000	1.84							03 - 6120DB	- 231	B-108	B-124	B-143
5.31	405	41.2	9810	1000	1.72	6.41	335	34.2	9810	1000	1.72	03	6125DA	- 231	B-108	B-124	B-143					
			9810	1000	1.84				9810	1000	1.72							03 - 6125DB	- 231	B-108	B-124	B-143
			14700	1500	2.28				14700	1500	2.75							03 - 6130DB	- 231	B-109	B-125	B-144
			14700	1500	2.75				14700	1500	3.31							03 - 6135DB	- 231	B-109	B-125	B-144
5.31	405	41.2	5400	550	*1	6.41	335	34.2	5400	550	*1	03	6105DA	- 273	B-108	B-124	B-143					
			9810	1000	1.29				9810	1000	1.56							03 - 6120DA	- 273	B-108	B-124	B-143
			9810	1000	1.56				9810	1000	1.72							03 - 6125DA	- 273	B-108	B-124	B-143
			14700	1500	1.72				14700	1500	1.88							03 - 6125DB	- 273	B-108	B-124	B-143
5.31	405	41.2	14700	1500	1.93	6.41	335	34.2	14700	1500	1.72	03	6130DA	- 273	B-109	B-125	B-144					
			14700	1500	2.33				14700	1500	1.72							03 - 6130DB	- 273	B-109	B-125	B-144
			14700	1500	2.32				14700	1500	2.80							03 - 6135DB	- 273	B-109	B-125	B-144
			14700	1500	2.32				14700	1500	2.80							03 - 6135DB	- 273	B-109	B-125	B-144


 Selection Tables
0.25 kW
GEARMOTORS

6. "**2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
7. Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
8. "**3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
9. Maintain torque load during operation within "Output torque" in the table for models with "**1" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables Gearmotors

n₁: Motor Speed

0.25 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165




50Hz						60Hz					Nomenclature			Page of Dimension Sheet						
Output Speed n ₂ r/min	Output Torque Tout N·m kgf·m		Allowable Radial Load Pro N kgf		SF	Output Speed n ₂ r/min	Output Torque Tout N·m kgf·m		Allowable Radial Load Pro N kgf		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM			
4.55	473	48.2	9810	1000	1.10	5.49	392	39.9	9810	1000	1.33		03 -	6120DA -	319	B-108	B-124	B-143		
			9810	1000	1.33				9810	1000	1.61					6125DA -	319	B-108	B-124	B-143
			14700	1500	1.65				14700	1500	1.72					6130DA -	319	B-109	B-125	B-144
			14700	1500	1.65				14700	1500	1.99					6130DB -	319	B-109	B-125	B-144
			14700	1500	1.72				14700	1500	1.72					6135DA -	319	B-109	B-125	B-144
			14700	1500	1.99				14700	1500	2.40					6135DB -	319	B-109	B-125	B-144
			16000	1630	2.59				16000	1630	3.13					6140DB -	319	B-109	B-125	B-144
			16000	1630	2.90	16000	1630	3.50	6145DB -	319	B-109	B-125	B-144							
3.85	559	56.9	9810	1000	1.13	4.64	463	47.2	9810	1000	1.36		03 -	6125DA -	377	B-108	B-124	B-143		
			14700	1500	1.40				14700	1500	1.69					6130DA -	377	B-109	B-125	B-144
			14700	1500	1.68				14700	1500	1.72					6135DA -	377	B-109	B-125	B-144
			14700	1500	1.68				14700	1500	2.03					6135DB -	377	B-109	B-125	B-144
			16000	1630	1.72				16000	1630	1.72					6140DA -	377	B-109	B-125	B-144
			16000	1630	2.19				16000	1630	2.65					6140DB -	377	B-109	B-125	B-144
			16000	1630	2.45				16000	1630	2.96					6145DB -	377	B-109	B-125	B-144
	525	53.5	9810	1000	*1		525	53.5	9810	1000	*1		03 -	6120DA -	473	B-108	B-124	B-143		
3.07	701	71.5	9810	1000	0.90	3.70	581	59.2	9810	1000	1.08		03 -	6125DA -	473	B-108	B-124	B-143		
			14700	1500	1.11				14700	1500	1.34					6130DA -	473	B-109	B-125	B-144
			14700	1500	1.34				14700	1500	1.62					6135DA -	473	B-109	B-125	B-144
			16000	1630	1.72				16000	1630	1.72					6140DA -	473	B-109	B-125	B-144
			16000	1630	1.75				16000	1630	2.11					6140DB -	473	B-109	B-125	B-144
			16000	1630	1.95				16000	1630	2.36					6145DB -	473	B-109	B-125	B-144
2.59	828	84.4	9810	1000	*1	3.13	686	70.0	9810	1000	*1		03 -	6125DA -	559	B-108	B-124	B-143		
			14700	1500	1.13				14700	1500	1.37					6135DA -	559	B-109	B-125	B-144
			16000	1630	1.48				16000	1630	1.72					6140DA -	559	B-109	B-125	B-144
			16000	1630	1.48				16000	1630	1.78					6140DB -	559	B-109	B-125	B-144
			16000	1630	1.65				16000	1630	1.72					6145DA -	559	B-109	B-125	B-144
			16000	1630	1.65				16000	1630	2.00					6145DB -	559	B-109	B-125	B-144
2.23	962	98.0	14700	1500	1.09	2.70	797	81.2	14700	1500	1.32		03 -	6135DA -	649	B-109	B-125	B-144		
			16000	1630	1.27				16000	1630	1.54					6140DA -	649	B-109	B-125	B-144
			16000	1630	1.42				16000	1630	1.72					6145DA -	649	B-109	B-125	B-144
				780	79.5				14700	1500	*1						780	79.5	14700	1500
1.98	1080	110	14700	1500	0.87	2.39	898	91.5	14700	1500	1.05		03 -	6135DA -	731	B-109	B-125	B-144		
			16000	1630	1.13				16000	1630	1.36					6140DA -	731	B-109	B-125	B-144
			16000	1630	1.26				16000	1630	1.53					6145DA -	731	B-109	B-125	B-144
				940	95.8				14700	1500	*1						940	95.8	14700	1500
1.72	1250	127	16000	1630	1.10	2.08	1030	105	16000	1630	1.21		03 -	6145DA	- 841	B-109	B-125	B-144		
			16000	1630	1.10				16000	1630	1.33					6145DB -	841	B-109	B-125	B-144
1.45	1050	107	14700	1500	*1	1.74	1230	125	14700	1500	*1		03 -	6135DA -	1003	B-109	B-125	B-144		
			16000	1630	*1				16000	1630	*1					6140DA -	1003	B-109	B-125	B-144
1.16	1370	140	16000	1630	0.92	1.40	1370	140	16000	1630	1.11		03 -	6145DA -	1003	B-109	B-125	B-144		
			15700	1600	*1				15700	1600	*1					6145DA -	1247	B-109	B-125	B-144
0.702	2100	214	22100	2250	*1	0.847	2100	214	22100	2250	*1		03 -	6165DA -	2065	B-110	B-126	B-145		
0.572	2530	258	29500	3010	*1	0.690	2530	258	29500	3010	*1		03 -	6170DA -	2537	B-110	B-126	B-145		
0.476	3150	321	29500	3010	*1	0.575	3150	321	29500	3010	*1		03 -	6175DA -	3045	B-110	B-126	B-145		

Selection Tables 0.25 kW

- Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
- Motor slippage may affect n₁ and n₂. Refer to technical data for details.
- CNHM, CHHM, CNFM, CHFMC, CNVM, and CVVM indicate types. Refer to page B-10 for details.
- Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
- "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors




0.4 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

50Hz						60Hz						Nomenclature			Page of Dimension Sheet		
Output Speed n ₂ r/min	Output Torque Tout N·m kgf·m		Allowable Radial Load Pro N kgf		SF	Output Speed n ₂ r/min	Output Torque Tout N·m kgf·m		Allowable Radial Load Pro N kgf		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
58.0	62.6	6.38	2560	261	1.19	70.0	51.8	5.28	2520	256	1.19	05 -	6085	- 25	B-100	B-116	B-135
			3340	340	1.68				3340	340	1.68	05 -	6090	- 25	B-100	B-116	B-135
			3340	340	2.17				3340	340	2.17	05 -	6095	- 25	B-100	B-116	B-135
50.0	72.6	7.40	2560	261	1.17	60.3	60.1	6.13	2560	261	1.17	05 -	6085	- 29	B-100	B-116	B-135
			3340	340	1.56				3340	340	1.56	05 -	6090	- 29	B-100	B-116	B-135
			3340	340	1.96				3340	340	1.96	05 -	6095	- 29	B-100	B-116	B-135
41.4	87.6	8.93	2560	261	0.82	50.0	72.6	7.40	2560	261	0.93	05 -	6085	- 35	B-100	B-116	B-135
			3340	340	1.53				3340	340	1.53	05 -	6090	- 35	B-100	B-116	B-135
			3340	340	1.90				3340	340	1.90	05 -	6095	- 35	B-100	B-116	B-135
			5400	550	2.44				5400	550	2.44	05 -	6100	- 35	B-101	B-117	B-136
			5400	550	3.00				5400	550	3.00	05 -	6105	- 35	B-101	B-117	B-136
33.7	108	11.0	3340	340	1.09	40.7	89.2	9.09	3340	340	1.09	05 -	6090	- 43	B-100	B-116	B-135
			3340	340	1.51				3340	340	1.51	05 -	6095	- 43	B-100	B-116	B-135
			5400	550	1.95				5400	550	1.95	05 -	6100	- 43	B-101	B-117	B-136
			5400	550	2.70				5400	550	2.70	05 -	6105	- 43	B-101	B-117	B-136
			3320	339	1.02				3340	340	1.06	05 -	6095	- 51	B-100	B-116	B-135
28.4	128	13.0	5400	550	1.40	34.3	106	10.8	5400	550	1.40	05 -	6100	- 51	B-101	B-117	B-136
			5400	550	1.94				5400	550	1.94	05 -	6105	- 51	B-101	B-117	B-136
			7610	776	2.36				7610	776	2.36	05 -	6110	- 51	B-101	B-117	B-136
			7610	776	2.78				7610	776	2.78	05 -	6115	- 51	B-101	B-117	B-136
			3300	336	0.84				3340	340	0.93	05 -	6095	- 59	B-100	B-116	B-135
24.6	148	15.1	5400	550	1.29	29.7	122	12.5	5400	550	1.29	05 -	6100	- 59	B-101	B-117	B-136
			5400	550	1.70				5400	550	1.77	05 -	6105	- 59	B-101	B-117	B-136
			7610	776	2.15				7610	776	2.15	05 -	6110	- 59	B-101	B-117	B-136
			7610	776	2.53				7610	776	2.53	05 -	6115	- 59	B-101	B-117	B-136
			5400	550	1.09				5400	550	1.09	05 -	6100	- 71	B-101	B-117	B-136
20.4	178	18.1	5400	550	1.27	24.6	147	15.0	5400	550	1.40	05 -	6105	- 71	B-101	B-117	B-136
			7610	776	1.67				7610	776	1.67	05 -	6110	- 71	B-101	B-117	B-136
			7610	776	1.90				7610	776	1.90	05 -	6115	- 71	B-101	B-117	B-136
			9810	1000	2.39				9810	1000	2.39	05 -	6120	- 71	B-101	B-117	B-136
			9810	1000	2.85				9810	1000	3.00	05 -	6125	- 71	B-101	B-117	B-136
16.7	218	22.2	5400	550	1.08	20.1	180	18.4	5400	550	1.08	05 -	6100	- 87	B-101	B-117	B-136
			5400	550	1.26				5400	550	1.41	05 -	6105	- 87	B-101	B-117	B-136
			7610	776	1.65				7610	776	1.65	05 -	6110	- 87	B-101	B-117	B-136
			7610	776	1.90				7610	776	1.90	05 -	6115	- 87	B-101	B-117	B-136
			9810	1000	2.36				9810	1000	2.36	05 -	6120	- 87	B-101	B-117	B-136
13.9	150	15.3	3340	340	*1	16.8	150	15.3	3340	340	*1	05 -	6090DA	- 104	B-108	B-124	B-143
			181	18.4	3340				340	*1	05 -	6095DA	- 104	B-108	B-124	B-143	
			5400	550	1.01				5400	550	1.07	05 -	6100DA	- 104	B-108	B-124	B-143
			5400	550	1.07				5400	550	1.07	05 -	6105DA	- 104	B-108	B-124	B-143
			9810	1000	2.13				9810	1000	2.57	05 -	6120DB	- 104	B-108	B-124	B-143
12.0	150	15.3	3340	340	*1	14.5	150	15.3	3340	340	*1	05 -	6090DA	- 121	B-108	B-124	B-143
			160	16.4	3340				340	*1	05 -	6095DA	- 121	B-108	B-124	B-143	
			5400	550	1.07				5400	550	1.07	05 -	6105DA	- 121	B-108	B-124	B-143
			9810	1000	1.83				9810	1000	2.21	05 -	6120DB	- 121	B-108	B-124	B-143
			9810	1000	2.17				9810	1000	2.62	05 -	6125DB	- 121	B-108	B-124	B-143
			14700	1500	2.72				14700	1500	3.28	05 -	6130DB	- 121	B-109	B-125	B-144

- Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
- Motor slippage may affect n₁ and n₂. Refer to technical data for details.
- CNHM, CHHM, CNFM, CHF, CNVM, and CVVM indicate types. Refer to page B-10 for details.
- Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
- "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors



0.4 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

50Hz						60Hz					Nomenclature			Page of Dimension Sheet			
Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
	N-m	kgf-m	N	kgf			N-m	kgf-m	N	kgf							
10.1	183	18.7	3340	340	*1	12.2	183	18.7	3340	340	*1	05 - 6095DA	- 143	B-108	B-124	B-143	
	250	25.5	5400	550	*1		250	25.5	5400	550	*1	05 - 6100DA	- 143	B-108	B-124	B-143	
	339	34.6	5400	550	0.88		5400	550	1.07	05 - 6105DA	- 143	B-108	B-124	B-143			
			9810	1000	1.07		9810	1000	1.07	05 - 6120DA	- 143	B-108	B-124	B-143			
			9810	1000	1.55		9810	1000	1.87	05 - 6120DB	- 143	B-108	B-124	B-143			
			9810	1000	1.86		9810	1000	2.24	05 - 6125DB	- 143	B-108	B-124	B-143			
14700	1500	2.30	14700	1500	2.78	05 - 6130DB	- 143	B-109	B-125	B-144							
14700	1500	2.77	14700	1500	3.35	05 - 6135DB	- 143	B-109	B-125	B-144							
8.79	250	25.5	5400	550	*1	10.6	250	25.5	5400	550	*1	05 - 6100DA	- 165	B-108	B-124	B-143	
	300	30.6	5400	550	*1		300	30.6	5400	550	*1	05 - 6105DA	- 165	B-108	B-124	B-143	
	391	39.9	5400	550	1.07		5400	550	1.07	05 - 6120DA	- 165	B-108	B-124	B-143			
			9810	1000	1.34		9810	1000	1.62	05 - 6120DB	- 165	B-108	B-124	B-143			
			9810	1000	1.61		9810	1000	1.94	05 - 6125DB	- 165	B-108	B-124	B-143			
			14700	1500	1.99		14700	1500	2.41	05 - 6130DB	- 165	B-109	B-125	B-144			
14700	1500	2.40	14700	1500	2.90	05 - 6135DB	- 165	B-109	B-125	B-144							
7.44	250	25.5	5400	550	*1	8.97	250	25.5	5400	550	*1	05 - 6100DA	- 195	B-108	B-124	B-143	
	300	30.6	5400	550	*1		300	30.6	5400	550	*1	05 - 6105DA	- 195	B-108	B-124	B-143	
	462	47.1	5400	550	1.07		5400	550	1.07	05 - 6120DA	- 195	B-108	B-124	B-143			
			9810	1000	1.14		9810	1000	1.37	05 - 6120DB	- 195	B-108	B-124	B-143			
			9810	1000	1.36		9810	1000	1.64	05 - 6125DB	- 195	B-108	B-124	B-143			
			14700	1500	1.69		14700	1500	2.04	05 - 6130DB	- 195	B-109	B-125	B-144			
14700	1500	2.03	14700	1500	2.45	05 - 6135DB	- 195	B-109	B-125	B-144							
16000	1630	2.65	16000	1630	3.20	05 - 6140DB	- 195	B-109	B-125	B-144							
16000	1630	2.94	16000	1630	3.54	05 - 6145DB	- 195	B-109	B-125	B-144							
6.28	300	30.6	5400	550	*1	7.58	300	30.6	5400	550	*1	05 - 6105DA	- 231	B-108	B-124	B-143	
	548	55.8	5400	550	1.07		5400	550	1.07	05 - 6125DA	- 231	B-108	B-124	B-143			
			9810	1000	1.15		9810	1000	1.39	05 - 6125DB	- 231	B-108	B-124	B-143			
			14700	1500	1.42		14700	1500	1.72	05 - 6130DB	- 231	B-109	B-125	B-144			
			14700	1500	1.72		14700	1500	2.07	05 - 6135DB	- 231	B-109	B-125	B-144			
			16000	1630	2.24		16000	1630	2.70	05 - 6140DB	- 231	B-109	B-125	B-144			
16000	1630	2.44	16000	1630	2.95	05 - 6145DB	- 231	B-109	B-125	B-144							
5.31	522	53.2	9810	1000	*1	6.41	522	53.2	9810	1000	*1	05 - 6120DA	- 273	B-108	B-124	B-143	
	647	66.0	9810	1000	0.97		9810	1000	1.07	05 - 6125DA	- 273	B-108	B-124	B-143			
			9810	1000	0.97		9810	1000	1.17	05 - 6125DB	- 273	B-108	B-124	B-143			
			14700	1500	1.07		14700	1500	1.07	05 - 6130DA	- 273	B-109	B-125	B-144			
			14700	1500	1.21		14700	1500	1.45	05 - 6130DB	- 273	B-109	B-125	B-144			
			14700	1500	1.45		14700	1500	1.75	05 - 6135DB	- 273	B-109	B-125	B-144			
16000	1630	1.89	16000	1630	2.28	05 - 6140DB	- 273	B-109	B-125	B-144							
16000	1630	2.07	16000	1630	2.49	05 - 6145DB	- 273	B-109	B-125	B-144							
22100	2250	2.71	22100	2250	3.27	05 - 6160DA	- 273	B-110	B-126	B-145							
4.55	520	53.0	9810	1000	*1	5.49	520	53.0	9810	1000	*1	05 - 6120DA	- 319	B-108	B-124	B-143	
	756	77.1	9810	1000	0.83		9810	1000	1.01	05 - 6125DA	- 319	B-108	B-124	B-143			
			14700	1500	1.03		14700	1500	1.07	05 - 6130DA	- 319	B-109	B-125	B-144			
			14700	1500	1.03		14700	1500	1.24	05 - 6130DB	- 319	B-109	B-125	B-144			
			14700	1500	1.07		14700	1500	1.07	05 - 6135DA	- 319	B-109	B-125	B-144			
			14700	1500	1.24		14700	1500	1.50	05 - 6135DB	- 319	B-109	B-125	B-144			
16000	1630	1.62	16000	1630	1.95	05 - 6140DB	- 319	B-109	B-125	B-144							
16000	1630	1.81	16000	1630	2.19	05 - 6145DB	- 319	B-109	B-125	B-144							
22100	2250	2.32	22100	2250	2.80	05 - 6160DA	- 319	B-110	B-126	B-145							
22100	2250	2.78	22100	2250	3.35	05 - 6165DA	- 319	B-110	B-126	B-145							


GEARMOTORS

Selection Tables

0.4 kW

- 6. "*"2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- 7. Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- 8. "*"3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- 9. Maintain torque load during operation within "Output torque" in the table for models with "*"1" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables Gearmotors



0.4 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

n: Motor Speed


50Hz						60Hz					Nomenclature			Page of Dimension Sheet			
Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity - Symbol	Frame - Size	Reduction - Ratio	CNHM	CNFM	CNVM
	N-m	kgf-m	N	kgf			N-m	kgf-m	N	kgf							
0.980	1760	179	22100	2250	*1	1.18	1760	179	22100	2250	*1	05 - 6160DA	-1479	B-110	B-126	B-145	
	2050	209	21800	2220	*1		2050	209	21800	2220	*1	05 - 6165DA	-1479	B-110	B-126	B-145	
	2530	258	29500	3010	*1		2530	258	29500	3010	*1	05 - 6170DA	-1479	B-110	B-126	B-145	
	3510	357	29500	3010	0.90		2910	296	29500	3010	1.08	05 - 6175DA	-1479	B-110	B-126	B-145	
0.784	2100	214	22100	2250	*1	0.946	2100	214	22100	2250	*1	05 - 6165DA	-1849	B-110	B-126	B-145	
	2530	258	29500	3010	*1		2530	258	29500	3010	*1	05 - 6170DA	-1849	B-110	B-126	B-145	
	3150	321	29500	3010	*1		3150	321	29500	3010	*1	05 - 6175DA	-1849	B-110	B-126	B-145	
	4380	447	41700	4250	0.93		3630	370	41700	4250	1.12	05 - 6180DA	-1849	B-110	B-126	B-145	
0.702	2530	258	29500	3010	*1	0.847	2530	258	29500	3010	*1	05 - 6170DA	-2065	B-110	B-126	B-145	
	3150	321	29500	3010	*1		3150	321	29500	3010	*1	05 - 6175DA	-2065	B-110	B-126	B-145	
	4050	413	41700	4250	*1		4050	413	41700	4250	*1	05 - 6180DA	-2065	B-110	B-126	B-145	
0.572	3150	321	29500	3010	*1	0.690	3150	321	29500	3010	*1	05 - 6175DA	-2537	B-110	B-126	B-145	
	4050	413	41700	4250	*1		4050	413	41700	4250	*1	05 - 6180DA	-2537	B-110	B-126	B-145	
	5000	510	41600	4240	*1		5000	510	41600	4240	*1	05 - 6185DA	-2537	B-110	B-126	B-145	
	6020	613	41200	4200	0.83		4980	508	41600	4240	1.00	05 - 6185DA	-2537	B-110	B-126	B-145	
0.476	4060	414	41700	4250	*1	0.575	4060	414	41700	4250	*1	05 - 6180DA	-3045	B-110	B-126	B-145	
	5000	510	41700	4250	*1		5000	510	41700	4250	*1	05 - 6185DA	-3045	B-110	B-126	B-145	
0.417	4050	413	41700	4250	*1	0.503	4050	413	41700	4250	*1	05 - 6180DA	-3481	B-110	B-126	B-145	
	5000	510	41600	4240	*1		5000	510	41600	4240	*1	05 - 6185DA	-3481	B-110	B-126	B-145	
0.327	4060	414	41700	4250	*1	0.394	4060	414	41700	4250	*1	05 - 6180DA	-4437	B-110	B-126	B-145	
	5000	510	41700	4250	*1		5000	510	41700	4250	*1	05 - 6185DA	-4437	B-110	B-126	B-145	
0.282	4060	414	41700	4250	*1	0.341	4060	414	41700	4250	*1	05 - 6180DA	-5133	B-110	B-126	B-145	
	5000	510	41700	4250	*1		5000	510	41700	4250	*1	05 - 6185DA	-5133	B-110	B-126	B-145	
0.235	4060	414	41700	4250	*1	0.283	4060	414	41700	4250	*1	05 - 6180DA	-6177	B-110	B-126	B-145	
	5000	510	41700	4250	*1		5000	510	41700	4250	*1	05 - 6185DA	-6177	B-110	B-126	B-145	
0.192	4060	414	41700	4250	*1	0.231	4060	414	41700	4250	*1	05 - 6180DA	-7569	B-110	B-126	B-145	
	5000	510	41700	4250	*1		5000	510	41700	4250	*1	05 - 6185DA	-7569	B-110	B-126	B-145	

GEARMOTORS

Selection Tables
0.4 kW

- "*2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- "*3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- Maintain torque load during operation within "Output torque" in the table for models with "*1" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables Gearmotors




0.55 kW	n: Motor Speed					
	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

50Hz					60Hz					Nomenclature			Page of Dimension Sheet								
Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM CHHM	CNFM CHFV	CNVM CVVM				
	N·m	kgf·m	N	kgf			N·m	kgf·m	N	kgf											
580	8.60	0.877	1170	119	2.02	700	7.13	0.727	1100	112	2.02	08 -	6070SK	- 2.5 *3	B-98	-	B-133				
			1170	119	2.53				1100	112	2.53							08 - 6075SK - 2.5 *3 B-98 - B-133			
			1290	131	3.00				1220	124	3.00							08 - 6080SK - 2.5 *3 B-98 - B-133			
			1290	131	3.75				1220	124	3.75							08 - 6085SK - 2.5 *3 B-98 - B-133			
			2280	232	4.36				2150	219	4.36							08 - 6090SK - 2.5 *3 B-98 - B-133			
483	10.3	1.05	1220	124	1.93	583	8.55	0.872	1150	117	1.93	08 -	6070SK	- 3 *3	B-98	-	B-133				
			1220	124	2.41				1150	117	2.41							08 - 6075SK - 3 *3 B-98 - B-133			
			1350	138	3.00				1290	131	3.00							08 - 6080SK - 3 *3 B-98 - B-133			
			1350	138	3.75				1290	131	3.75							08 - 6085SK - 3 *3 B-98 - B-133			
			2380	243	4.25				2250	229	4.25							08 - 6090SK - 3 *3 B-98 - B-133			
363	13.8	1.40	1320	135	1.70	438	11.4	1.16	1260	128	1.70	08 -	6070SK	- 4 *3	B-98	-	B-133				
			1320	135	2.12				1260	128	2.12							08 - 6075SK - 4 *3 B-98 - B-133			
			1470	150	3.00				1390	142	3.00							08 - 6080SK - 4 *3 B-98 - B-133			
			1470	150	3.75				1390	142	3.75							08 - 6085SK - 4 *3 B-98 - B-133			
			2670	272	4.25				2560	261	4.25							08 - 6090SK - 4 *3 B-98 - B-133			
290	17.2	1.75	1370	140	1.61	350	14.3	1.45	1290	132	1.61	08 -	6070SK	- 5 *3	B-98	-	B-133				
			1370	140	2.02				1290	132	2.02							08 - 6075SK - 5 *3 B-98 - B-133			
			1590	162	2.82				1510	154	2.82							08 - 6080SK - 5 *3 B-98 - B-133			
			1590	162	3.31				1510	154	3.31							08 - 6085SK - 5 *3 B-98 - B-133			
			2880	294	4.06				2730	278	4.06							08 - 6090SK - 5 *3 B-98 - B-133			
242	20.6	2.10	1370	140	1.42	292	17.1	1.74	1290	132	1.42	08 -	6070SK	- 6 *3	B-98	-	B-133				
			1370	140	1.78				1290	132	1.78							08 - 6075SK - 6 *3 B-98 - B-133			
			1660	169	2.36				1580	161	2.36							08 - 6080SK - 6 *3 B-98 - B-133			
			1660	169	2.95				1580	161	2.95							08 - 6085SK - 6 *3 B-98 - B-133			
			2950	301	3.47				2810	286	3.47							08 - 6090SK - 6 *3 B-98 - B-133			
			2950	301	4.13				2810	286	4.13							08 - 6095SK - 6 *3 B-98 - B-133			
			1910	195	1.08				1800	183	1.08							08 - 6080 - 6	B-100	B-116	B-135
			1910	195	1.41				1800	183	1.41							08 - 6085 - 6	B-100	B-116	B-135
			2850	291	2.09				2690	274	2.09							08 - 6090 - 6	B-100	B-116	B-135
			2850	291	2.76				2690	274	2.76							08 - 6095 - 6	B-100	B-116	B-135
			181	27.5	2.81				1510	154	1.07							219	22.8	2.33	1420
1510	154	1.34				1420	145	1.34	08 - 6075SK - 8 *3 B-98 - B-133												
1750	178	1.99				1670	170	1.99	08 - 6080SK - 8 *3 B-98 - B-133												
1750	178	2.49				1670	170	2.49	08 - 6085SK - 8 *3 B-98 - B-133												
3300	336	2.74				3140	320	2.74	08 - 6090SK - 8 *3 B-98 - B-133												
3300	336	3.22				3140	320	3.22	08 - 6095SK - 8 *3 B-98 - B-133												
3300	336	3.85				3140	320	3.85	08 - 6100SK - 8 *3 B-99 - B-134												
2070	211	1.08				1950	198	1.08	08 - 6080 - 8	B-100	B-116	B-135									
2070	211	1.41				1950	198	1.41	08 - 6085 - 8	B-100	B-116	B-135									
3180	324	2.09				2990	305	2.09	08 - 6090 - 8	B-100	B-116	B-135									
3180	324	2.76				2990	305	2.76	08 - 6095 - 8	B-100	B-116	B-135									
145	34.4	3.51	1680	171	1.03	175	28.5	2.91	1590	162	1.03	08 -	6075SK	- 10 *3	B-98	-	B-133				
			1840	188	1.60				1770	180	1.60							08 - 6080SK - 10 *3 B-98 - B-133			
			1840	188	2.00				1770	180	2.00							08 - 6085SK - 10 *3 B-98 - B-133			
			3490	356	2.55				3330	339	2.55							08 - 6090SK - 10 *3 B-98 - B-133			
			3490	356	3.22				3330	339	3.22							08 - 6095SK - 10 *3 B-98 - B-133			
			3490	356	3.60				3330	339	3.60							08 - 6100SK - 10 *3 B-99 - B-134			
			3490	356	4.00				3330	339	4.00							08 - 6105SK - 10 *3 B-99 - B-134			
132	37.9	3.86	2280	232	1.08	159	31.4	3.20	2150	219	1.08	08 -	6080	- 11	B-100	B-116	B-135				
			2280	232	1.41				2150	219	1.41							08 - 6085 - 11 B-100 B-116 B-135			
			3340	340	2.09				3340	340	2.09							08 - 6090 - 11 B-100 B-116 B-135			
			3340	340	2.76				3340	340	2.76							08 - 6095 - 11 B-100 B-116 B-135			
112	44.7	4.56	2450	249	1.08	135	37.1	3.78	2310	235	1.08	08 -	6080	- 13	B-100	B-116	B-135				
			2450	249	1.41				2310	235	1.41							08 - 6085 - 13 B-100 B-116 B-135			
			3340	340	2.09				3340	340	2.09							08 - 6090 - 13 B-100 B-116 B-135			
			3340	340	2.76				3340	340	2.76							08 - 6095 - 13 B-100 B-116 B-135			

GEARMOTORS
Selection Tables
0.55 kW

- Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
- Motor slippage may affect n₁ and n₂. Refer to technical data for details.
- CNHM, CHHM, CNFM, CHFV, CNVM, and CVVM indicate types. Refer to page B-10 for details.
- Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
- "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors




0.55 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁ r/min		1450	980	1750	1165
	n: Motor Speed					

Output Speed n ₂ r/min	50Hz				60Hz				Nomenclature			Page of Dimension Sheet					
	Output Torque Tout		Allowable Radial Load Pro		SF	Output Torque Tout		Allowable Radial Load Pro		Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM		
	N·m	kgf·m	N	kgf		N·m	kgf·m	N	kgf							CHHM	CHFM
13.9	339	34.6	9810	1000	1.55	16.8	281	28.6	9810	1000	1.87	08 - 6120DB	- 104	B-108	B-124	B-143	
			9810	1000	1.86				9810	1000	2.24	08 - 6125DB	- 104	B-108	B-124	B-143	
			14700	1500	2.30				14700	1500	2.78	08 - 6130DB	- 104	B-109	B-125	B-144	
			14700	1500	2.77				14700	1500	2.91	08 - 6135DB	- 104	B-109	B-125	B-144	
			14700	1500	2.77				14700	1500	3.35	08 - 6135DC	- 104	B-109	B-125	B-144	
			16000	1630	2.91				16000	1630	2.91	08 - 6140DB	- 104	B-109	B-125	B-144	
12.0	394	40.2	9810	1000	1.33	14.5	327	33.3	9810	1000	1.61	08 - 6120DB	- 121	B-108	B-124	B-143	
			9810	1000	1.58				9810	1000	1.90	08 - 6125DB	- 121	B-108	B-124	B-143	
			14700	1500	1.98				14700	1500	2.39	08 - 6130DB	- 121	B-109	B-125	B-144	
			14700	1500	2.38				14700	1500	2.88	08 - 6135DB	- 121	B-109	B-125	B-144	
			16000	1630	2.91				16000	1630	2.91	08 - 6140DB	- 121	B-109	B-125	B-144	
10.1	466	47.5	9810	1000	1.13	12.2	386	39.4	9810	1000	1.36	08 - 6120DB	- 143	B-108	B-124	B-143	
			9810	1000	1.35				9810	1000	1.63	08 - 6125DB	- 143	B-108	B-124	B-143	
			14700	1500	1.67				14700	1500	2.02	08 - 6130DB	- 143	B-109	B-125	B-144	
			14700	1500	2.02				14700	1500	2.43	08 - 6135DB	- 143	B-109	B-125	B-144	
			16000	1630	2.63				16000	1630	2.91	08 - 6140DB	- 143	B-109	B-125	B-144	
			16000	1630	2.63				16000	1630	3.17	08 - 6140DC	- 143	B-109	B-125	B-144	
			16000	1630	2.91				16000	1630	2.91	08 - 6145DB	- 143	B-109	B-125	B-144	
			16000	1630	2.94				16000	1630	3.55	08 - 6145DC	- 143	B-109	B-125	B-144	
8.79	538	54.8	9810	1000	1.17	10.6	446	45.4	9810	1000	1.41	08 - 6125DB	- 165	B-108	B-124	B-143	
			14700	1500	1.45				14700	1500	1.75	08 - 6130DB	- 165	B-109	B-125	B-144	
			14700	1500	1.75				14700	1500	2.11	08 - 6135DB	- 165	B-109	B-125	B-144	
			16000	1630	2.28				16000	1630	2.75	08 - 6140DB	- 165	B-109	B-125	B-144	
			16000	1630	2.52				16000	1630	2.91	08 - 6145DB	- 165	B-109	B-125	B-144	
			16000	1630	2.52				16000	1630	3.05	08 - 6145DC	- 165	B-109	B-125	B-144	
			22100	2250	2.91				22100	2250	2.91	08 - 6160DA	- 165	B-110	B-126	B-145	
7.44	636	64.8	525	53.5	9810	1000	*1	525	53.5	9810	1000	*1	08 - 6120DB	- 195	B-108	B-124	B-143
			9810	1000	0.98	9810	1000	1.20	08 - 6125DB	- 195	B-108	B-124	B-143				
			14700	1500	1.23	14700	1500	1.48	08 - 6130DB	- 195	B-109	B-125	B-144				
			14700	1500	1.48	14700	1500	1.78	08 - 6135DB	- 195	B-109	B-125	B-144				
			16000	1630	1.93	16000	1630	2.33	08 - 6140DB	- 195	B-109	B-125	B-144				
			16000	1630	2.14	16000	1630	2.58	08 - 6145DB	- 195	B-109	B-125	B-144				
			22100	2250	2.76	22100	2250	2.91	08 - 6160DA	- 195	B-110	B-126	B-145				
			22100	2250	2.76	22100	2250	3.33	08 - 6160DB	- 195	B-110	B-126	B-145				
22100	2250	2.91	22100	2250	2.91	08 - 6165DA	- 195	B-110	B-126	B-145							
6.28	753	76.8	522	53.2	9810	1000	*1	522	53.2	9810	1000	*1	08 - 6120DB	- 231	B-108	B-124	B-143
			9810	1000	0.84	9810	1000	1.01	08 - 6125DB	- 231	B-108	B-124	B-143				
			14700	1500	1.04	14700	1500	1.25	08 - 6130DB	- 231	B-109	B-125	B-144				
			14700	1500	1.25	14700	1500	1.51	08 - 6135DB	- 231	B-109	B-125	B-144				
			16000	1630	1.63	16000	1630	1.96	08 - 6140DB	- 231	B-109	B-125	B-144				
			16000	1630	1.78	16000	1630	2.14	08 - 6145DB	- 231	B-109	B-125	B-144				
			22100	2250	2.33	22100	2250	2.81	08 - 6160DA	- 231	B-110	B-126	B-145				
			22100	2250	2.79	22100	2250	2.91	08 - 6165DA	- 231	B-110	B-126	B-145				
			22100	2250	2.79	22100	2250	3.37	08 - 6165DB	- 231	B-110	B-126	B-145				
			29500	3010	2.91	29500	3010	2.91	08 - 6170DA	- 231	B-110	B-126	B-145				

1. Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
2. Motor slippage may affect n₁ and n₂. Refer to technical data for details.
3. CNHM, CHHM, CNFM, CHFM, CNVM, and CVVM indicate types. Refer to page B-10 for details.
4. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
5. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors



0.55 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

n₁: Motor Speed

50Hz					60Hz					Nomenclature			Page of Dimension Sheet					
Output Speed n ₂ r/min	Output Torque Tout N-m kgf-m		Allowable Radial Load Pro N kgf		SF	Output Speed n ₂ r/min	Output Torque Tout N-m kgf-m		Allowable Radial Load Pro N kgf		SF	Input Capacity - Symbol	Frame - Size	Reduction - Ratio	CNHM	CNFM	CNVM	
											CHHM							CHFM
5.31	890	90.7	14700	1500	1.06	6.41	737	75.2	14700	1500	1.27	08 - 6135DB - 273			B-109	B-125	B-144	
			16000	1630					16000	1630		1.66	08 - 6140DB - 273			B-109	B-125	B-144
			16000	1630					1.81	08 - 6145DB - 273				B-109	B-125	B-144		
			22100	2250					2.38	08 - 6160DA - 273				B-110	B-126	B-145		
			22100	2250					2.85	08 - 6165DA - 273				B-110	B-126	B-145		
			29500	3010					2.91	08 - 6170DA - 273				B-110	B-126	B-145		
			29500	3010					3.43	08 - 6170DB - 273				B-110	B-126	B-145		
4.55	1040	106	14700	1500	0.90	5.49	862	87.8	14700	1500	1.09	08 - 6135DB - 319			B-109	B-125	B-144	
			16000	1630					1.42	08 - 6140DB - 319				B-109	B-125	B-144		
			16000	1630					1.59	08 - 6145DB - 319				B-109	B-125	B-144		
			22100	2250					2.04	08 - 6160DA - 319				B-110	B-126	B-145		
			22100	2250					2.44	08 - 6165DA - 319				B-110	B-126	B-145		
			29500	3010					2.91	08 - 6170DA - 319				B-110	B-126	B-145		
			29500	3010					2.94	08 - 6170DB - 319				B-110	B-126	B-145		
3.85	1230	125	14700	1500	1.00	4.64	1020	104	14700	1500	1.20	08 - 6130DB - 377			B-109	B-125	B-144	
			16000	1630					1.35	08 - 6145DB - 377				B-109	B-125	B-144		
			22100	2250					1.72	08 - 6160DA - 377				B-110	B-126	B-145		
			22100	2250					2.06	08 - 6165DA - 377				B-110	B-126	B-145		
			29500	3010					2.48	08 - 6170DA - 377				B-110	B-126	B-145		
			29500	3010					2.91	08 - 6175DA - 377				B-110	B-126	B-145		
			29500	3010					3.09	08 - 6175DB - 377				B-110	B-126	B-145		
3.07	1540	157	14700	1500	0.89	3.70	1280	130	14700	1500	1.07	08 - 6135DB - 473			B-109	B-125	B-144	
			16000	1630					1.36	08 - 6145DB - 473				B-109	B-125	B-144		
			22100	2250					1.64	08 - 6160DA - 473				B-110	B-126	B-145		
			22100	2250					1.98	08 - 6165DA - 473				B-110	B-126	B-145		
			29500	3010					2.47	08 - 6170DA - 473				B-110	B-126	B-145		
			29500	3010					2.47	08 - 6175DA - 473				B-110	B-126	B-145		
			29500	3010					2.47	08 - 6175DB - 473				B-110	B-126	B-145		
2.59	1820	186	16000	1630	1.15	3.13	1510	154	16000	1630	1.39	08 - 6140DB - 559			B-109	B-125	B-144	
			15700	1600					*1	08 - 6145DB - 559				B-109	B-125	B-144		
			22100	2250					1.39	08 - 6165DA - 559				B-110	B-126	B-145		
			29500	3010					1.68	08 - 6170DA - 559				B-110	B-126	B-145		
2.23	2120	216	16000	1630	0.98	2.70	1750	179	16000	1630	1.20	08 - 6145DB - 649			B-109	B-125	B-144	
			22100	2250					*1	08 - 6160DA - 649				B-110	B-126	B-145		
			22100	2250					1.44	08 - 6165DA - 649				B-110	B-126	B-145		
			29500	3010					1.80	08 - 6170DA - 649				B-110	B-126	B-145		
1.98	2380	243	22100	2250	0.88	2.39	1970	201	22100	2250	1.06	08 - 6160DA - 731			B-110	B-126	B-145	
			22100	2250					*1	08 - 6165DA - 731				B-110	B-126	B-145		
			29500	3010					1.28	08 - 6170DA - 731				B-110	B-126	B-145		
			29500	3010					1.60	08 - 6175DA - 731				B-110	B-126	B-145		

GEARMOTORS


Selection Tables
0.55 kW

- 6. "2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- 7. Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- 8. "3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- 9. Maintain torque load during operation within "Output torque" in the table for models with "1" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables Gearmotors


Selection Tables
0.55 kW
GEARMOTORS

0.55 kW	n: Motor Speed					
	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165



50Hz						60Hz					Nomenclature			Page of Dimension Sheet						
Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity - Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM			
r/min	N·m	kgf·m	N	kgf		r/min	N·m	kgf·m	N	kgf					CHHM	CHFM	CVVM			
1.72	1760	179	22100	2250	*1	2.08	1760	179	22100	2250	*1	08 - 6160DA	- 841		B-110	B-126	B-145			
	2100	214	22100	2250	*1		2100	214	22100	2250	*1				08 - 6165DA	- 841		B-110	B-126	B-145
	2740	279	29500	3010	1.15		2270	232	29500	3010	1.39				08 - 6175DA	- 841		B-110	B-126	B-145
1.45	2100	214	22100	2250	*1	1.74	2100	214	22100	2250	*1	08 - 6165DA	- 1003		B-110	B-126	B-145			
	2530	258	29500	3010	*1		2530	258	29500	3010	*1				08 - 6170DA	- 1003		B-110	B-126	B-145
	3270	333	29500	3010	0.96		2710	276	29500	3010	1.16				08 - 6175DA	- 1003		B-110	B-126	B-145
1.16	2530	258	29500	3010	*1	1.40	2530	258	29500	3010	*1	08 - 6170DA	- 1247		B-110	B-126	B-145			
	3150	321	29500	3010	*1		3150	321	29500	3010	*1				08 - 6175DA	- 1247		B-110	B-126	B-145
0.980	3150	321	29500	3010	*1	1.18	3150	321	29500	3010	*1	08 - 6175DA	- 1479		B-110	B-126	B-145			
0.784	4060	414	41700	4250	*1	0.946	4060	414	41700	4250	*1	08 - 6180DA	- 1849		B-110	B-126	B-145			


0.75 kW	n: Motor Speed					
	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165



50Hz						60Hz					Nomenclature			Page of Dimension Sheet					
Output Speed n ₂	Output Torque Tout		Alloeeable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout		Alloeeable Radial Load Pro		SF	Input Capacity - Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM		
r/min	N·m	kgf·m	N	kgf		r/min	N·m	kgf·m	N	kgf					CHHM	CHFM	CVVM		
580	11.7	1.20	1130	115	1.48	700	9.72	0.991	1080	110	1.48	1 - 6070SK	- 2.5 *3		B-98	-	B-133		
			1130	115	1.85				1080	110	1.85				1 - 6075SK	- 2.5 *3	B-98	-	B-133
			1260	128	2.20				1190	121	2.20				1 - 6080SK	- 2.5 *3	B-98	-	B-133
			1260	128	2.75				1190	121	2.75				1 - 6085SK	- 2.5 *3	B-98	-	B-133
			2250	229	3.20				2130	217	3.20				1 - 6090SK	- 2.5 *3	B-98	-	B-133
			2250	229	3.61				2130	217	3.61				1 - 6095SK	- 2.5 *3	B-98	-	B-133
483	14.1	1.44	1180	120	1.41	583	11.7	1.19	1120	114	1.41	1 - 6070SK	- 3 *3		B-98	-	B-133		
			1180	120	1.77				1120	114	1.77				1 - 6075SK	- 3 *3	B-98	-	B-133
			1310	134	2.20				1250	127	2.20				1 - 6080SK	- 3 *3	B-98	-	B-133
			1310	134	2.75				1250	127	2.75				1 - 6085SK	- 3 *3	B-98	-	B-133
			2340	239	3.12				2220	226	3.12				1 - 6090SK	- 3 *3	B-98	-	B-133
			2340	239	3.51				2220	226	3.51				1 - 6095SK	- 3 *3	B-98	-	B-133
363	18.8	1.91	1270	129	1.25	438	15.6	1.59	1220	124	1.25	1 - 6070SK	- 4 *3		B-98	-	B-133		
			1270	129	1.56				1220	124	1.56				1 - 6075SK	- 4 *3	B-98	-	B-133
			1420	145	2.20				1350	138	2.20				1 - 6080SK	- 4 *3	B-98	-	B-133
			1420	145	2.75				1350	138	2.75				1 - 6085SK	- 4 *3	B-98	-	B-133
			2660	271	3.12				2520	257	3.12				1 - 6090SK	- 4 *3	B-98	-	B-133
			2660	271	3.51				2520	257	3.51				1 - 6095SK	- 4 *3	B-98	-	B-133
290	23.5	2.39	1370	140	1.18	350	19.4	1.98	1290	132	1.18	1 - 6070SK	- 5 *3		B-98	-	B-133		
			1370	140	1.48				1290	132	1.48				1 - 6075SK	- 5 *3	B-98	-	B-133
			1530	156	2.07				1460	149	2.07				1 - 6080SK	- 5 *3	B-98	-	B-133
			1530	156	2.47				1460	149	2.43				1 - 6085SK	- 5 *3	B-98	-	B-133
			2820	287	2.98				2680	273	2.98				1 - 6090SK	- 5 *3	B-98	-	B-133
			2820	287	3.51				2680	273	3.51				1 - 6095SK	- 5 *3	B-98	-	B-133

- Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
- Motor slippage may affect n₁ and n₂. Refer to technical data for details.
- CNHM, CHHM, CNFM, CHFM, CNVM, and CVVM indicate types. Refer to page B-10 for details.
- Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
- "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors




0.75 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁ r/min		1450	980	1750	1165
	n: Motor Speed					

50Hz					60Hz					Nomenclature			Page of Dimension Sheet		
Output Speed n ₂ r/min	Output Torque Tout N·m	Allowable Radial Load Pro		SF	Output Speed n ₂ r/min	Output Torque Tout N·m	Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
		N	kgf				N	kgf					CHHM	CHFM	CVVM
41.4	164	16.7	3270	334	1.01	50.0	136	13.9					B-100	B-116	B-135
			5400	550	1.30								B-101	B-117	B-136
			5400	550	1.60								B-101	B-117	B-136
			7470	761	2.00								B-101	B-117	B-136
			7470	761	2.41								B-101	B-117	B-136
33.7	202	20.6	3210	328	0.80	40.7	167	17.0					B-100	B-116	B-135
			5400	550	1.04								B-101	B-117	B-136
			5400	550	1.44								B-101	B-117	B-136
			7610	776	1.73								B-101	B-117	B-136
			7610	776	2.03								B-101	B-117	B-136
28.4	239	24.4	9810	1000	2.55	34.3	198	20.2					B-101	B-117	B-136
			5400	550	1.03								B-101	B-117	B-136
			7610	776	1.26								B-101	B-117	B-136
			7610	776	1.48								B-101	B-117	B-136
			9810	1000	2.17								B-101	B-117	B-136
24.6	277	28.2	9810	1000	2.63	29.7	229	23.4					B-101	B-117	B-136
			5400	550	0.91								B-101	B-117	B-136
			7610	776	1.15								B-101	B-117	B-136
			7610	776	1.35								B-101	B-117	B-136
			9810	1000	1.73								B-101	B-117	B-136
20.4	333	34.0	9810	1000	2.16	24.6	276	28.1					B-101	B-117	B-136
			13200	1340	2.81								B-102	B-118	B-137
			7610	776	1.01								B-101	B-117	B-136
			9810	1000	1.28								B-101	B-117	B-136
			9810	1000	1.52								B-101	B-117	B-136
16.7	408	41.6	14000	1420	2.35	20.1	338	34.5					B-102	B-118	B-137
			14000	1420	2.71								B-102	B-118	B-137
			7550	770	1.01								B-101	B-117	B-136
			9810	1000	1.26								B-101	B-117	B-136
			9810	1000	1.37								B-101	B-117	B-136
13.9	462	47.1	14700	1500	1.89	16.8	383	39.1					B-102	B-118	B-137
			14700	1500	2.20								B-102	B-118	B-137
			16000	1630	2.64								B-102	B-118	B-137
			16000	1630	2.88								B-102	B-118	B-137
			9810	1000	1.14								B-108	B-124	B-143
12.0	538	54.8	9810	1000	1.36	14.5	446	45.4					B-108	B-124	B-143
			14700	1500	1.69								B-109	B-125	B-144
			14700	1500	2.03								B-109	B-125	B-144
			16000	1630	2.13								B-109	B-125	B-144
			16000	1630	2.65								B-109	B-125	B-144
12.0	538	54.8	16000	1630	2.96	14.5	446	45.4					B-109	B-125	B-144
			9810	1000	1.16								B-108	B-124	B-143
			14700	1500	1.45								B-109	B-125	B-144
			14700	1500	1.75								B-109	B-125	B-144
			16000	1630	2.13								B-109	B-125	B-144
12.0	538	54.8	16000	1630	2.28	14.5	446	45.4					B-109	B-125	B-144
			16000	1630	2.40								B-109	B-125	B-144
			9810	1000	1.40								B-108	B-124	B-143
			14700	1500	1.75								B-109	B-125	B-144
			14700	1500	2.11								B-109	B-125	B-144
12.0	538	54.8	16000	1630	2.75	14.5	446	45.4					B-109	B-125	B-144
			16000	1630	2.90								B-109	B-125	B-144
			9810	1000	1.40								B-108	B-124	B-143
			14700	1500	1.75								B-109	B-125	B-144
			14700	1500	2.11								B-109	B-125	B-144

- Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
- Motor slippage may affect n₁ and n₂. Refer to technical data for details.
- CNHM, CHHM, CNFM, CHFM, CNVM, and CVVM indicate types. Refer to page B-10 for details.
- Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
- "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors



0.75 kW

n₁: Motor Speed

Hz	50Hz		60Hz	
	P		4	6
	n ₁	r/min	1450	980
			1750	1165


50Hz						60Hz						Nomenclature			Page of Dimension Sheet		
Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity - Symbol	Frame - Size	Reduction - Ratio	CNHM CHHM	CNFM CHFM	CNVM CVVM
	r/min	N·m	kgf·m	N			kgf	r/min	N·m	kgf·m							
10.1	525	53.5	9810	1000	*1	12.2	525	53.5	9810	1000	*1	1 - 6120DB	- 143	B-108	B-124	B-143	
												1 - 6125DB	- 143	B-108	B-124	B-143	
												1 - 6130DB	- 143	B-109	B-125	B-144	
												1 - 6135DB	- 143	B-109	B-125	B-144	
	636	64.8	16000	1630	1.93		2.13	527	53.7	16000	1630	2.13	1 - 6140DB	- 143	B-109	B-125	B-144
													1 - 6140DC	- 143	B-109	B-125	B-144
													1 - 6145DB	- 143	B-109	B-125	B-144
													1 - 6145DC	- 143	B-109	B-125	B-144
16000	1630	2.15	2.15	2.15	2.76			16000	1630	2.60	1 - 6160DB	- 143	B-110	B-126	B-145		
											1 - 6160DB	- 143	B-110	B-126	B-145		
											1 - 6160DB	- 143	B-110	B-126	B-145		
											1 - 6160DB	- 143	B-110	B-126	B-145		
8.79	525	53.5	9810	1000	*1	10.6	525	53.5	9810	1000	*1	1 - 6120DB	- 165	B-108	B-124	B-143	
												1 - 6125DB	- 165	B-108	B-124	B-143	
												1 - 6130DB	- 165	B-109	B-125	B-144	
												1 - 6135DB	- 165	B-109	B-125	B-144	
	734	74.8	16000	1630	1.67		2.13	608	62.0	16000	1630	2.02	1 - 6140DB	- 165	B-109	B-125	B-144
													1 - 6145DB	- 165	B-109	B-125	B-144
													1 - 6145DC	- 165	B-109	B-125	B-144
													1 - 6160DA	- 165	B-110	B-126	B-145
	22100	2250	2.39	2.39	2.39		2.86			22100	2250	2.89	1 - 6160DB	- 165	B-110	B-126	B-145
													1 - 6160DB	- 165	B-110	B-126	B-145
1 - 6160DB						- 165							B-110	B-126	B-145		
1 - 6165DB						- 165							B-110	B-126	B-145		
7.44	630	64.2	9810	1000	*1	8.97	630	64.2	9810	1000	*1	1 - 6125DB	- 195	B-108	B-124	B-143	
												1 - 6135DB	- 195	B-109	B-125	B-144	
												1 - 6140DB	- 195	B-109	B-125	B-144	
												1 - 6145DB	- 195	B-109	B-125	B-144	
	867	88.4	22100	2250	2.02		2.13	718	73.2	22100	2250	2.13	1 - 6160DA	- 195	B-110	B-126	B-145
													1 - 6160DB	- 195	B-110	B-126	B-145
													1 - 6165DA	- 195	B-110	B-126	B-145
													1 - 6165DB	- 195	B-110	B-126	B-145
	22100	2250	2.42	2.42	2.42		2.92			22100	2250	2.92	1 - 6165DB	- 195	B-110	B-126	B-145
													1 - 6165DB	- 195	B-110	B-126	B-145
1 - 6165DB						- 195							B-110	B-126	B-145		
1 - 6170DB						- 195							B-110	B-126	B-145		
6.28	630	64.2	9810	1000	*1	7.58	630	64.2	9810	1000	*1	1 - 6125DB	- 231	B-108	B-124	B-143	
												1 - 6130DB	- 231	B-109	B-125	B-144	
	780	79.5	14700	1500	0.92		1.10	851	86.7	14700	1500	1.10	1 - 6135DB	- 231	B-109	B-125	B-144
													1 - 6140DB	- 231	B-109	B-125	B-144
													1 - 6145DB	- 231	B-109	B-125	B-144
													1 - 6160DA	- 231	B-110	B-126	B-145
													1 - 6165DA	- 231	B-110	B-126	B-145
													1 - 6165DB	- 231	B-110	B-126	B-145
													1 - 6165DB	- 231	B-110	B-126	B-145
													1 - 6170DA	- 231	B-110	B-126	B-145
1 - 6170DB	- 231	B-110	B-126	B-145													
940	95.8	14700	1500	*1	1.75	1010	103	14700	1500	*1	1 - 6130DB	- 273	B-109	B-125	B-144		
											1 - 6135DB	- 273	B-109	B-125	B-144		
											1 - 6140DB	- 273	B-109	B-125	B-144		
											1 - 6145DB	- 273	B-109	B-125	B-144		
											1 - 6160DA	- 273	B-110	B-126	B-145		
											1 - 6165DA	- 273	B-110	B-126	B-145		
											1 - 6170DA	- 273	B-110	B-126	B-145		
											1 - 6170DB	- 273	B-110	B-126	B-145		
1210	124	29500	3010	2.08	2.13			29500	3010	2.13	1 - 6175DA	- 273	B-110	B-126	B-145		
											1 - 6175DA	- 273	B-110	B-126	B-145		
											1 - 6175DB	- 273	B-110	B-126	B-145		
											1 - 6175DB	- 273	B-110	B-126	B-145		
											1 - 6175DB	- 273	B-110	B-126	B-145		
											1 - 6175DB	- 273	B-110	B-126	B-145		

SELECTION TABLES

GEARMOTORS
0.75 kW

- "*2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- "*3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- Maintain torque load during operation within "Output torque" in the table for models with "*1" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables Gearmotors



0.75 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

n: Motor Speed

50Hz						60Hz					Nomenclature			Page of Dimension Sheet			
Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
	N-m	kgf-m	N	kgf			N-m	kgf-m	N	kgf							
1.16	4060	414	41700	4250	*1	1.40	4060	414	41700	4250	*1	1 - 6180DA	-1247	B-110	B-126	B-145	
	5540	565	41700	4250	0.90		41700	4250	1.09	1 - 6185DA	-1247	B-110	B-126	B-145			
			59000	6010	1.15		59000	6010	1.39	1 - 6190DA	-1247	B-111	B-128	B-147			
0.980	4060	414	41700	4250	*1	1.18	4060	414	41700	4250	*1	1 - 6180DA	-1479	B-110	B-126	B-145	
	5000	510	41700	4250	*1		5000	510	41700	4250	*1	1 - 6185DA	-1479	B-110	B-126	B-145	
	6580	670	58800	5990	1.21		6580	670	58800	6010	1.46	1 - 6195DA	-1479	B-111	B-128	B-147	
0.784	5000	510	41700	4250	*1	0.946	5000	510	41700	4250	*1	1 - 6185DA	-1849	B-110	B-126	B-145	
	6380	650	59000	6010	*1		6380	650	59000	6010	*1	1 - 6190DA	-1849	B-111	B-128	B-147	
	8220	838	58900	6000	0.97		8220	838	58900	6010	1.17	1 - 6195DA	-1849	B-111	B-128	B-147	
0.702	5000	510	41600	4240	*1	0.847	5000	510	41600	4240	*1	1 - 6185DA	-2065	B-110	B-126	B-145	
	6380	650	58600	5970	*1		6380	650	58600	5970	*1	1 - 6190DA	-2065	B-111	B-128	B-147	
	9180	936	57800	5890	0.87		9180	936	57800	5940	1.05	1 - 6195DA	-2065	B-111	B-128	B-147	
0.572	6380	650	58600	5970	*1	0.690	6380	650	58600	5970	*1	1 - 6190DA	-2537	B-111	B-128	B-147	
	7960	811	58100	5930	*1		7960	811	58100	5930	*1	1 - 6195DA	-2537	B-111	B-128	B-147	
	9300	948	84100	8570	*1		9300	948	84100	8570	*1	1 - 6205DA	-2537	B-112	B-129	B-148	
	11300	1150	84100	8570	0.82		9350	953	84100	8570	1.00	1 - 6205DA	-2537	B-112	B-129	B-148	
0.476	6380	650	58900	6000	*1	0.575	6380	650	58900	6000	*1	1 - 6190DA	-3045	B-111	B-128	B-147	
	7960	811	58400	5950	*1		7960	811	58400	5950	*1	1 - 6195DA	-3045	B-111	B-128	B-147	
	8760	893	84100	8570	*1		8760	893	84100	8570	*1	1 - 6205DA	-3045	B-112	B-129	B-148	
0.417	6380	650	58600	5970	*1	0.503	6380	650	58600	5970	*1	1 - 6190DA	-3481	B-111	B-128	B-147	
	7960	811	58100	5930	*1		7960	811	58100	5930	*1	1 - 6195DA	-3481	B-111	B-128	B-147	
	9300	948	84100	8570	*1		9300	948	84100	8570	*1	1 - 6205DA	-3481	B-112	B-129	B-148	
0.327	6380	650	58900	6000	*1	0.394	6380	650	58900	6000	*1	1 - 6190DA	-4437	B-111	B-128	B-147	
	7960	811	58400	5950	*1		7960	811	58400	5950	*1	1 - 6195DA	-4437	B-111	B-128	B-147	
	8760	893	84100	8570	*1		8760	893	84100	8570	*1	1 - 6205DA	-4437	B-112	B-129	B-148	
0.282	6380	650	58900	6000	*1	0.341	6380	650	58900	6000	*1	1 - 6190DA	-5133	B-111	B-128	B-147	
	7960	811	58400	5950	*1		7960	811	58400	5950	*1	1 - 6195DA	-5133	B-111	B-128	B-147	
	9300	948	84100	8570	*1		9300	948	84100	8570	*1	1 - 6205DA	-5133	B-112	B-129	B-148	
0.235	6380	650	58900	6000	*1	0.283	6380	650	58900	6000	*1	1 - 6190DA	-6177	B-111	B-128	B-147	
	7960	811	58400	5950	*1		7960	811	58400	5950	*1	1 - 6195DA	-6177	B-111	B-128	B-147	
	8760	893	84100	8570	*1		8760	893	84100	8570	*1	1 - 6205DA	-6177	B-112	B-129	B-148	
0.192	6380	650	58900	6000	*1	0.231	6380	650	58900	6000	*1	1 - 6190DA	-7569	B-111	B-128	B-147	
	7960	811	58400	5950	*1		7960	811	58400	5950	*1	1 - 6195DA	-7569	B-111	B-128	B-147	
	8760	893	84100	8570	*1		8760	893	84100	8570	*1	1 - 6205DA	-7569	B-112	B-129	B-148	


- "*2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- "*3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- Maintain torque load during operation within "Output torque" in the table for models with "*" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables Gearmotors

1.1 kW	Hz		50Hz		60Hz		n: Motor Speed										
	P		4	6	4	6	CHHM/CNHM		CHF/CNFM	CVVM/CNVM							
	n ₁	r/min	1450	980	1750	1165											
50Hz						60Hz						Nomenclature			Page of Dimension Sheet		
Output Speed n ₂	Output Torque Tout	Allowable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout	Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM		
r/min	N·m	kgf·m	N	kgf	r/min	N·m	kgf·m	N	kgf				CHHM	CHF	CVVM		
580	17.2	1.75	1200	122	1.50	700	14.3	1.45	1140	116	1.50	1H - 6080SK	- 2.5 *3	B-98	-	B-133	
			1200	122	1.87				1140	116	1.87	1H - 6085SK	- 2.5 *3	B-98	-	B-133	
			2230	227	2.18				2120	216	2.18	1H - 6090SK	- 2.5 *3	B-98	-	B-133	
			2230	227	2.46				2120	216	2.46	1H - 6095SK	- 2.5 *3	B-98	-	B-133	
			2230	227	2.90				2120	216	2.90	1H - 6100SK	- 2.5 *3	B-99	-	B-134	
483	20.6	2.10	1250	127	1.50	583	17.1	1.74	1200	122	1.50	1H - 6080SK	- 3 *3	B-98	-	B-133	
			1250	127	1.87				1200	122	1.87	1H - 6085SK	- 3 *3	B-98	-	B-133	
			2310	235	2.13				2210	225	2.13	1H - 6090SK	- 3 *3	B-98	-	B-133	
			2310	235	2.39				2210	225	2.39	1H - 6095SK	- 3 *3	B-98	-	B-133	
			2310	235	3.00				2210	225	3.00	1H - 6100SK	- 3 *3	B-99	-	B-134	
363	27.5	2.81	1330	136	1.50	438	22.8	2.33	1290	131	1.50	1H - 6080SK	- 4 *3	B-98	-	B-133	
			1330	136	1.87				1290	131	1.87	1H - 6085SK	- 4 *3	B-98	-	B-133	
			2560	261	2.13				2450	250	2.13	1H - 6090SK	- 4 *3	B-98	-	B-133	
			2560	261	2.39				2450	250	2.39	1H - 6095SK	- 4 *3	B-98	-	B-133	
			2560	261	2.93				2450	250	2.93	1H - 6100SK	- 4 *3	B-99	-	B-134	
290	34.4	3.51	1420	145	1.41	350	28.5	2.91	1370	140	1.41	1H - 6080SK	- 5 *3	B-98	-	B-133	
			1420	145	1.65				1370	140	1.65	1H - 6085SK	- 5 *3	B-98	-	B-133	
			2740	279	2.03				2600	265	2.03	1H - 6090SK	- 5 *3	B-98	-	B-133	
			2740	279	2.39				2600	265	2.39	1H - 6095SK	- 5 *3	B-98	-	B-133	
			2740	279	2.86				2600	265	2.86	1H - 6100SK	- 5 *3	B-99	-	B-134	
242	41.3	4.21	1450	148	1.18	292	34.2	3.49	1410	144	1.18	1H - 6080SK	- 6 *3	B-98	-	B-133	
			1450	148	1.47				1410	144	1.47	1H - 6085SK	- 6 *3	B-98	-	B-133	
			2800	285	1.74				2670	272	1.74	1H - 6090SK	- 6 *3	B-98	-	B-133	
			2800	285	2.06				2670	272	2.06	1H - 6095SK	- 6 *3	B-98	-	B-133	
			2800	285	2.43				2670	272	2.43	1H - 6100SK	- 6 *3	B-99	-	B-134	
			2800	285	2.85				2670	272	2.85	1H - 6105SK	- 6 *3	B-99	-	B-134	
			2820	287	1.05				2650	270	1.05	1H - 6090	- 6	B-100	B-116	B-135	
			2820	287	1.38				2650	270	1.38	1H - 6095	- 6	B-100	B-116	B-135	
			4140	422	2.14				3900	397	2.14	1H - 6100	- 6	B-101	B-117	B-136	
4140	422	2.89	3900	397	2.89	1H - 6105	- 6	B-101	B-117	B-136							
181	55.1	5.61	1490	152	1.00	219	45.6	4.65	1450	148	1.00	1H - 6080SK	- 8 *3	B-98	-	B-133	
			1490	152	1.25				1450	148	1.25	1H - 6085SK	- 8 *3	B-98	-	B-133	
			3060	312	1.37				2930	299	1.37	1H - 6090SK	- 8 *3	B-98	-	B-133	
			3060	312	1.61				2930	299	1.61	1H - 6095SK	- 8 *3	B-98	-	B-133	
			3060	312	1.92				2930	299	1.92	1H - 6100SK	- 8 *3	B-99	-	B-134	
			3060	312	2.26				2930	299	2.26	1H - 6105SK	- 8 *3	B-99	-	B-134	
			4080	416	3.37				3870	395	3.37	1H - 6110SK	- 8 *3	B-99	-	B-134	
			3130	319	1.05				2950	301	1.05	1H - 6090	- 8	B-100	B-116	B-135	
			3130	319	1.38				2950	301	1.38	1H - 6095	- 8	B-100	B-116	B-135	
			4620	471	2.14				4350	443	2.14	1H - 6100	- 8	B-101	B-117	B-136	
4620	471	2.89	4350	443	2.89	1H - 6105	- 8	B-101	B-117	B-136							
145	68.8	7.02	1540	157	1.00	175	57.0	5.81	1510	154	1.00	1H - 6085SK	- 10 *3	B-98	-	B-133	
			3220	328	1.27				3070	313	1.27	1H - 6090SK	- 10 *3	B-98	-	B-133	
			3220	328	1.61				3070	313	1.61	1H - 6095SK	- 10 *3	B-98	-	B-133	
			3220	328	1.80				3070	313	1.80	1H - 6100SK	- 10 *3	B-99	-	B-134	
			3220	328	2.00				3070	313	2.00	1H - 6105SK	- 10 *3	B-99	-	B-134	
			4400	449	2.78				4180	426	2.78	1H - 6110SK	- 10 *3	B-99	-	B-134	
			4400	449	3.47				4180	426	3.47	1H - 6115SK	- 10 *3	B-99	-	B-134	
132	75.7	7.72	3340	340	1.05	159	62.7	6.39	3340	340	1.05	1H - 6090	- 11	B-100	B-116	B-135	
			3340	340	1.38				3340	340	1.38	1H - 6095	- 11	B-100	B-116	B-135	
			5250	536	2.14				4950	504	2.14	1H - 6100	- 11	B-101	B-117	B-136	
			5250	536	2.89				4950	504	2.89	1H - 6105	- 11	B-101	B-117	B-136	

- Combinations in bold are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
- Motor slippage may affect n₁ and n₂. Refer to technical data for details.
- CNHM, CHHM, CNFM, CHF, CNVM, and CVVM indicate types. Refer to page B-10 for details.
- Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
- "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors



CHHM/CNHM

CHF/CNFM

CVVM/CNVM

1.1 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

n: Motor Speed


50Hz					60Hz					Nomenclature			Page of Dimension Sheet				
Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
	N-m	kgf-m	N	kgf			N-m	kgf-m	N	kgf							
7.44	780	79.5	14700	1500	*1	8.97	780	79.5	14700	1500	*1	1H - 6130DB	- 195	B-109	B-125	B-144	
	940	95.8	14700	1500	*1		940	95.8	14700	1500	*1	1H - 6135DB	- 195	B-109	B-125	B-144	
			16000	1630	1.07					16000	1630	1.29	1H - 6145DB	- 195	B-109	B-125	B-144
			22100	2250	1.38					22100	2250	1.45	1H - 6160DA	- 195	B-110	B-126	B-145
			22100	2250	1.38					22100	2250	1.67	1H - 6160DB	- 195	B-110	B-126	B-145
	1270	130	22100	2250	1.45		1050	107	22100	2250	1.45	1H - 6165DA	- 195	B-110	B-126	B-145	
			22100	2250	1.65				22100	2250	1.99	1H - 6165DB	- 195	B-110	B-126	B-145	
6.28	940	95.8	14700	1500	*1	7.58	940	95.8	14700	1500	*1	1H - 6135DB	- 231	B-109	B-125	B-144	
	1230	125	16000	1630	*1		1230	125	16000	1630	*1	1H - 6140DB	- 231	B-109	B-125	B-144	
			15500	1580	0.89					16000	1630	1.07	1H - 6145DB	- 231	B-109	B-125	B-144
			22100	2250	1.17					22100	2250	1.41	1H - 6160DA	- 231	B-110	B-126	B-145
			22100	2250	1.39					22100	2250	1.45	1H - 6165DA	- 231	B-110	B-126	B-145
	1510	154	29500	3010	1.45		1250	127	22100	2250	1.68	1H - 6165DB	- 231	B-110	B-126	B-145	
			29500	3010	1.68				29500	3010	1.45	1H - 6170DA	- 231	B-110	B-126	B-145	
5.31	1230	125	16000	1630	*1	6.41	1230	125	16000	1630	*1	1H - 6140DB	- 273	B-109	B-125	B-144	
	1340	136	16000	1630	*1		1340	136	16000	1630	*1	1H - 6145DB	- 273	B-109	B-125	B-144	
			22100	2250	1.18					22100	2250	1.42	1H - 6165DA	- 273	B-110	B-126	B-145
			29500	3010	1.42					29500	3010	1.45	1H - 6170DA	- 273	B-110	B-126	B-145
			29500	3010	1.42					29500	3010	1.72	1H - 6170DB	- 273	B-110	B-126	B-145
	1780	181	29500	3010	1.45		1470	150	29500	3010	1.45	1H - 6175DA	- 273	B-110	B-126	B-145	
			29500	3010	1.77				29500	3010	2.14	1H - 6175DB	- 273	B-110	B-126	B-145	
4.55	1230	125	16000	1630	*1	5.49	1230	125	16000	1630	*1	1H - 6140DB	- 319	B-109	B-125	B-144	
	1370	140	15800	1610	*1		1370	140	15800	1610	*1	1H - 6145DB	- 319	B-109	B-125	B-144	
			22100	2250	1.01					22100	2250	1.22	1H - 6165DA	- 319	B-110	B-126	B-145
			29500	3010	1.22					29500	3010	1.45	1H - 6170DA	- 319	B-110	B-126	B-145
			29500	3010	1.22					29500	3010	1.47	1H - 6170DB	- 319	B-110	B-126	B-145
	2080	212	29500	3010	1.45		1720	176	29500	3010	1.45	1H - 6175DA	- 319	B-110	B-126	B-145	
			29500	3010	1.51				29500	3010	1.83	1H - 6175DB	- 319	B-110	B-126	B-145	
3.85	1760	179	22100	2250	*1	4.64	1760	179	22100	2250	*1	1H - 6160DA	- 377	B-110	B-126	B-145	
			22100	2250	0.85					22100	2250	1.03	1H - 6165DA	- 377	B-110	B-126	B-145
			29500	3010	1.03					29500	3010	1.24	1H - 6170DA	- 377	B-110	B-126	B-145
			29500	3010	1.28					29500	3010	1.45	1H - 6175DA	- 377	B-110	B-126	B-145
	2460	251	29500	3010	1.28		2040	208	29500	3010	1.55	1H - 6175DB	- 377	B-110	B-126	B-145	
			41700	4250	1.65				41700	4250	1.99	1H - 6180DA	- 377	B-110	B-126	B-145	
			41700	4250	2.03				41700	4250	2.45	1H - 6185DA	- 377	B-110	B-126	B-145	
		59000	6010	2.60			59000	6010	3.13	1H - 6190DA	- 377	B-111	B-128	B-147			

- "*2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- "*3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- Maintain torque load during operation within "Output torque" in the table for models with "*"1" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables Gearmotors

1.1 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n_1	r/min	1450	980	1750	1165


n: Motor Speed



50Hz						60Hz						Nomenclature			Page of Dimension Sheet		
Output Speed n_2	Output Torque T_{out}	Allowable Radial Load Pro		SF		Output Speed n_2	Output Torque T_{out}	Allowable Radial Load Pro		SF		Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
r/min	N·m	kgf·m	N	kgf		r/min	N·m	kgf·m	N	kgf					CHHM	CHFMCNFM	CVVM
3.07	2100	214	22100	2250	*1	3.70	2100	214	22100	2250	*1	1H - 6165DA	- 473	B-110	B-126	B-145	
	2530	258	29500	3010	*1		2530	258	29500	3010	*1	1H - 6170DA	- 473	B-110	B-126	B-145	
			29500	3010	1.02					29500	3010	1.23	1H - 6175DA	- 473	B-110	B-126	B-145
			41700	4250	1.32					41700	4250	1.59	1H - 6180DA	- 473	B-110	B-126	B-145
	3080	314	41700	4250	1.62			2560	260	41700	4250	1.96	1H - 6185DA	- 473	B-110	B-126	B-145
			59000	6010	2.07					59000	6010	2.50	1H - 6190DA	- 473	B-111	B-128	B-147
		59000	6010	2.58				59000	6010	3.11	1H - 6195DA	- 473	B-111	B-128	B-147		
2.59	2100	214	22100	2250	*1	3.13	2100	214	22100	2250	*1	1H - 6165DA	- 559	B-110	B-126	B-145	
	2530	258	29500	3010	*1		2530	258	29500	3010	*1	1H - 6170DA	- 559	B-110	B-126	B-145	
			29500	3010	0.86					29500	3010	1.04	1H - 6175DA	- 559	B-110	B-126	B-145
			41700	4250	1.11					41700	4250	1.34	1H - 6180DA	- 559	B-110	B-126	B-145
	3640	372	41700	4250	1.37			3020	308	41700	4250	1.66	1H - 6185DA	- 559	B-110	B-126	B-145
			59000	6010	1.75					59000	6010	2.11	1H - 6190DA	- 559	B-111	B-128	B-147
		59000	6010	2.18				59000	6010	2.64	1H - 6195DA	- 559	B-111	B-128	B-147		
2.23	2530	258	29500	3010	*1	2.70	2530	258	29500	3010	*1	1H - 6170DA	- 649	B-110	B-126	B-145	
	3150	321	29500	3010	*1		3150	321	29500	3010	*1	1H - 6175DA	- 649	B-110	B-126	B-145	
			41700	4250	1.18					41700	4250	1.43	1H - 6185DA	- 649	B-110	B-126	B-145
	4230	431	59000	6010	1.51			3510	357	59000	6010	1.82	1H - 6190DA	- 649	B-111	B-128	B-147
		59000	6010	1.88				59000	6010	2.27	1H - 6195DA	- 649	B-111	B-128	B-147		
1.98	3150	321	29500	3010	*1	2.39	3150	321	29500	3010	*1	1H - 6175DA	- 731	B-110	B-126	B-145	
			41700	4250	1.05					41700	4250	1.27	1H - 6185DA	- 731	B-110	B-126	B-145
	4770	486	59000	6010	1.34			3950	403	59000	6010	1.62	1H - 6190DA	- 731	B-111	B-128	B-147
			59000	6010	1.67					59000	6010	2.02	1H - 6195DA	- 731	B-111	B-128	B-147
1.72	3150	321	29500	3010	*1	2.08	3150	321	29500	3010	*1	1H - 6175DA	- 841	B-110	B-126	B-145	
	4050	413	41700	4250	*1		4050	413	41700	4250	*1	1H - 6180DA	- 841	B-110	B-126	B-145	
			41700	4250	0.91					41700	4250	1.10	1H - 6185DA	- 841	B-110	B-126	B-145
		59000	6010	1.16				59000	6010	1.40	1H - 6190DA	- 841	B-111	B-128	B-147		
		59000	6010	1.45				59000	6010	1.75	1H - 6195DA	- 841	B-111	B-128	B-147		
1.45	4050	413	41700	4250	*1	1.74	4050	413	41700	4250	*1	1H - 6180DA	- 1003	B-110	B-126	B-145	
	5000	510	41600	4240	*1		5000	510	41600	4240	*1	1H - 6185DA	- 1003	B-110	B-126	B-145	
	6540	667	58500	5970	1.22			5420	552	58800	6000	1.47	1H - 6195DA	- 1003	B-111	B-128	B-147
1.16	5000	510	41700	4250	*1	1.40	5000	510	41700	4250	*1	1H - 6185DA	- 1247	B-110	B-126	B-145	
	6380	650	59000	6010	*1		6380	650	59000	6010	*1	1H - 6190DA	- 1247	B-111	B-128	B-147	
	8130	829	58900	6010	0.98			6740	687	59000	6010	1.18	1H - 6195DA	- 1247	B-111	B-128	B-147
0.980	6380	650	58900	6000	*1	1.18	6380	650	58900	6000	*1	1H - 6190DA	- 1479	B-111	B-128	B-147	
	7960	811	58400	5950	*1		7960	811	58400	5950	*1	1H - 6195DA	- 1479	B-111	B-128	B-147	
	9640	983	57800	5900	0.83			7990	815	58400	5950	1.00	1H - 6195DA	- 1479	B-111	B-128	B-147
0.784	7960	811	59000	6010	*1	0.946	7960	811	59000	6010	*1	1H - 6195DA	- 1849	B-111	B-128	B-147	
0.702	7960	811	58100	5930	*1	0.847	7960	811	58100	5930	*1	1H - 6195DA	- 2065	B-111	B-128	B-147	

- Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
- Motor slippage may affect n_1 and n_2 . Refer to technical data for details.
- CNHM, CHHM, CNFM, CHFMCNFM, CNVM, and CVVM indicate types. Refer to page B-10 for details.
- Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
- "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors



1.5 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

50Hz						60Hz						Nomenclature			Page of Dimension Sheet									
Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM							
r/min	N·m	kgf·m	N	kgf		r/min	N·m	kgf·m	N	kgf					CHHM	CHFM	CVVM							
8.79	940	95.8	14700	1500	*1	10.6	1220	124	14700	1500	*1	2 -	6135DB	- 165	B-109	B-125	B-144							
			15500	1580	0.93				16000	1630	1.07				6145DB	- 165	B-109	B-125	B-144					
			15500	1580	0.93				16000	1630	1.12				6145DC	- 165	B-109	B-125	B-144					
			22100	2250	1.07				22100	2250	1.07				2 - 6160DA	- 165	B-110	B-126	B-145					
	1470	150	22100	2250	1.20		22100	2250	1.44	22100	2250	1.44	2 -	6160DB	- 165	B-110	B-126	B-145						
			22100	2250	1.43		22100	2250	1.73	2 -	6165DB	- 165	B-110	B-126	B-145									
			29500	3010	1.72		29500	3010	2.08	2 -	6170DB	- 165	B-110	B-126	B-145									
			29500	3010	2.15		29500	3010	2.24	2 -	6175DB	- 165	B-110	B-126	B-145									
7.44	1230	125	16000	1630	*1	8.97	1440	146	16000	1630	*1	2 -	6140DB	- 195	B-109	B-125	B-144							
			1360	138	16000				1630	*1	6145DB				- 195	B-109	B-125	B-144						
			22100	2250	1.01				22100	2250	1.07				2 - 6160DA	- 195	B-110	B-126	B-145					
			22100	2250	1.01				22100	2250	1.22				6160DB	- 195	B-110	B-126	B-145					
	1730	177	22100	2250	1.07		22100	2250	1.07	2 -	6165DA	- 195	B-110	B-126	B-145									
			22100	2250	1.21		22100	2250	1.46	2 -	6165DB	- 195	B-110	B-126	B-145									
			29500	3010	1.46		29500	3010	1.76	2 -	6170DB	- 195	B-110	B-126	B-145									
			29500	3010	1.82		29500	3010	2.19	2 -	6175DB	- 195	B-110	B-126	B-145									
6.28	1340	136	16000	1630	*1	7.58	1700	173	16000	1630	*1	2 -	6145DB	- 231	B-109	B-125	B-144							
			22100	2250	1.02				22100	2250	1.07				2 - 6165DA	- 231	B-110	B-126	B-145					
			22100	2250	1.02				22100	2250	1.23				6165DB	- 231	B-110	B-126	B-145					
			29500	3010	1.07				29500	3010	1.07				2 -	6170DA	- 231	B-110	B-126	B-145				
	2050	209	29500	3010	1.23		29500	3010	1.49	2 -	6170DB	- 231	B-110	B-126	B-145									
			29500	3010	1.53		29500	3010	1.85	2 -	6175DB	- 231	B-110	B-126	B-145									
			41700	4250	1.97		41700	4250	2.24	2 -	6180DA	- 231	B-110	B-126	B-145									
			41700	4250	1.97		41700	4250	2.38	2 -	6180DB	- 231	B-111	B-127	B-146									
5.31	1760	179	22100	2250	*1	6.41	2010	205	22100	2250	*1	2 -	6160DA	- 273	B-110	B-126	B-145							
			29500	3010	1.04				29500	3010	1.07				2 - 6170DA	- 273	B-110	B-126	B-145					
			22100	2250	0.87				22100	2250	1.04				2 -	6165DA	- 273	B-110	B-126	B-145				
			29500	3010	1.04				29500	3010	1.26				2 -	6170DB	- 273	B-110	B-126	B-145				
	2430	247	29500	3010	1.07		29500	3010	1.07	2 -	6175DA	- 273	B-110	B-126	B-145									
			29500	3010	1.30		29500	3010	1.57	2 -	6175DB	- 273	B-110	B-126	B-145									
			41700	4250	1.67		41700	4250	2.01	2 -	6180DA	- 273	B-110	B-126	B-145									
			41700	4250	2.06		41700	4250	2.24	2 -	6185DA	- 273	B-110	B-126	B-145									
4.55	1760	179	22100	2250	*1	5.49	2350	240	22100	2250	*1	2 -	6160DA	- 319	B-110	B-126	B-145							
			29500	3010	1.07				29500	3010	1.07				2 - 6175DA	- 319	B-110	B-126	B-145					
			2100	214	22100				2250	*1	2100				214	22100	2250	*1	2 -	6165DA	- 319	B-110	B-126	B-145
			29500	3010	1.11				29500	3010	1.34				2 -	6175DB	- 319	B-110	B-126	B-145				
	2840	289	41700	4250	1.43		41700	4250	1.72	2 -	6180DA	- 319	B-110	B-126	B-145									
			41700	4250	1.76		41700	4250	2.13	2 -	6185DA	- 319	B-110	B-126	B-145									
			59000	6010	2.25		59000	6010	2.71	2 -	6190DA	- 319	B-111	B-128	B-147									
			59000	6010	2.81		59000	6010	3.39	2 -	6195DA	- 319	B-111	B-128	B-147									


1. Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
2. Motor slippage may affect n₁ and n₂. Refer to technical data for details.
3. CNHM, CHHM, CNFM, CHFM, CNVM, and CVVM indicate types. Refer to page B-10 for details.
4. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
5. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors

GEARMOTORS


Selection Tables
1.5 kW, 2.2 kW

1.5 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165



50Hz					60Hz					Nomenclature			Page of Dimension Sheet				
Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
r/min	N·m	kgf·m	N	kgf	*	r/min	N·m	kgf·m	N	kgf	*				B-112	B-129	B-148
0.235	11300	1150	104000	10600	*1	0.283	11300	1150	104000	10600	*1	2 -	6215DA	-6177	B-112	B-129	B-148
	15100	1540	145000	14800	*1		15100	1540	145000	14800	*1				2 -	6225DA	-6177
0.192	11300	1150	104000	10600	*1	0.231	11300	1150	104000	10600	*1	2 -	6215DA	-7569	B-112	B-129	B-148
	15100	1540	145000	14800	*1		15100	1540	145000	14800	*1				2 -	6225DA	-7569


2.2 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165



50Hz					60Hz					Nomenclature			Page of Dimension Sheet							
Output Speed n ₂	Output Torque Tout		Alloeaable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout		Alloeaable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM			
r/min	N·m	kgf·m	N	kgf		r/min	N·m	kgf·m	N	kgf					B-98	B-98	B-133			
580	34.4	3.51	2050	209	1.09	700	28.5	2.91	1970	201	1.09	3 -	6090SK	- 2.5 *3	B-98	-	B-133			
			2050	209	1.23				1970	201	1.23				3 -	6095SK	- 2.5 *3	B-98	-	B-133
			2050	209	1.45				1970	201	1.45				3 -	6100SK	- 2.5 *3	B-99	-	B-134
			2050	209	1.70				1970	201	1.70				3 -	6105SK	- 2.5 *3	B-99	-	B-134
			2790	284	2.34				2650	270	2.34				3 -	6110SK	- 2.5 *3	B-99	-	B-134
			2790	284	2.93				2650	270	2.93				3 -	6115SK	- 2.5 *3	B-99	-	B-134
483	41.3	4.21	2120	216	1.06	583	34.2	3.49	2040	208	1.06	3 -	6090SK	- 3 *3	B-98	-	B-133			
			2120	216	1.20				2040	208	1.20				3 -	6095SK	- 3 *3	B-98	-	B-133
			2120	216	1.50				2040	208	1.50				3 -	6100SK	- 3 *3	B-99	-	B-134
			2120	216	1.76				2040	208	1.76				3 -	6105SK	- 3 *3	B-99	-	B-134
			2960	302	2.40				2820	287	2.40				3 -	6110SK	- 3 *3	B-99	-	B-134
2960	302	3.00	2820	287	3.00	3 -	6115SK	- 3 *3	B-99	-	B-134									
363	55.1	5.61	2300	234	1.06	438	45.6	4.65	2240	228	1.06	3 -	6090SK	- 4 *3	B-98	-	B-133			
			2300	234	1.20				2240	228	1.20				3 -	6095SK	- 4 *3	B-98	-	B-133
			2300	234	1.46				2240	228	1.46				3 -	6100SK	- 4 *3	B-99	-	B-134
			2300	234	1.72				2240	228	1.72				3 -	6105SK	- 4 *3	B-99	-	B-134
			3170	323	2.43				3010	307	2.43				3 -	6110SK	- 4 *3	B-99	-	B-134
3170	323	3.04	3010	307	3.04	3 -	6115SK	- 4 *3	B-99	-	B-134									
290	68.8	7.02	2420	247	1.02	350	57.0	5.81	2330	238	1.02	3 -	6090SK	- 5 *3	B-98	-	B-133			
			2420	247	1.20				2330	238	1.20				3 -	6095SK	- 5 *3	B-98	-	B-133
			2420	247	1.43				2330	238	1.43				3 -	6100SK	- 5 *3	B-99	-	B-134
			2420	247	1.68				2330	238	1.68				3 -	6105SK	- 5 *3	B-99	-	B-134
			3330	339	2.09				3180	324	2.09				3 -	6110SK	- 5 *3	B-99	-	B-134
3330	339	2.62	3180	324	2.62	3 -	6115SK	- 5 *3	B-99	-	B-134									
242	82.6	8.42	2410	246	1.03	292	68.4	6.98	2370	242	1.03	3 -	6095SK	- 6 *3	B-98	-	B-133			
			2410	246	1.21				2370	242	1.21				3 -	6100SK	- 6 *3	B-99	-	B-134
			2410	246	1.43				2370	242	1.43				3 -	6105SK	- 6 *3	B-99	-	B-134
			3520	359	1.92				3370	344	1.92				3 -	6110SK	- 6 *3	B-99	-	B-134
			3520	359	2.40				3370	344	2.40				3 -	6115SK	- 6 *3	B-99	-	B-134
			4090	417	1.07				3860	393	1.07				3 -	6100	- 6	B-101	B-117	B-136
			4090	417	1.45				3860	393	1.45							B-101	B-117	B-136
			4640	473	1.61				4370	445	1.61							3 -	6110	- 6
4640	473	1.78	4370	445	1.78	3 -	6115	- 6	B-101	B-117	B-136									
5260	536	2.30	4950	505	2.30	3 -	6120	- 6	B-101	B-117	B-136									

- Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
- Motor slippage may affect n₁ and n₂. Refer to technical data for details.
- CNHM, CHHM, CNFM, CHF, CNVM, and CVVM indicate types. Refer to page B-10 for details.
- Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
- "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors



2.2 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

Output Speed n ₂ r/min	50Hz				60Hz				Nomenclature			Page of Dimension Sheet												
	Output Torque Tout N·m	Output Torque Tout kgf·m	Allowable Radial Load Pro N	Allowable Radial Load Pro kgf	SF	Output Speed n ₂ r/min	Output Torque Tout N·m	Output Torque Tout kgf·m	Allowable Radial Load Pro N	Allowable Radial Load Pro kgf	SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM							
41.4	482	49.1	4960	506	0.82	50.0	399	40.7	7230	737	0.82	3 -	6115	- 35	B-101	B-117	B-136							
			9350	954	1.08				8830	900	1.13	3 -	6120	- 35	B-101	B-117	B-136							
			9350	954	1.31				8830	900	1.45	3 -	6125	- 35	B-101	B-117	B-136							
			11000	1120	1.62				10300	1050	1.69	3 -	6130	- 35	B-102	B-118	B-137							
			11000	1120	1.87				10300	1050	1.93	3 -	6135	- 35	B-102	B-118	B-137							
			16000	1630	2.37				15200	1550	2.37	3 -	6140	- 35	B-102	B-118	B-137							
33.7	592	60.3	16000	1630	2.85	40.7	490	50.0	15200	1550	3.42	3 -	6145	- 35	B-102	B-118	B-137							
			9810	1000	1.06				9380	956	1.08	3 -	6125	- 43	B-101	B-117	B-136							
			11800	1200	1.32				11100	1130	1.36	3 -	6130	- 43	B-102	B-118	B-137							
			11800	1200	1.52				11100	1130	1.71	3 -	6135	- 43	B-102	B-118	B-137							
			16000	1630	1.79				15900	1620	1.79	3 -	6140	- 43	B-102	B-118	B-137							
			16000	1630	2.12				15900	1620	2.45	3 -	6145	- 43	B-102	B-118	B-137							
28.4	702	71.6	20600	2100	2.93	34.3	582	59.3	19300	1970	3.39	3 -	6160	- 43	B-103	B-119	B-138							
			9810	1000	0.90				9760	995	1.04	3 -	6125	- 51	B-101	B-117	B-136							
			12200	1250	1.11				11500	1180	1.15	3 -	6130	- 51	B-102	B-118	B-137							
			12200	1250	1.16				11500	1180	1.33	3 -	6135	- 51	B-102	B-118	B-137							
			16000	1630	1.56				16000	1630	1.56	3 -	6140	- 51	B-102	B-118	B-137							
			16000	1630	1.68				16000	1630	1.92	3 -	6145	- 51	B-102	B-118	B-137							
24.6	812	82.8	21300	2180	2.50	29.7	673	68.6	20100	2050	2.61	3 -	6160	- 51	B-103	B-119	B-138							
			21300	2180	2.99				20100	2050	3.42	3 -	6165	- 51	B-103	B-119	B-138							
			12800	1300	1.11				12100	1230	1.15	3 -	6135	- 59	B-102	B-118	B-137							
			16000	1630	1.35				16000	1630	1.35	3 -	6140	- 59	B-102	B-118	B-137							
			16000	1630	1.45				16000	1630	1.66	3 -	6145	- 59	B-102	B-118	B-137							
			22100	2250	2.01				22100	2250	2.01	3 -	6160	- 59	B-103	B-119	B-138							
20.4	977	99.6	22100	2250	2.59	24.6	810	82.5	22100	2250	2.61	3 -	6165	- 59	B-103	B-119	B-138							
			13500	1380	0.92				12800	1300	0.98	3 -	6135	- 71	B-102	B-118	B-137							
			16000	1630	1.10				16000	1630	1.10	3 -	6140	- 71	B-102	B-118	B-137							
			16000	1630	1.19				16000	1630	1.38	3 -	6145	- 71	B-102	B-118	B-137							
			22100	2250	1.58				22100	2250	1.58	3 -	6160	- 71	B-103	B-119	B-138							
			22100	2250	2.15				22100	2250	2.57	3 -	6165	- 71	B-103	B-119	B-138							
16.7	1200	122	16000	1630	0.98	20.1	992	101	16000	1630	1.13	3 -	6145	- 87	B-102	B-118	B-137							
			22100	2250	1.46				22100	2250	1.58	3 -	6160	- 87	B-103	B-119	B-138							
			22100	2250	1.71				22100	2250	1.77	3 -	6165	- 87	B-103	B-119	B-138							
			780	79.5	14700				1500	*1	16.8	1120	115	780	79.5	14700	1500	*1	3 -	6130DC	- 104	B-109	B-125	B-144
			940	95.8	14700				1500	*1				940	95.8	14700	1500	*1	3 -	6135DC	- 104	B-109	B-125	B-144
			16000	1630	1.01				16000	1630				1.22	3 -	6145DC	- 104	B-109	B-125	B-144				
22100	2250	1.29	22100	2250	1.53	3 -	6160DB	- 104	B-110	B-126				B-145										
22100	2250	1.29	22100	2250	1.56	3 -	6160DC	- 104	B-111	B-127				B-146										
22100	2250	1.53	22100	2250	1.53	3 -	6165DB	- 104	B-110	B-126				B-145										
13.9	1360	138	22100	2250	1.55	16.8	1120	115	22100	2250	1.53	3 -	6165DC	- 104	B-111	B-127	B-146							
			29500	3010	1.86				29400	3000	2.25	3 -	6170DC	- 104	B-111	B-127	B-146							
			29500	3010	2.32				29400	3000	2.80	3 -	6175DC	- 104	B-111	B-127	B-146							
			41300	4210	2.99				38800	3960	3.61	3 -	6180DB	- 104	B-111	B-127	B-146							


1. Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
2. Motor slippage may affect n₁ and n₂. Refer to technical data for details.
3. CNHM, CHHM, CNFM, CHFMCNFM, CNVM, and CVVM indicate types. Refer to page B-10 for details.
4. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
5. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors

GEARMOTORS


Selection Tables
2.2 kW, 3.0 kW

2.2 kW	n ₁ : Motor Speed					
	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165



50Hz					60Hz					Nomenclature			Page of Dimension Sheet			
Output Speed n ₂	Output Torque Tout	Allowable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout	Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM	
r/min	N·m	kgf·m	N	kgf	r/min	N·m	kgf·m	N	kgf				B-114	B-131	B-150	
0.192	17200	1750	179000	18200	0.231	17200	1750	179000	18200	*1	3 -	6235DA	- 7569	B-114	B-131	B-150
	22600	2310	208000	21200		22600	2310	208000	21200		*1	3 -	6245DA	- 7569	B-114	B-131

3.0 kW	n ₁ : Motor Speed					
	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165




50Hz					60Hz					Nomenclature			Page of Dimension Sheet			
Output Speed n ₂	Output Torque Tout	Alloable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout	Alloable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM	
r/min	N·m	kgf·m	N	kgf	r/min	N·m	kgf·m	N	kgf				CHHM	CHFM	CVVM	
580	46.9	4.78	1930	197	1.06	700	38.9	3.96	1870	191	1.06	4 - 6100SK	- 2.5 *3	B-99	-	B-134
			1930	197	1.25				1870	191	1.25	4 - 6105SK	- 2.5 *3	B-99	-	B-134
			2700	275	1.72				2570	262	1.72	4 - 6110SK	- 2.5 *3	B-99	-	B-134
			2700	275	2.15				2570	262	2.15	4 - 6115SK	- 2.5 *3	B-99	-	B-134
483	56.3	5.74	1980	202	1.10	583	46.7	4.76	1920	196	1.10	4 - 6100SK	- 3 *3	B-99	-	B-134
			1980	202	1.29				1920	196	1.29	4 - 6105SK	- 3 *3	B-99	-	B-134
			2850	291	1.76				2730	278	1.76	4 - 6110SK	- 3 *3	B-99	-	B-134
			2850	291	2.20				2730	278	2.20	4 - 6115SK	- 3 *3	B-99	-	B-134
363	75.1	7.65	2130	217	1.07	583	62.2	6.34	2080	212	1.07	4 - 6100SK	- 4 *3	B-99	-	B-134
			2130	217	1.26				2080	212	1.26	4 - 6105SK	- 4 *3	B-99	-	B-134
			3040	310	1.78				2900	296	1.78	4 - 6110SK	- 4 *3	B-99	-	B-134
			3040	310	2.23				2900	296	2.23	4 - 6115SK	- 4 *3	B-99	-	B-134
290	93.9	9.57	2210	225	1.23	350	77.8	7.93	2160	220	1.23	4 - 6105SK	- 5 *3	B-99	-	B-134
			3180	324	1.54				3040	310	1.26	4 - 6110SK	- 5 *3	B-99	-	B-134
			3180	324	1.92				3040	310	1.78	4 - 6115SK	- 5 *3	B-99	-	B-134
242	113	11.5	2190	223	1.05	292	93.3	9.51	2160	220	1.05	4 - 6105SK	- 6 *3	B-99	-	B-134
			3330	339	1.41				3210	327	1.41	4 - 6110SK	- 6 *3	B-99	-	B-134
			3330	339	1.76				3210	327	1.76	4 - 6115SK	- 6 *3	B-99	-	B-134
			4610	470	1.18				4340	443	1.18	4 - 6110	- 6	B-101	B-117	B-136
			4610	470	1.31				4340	443	1.31	4 - 6115	- 6	B-101	B-117	B-136
			5230	534	1.69				4930	502	1.69	4 - 6120	- 6	B-101	B-117	B-136
181	150	15.3	5230	534	2.32	219	124	12.7	4930	502	1.94	4 - 6125	- 6	B-101	B-117	B-136
			2170	221	0.83				2190	223	0.83	4 - 6105SK	- 8 *3	B-99	-	B-134
			3470	354	1.23				3370	344	1.23	4 - 6110SK	- 8 *3	B-99	-	B-134
			3470	354	1.54				3370	344	1.54	4 - 6115SK	- 8 *3	B-99	-	B-134
			5130	523	1.18				4830	493	1.18	4 - 6110	- 8	B-101	B-117	B-136
			5130	523	1.31				4830	493	1.31	4 - 6115	- 8	B-101	B-117	B-136
145	188	19.1	5830	595	1.69	175	156	15.9	5490	560	1.69	4 - 6120	- 8	B-101	B-117	B-136
			5830	595	2.32				5490	560	2.32	4 - 6125	- 8	B-101	B-117	B-136
			3650	372	1.02				3550	362	1.02	4 - 6110SK	- 10 *3	B-99	-	B-134
			3650	372	1.27				3550	362	1.27	4 - 6115SK	- 10 *3	B-99	-	B-134
132	206	21.0	5840	595	1.18	159	171	17.4	5510	561	1.18	4 - 6110	- 11	B-101	B-117	B-136
			5840	595	1.31				5510	561	1.31	4 - 6115	- 11	B-101	B-117	B-136
			6620	675	1.69				6240	636	1.69	4 - 6120	- 11	B-101	B-117	B-136
			6620	675	1.97				6240	636	1.97	4 - 6125	- 11	B-101	B-117	B-136

1. Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
2. Motor slippage may affect n₁ and n₂. Refer to technical data for details.
3. CNHM, CHHM, CNFM, CHFM, CNVM, and CVVM indicate types. Refer to page B-10 for details.
4. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
5. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors


3.0 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165



50Hz					60Hz					Nomenclature			Page of Dimension Sheet								
Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM				
r/min	N·m	kgf·m	N	kgf		r/min	N·m	kgf·m	N	kgf					CHHM	CHFV	CVVM				
24.6	1110	113	12600	1280	0.81	29.7	918	93.5	11900	1210	0.84	4	6135	- 59	B-102	B-118	B-137				
			16000	1630	0.98				16000	1630	0.98				4	6140	- 59	B-102	B-118	B-137	
			16000	1630	1.06				16000	1630	1.22				4	6145	- 59	B-102	B-118	B-137	
			22100	2250	1.47				22100	2250	1.47				4	6160	- 59	B-103	B-119	B-138	
			22100	2250	1.90				22100	2250	1.92				4	6165	- 59	B-103	B-119	B-138	
			25200	2570	2.21				23800	2420	2.38				4	6170	- 59	B-103	B-119	B-138	
			25200	2570	2.76				23800	2420	2.76	4	6175	- 59	B-103	B-119	B-138				
20.4	1330	136	16000	1630	0.87	24.6	1100	113	16000	1630	1.01	4	6145	- 71	B-102	B-118	B-137				
			22100	2250	1.16				22100	2250	1.16				4	6160	- 71	B-103	B-119	B-138	
			22100	2250	1.58				22100	2250	1.88				4	6165	- 71	B-103	B-119	B-138	
			26700	2720	1.83				25100	2560	1.97				4	6170	- 71	B-103	B-119	B-138	
			26700	2720	2.33				25100	2560	2.38				4	6175	- 71	B-103	B-119	B-138	
			35900	3650	2.93				33700	3440	2.93	4	6180	- 71	B-104	B-120	B-139				
16.7	1630	166	22100	2250	1.07	20.1	1350	138	21900	2230	1.16	4	6160	- 87	B-103	B-119	B-138				
			22100	2250	1.26				21900	2230	1.30				4	6165	- 87	B-103	B-119	B-138	
			28600	2910	1.52				26900	2750	1.60				4	6170	- 87	B-103	B-119	B-138	
			28600	2910	1.87				26900	2750	1.87				4	6175	- 87	B-103	B-119	B-138	
			38600	3930	2.38				36300	3700	2.38				4	6180	- 87	B-104	B-120	B-139	
			38600	3930	2.86				36300	3700	2.86				4	6185	- 87	B-104	B-120	B-139	
13.9	1850	189	22100	2250	1.14	16.8	1530	156	22100	2250	1.37	4	6165DC	- 104	B-111	B-127	B-146				
			29500	3010	1.37				29200	2970	1.65				4	6170DC	- 104	B-111	B-127	B-146	
			29500	3010	1.70				29200	2970	2.06				4	6175DC	- 104	B-111	B-127	B-146	
			41100	4190	2.20				38700	3940	2.65				4	6180DB	- 104	B-111	B-127	B-146	
			41100	4190	2.65				38700	3940	3.20				4	6185DB	- 104	B-111	B-127	B-146	
			57400	5850	2.44				53900	5500	2.44				4	6190DA	- 104	B-111	B-128	B-147	
			57400	5850	2.44				53900	5500	2.44				4	6195DA	- 104	B-111	B-128	B-147	
12.0	2150	219	1760	179	22100	2250	*1	14.5	1780	182	1760	179	22100	2250	*1	4	6160DC	- 121	B-111	B-127	B-146
			22100	2250	0.98	22100	2250				1.18	4	6165DC	- 121	B-111	B-127	B-146				
			29500	3010	1.18	29500	3010				1.42	4	6170DC	- 121	B-111	B-127	B-146				
			29500	3010	1.46	29500	3010				1.77	4	6175DC	- 121	B-111	B-127	B-146				
			41700	4250	1.89	41200	4200				2.28	4	6180DB	- 121	B-111	B-127	B-146				
			41700	4250	2.23	41200	4200				2.70	4	6185DB	- 121	B-111	B-127	B-146				
			59000	6010	2.97				57500	5860	3.58	4	6190DB	- 121	B-112	B-128	B-147				
10.1	1760	179	22100	2250	*1	12.2	2110	215	1760	179	22100	2250	*1	4	6160DC	- 143	B-111	B-127	B-146		
			2100	214	22100				2250	*1	2100	214	22100	2250	*1	4	6165DC	- 143	B-111	B-127	B-146
				22100	2250		0.83				22100	2250	1.00	4	6165DC	- 143	B-111	B-127	B-146		
				29500	3010		0.98				29500	3010	1.20	4	6170DC	- 143	B-111	B-127	B-146		
				29500	3010		1.24				29500	3010	1.50	4	6175DC	- 143	B-111	B-127	B-146		
				41700	4250		1.60				41700	4250	1.93	4	6180DB	- 143	B-111	B-127	B-146		
				41700	4250		1.93				41700	4250	2.33	4	6185DB	- 143	B-111	B-127	B-146		
				59000	6010		2.08				59000	6010	2.08	4	6190DA	- 143	B-111	B-128	B-147		
				59000	6010		2.51				59000	6010	3.03	4	6190DB	- 143	B-112	B-128	B-147		
				59000	6010		3.00				59000	6010	3.62	4	6195DB	- 143	B-112	B-128	B-147		

- Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
- Motor slippage may affect n₁ and n₂. Refer to technical data for details.
- CNHM, CHHM, CNFM, CHFV, CNVM, and CVVM indicate types. Refer to page B-10 for details.
- Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
- "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors



3.0 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165


50Hz						60Hz						Nomenclature			Page of Dimension Sheet		
Output Speed n ₂ r/min	Output Torque Tout N·m	Allowable Radial Load Pro kgf·m / N		SF		Output Speed n ₂ r/min	Output Torque Tout N·m	Allowable Radial Load Pro kgf·m / N		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM	
2.59	6380	650	59000	6010	*1	3.13	6380	650	59000	6010	*1	4 - 6190DA	- 559	B-111	B-128	B-147	
	7960	811	59000	6010	*1		7960	811	59000	6010	*1	4 - 6195DA	- 559	B-111	B-128	B-147	
	8760	893	84100	8570	*1		8230	839	84100	8570	*1	4 - 6205DA	- 559	B-112	B-129	B-148	
			58400	5950	0.80					58900	6000	0.97	4 - 6195DA	- 559	B-111	B-128	B-147
			84100	8570	0.88					84100	8570	1.00	4 - 6205DA	- 559	B-112	B-129	B-148
			84100	8570	0.94					84100	8570	1.13	4 - 6205DB	- 559	B-112	B-129	B-148
		9940	1010	104000	10600		1.27	8240	840	104000	10600	1.54	4 - 6215DA	- 559	B-112	B-129	B-148
			145000	14800	1.61					145000	14800	1.94	4 - 6225DA	- 559	B-113	B-130	B-149
			179000	18200	2.06					179000	18200	2.49	4 - 6235DA	- 559	B-114	B-131	B-150
		208000	21200	2.60				208000	21200	3.13	4 - 6245DA	- 559	B-114	B-131	B-150		
2.23	7960	811	58100	5930	*1	2.70	7960	811	58100	5930	*1	4 - 6195DA	- 649	B-111	B-128	B-147	
	8300	846	84100	8570	*1		7790	794	84100	8570	*1	4 - 6205DA	- 649	B-112	B-129	B-148	
			84100	8570	0.81					84100	8570	0.97	4 - 6205DB	- 649	B-112	B-129	B-148
			104000	10600	1.10					104000	10600	1.32	4 - 6215DA	- 649	B-112	B-129	B-148
	11500	1180	145000	14800	1.38		9560	975	145000	14800	1.66	4 - 6225DA	- 649	B-113	B-130	B-149	
			179000	18200	1.78					179000	18200	2.14	4 - 6235DA	- 649	B-114	B-131	B-150
		208000	21200	2.24				208000	21200	2.70	4 - 6245DA	- 649	B-114	B-131	B-150		
1.98	7960	811	59000	6010	*1	2.39	7960	811	59000	6010	*1	4 - 6195DA	- 731	B-111	B-128	B-147	
	9300	948	84100	8570	*1		9060	923	84100	8570	*1	4 - 6205DA	- 731	B-112	B-129	B-148	
			104000	10600	0.97					104000	10600	1.17	4 - 6215DA	- 731	B-112	B-129	B-148
			145000	14800	1.23					145000	14800	1.49	4 - 6225DA	- 731	B-113	B-130	B-149
	13000	1330	179000	18200	1.58		10800	1100	179000	18200	1.90	4 - 6235DA	- 731	B-114	B-131	B-150	
		208000	21200	1.98				208000	21200	2.40	4 - 6245DA	- 731	B-114	B-131	B-150		
1.72	9230	941	84100	8570	*1	2.08	9230	941	84100	8570	*1	4 - 6205DA	- 841	B-112	B-129	B-148	
			104000	10600	0.85					104000	10600	1.02	4 - 6215DA	- 841	B-112	B-129	B-148
			145000	14800	1.01					145000	14800	1.21	4 - 6225DA	- 841	B-113	B-130	B-149
	15000	1520	179000	18200	1.26		12400	1260	179000	18200	1.53	4 - 6235DA	- 841	B-114	B-131	B-150	
		208000	21200	1.73				208000	21200	2.08	4 - 6245DA	- 841	B-114	B-131	B-150		
1.45	12700	1290	104000	10600	*1	1.74	12700	1290	104000	10600	*1	4 - 6215DA	- 1003	B-112	B-129	B-148	
			145000	14800	0.89					145000	14800	1.07	4 - 6225DA	- 1003	B-113	B-130	B-149
	17800	1820	179000	18200	1.15		14800	1510	179000	18200	1.39	4 - 6235DA	- 1003	B-114	B-131	B-150	
		208000	21200	1.45				208000	21200	1.75	4 - 6245DA	- 1003	B-114	B-131	B-150		
1.16	16000	1630	145000	14800	*1	1.40	16000	1630	145000	14800	*1	4 - 6225DA	- 1247	B-113	B-130	B-149	
			179000	18200	0.92					179000	18200	1.12	4 - 6235DA	- 1247	B-114	B-131	B-150
	22200	2260	208000	21200	1.16		18400	1870	208000	21200	1.40	4 - 6245DA	- 1247	B-114	B-131	B-150	
0.980	17200	1750	179000	18200	*1	1.18	17200	1750	179000	18200	*1	4 - 6235DA	- 1479	B-114	B-131	B-150	
	26300	2680	208000	21200	0.86		21800	2220	208000	21200	1.04	4 - 6245DA	- 1479	B-114	B-131	B-150	
0.784	20500	2090	179000	18200	*1	0.946	20500	2090	179000	18200	*1	4 - 6235DA	- 1849	B-114	B-131	B-150	
	25800	2630	208000	21200	*1		25800	2630	208000	21200	*1	4 - 6245DA	- 1849	B-114	B-131	B-150	
0.702	25800	2630	208000	21200	*1	0.847	25800	2630	208000	21200	*1	4 - 6245DA	- 2065	B-114	B-131	B-150	

Selection Tables 3.0 kW

GEARMOTORS

1. Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
2. Motor slippage may affect n₁ and n₂. Refer to technical data for details.
3. CNHM, CHHM, CNFM, CHFM, CNVM, and CVVM indicate types. Refer to page B-10 for details.
4. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
5. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors



3.7 kW


n: Motor Speed

Hz		50Hz		60Hz	
P		4	6	4	6
n ₁	r/min	1450	980	1750	1165

50Hz					60Hz					Nomenclature			Page of Dimension Sheet				
Output Speed n ₂ r/min	Output Torque Tout N-m kgf-m		Allowable Radial Load Pro N kgf		SF	Output Speed n ₂ r/min	Output Torque Tout N-m kgf-m		Allowable Radial Load Pro N kgf		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
580	57.9	5.90	1820	186	1.01	700	48.0	4.89	1790	182	1.01	5 - 6105SK	- 2.5 *3	B-99	-	B-134	
			2620	267	1.39				2500	255	1.39	5 - 6110SK	- 2.5 *3	B-99	-	B-134	
			2620	267	1.74				2500	255	1.74	5 - 6115SK	- 2.5 *3	B-99	-	B-134	
483	69.5	7.08	1850	189	1.05	583	57.5	5.87	1810	185	1.05	5 - 6105SK	- 3 *3	B-99	-	B-134	
			2770	282	1.43				2650	270	1.43	5 - 6110SK	- 3 *3	B-99	-	B-134	
			2770	282	1.78				2650	270	1.78	5 - 6115SK	- 3 *3	B-99	-	B-134	
363	92.6	9.44	1960	200	1.02	438	76.7	7.82	1940	198	1.02	5 - 6105SK	- 4 *3	B-99	-	B-134	
			2920	298	1.45				2820	287	1.45	5 - 6110SK	- 4 *3	B-99	-	B-134	
			2920	298	1.81				2820	287	1.81	5 - 6115SK	- 4 *3	B-99	-	B-134	
290	116	11.8	2010	205	1.00	350	95.9	9.78	2000	204	1.00	5 - 6105SK	- 5 *3	B-99	-	B-134	
			3040	310	1.25				2930	299	1.25	5 - 6110SK	- 5 *3	B-99	-	B-134	
			3040	310	1.56				2930	299	1.56	5 - 6115SK	- 5 *3	B-99	-	B-134	
242	139	14.2	1960	200	0.85	292	115	11.7	1970	201	0.85	5 - 6105SK	- 6 *3	B-99	-	B-134	
			3160	322	1.14				3060	312	1.14	5 - 6110SK	- 6 *3	B-99	-	B-134	
			3160	322	1.43				3060	312	1.43	5 - 6115SK	- 6 *3	B-99	-	B-134	
			4580	467	1.06				4320	440	1.06	5 - 6115	- 6	B-101	B-117	B-136	
			5210	531	1.37				4910	500	1.37	5 - 6120	- 6	B-101	B-117	B-136	
			5210	531	1.88				4910	500	1.57	5 - 6125	- 6	B-101	B-117	B-136	
			6120	624	2.54				5760	587	2.54	5 - 6130	- 6	B-102	B-118	B-137	
181	185	18.9	3260	332	1.00	219	153	15.6	3190	325	1.00	5 - 6110SK	- 8 *3	B-99	-	B-134	
			3260	332	1.25				3190	325	1.25	5 - 6115SK	- 8 *3	B-99	-	B-134	
			5090	519	1.06				4800	489	1.06	5 - 6115	- 8	B-101	B-117	B-136	
			5800	591	1.37				5470	557	1.37	5 - 6120	- 8	B-101	B-117	B-136	
			5800	591	1.88				5470	557	1.88	5 - 6125	- 8	B-101	B-117	B-136	
6820	695	2.54	6420	655	2.54	5 - 6130	- 8	B-102	B-118	B-137							
145	232	23.6	3360	343	1.03	175	192	19.6	3330	339	1.03	5 - 6115SK	- 10 *3	B-99	-	B-134	
132	255	26.0	5780	589	1.06	159	211	21.5	5460	557	1.06	5 - 6115	- 11	B-101	B-117	B-136	
			6580	670	1.37				6200	632	1.37	5 - 6120	- 11	B-101	B-117	B-136	
			6580	670	1.60				6200	632	1.60	5 - 6125	- 11	B-101	B-117	B-136	
			7770	792	2.54				7320	746	2.54	5 - 6130	- 11	B-102	B-118	B-137	
112	301	30.7	5960	608	1.05	135	249	25.4	5640	574	1.05	5 - 6115	- 13	B-101	B-117	B-136	
			6780	691	1.37				6400	652	1.37	5 - 6120	- 13	B-101	B-117	B-136	
			6780	691	1.60				6400	652	1.60	5 - 6125	- 13	B-101	B-117	B-136	
			8080	824	2.54				7620	776	2.54	5 - 6130	- 13	B-102	B-118	B-137	
8080	824	2.76	7620	776	3.05	5 - 6135	- 13	B-102	B-118	B-137							
96.7	347	35.4	6330	646	1.05	117	288	29.3	5990	611	1.05	5 - 6115	- 15	B-101	B-117	B-136	
			7260	741	1.37				6860	699	1.37	5 - 6120	- 15	B-101	B-117	B-136	
			7260	741	1.60				6860	699	1.60	5 - 6125	- 15	B-101	B-117	B-136	
			8250	841	2.10				7770	792	2.10	5 - 6130	- 15	B-102	B-118	B-137	
8250	841	2.42	7770	792	2.42	5 - 6135	- 15	B-102	B-118	B-137							
85.3	394	40.1	6380	650	1.05	103	326	33.2	6040	616	1.05	5 - 6115	- 17	B-101	B-117	B-136	
			7320	747	1.32				6920	705	1.37	5 - 6120	- 17	B-101	B-117	B-136	
			7320	747	1.53				6920	705	1.53	5 - 6125	- 17	B-101	B-117	B-136	
			8850	902	1.96				8340	850	1.96	5 - 6130	- 17	B-102	B-118	B-137	
			8850	902	2.24				8340	850	2.24	5 - 6135	- 17	B-102	B-118	B-137	
			13100	1330	2.73				12300	1260	2.73	5 - 6140	- 17	B-102	B-118	B-137	
69.0	486	49.6	5010	511	0.84	83.3	403	41.1	6350	647	0.84	5 - 6115	- 21	B-101	B-117	B-136	
			8010	816	1.07				7570	772	1.07	5 - 6120	- 21	B-101	B-117	B-136	
			8010	816	1.29				7570	772	1.32	5 - 6125	- 21	B-101	B-117	B-136	
			9440	962	1.61				8900	908	1.66	5 - 6130	- 21	B-102	B-118	B-137	
			9440	962	1.82				8900	908	2.04	5 - 6135	- 21	B-102	B-118	B-137	
			14000	1420	2.34				13200	1350	2.34	5 - 6140	- 21	B-102	B-118	B-137	
			14000	1420	2.56				13200	1350	2.97	5 - 6145	- 21	B-102	B-118	B-137	

- "*2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- "*3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000 SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- Maintain torque load during operation within "Output torque" in the table for models with "*"1" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables Gearmotors



CHHM/CNHM CHF/CNFM CVVM/CNVM

3.7 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

n: Motor Speed


50Hz						60Hz					Nomenclature			Page of Dimension Sheet			
Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity - Symbol	Frame - Size	Reduction - Ratio	CNHM	CNFM	CNVM
	N-m	kgf-m	N	kgf			N-m	kgf-m	N	kgf							
12.0	2100	214	22100	2250	*1	14.5	2100	214	22100	2250	*1	5 - 6165DC	- 121	B-111	B-127	B-146	
			29500	3010	1.43				5 - 6175DC	- 121	B-111	B-127	B-146				
	41700	4250	1.85	5 - 6180DB	- 121		B-111	B-127	B-146								
	41700	4250	2.19	5 - 6185DB	- 121		B-111	B-127	B-146								
	59000	6010	2.90	5 - 6190DB	- 121		B-112	B-128	B-147								
10.1	2530	258	29500	3010	*1	12.2	2530	258	29500	3010	*1	5 - 6170DC	- 143	B-111	B-127	B-146	
			29500	3010	1.21				5 - 6175DC	- 143	B-111	B-127	B-146				
	41700	4250	1.56	5 - 6180DB	- 143		B-111	B-127	B-146								
	41700	4250	1.89	5 - 6185DB	- 143		B-111	B-127	B-146								
	59000	6010	1.69	5 - 6190DA	- 143		B-111	B-128	B-147								
8.79	2530	258	29500	3010	*1	10.6	2530	258	29500	3010	*1	5 - 6170DC	- 165	B-111	B-127	B-146	
			29500	3010	1.05				5 - 6175DC	- 165	B-111	B-127	B-146				
	41700	4250	1.35	5 - 6180DB	- 165		B-111	B-127	B-146								
	41700	4250	1.64	5 - 6185DB	- 165		B-111	B-127	B-146								
	59000	6010	1.69	5 - 6190DA	- 165		B-111	B-128	B-147								
7.44	3150	321	29500	3010	*1	8.97	3150	321	29500	3010	*1	5 - 6175DC	- 195	B-111	B-127	B-146	
			41700	4250	1.39				5 - 6185DB	- 195	B-111	B-127	B-146				
	59000	6010	1.69	5 - 6190DA	- 195		B-111	B-128	B-147								
	59000	6010	1.80	5 - 6190DB	- 195		B-112	B-128	B-147								
	59000	6010	1.69	5 - 6195DA	- 195		B-111	B-128	B-147								
6.28	4050	413	41700	4250	*1	7.58	4050	413	41700	4250	*1	5 - 6180DB	- 231	B-111	B-127	B-146	
			41700	4250	1.19				5 - 6185DB	- 231	B-111	B-127	B-146				
	59000	6010	1.52	5 - 6190DA	- 231		B-111	B-128	B-147								
	59000	6010	1.69	5 - 6195DA	- 231		B-111	B-128	B-147								
	59000	6010	1.90	5 - 6195DB	- 231		B-112	B-128	B-147								
6.28	5070	516	84100	8570	1.83	7.58	4200	428	84100	8570	2.21	5 - 6205DB	- 231	B-112	B-129	B-148	
			104000	10600	2.98				5 - 6215DA	- 231	B-112	B-129	B-148				
	140000	14200	3.22	5 - 6225DA	- 231		B-113	B-130	B-149								
	140000	14200	3.53	5 - 6225DB	- 231		B-113	B-130	B-149								
	140000	14200	3.53	5 - 6225DB	- 231		B-113	B-130	B-149								

GEARMOTORS

Selection Tables
3.7 kW

- "*2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- "*3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- Maintain torque load during operation within "Output torque" in the table for models with "*1" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables Gearmotors



3.7 kW	Hz		n ₁ : Motor Speed												
	P	r/min	50Hz		60Hz										
			4	6	4	6									
n ₁	r/min	1450	980	1750	1165										
50Hz		60Hz				Nomenclature			Page of Dimension Sheet						
Output Speed n ₂	Output Torque T _{out}	Allowable Radial Load Pro		SF	Output Speed n ₂	Output Torque T _{out}	Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
r/min	N·m	kgf·m	N	kgf	r/min	N·m	kgf·m	N	kgf				CHHM	CHFM	CVVM


GEARMOTORS

Selection Tables

3.7 kW


1. Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
2. Motor slippage may affect n₁ and n₂. Refer to technical data for details.
3. CNHM, CHHM, CNFM, CHFM, CNVM, and CVVM indicate types. Refer to page B-10 for details.
4. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
5. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors



3.7 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

50Hz						60Hz						Nomenclature			Page of Dimension Sheet		
Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
	N·m	kgf·m	N	kgf			N·m	kgf·m	N	kgf							
1.16	20500	2090	179000	18200	*1	1.40	20500	2090	179000	18200	*1	5 - 6235DA	-1247	B-114	B-131	B-150	
	27300	2790	208000	21200	0.94		22700	2310	208000	21200	1.14	5 - 6245DA	-1247	B-114	B-131	B-150	
0.980	22600	2310	208000	21200	*1	1.18	22600	2310	208000	21200	*1	5 - 6245DA	-1479	B-114	B-131	B-150	
	32400	3310	258000	26300	0.96		26900	2740	258000	26300	1.15	5 - 6255DA	-1479	B-115	B-132	B-151	
0.784	40600	4130	258000	26300	0.85	0.946	33600	3430	258000	26300	1.03	5 - 6255DA	-1849	B-115	B-132	B-151	
0.702	34500	3520	258000	26300	*1	0.847	34500	3520	258000	26300	*1	5 - 6255DA	-2065	B-115	B-132	B-151	
0.572	34500	3520	258000	26300	*1	0.690	34500	3520	258000	26300	*1	5 - 6255DA	-2537	B-115	B-132	B-151	
0.476	31000	3160	258000	26300	*1	0.575	31000	3160	258000	26300	*1	5 - 6255DA	-3045	B-115	B-132	B-151	
0.417	34500	3520	258000	26300	*1	0.503	34500	3520	258000	26300	*1	5 - 6255DA	-3481	B-115	B-132	B-151	
0.327	31000	3160	258000	26300	*1	0.394	31000	3160	258000	26300	*1	5 - 6255DA	-4437	B-115	B-132	B-151	
0.282	34500	3520	258000	26300	*1	0.341	34500	3520	258000	26300	*1	5 - 6255DA	-5133	B-115	B-132	B-151	
0.235	31000	3160	258000	26300	*1	0.283	31000	3160	258000	26300	*1	5 - 6255DA	-6177	B-115	B-132	B-151	
0.192	31000	3160	258000	26300	*1	0.231	31000	3160	258000	26300	*1	5 - 6255DA	-7569	B-115	B-132	B-151	



5.5 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165


50Hz						60Hz						Nomenclature			Page of Dimension Sheet				
Output Speed n ₂ r/min	Output Torque Tout		Alloable Radial Load Pro		SF	Output Speed n ₂ r/min	Output Torque Tout		Alloable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM		
	N·m	kgf·m	N	kgf			N·m	kgf·m	N	kgf								CHHM	CHFM
580	86.0	8.77	2410	246	1.17	700	71.3	7.27	2330	238	1.17	8 - 6115SK	- 2.5 *3	B-99	-	B-134			
483	103	10.5	2530	258	1.20	583	85.5	8.72	2450	250	1.20	8 - 6115SK	- 3 *3	B-99	-	B-134			
363	138	14.0	2640	269	1.22	11.6	2580	263	2580	263	1.22	8 - 6115SK	- 4 *3	B-99	-	B-134			
290	172	17.5	2690	274	1.05	350	143	14.5	2640	269	1.05	8 - 6115SK	- 5 *3	B-99	-	B-134			
242	206	21.0	2710	276	0.96	292	171	17.4	2700	275	0.96	8	6115SK	- 6 *3	B-99 - B-134				
			5140	524	1.27				4850	494	1.06				8 - 6125	- 6	B-101	B-117	B-136
			6060	617	1.71				5710	582	1.71				8 - 6130	- 6	B-102	B-118	B-137
			6060	617	2.05				5710	582	2.05				8 - 6135	- 6	B-102	B-118	B-137
			9370	955	2.36				8860	903	2.36				8 - 6140	- 6	B-102	B-118	B-137
			9370	955	2.75				8860	903	2.75				8 - 6145	- 6	B-102	B-118	B-137
181	275	28.1	2680	273	0.84	219	228	23.3	2710	276	0.84	8	6115SK	- 8 *3	B-99 - B-134				
			5710	582	1.26				5400	550	1.26				8 - 6125	- 8	B-101	B-117	B-136
			6740	687	1.71				6360	648	1.71				8 - 6130	- 8	B-102	B-118	B-137
			6740	687	2.05				6360	648	2.05				8 - 6135	- 8	B-102	B-118	B-137
			10400	1060	2.36				9820	1000	2.36				8 - 6140	- 8	B-102	B-118	B-137
			10400	1060	2.75				9820	1000	2.75				8 - 6145	- 8	B-102	B-118	B-137
132	379	38.6	6450	658	1.08	159	314	32.0	6100	622	1.08	8	6125	- 11	B-101 B-117 B-136				
			7680	783	1.71				7240	739	1.71				8 - 6130	- 11	B-102	B-118	B-137
			7680	783	2.05				7240	739	2.05				8 - 6135	- 11	B-102	B-118	B-137
			11600	1190	2.36				11000	1120	2.36				8 - 6140	- 11	B-102	B-118	B-137
			11600	1190	2.75				11000	1120	2.75				8 - 6145	- 11	B-102	B-118	B-137

- "*2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- "*3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- Maintain torque load during operation within "Output torque" in the table for models with "*" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables
3.7 kW, 5.5 kW
GEARMOTORS

Selection Tables Gearmotors


5.5 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165



50Hz						60Hz						Nomenclature			Page of Dimension Sheet															
Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM													
	N·m	kgf·m	N	kgf			N·m	kgf·m	N	kgf								CHHM	CHFMCNFM	CVVM										
7.44	4060	414	41700	4250	*1	8.97	4060	414	41700	4250	*1	8	6	195	B-111	B-127	B-146													
																		4920	502	41700	4250	*1	8	6	195	B-111	B-127	B-146		
				58900				6000	1.00									59000	6010	1.14	8	6	195	B-111	B-128	B-147				
				58900				6000	1.00									59000	6010	1.21	8	6	195	B-112	B-128	B-147				
			58900	6000	1.02				59000	6010	1.14				8	6	195	B-111	B-128	B-147										
			58900	6000	1.24				59000	6010	1.50				8	6	195	B-112	B-128	B-147										
	6360	648	84100	8570	1.46		7.58	6240	636	104000	10600				2.17	8	6	195	B-112	B-129	B-148									
																						104000	10600	1.91	8	6	195	B-112	B-129	B-148
																						104000	10600	1.91	8	6	195	B-113	B-130	B-149
																						131000	13300	1.96	8	6	195	B-113	B-130	B-149
			131000	13300	2.28				124000	12600	2.17				8	6	195	B-113	B-130	B-149										
			131000	13300	2.28				124000	12600	2.75				8	6	195	B-113	B-130	B-149										
6.28	5000	510	41700	4250	*1	7.58	5000	510	41700	4250	*1	8	6	231	B-111	B-127	B-146													
																		59000	6010	1.06	8	6	231	B-112	B-128	B-147				
		59000	6010	1.06				8	6	231								B-112	B-128	B-147										
		84100	8570	1.23				8	6	231								B-112	B-129	B-148										
	7530	768	104000	10600	1.66		7.58	6240	636	104000	10600				2.00	8	6	231	B-112	B-129	B-148									
																						139000	14200	1.97	8	6	231	B-113	B-130	B-149
																						139000	14200	1.97	8	6	231	B-113	B-130	B-149
																						173000	17700	2.51	8	6	231	B-114	B-131	B-150
	5.31	5000	510	41700	4250		*1	6.41	5000	510	41700				4250	*1	8	6	273	B-111	B-127	B-146								
																							6380	650	59000	6010	*1	8	6	273
			59000	6010	0.89					8	6				273								B-111	B-128	B-147					
			84100	8570	0.94					8	6				273								B-112	B-129	B-148					
8900		907	104000	10600	1.40	6.41	7370		752	104000	10600	1.70	8	6	273	B-112				B-129	B-148									
																						145000	14800	1.66	8	6	273	B-113	B-130	B-149
																						179000	18200	2.12	8	6	273	B-114	B-131	B-150
																						203000	20600	2.90	8	6	273	B-114	B-131	B-150
4.55		6380	650	59000	6010	*1	5.49		6380	650	59000	6010	*1	8	6	319				B-111	B-128	B-147								
																							7960	811	59000	6010	*1	8	6	319
			8080	823	84100					8570	*1	8											6	319	B-112	B-129	B-148			
			84100	8570	0.89					8	6	319											B-112	B-129	B-148					
	10400	1060	145000	14800	1.45	5.49		8620	878	104000	10600	1.47	8				6	319	B-112	B-129	B-148									
																						145000	14800	1.45	8	6	319	B-113	B-130	B-149
																						179000	18200	1.82	8	6	319	B-114	B-131	B-150
																						208000	21200	2.48	8	6	319	B-114	B-131	B-150
	3.85	7960	811	59000	6010	*1		4.64	7960	811	59000	6010	*1				8	6	377	B-111	B-128	B-147								
																							8550	872	84100	8570	*1	8	6	377
			104000	10600	1.03					8	6	377											B-112	B-129	B-148					
			145000	14800	1.22					8	6	377											B-113	B-130	B-149					
12300		1250	179000	18200	1.54	4.64	10200		1040	179000	18200	1.86	8	6	377	B-114				B-131	B-150									
																						208000	21200	2.10	8	6	377	B-114	B-131	B-150
																						258000	26300	2.64	8	6	377	B-115	B-132	B-151
																						258000	26300	3.19	8	6	377	B-115	B-132	B-151

1. Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
2. Motor slippage may affect n₁ and n₂. Refer to technical data for details.
3. CNHM, CHHM, CNFM, CHFMCNFM, CNVM, and CVVM indicate types. Refer to page B-10 for details.
4. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
5. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors



5.5 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

n: Motor Speed


50Hz						60Hz					Nomenclature			Page of Dimension Sheet			
Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity - Symbol	Frame - Size	Reduction Ratio	CNHM	CNFM	CNVM
	N-m	kgf-m	N	kgf			N-m	kgf-m	N	kgf							
3.07	12700	1290	104000	10600	*1	3.70	12700	1290	104000	10600	*1	8 -	6215DA	- 473	B-112	B-129	B-148
			104000	10600	0.82				8 -	6215DA	- 473	B-112	B-129	B-148			
			145000	14800	1.04				8 -	6225DA	- 473	B-113	B-130	B-149			
	15400	1570	179000	18200	1.33		12800	1300	179000	18200	1.60	8 -	6235DA	- 473	B-114	B-131	B-150
			208000	21200	1.67				8 -	6245DA	- 473	B-114	B-131	B-150			
			258000	26300	2.24				8 -	6255DA	- 473	B-115	B-132	B-151			
			276000	28100	2.98				8 -	6265DA	- 473	B-115	B-132	B-151			
2.59	12700	1290	104000	10600	*1	3.13	12700	1290	104000	10600	*1	8 -	6215DA	- 559	B-112	B-129	B-148
			145000	14800	0.88				8 -	6225DA	- 559	B-113	B-130	B-149			
			179000	18200	1.12				8 -	6235DA	- 559	B-114	B-131	B-150			
	18200	1860	208000	21200	1.42		15100	1540	208000	21200	1.71	8 -	6245DA	- 559	B-114	B-131	B-150
			258000	26300	1.89				8 -	6255DA	- 559	B-115	B-132	B-151			
276000	28100	2.52	8 -	6265DA	- 559	B-115	B-132	B-151									
2.23	12700	1290	104000	10600	*1	2.70	12700	1290	104000	10600	*1	8 -	6215DA	- 649	B-112	B-129	B-148
			15900	1620	145000				14800	*1	8 -	6225DA	- 649	B-113	B-130	B-149	
	21200	2160	179000	18200	0.97		17500	1790	179000	18200	1.17	8 -	6235DA	- 649	B-114	B-131	B-150
			208000	21200	1.22				8 -	6245DA	- 649	B-114	B-131	B-150			
			258000	26300	1.63				8 -	6255DA	- 649	B-115	B-132	B-151			
276000	28100	2.17	8 -	6265DA	- 649	B-115	B-132	B-151									
1.98	16000	1630	145000	14800	*1	2.39	16000	1630	145000	14800	*1	8 -	6225DA	- 731	B-113	B-130	B-149
			179000	18200	0.86				8 -	6235DA	- 731	B-114	B-131	B-150			
	23800	2430	208000	21200	1.08		19700	2010	208000	21200	1.31	8 -	6245DA	- 731	B-114	B-131	B-150
			258000	26300	1.45				8 -	6255DA	- 731	B-115	B-132	B-151			
			276000	28100	1.93				8 -	6265DA	- 731	B-115	B-132	B-151			
1.72	18900	1930	179000	18200	*1	2.08	18900	1930	179000	18200	*1	8 -	6235DA	- 841	B-114	B-131	B-150
			208000	21200	0.94				8 -	6245DA	- 841	B-114	B-131	B-150			
	27400	2790	258000	26300	1.18		22700	2320	258000	26300	1.43	8 -	6255DA	- 841	B-115	B-132	B-151
			276000	28100	1.68				8 -	6265DA	- 841	B-115	B-132	B-151			
1.45	20500	2090	179000	18200	*1	1.74	20500	2090	179000	18200	*1	8 -	6235DA	- 1003	B-114	B-131	B-150
			25800	2630	208000				21200	*1	8 -	6245DA	- 1003	B-114	B-131	B-150	
	32700	3330	258000	26300	1.06		27100	2760	258000	26300	1.27	8 -	6255DA	- 1003	B-115	B-132	B-151
			276000	28100	1.41				8 -	6265DA	- 1003	B-115	B-132	B-151			
			25800	2630	208000				21200	*1	8 -	6245DA	- 1247	B-114	B-131	B-150	
1.16	25800	2630	208000	21200	*1	1.40	25800	2630	208000	21200	*1	8 -	6245DA	- 1247	B-114	B-131	B-150
			258000	26300	0.85				8 -	6255DA	- 1247	B-115	B-132	B-151			
40700	4140	276000	28100	1.13	33700	3430	276000	28100	1.37	8 -	6265DA	- 1247	B-115	B-132	B-151		
0.980	31000	3160	258000	26300	*1	1.18	31000	3160	258000	26300	*1	8 -	6255DA	- 1479	B-115	B-132	B-151
			48200	4920	276000				28100	0.91	40000	4070	276000	28100	1.10	8 -	6265DA
0.784	34500	3520	258000	26300	*1	0.946	34500	3520	258000	26300	*1	8 -	6255DA	- 1849	B-115	B-132	B-151
			46000	4690	276000				28100	*1	8 -	6265DA	- 1849	B-115	B-132	B-151	
0.702	46000	4690	276000	28100	*1	0.847	46000	4690	276000	28100	*1	8 -	6265DA	- 2065	B-115	B-132	B-151
0.572	46000	4690	276000	28100	*1	0.690	46000	4690	276000	28100	*1	8 -	6265DA	- 2537	B-115	B-132	B-151
0.476	44000	4490	276000	28100	*1	0.575	44000	4490	276000	28100	*1	8 -	6265DA	- 3045	B-115	B-132	B-151
0.417	46000	4690	276000	28100	*1	0.503	46000	4690	276000	28100	*1	8 -	6265DA	- 3481	B-115	B-132	B-151
0.327	44000	4490	276000	28100	*1	0.394	44000	4490	276000	28100	*1	8 -	6265DA	- 4437	B-115	B-132	B-151
0.282	46000	4690	276000	28100	*1	0.341	46000	4690	276000	28100	*1	8 -	6265DA	- 5133	B-115	B-132	B-151
0.235	44000	4490	276000	28100	*1	0.283	44000	4490	276000	28100	*1	8 -	6265DA	- 6177	B-115	B-132	B-151
0.192	44000	4490	276000	28100	*1	0.231	44000	4490	276000	28100	*1	8 -	6265DA	- 7569	B-115	B-132	B-151

GEARMOTORS

Selection Tables 5.5 kW

- 6. "*"2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- 7. Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- 8. "*"3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- 9. Maintain torque load during operation within "Output torque" in the table for models with "*"1" in the SF column. They cannot be operated with 100% motor rating.


Selection Tables Gearmotors



7.5 kW	Hz		n ₁ : Motor Speed																
	P		50Hz		60Hz														
	n ₁	r/min	4	6	4	6													
			1450	980	1750	1165													
50Hz					60Hz					Nomenclature			Page of Dimension Sheet						
Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVV		
r/min	N·m	kgf·m	N	kgf		r/min	N·m	kgf·m	N	kgf					CHHM	CHFV	CVVM		
242	282	28.7	5980	610	1.25	292	233	23.8	5650	576	1.25	10 -	6130	- 6	B-102	B-118	B-137		
			5980	610	1.51				5650	576	1.51				6135	- 6	B-102	B-118	B-137
			9330	951	2.01				8830	901	1.73				6140	- 6	B-102	B-118	B-137
			10400	1070	2.71				8830	901	2.01				6145	- 6	B-102	B-118	B-137
181	375	38.3	6650	678	1.25	219	311	31.7	6290	641	1.25	10 -	6130	- 8	B-102	B-118	B-137		
			6650	678	1.51				6290	641	1.51				6135	- 8	B-102	B-118	B-137
			10300	1050	2.01				9790	998	1.73				6140	- 8	B-102	B-118	B-137
			11700	1190	2.63				9790	998	2.01				6145	- 8	B-102	B-118	B-137
132	516	52.6	7570	771	1.25	159	428	43.6	7150	729	1.25	10 -	6130	- 11	B-102	B-118	B-137		
			7570	771	1.51				7150	729	1.51				6135	- 11	B-102	B-118	B-137
			11600	1180	2.01				11000	1120	1.73				6140	- 11	B-102	B-118	B-137
			13200	1350	2.63				11000	1120	2.01				6145	- 11	B-102	B-118	B-137
112	610	62.2	7860	801	1.25	135	505	51.5	7430	758	1.25	10 -	6130	- 13	B-102	B-118	B-137		
			7860	801	1.36				7430	758	1.51				6135	- 13	B-102	B-118	B-137
			11800	1210	2.01				11200	1140	1.73				6140	- 13	B-102	B-118	B-137
			13800	1410	2.63				11200	1140	2.01				6145	- 13	B-102	B-118	B-137
96.7	704	71.8	8000	815	1.04	117	583	59.5	7570	771	1.04	10 -	6130	- 15	B-102	B-118	B-137		
			8000	815	1.20				7570	771	1.20				6135	- 15	B-102	B-118	B-137
			12400	1260	1.60				11700	1200	1.60				6140	- 15	B-102	B-118	B-137
			14700	1490	2.49				11700	1200	2.01				6145	- 15	B-102	B-118	B-137
85.3	798	81.3	8550	872	1.11	103	661	67.4	8100	826	1.11	10 -	6135	- 17	B-102	B-118	B-137		
			12900	1320	1.35				12200	1250	1.35				6140	- 17	B-102	B-118	B-137
			12900	1320	1.60				12200	1250	1.60				6145	- 17	B-102	B-118	B-137
			15100	1540	1.75				14300	1450	1.75				6160	- 17	B-103	B-119	B-138
69.0	985	100	9050	923	0.90	83.3	817	83.2	8590	876	1.00	10 -	6135	- 21	B-102	B-118	B-137		
			13800	1410	1.15				13100	1330	1.15				10 - 6140	- 21	B-102	B-118	B-137
			13800	1410	1.27				13100	1330	1.47				6145	- 21	B-102	B-118	B-137
			16200	1650	1.72				15300	1560	1.72				6160	- 21	B-103	B-119	B-138
58.0	1170	120	14400	1470	1.05	70.0	972	99.1	13700	1390	1.05	10 -	6145	- 25	B-102	B-118	B-137		
			16900	1720	1.31				15900	1630	1.31				6160	- 25	B-103	B-119	B-138
			16900	1720	1.79				15900	1630	2.01				6165	- 25	B-103	B-119	B-138
			19100	1940	2.08				18000	1830	2.11				6170	- 25	B-103	B-119	B-138
50.0	1360	139	14700	1500	1.00	60.3	1130	115	14000	1420	1.00	10 -	6145	- 29	B-102	B-118	B-137		
			17600	1790	1.27				16600	1690	1.40				6160	- 29	B-103	B-119	B-138
			17600	1790	1.52				16600	1690	1.52				6165	- 29	B-103	B-119	B-138
			20100	2050	1.80				18900	1930	1.91				6170	- 29	B-103	B-119	B-138
41.4	1640	167	14500	1480	0.83	50.0	1360	139	14900	1520	1.00	10 -	6145	- 35	B-102	B-118	B-137		
			18600	1890	1.07				17500	1790	1.29				10 - 6160	- 35	B-103	B-119	B-138
			18600	1890	1.28				17500	1790	1.52				6165	- 35	B-103	B-119	B-138
			21200	2160	1.49				20000	2040	1.60				6170	- 35	B-103	B-119	B-138
			21200	2160	1.92				20000	2040	2.01	6175	- 35	B-103	B-119	B-138			
			28600	2920	2.47				26900	2750	2.51	6180	- 35	B-104	B-120	B-139			

- Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
- Motor slippage may affect n₁ and n₂. Refer to technical data for details.
- CNHM, CHHM, CNFM, CHFV, CNVM, and CVVM indicate types. Refer to page B-10 for details.
- Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
- "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors




7.5 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

n₁: Motor Speed

50Hz					60Hz					Nomenclature			Page of Dimension Sheet							
Output Speed n ₂ r/min	Output Torque Tout N-m kgf-m		Allowable Radial Load Pro N kgf		SF	Output Speed n ₂ r/min	Output Torque Tout N-m kgf-m		Allowable Radial Load Pro N kgf		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM			
															CHHM	CHFM	CVVM			
33.7	2020	206	19700	2010	1.04	40.7	1670	170	18600	1900	1.05	10 - 6165	- 43		B-103	B-119	B-138			
			22500	2300	1.21				21300	2170	1.30	10 - 6170	- 43		B-103	B-119	B-138			
			22500	2300	1.51				21300	2170	1.51	10 - 6175	- 43		B-103	B-119	B-138			
			30700	3130	2.01				28900	2950	2.01	10 - 6180	- 43		B-104	B-120	B-139			
			30700	3130	2.48				28900	2950	2.51	10 - 6185	- 43		B-104	B-120	B-139			
28.4	2390	244	20400	2080	0.88	34.3	1980	202	19300	1970	1.00	10 - 6165	- 51		B-103	B-119	B-138			
			23400	2390	1.02				22100	2250	1.12	10 - 6170	- 51		B-103	B-119	B-138			
			23400	2390	1.32				22100	2250	1.51	10 - 6175	- 51		B-103	B-119	B-138			
			31700	3230	1.60				29900	3050	1.60	10 - 6180	- 51		B-104	B-120	B-139			
			31700	3230	2.01				29900	3050	2.01	10 - 6185	- 51		B-104	B-120	B-139			
			44800	4560	2.43				42100	4290	2.43	10 - 6190	- 51		B-104	B-120	B-139			
24.6	2770	282	24400	2490	1.11	29.7	2290	234	23100	2360	1.11	10 - 6175	- 59		B-103	B-119	B-138			
			33100	3380	1.30				31200	3180	1.30	10 - 6180	- 59		B-104	B-120	B-139			
			33100	3380	1.60				31200	3180	1.60	10 - 6185	- 59		B-104	B-120	B-139			
			46800	4770	2.04				44000	4490	2.04	10 - 6190	- 59		B-104	B-120	B-139			
20.4	3330	340	25700	2620	0.93	24.6	2760	281	24300	2480	0.95	10 - 6175	- 71		B-103	B-119	B-138			
			35100	3580	1.17				33100	3380	1.31	10 - 6180	- 71		B-104	B-120	B-139			
			35100	3580	1.31				33100	3380	1.31	10 - 6185	- 71		B-104	B-120	B-139			
			49600	5050	1.80				46700	4760	1.80	10 - 6190	- 71		B-104	B-120	B-139			
			49600	5050	2.08				46700	4760	2.08	10 - 6195	- 71		B-104	B-120	B-139			
16.7	4080	416	37700	3840	1.15	20.1	3380	345	35600	3620	1.15	10 - 6185	- 87		B-104	B-120	B-139			
			53300	5430	1.56				50200	5120	1.57	10 - 6190	- 87		B-104	B-120	B-139			
			53300	5430	1.81				50200	5120	1.81	10 - 6195	- 87		B-104	B-120	B-139			
13.9	4620	471	40000	4080	1.06	16.8	3830	391	37800	3850	1.28	10 - 6185DB	- 104		B-111	B-127	B-146			
			56400	5750	1.38				53200	5420	1.59	10 - 6190DB	- 104		B-112	B-128	B-147			
			56400	5750	1.59				53200	5420	1.59	10 - 6195DB	- 104		B-112	B-128	B-147			
12.0	5380	548	4060	414	41700	4250	*1	14.5	4460	454	4060	414	40300	4100	*1	10 - 6180DB	- 121	B-111	B-127	B-146
			41700	4250	0.89	40100	4090				1.08	10 - 6185DB	- 121		B-111	B-127	B-146			
			59000	6010	1.19	56600	5770				1.43	10 - 6190DB	- 121		B-112	B-128	B-147			
			59000	6010	1.41	56600	5770				1.59	10 - 6195DB	- 121		B-112	B-128	B-147			
			84100	8570	1.59	84100	8570				1.59	10 - 6205DB	- 121		B-112	B-129	B-148			
			104000	10600	2.12	102000	10400				2.55	10 - 6215DB	- 121		B-113	B-130	B-149			
10.1	4900	500	41700	4250	*1	12.2	4900	500	41700	4250	*1	10 - 6180DB	- 143		B-111	B-127	B-146			
			41700	4250	*1				41700	4250	*1	10 - 6185DB	- 143		B-111	B-127	B-146			
			58700	5980	1.00				58800	5990	1.21	10 - 6190DB	- 143		B-112	B-128	B-147			
8.79	7340	748	4920	502	41700	4250	*1	10.6	6080	620	4920	502	41700	4250	*1	10 - 6185DB	- 165	B-111	B-127	B-146
			58500	5960	1.08	59000	6010				1.30	10 - 6195DB	- 165		B-112	B-128	B-147			
			84100	8570	1.26	84100	8570				1.53	10 - 6205DB	- 165		B-112	B-129	B-148			
			104000	10600	1.59	104000	10600				1.59	10 - 6215DA	- 165		B-112	B-129	B-148			
			104000	10600	1.66	104000	10600				2.00	10 - 6215DB	- 165		B-113	B-130	B-149			
			124000	12600	1.97	117000	12000				2.38	10 - 6225DB	- 165		B-113	B-130	B-149			
154000	15700	2.67	146000	14800	3.23	10 - 6235DA	- 165		B-114	B-131	B-150									

6. "*2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
7. Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
8. "*3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
9. Maintain torque load during operation within "Output torque" in the table for models with "*1" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables Gearmotors




<h1>7.5 kW</h1>	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

n₁: Motor Speed

50Hz					60Hz					Nomenclature			Page of Dimension Sheet					
Output Speed n ₂ r/min	Output Torque T _{out}		Allowable Radial Load Pro		SF	Output Speed n ₂ r/min	Output Torque T _{out}		Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM	
	N-m	kgf-m	N	kgf			N-m	kgf-m	N	kgf								CHHM
1.72	25800	2630	208000	21200	*1	2.08	25800	2630	208000	21200	*1	10 -	6245DA	- 841	B-114	B-131	B-150	
			258000	26300	0.87				258000	26300	1.05	10 -	6255DA	- 841	B-115	B-132	B-151	
	37400	3810	276000	28100	1.23			31000	3160	276000	28100	1.48	10 -	6265DA	- 841	B-115	B-132	B-151
			248000	25300	1.82					248000	25300	2.20	10 -	6275DA	- 841	B-115	-	B-151
1.45	34500	3520	258000	26300	*1	1.74	34500	3520	258000	26300	*1	10 -	6255DA	- 1003	B-115	B-132	B-151	
	44600	4550	276000	28100	1.03		36900	3770	276000	28100	1.25	10 - 6265DA	- 1003	B-115	B-132	B-151		
1.16	34500	3520	258000	26300	*1	1.40	34500	3520	258000	26300	*1	10 -	6255DA	- 1247	B-115	B-132	B-151	
	46000	4690	276000	28100	*1		46000	4690	276000	28100	*1	10 -	6265DA	- 1247	B-115	B-132	B-151	
			276000	28100	0.83				276000	28100	1.00	10 -	6265DA	- 1247	B-115	B-132	B-151	
	55400	5650	248000	25300	1.23			45900	4680	248000	25300	1.48	10 -	6275DA	- 1247	B-115	-	B-151
0.980	44000	4490	276000	28100	*1	1.18	44000	4490	276000	28100	*1	10 -	6265DA	- 1479	B-115	B-132	B-151	
	65800	6700	247000	25200	1.04		54500	5550	248000	25300	1.25	10 - 6275DA	- 1479	B-115	-	B-151		
0.784	82200	8380	248000	25300	0.83	0.946	68100	6940	248000	25300	1.00	10 -	6275DA	- 1849	B-115	-	B-151	
0.702	68200	6950	248000	25300	*1	0.847	68200	6950	248000	25300	*1	10 -	6275DA	- 2065	B-115	-	B-151	
0.572	68200	6950	248000	25300	*1	0.690	68200	6950	248000	25300	*1	10 -	6275DA	- 2537	B-115	-	B-151	
0.476	68200	6950	245000	25000	*1	0.575	68200	6950	245000	25000	*1	10 -	6275DA	- 3045	B-115	-	B-151	
0.417	68200	6950	248000	25300	*1	0.503	68200	6950	248000	25300	*1	10 -	6275DA	- 3481	B-115	-	B-151	
0.327	68200	6950	245000	25000	*1	0.394	68200	6950	245000	25000	*1	10 -	6275DA	- 4437	B-115	-	B-151	
0.282	68200	6950	245000	25000	*1	0.341	68200	6950	245000	25000	*1	10 -	6275DA	- 5133	B-115	-	B-151	
0.235	68200	6950	245000	25000	*1	0.283	68200	6950	245000	25000	*1	10 -	6275DA	- 6177	B-115	-	B-151	
0.192	68200	6950	245000	25000	*1	0.231	68200	6950	245000	25000	*1	10 -	6275DA	- 7569	B-115	-	B-151	

GEARMOTORS

Selection Tables
7.5 kW, 11 kW


<h1>11 kW</h1>	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

n₁: Motor Speed

50Hz					60Hz					Nomenclature			Page of Dimension Sheet				
Output Speed n ₂ r/min	Output Torque T _{out}		Alloeeable Radial Load Pro		SF	Output Speed n ₂ r/min	Output Torque T _{out}		Alloeeable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
	N-m	kgf-m	N	kgf			N-m	kgf-m	N	kgf							
242	413	42.1	5840	595	1.03	292	342	34.9	5540	564	1.03	15 -	6135	- 6	B-102	B-118	B-137
			9270	945	1.18				8780	895	1.18	15 -	6140	- 6	B-102	B-118	B-137
			9270	945	1.37				8780	895	1.37	15 -	6145	- 6	B-102	B-118	B-137
			10400	1060	1.85				9760	995	1.85	15 -	6160	- 6	B-103	B-119	B-138
			10400	1060	2.19				9760	995	2.19	15 -	6165	- 6	B-103	B-119	B-138
			11700	1190	2.51				11000	1120	2.51	15 -	6170	- 6	B-103	B-119	B-138
181	551	56.1	11700	1190	2.74				11000	1120	2.74	15 -	6175	- 6	B-103	B-119	B-138
			6480	661	1.03				6150	627	1.03	15 -	6135	- 8	B-102	B-118	B-137
			10300	1050	1.18				9730	992	1.18	15 -	6140	- 8	B-102	B-118	B-137
			10300	1050	1.37				9730	992	1.37	15 -	6145	- 8	B-102	B-118	B-137
			11600	1180	1.79	219	456	46.5	10900	1110	1.79	15 -	6160	- 8	B-103	B-119	B-138
			11600	1180	2.19				10900	1110	2.19	15 -	6165	- 8	B-103	B-119	B-138
			12900	1320	2.51				12200	1240	2.51	15 -	6170	- 8	B-103	B-119	B-138
			12900	1320	2.74				12200	1240	2.74	15 -	6175	- 8	B-103	B-119	B-138

- "*2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- "*3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- Maintain torque load during operation within "Output torque" in the table for models with "*1" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables Gearmotors




11 kW	n: Motor Speed		50Hz		60Hz	
	Hz		4	6	4	6
	P	r/min	1450	980	1750	1165

50Hz					60Hz					Nomenclature			Page of Dimension Sheet					
Output Speed n ₂	Output Torque Tout	Allowable Radial Load Pro	SF		Output Speed n ₂	Output Torque Tout	Allowable Radial Load Pro	SF		Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVN			
r/min	N·m		kgf·m	N	kgf	r/min		N·m	kgf·m	N	kgf				CHHM	CHFM	CVVM	
132	757	77.2	7360	750	1.03	159	627	63.9	6980	712	1.03	15 -	6135	-	11	B-102	B-118	B-137
			11500	1170	1.18				10900	1110	1.18	15 -	6140	-	11	B-102	B-118	B-137
			11500	1170	1.37				10900	1110	1.37	15 -	6145	-	11	B-102	B-118	B-137
			13100	1330	1.79				12300	1260	1.79	15 -	6160	-	11	B-103	B-119	B-138
			13100	1330	2.19				12300	1260	2.19	15 -	6165	-	11	B-103	B-119	B-138
			14900	1520	2.51				14000	1430	2.51	15 -	6170	-	11	B-103	B-119	B-138
14900	1520	2.74	14000	1430	2.74	15 -	6175	-	11	B-103	B-119	B-138						
112	895	91.2	11700	1200	1.18	135	741	75.6	11100	1140	1.18	15 -	6140	-	13	B-102	B-118	B-137
			11700	1200	1.37				11100	1140	1.37	15 -	6145	-	13	B-102	B-118	B-137
			13700	1390	1.79				12900	1320	1.79	15 -	6160	-	13	B-103	B-119	B-138
			13700	1390	2.05				12900	1320	2.05	15 -	6165	-	13	B-103	B-119	B-138
			15500	1580	2.48				14600	1490	2.48	15 -	6170	-	13	B-103	B-119	B-138
			15500	1580	2.74				14600	1490	2.74	15 -	6175	-	13	B-103	B-119	B-138
96.7	1030	105	12300	1250	1.09	117	855	87.2	11600	1190	1.09	15 -	6140	-	15	B-102	B-118	B-137
			12300	1250	1.32				11600	1190	1.32	15 -	6145	-	15	B-102	B-118	B-137
			14500	1470	1.70				13600	1390	1.70	15 -	6160	-	15	B-103	B-119	B-138
			14500	1470	2.04				13600	1390	2.04	15 -	6165	-	15	B-103	B-119	B-138
			16300	1660	2.32				15400	1570	2.32	15 -	6170	-	15	B-103	B-119	B-138
			16300	1660	2.74				15400	1570	2.74	15 -	6175	-	15	B-103	B-119	B-138
21700	2210	2.95	20400	2080	2.95	15 -	6180	-	15	B-104	B-120	B-139						
85.3	1170	119	12800	1300	1.09	103	969	98.8	12100	1240	1.09	15 -	6145	-	17	B-102	B-118	B-137
			14900	1520	1.19				14100	1430	1.19	15 -	6160	-	17	B-103	B-119	B-138
			14900	1520	1.71				14100	1430	1.71	15 -	6165	-	17	B-103	B-119	B-138
			16900	1720	1.79				16000	1630	1.79	15 -	6170	-	17	B-103	B-119	B-138
			16900	1720	2.19				16000	1630	2.19	15 -	6175	-	17	B-103	B-119	B-138
			22900	2340	2.78				21600	2200	2.78	15 -	6180	-	17	B-104	B-120	B-139
69.0	1450	147	13600	1390	0.86	83.3	1200	122	12900	1320	1.00	15 -	6145	-	21	B-102	B-118	B-137
			15900	1620	1.17				15000	1530	1.17	15 -	6160	-	21	B-103	B-119	B-138
			15900	1620	1.45				15000	1530	1.46	15 -	6165	-	21	B-103	B-119	B-138
			18200	1860	1.69				17200	1750	1.77	15 -	6170	-	21	B-103	B-119	B-138
			18200	1860	2.15				17200	1750	2.19	15 -	6175	-	21	B-103	B-119	B-138
			24500	2500	2.73				23100	2350	2.73	15 -	6180	-	21	B-104	B-120	B-139
58.0	1720	175	16600	1690	1.22	70.0	1430	145	15700	1600	1.37	15 -	6165	-	25	B-103	B-119	B-138
			18800	1920	1.42				17800	1810	1.44	15 -	6170	-	25	B-103	B-119	B-138
			18800	1920	1.77				17800	1810	1.77	15 -	6175	-	25	B-103	B-119	B-138
			25500	2600	2.19				24000	2450	2.19	15 -	6180	-	25	B-104	B-120	B-139
			25500	2600	2.74				24000	2450	2.74	15 -	6185	-	25	B-104	B-120	B-139
			25500	2600	2.74				24000	2450	2.74	15 -	6185	-	25	B-104	B-120	B-139
50.0	2000	203	17200	1750	1.04	60.3	1650	169	16300	1660	1.04	15 -	6165	-	29	B-103	B-119	B-138
			19800	2010	1.23				18700	1900	1.30	15 -	6170	-	29	B-103	B-119	B-138
			19800	2010	1.58				18700	1900	1.71	15 -	6175	-	29	B-103	B-119	B-138
			26600	2710	1.77				25100	2560	1.77	15 -	6180	-	29	B-104	B-120	B-139
			26600	2710	2.19				25100	2560	2.19	15 -	6185	-	29	B-104	B-120	B-139
			37500	3830	2.79				35300	3600	2.79	15 -	6190	-	29	B-104	B-120	B-139
41.4	2410	246	18100	1840	0.87	50.0	2000	203	17100	1750	1.04	15 -	6165	-	35	B-103	B-119	B-138
			20900	2130	1.02				19700	2010	1.09	15 -	6170	-	35	B-103	B-119	B-138
			20900	2130	1.31				19700	2010	1.37	15 -	6175	-	35	B-103	B-119	B-138
			28400	2890	1.68				26700	2730	1.71	15 -	6180	-	35	B-104	B-120	B-139
			28400	2890	2.05				26700	2730	2.05	15 -	6185	-	35	B-104	B-120	B-139
			39600	4040	2.21				37300	3800	2.21	15 -	6190	-	35	B-104	B-120	B-139
39600	4040	2.74	37300	3800	2.74	15 -	6195	-	35	B-104	B-120	B-139						
33.7	2960	302	22100	2250	1.03	40.7	2450	250	20900	2130	1.03	15 -	6175	-	43	B-103	B-119	B-138
			30300	3090	1.37				28600	2920	1.37	15 -	6180	-	43	B-104	B-120	B-139
			30300	3090	1.69				28600	2920	1.71	15 -	6185	-	43	B-104	B-120	B-139
			42600	4340	1.90				40100	4090	1.90	15 -	6190	-	43	B-104	B-120	B-139
			42600	4340	2.46				40100	4090	2.74	15 -	6195	-	43	B-104	B-120	B-139
			77700	7920	2.89				73500	7500	2.89	15 -	6205	-	43	B-105	B-121	B-140

1. Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
2. Motor slippage may affect n₁ and n₂. Refer to technical data for details.
3. CNHM, CHHM, CNFM, CHFM, CNVM, and CVVM indicate types. Refer to page B-10 for details.
4. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
5. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors




<h1>11 kW</h1>	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

n: Motor Speed

50Hz						60Hz						Nomenclature			Page of Dimension Sheet									
Output Speed n ₂ r/min	Output Torque T _{out} N-m kgf-m		Allowable Radial Load Pro N kgf		SF	Output Speed n ₂ r/min	Output Torque T _{out} N-m kgf-m		Allowable Radial Load Pro N kgf		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM							
															CHHM	CHFV	CVVM							
28.4	3510	358	22900	2330	0.90	34.3	2910	296	21700	2210	1.03	15 -	6175	- 51	B-103	B-119	B-138							
			31300	3200	1.09				29600	3010	1.09	15 -	6180	- 51	B-104	B-120	B-139							
			31300	3200	1.37				29600	3010	1.37	15 -	6185	- 51	B-104	B-120	B-139							
			44400	4530	1.65				41900	4270	1.65	15 -	6190	- 51	B-104	B-120	B-139							
			44400	4530	1.90				41900	4270	1.90	15 -	6195	- 51	B-104	B-120	B-139							
24.6	4060	414	32700	3330	1.09	29.7	3360	343	30900	3150	1.09	15 -	6185	- 59	B-104	B-120	B-139							
			46400	4730	1.39				43700	4460	1.39	15 -	6190	- 59	B-104	B-120	B-139							
			46400	4730	1.71				43700	4460	1.71	15 -	6195	- 59	B-104	B-120	B-139							
			84100	8570	2.05				79900	8150	2.05	15 -	6205	- 59	B-105	B-121	B-140							
			34500	3520	0.89				32700	3330	0.89	15 -	6185	- 71	B-104	B-120	B-139							
20.4	4890	498	49100	5010	1.23	24.6	4050	413	46300	4720	1.23	15 -	6190	- 71	B-104	B-120	B-139							
			49100	5010	1.42				46300	4720	1.42	15 -	6195	- 71	B-104	B-120	B-139							
			52700	5380	1.06				49700	5070	1.07	15 -	6190	- 87	B-104	B-120	B-139							
16.7	5990	610	52700	5380	1.24	20.1	4960	506	49700	5070	1.24	15 -	6195	- 87	B-104	B-120	B-139							
			84100	8570	1.45				84100	8570	1.45	15 -	6205	- 87	B-105	B-121	B-140							
			96600	9850	1.79				91500	9320	1.95	15 -	6215	- 87	B-106	B-121	B-140							
			4060	414	40200				4100	*1	16.8	4060	414	37700	3840	*1	15 -	6180DB	- 104	B-111	B-127	B-146		
			4900	500	39900				4060	*1				4900	500	37300	3800	*1	15 -	6185DB	- 104	B-111	B-127	B-146
6780	691	55600	5670	1.08	5620	573	52500	5360	1.08	15 -				6195DB	- 104	B-112	B-128	B-147						
4810	490	41700	4250	*1	14.5	6540	666	40000	4070	*1				15 -	6185DB	- 121	B-111	B-127	B-146					
6380	650	59000	6010	*1				6380	650	55900				5700	*1	15 -	6190DB	- 121	B-112	B-128	B-147			
59000	6010	0.96	55900	5700				1.08	15 -	6195DB	- 121	B-112	B-128	B-147										
84100	8570	1.08	84100	8570				1.08	15 -	6205DB	- 121	B-112	B-129	B-148										
104000	10600	1.44	102000	10400				1.74	15 -	6215DB	- 121	B-113	B-130	B-149										
12.0	7890	804	114000	11600	1.71	14.5	6540	666	108000	11000	2.06	15 -	6225DB	- 121	B-113	B-130	B-149							
			143000	14600	2.31				135000	13800	2.31	15 -	6235DA	- 121	B-114	B-131	B-150							
			143000	14600	2.37				135000	13800	2.86	15 -	6235DB	- 121	B-114	B-131	B-150							
			159000	16200	2.60				151000	15400	3.14	15 -	6245DB	- 121	B-114	B-131	B-150							
			195000	19900	2.89				184000	18800	2.89	15 -	6255DA	- 121	B-115	B-132	B-151							
			6380	650	58700				5980	*1	10.1	7630	778	58400	5950	*1	15 -	6190DB	- 143	B-112	B-128	B-147		
7630	778	58200	5940	*1	7630	778	57900	5900	*1	15 -				6195DB	- 143	B-112	B-128	B-147						
9320	950	57600	5870	0.82	7730	788	57900	5900	0.98	15 -				6195DB	- 143	B-112	B-128	B-147						
8.79	10800	1100	6380	650	58900	6000	*1	10.6	8910	909	6380	650	58900	6000	*1	15 -	6190DB	- 165	B-112	B-128	B-147			
			7910	806	58300	5940	*1				7910	806	58300	5940	*1	15 -	6195DB	- 165	B-112	B-128	B-147			
			84100	8570	0.86	84100	8570				1.04	15 -	6205DB	- 165	B-112	B-129	B-148							
			104000	10600	1.08	104000	10600				1.08	15 -	6215DA	- 165	B-112	B-130	B-148							
			104000	10600	1.13	104000	10600				1.37	15 -	6215DB	- 165	B-113	B-130	B-149							
			123000	12600	1.35	117000	11900				1.62	15 -	6225DB	- 165	B-113	B-130	B-149							
			153000	15600	1.82	145000	14800				2.20	15 -	6235DA	- 165	B-114	B-131	B-150							
171000	17400	2.31	162000	16500	2.31	15 -	6245DA	- 165	B-114	B-131	B-150													
7.44	12700	1300	171000	17400	2.44	8.79	10500	1070	162000	16500	2.94	15 -	6245DB	- 165	B-114	B-131	B-150							
			209000	21300	2.89				198000	20200	2.89	15 -	6255DA	- 165	B-115	B-132	B-151							
			209000	21300	2.90				198000	20200	3.50	15 -	6255DB	- 165	B-115	B-132	B-151							
			7910	806	58300				5940	*1	8.79	10500	1070	58300	5940	*1	15 -	6195DB	- 195	B-112	B-128	B-147		
			9270	945	84100				8570	*1				9270	945	84100	8570	*1	15 -	6205DB	- 195	B-112	B-129	B-148
			104000	10600	0.96				104000	10600				1.08	15 -	6215DA	- 195	B-112	B-130	B-148				
104000	10600	0.96	104000	10600	1.16	15 -	6215DB	- 195	B-113	B-130				B-149										
129000	13200	0.98	122000	12500	1.08	15 -	6225DA	- 195	B-113	B-130				B-149										
129000	13200	1.14	122000	12500	1.37	15 -	6225DB	- 195	B-113	B-130				B-149										
161000	16400	1.54	152000	15500	1.86	15 -	6235DA	- 195	B-114	B-131	B-150													
180000	18300	2.06	170000	17300	2.17	15 -	6245DA	- 195	B-114	B-131	B-150													
180000	18300	2.06	170000	17300	2.49	15 -	6245DB	- 195	B-114	B-131	B-150													
220000	22400	2.45	208000	21200	2.89	15 -	6255DA	- 195	B-115	B-132	B-151													
220000	22400	2.45	208000	21200	2.96	15 -	6255DB	- 195	B-115	B-132	B-151													

- "*2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- "*3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- Maintain torque load during operation within "Output torque" in the table for models with "*1" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables Gearmotors



CHHM/CNHM CHF/CNFM CVVM/CNVM

15 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

n₁: Motor Speed

50Hz					60Hz					Nomenclature			Page of Dimension Sheet							
Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM				
	N-m	kgf-m	N	kgf			N-m	kgf-m	N	kgf							CHHM	CHF	CVVM	
242	563	57.4	9200	938	1.01	292	467	47.6	8730	889	1.01	20 -	6145	- 6	B-102	B-118	B-137			
			10200	1040	1.35				9670	986	1.35				6160	- 6	B-103	B-119	B-138	
			10200	1040	1.61				9670	986	1.61				6165	- 6	B-103	B-119	B-138	
			11600	1180	1.84				10900	1110	1.84				6170	- 6	B-103	B-119	B-138	
			11600	1180	2.01				10900	1110	2.01				6175	- 6	B-103	B-119	B-138	
181	751	76.5	10200	1040	1.01	219	622	63.4	9660	984	1.01	20 -	6145	- 8	B-102	B-118	B-137			
			11400	1170	1.31				10800	1100	1.31				6160	- 8	B-103	B-119	B-138	
			11400	1170	1.61				10800	1100	1.61				6165	- 8	B-103	B-119	B-138	
			12800	1310	1.84				12100	1230	1.84				6170	- 8	B-103	B-119	B-138	
			12800	1310	2.01				12100	1230	2.01				6175	- 8	B-103	B-119	B-138	
132	1030	105	11400	1160	1.01	159	855	87.2	10800	1100	1.01	20 -	6145	- 11	B-102	B-118	B-137			
			12900	1320	1.31				12200	1240	1.31				6160	- 11	B-103	B-119	B-138	
			12900	1320	1.61				12200	1240	1.61				6165	- 11	B-103	B-119	B-138	
			14700	1500	1.84				13900	1420	1.84				6170	- 11	B-103	B-119	B-138	
			14700	1500	2.01				13900	1420	2.01				6175	- 11	B-103	B-119	B-138	
			19600	2000	2.35				18500	1880	2.35				6180	- 11	B-104	B-120	B-139	
			19600	2000	2.60				18500	1880	2.60				6185	- 11	B-104	B-120	B-139	
27500	2800	2.73	25800	2630	2.73	6190	- 11	B-104	B-120	B-139										
112	1220	124	11600	1190	1.01	135	1010	103	11000	1130	1.01	20 -	6145	- 13	B-102	B-118	B-137			
			13500	1370	1.31				12700	1300	1.31				6160	- 13	B-103	B-119	B-138	
			13500	1370	1.51				12700	1300	1.51				6165	- 13	B-103	B-119	B-138	
			15300	1560	1.82				14500	1470	1.82				6170	- 13	B-103	B-119	B-138	
			15300	1560	2.01				14500	1470	2.01				6175	- 13	B-103	B-119	B-138	
			20400	2080	2.35				19200	1960	2.35				6180	- 13	B-104	B-120	B-139	
			20400	2080	2.60				19200	1960	2.60				6185	- 13	B-104	B-120	B-139	
28600	2910	2.73	26900	2740	2.73	6190	- 13	B-104	B-120	B-139										
96.7	1410	144	12100	1240	0.97	117	1170	119	11500	1170	1.01	20 -	6145	- 15	B-102	B-118	B-137			
			14200	1450	1.25				13500	1370	1.25				20 -	6160	- 15	B-103	B-119	B-138
			14200	1450	1.49				13500	1370	1.51				6165	- 15	B-103	B-119	B-138	
			16100	1640	1.70				15200	1550	1.70				6170	- 15	B-103	B-119	B-138	
			16100	1640	2.01				15200	1550	2.01				6175	- 15	B-103	B-119	B-138	
			21600	2200	2.16				20300	2070	2.16				6180	- 15	B-104	B-120	B-139	
			21600	2200	2.60				20300	2070	2.60				6185	- 15	B-104	B-120	B-139	
30000	3060	2.73	28200	2880	2.73	6190	- 15	B-104	B-120	B-139										
85.3	1600	163	12600	1290	0.80	103	1320	135	12000	1220	0.80	20 -	6145	- 17	B-102	B-118	B-137			
			14600	1490	1.25				13900	1410	1.25				20 -	6165	- 17	B-103	B-119	B-138
			16700	1700	1.31				15800	1610	1.31				6170	- 17	B-103	B-119	B-138	
			16700	1700	1.61				15800	1610	1.61				6175	- 17	B-103	B-119	B-138	
			22700	2320	2.04				21400	2180	2.04				6180	- 17	B-104	B-120	B-139	
			22700	2320	2.55				21400	2180	2.60				6185	- 17	B-104	B-120	B-139	
31600	3220	2.73	29800	3030	2.73	6190	- 17	B-104	B-120	B-139										
69.0	1970	201	15600	1590	1.07	83.3	1630	166	14800	1510	1.07	20 -	6165	- 21	B-103	B-119	B-138			
			17900	1830	1.24				17000	1730	1.30				6170	- 21	B-103	B-119	B-138	
			17900	1830	1.57				17000	1730	1.61				6175	- 21	B-103	B-119	B-138	
			24300	2480	2.00				22900	2340	2.00				6180	- 21	B-104	B-120	B-139	
			24300	2480	2.54				22900	2340	2.60				6185	- 21	B-104	B-120	B-139	
			34000	3470	2.73				32000	3260	2.73				6190	- 21	B-104	B-120	B-139	
58.0	2350	239	16200	1650	0.89	70.0	1940	198	15400	1570	1.01	20 -	6165	- 25	B-103	B-119	B-138			
			18500	1890	1.04				17500	1780	1.05				20 -	6170	- 25	B-103	B-119	B-138
			18500	1890	1.30				17500	1780	1.30				6175	- 25	B-103	B-119	B-138	
			25300	2580	1.61				23800	2430	1.61				6180	- 25	B-104	B-120	B-139	
			25300	2580	2.01				23800	2430	2.01				6185	- 25	B-104	B-120	B-139	
			35600	3620	2.35				33500	3410	2.35				6190	- 25	B-104	B-120	B-139	
35600	3620	2.70	33500	3410	2.70	6195	- 25	B-104	B-120	B-139										


GEARMOTORS

Selection Tables
15 kW

- "*2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- "*3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- Maintain torque load during operation within "Output torque" in the table for models with "*"1" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables Gearmotors

15 kW	Hz		n: Motor Speed																		
	P		50Hz		60Hz																
	n ₁	r/min	4	6	4	6															
			1450	980	1750	1165															
							Nomenclature			Page of Dimension Sheet											
Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM CNFM CNVM	CHHM CHFM CVVM					
r/min	N·m	kgf·m	N	kgf		r/min	N·m	kgf·m	N	kgf											
50.0	2720	277	19400	1980	1.16	60.3	2260	230	18400	1870	1.25	20 -	6175	- 29	B-103	B-119	B-138				
			26400	2690	1.30				24900	2540	1.30	20 -	6180	- 29	B-104	B-120	B-139				
			26400	2690	1.61				24900	2540	1.61	20 -	6185	- 29	B-104	B-120	B-139				
			37400	3810	2.05				35200	3580	2.05	20 -	6190	- 29	B-104	B-120	B-139				
			37400	3810	2.52				35200	3580	2.52	20 -	6195	- 29	B-104	B-120	B-139				
41.4	3280	335	20400	2080	0.96	50.0	2720	277	19400	1970	1.01	20 -	6175	- 35	B-103	B-119	B-138				
			28100	2860	1.23				26500	2700	1.25	20 -	6180	- 35	B-104	B-120	B-139				
			28100	2860	1.51				26500	2700	1.51	20 -	6185	- 35	B-104	B-120	B-139				
			39400	4020	1.62				37100	3780	1.62	20 -	6190	- 35	B-104	B-120	B-139				
			39400	4020	2.01				37100	3780	2.01	20 -	6195	- 35	B-104	B-120	B-139				
33.7	4040	411	29900	3050	1.01	40.7	3340	341	28300	2880	1.01	20 -	6180	- 43	B-104	B-120	B-139				
			29900	3050	1.24				28300	2880	1.25	20 -	6185	- 43	B-104	B-120	B-139				
			42300	4310	1.39				39900	4060	1.39	20 -	6190	- 43	B-104	B-120	B-139				
			42300	4310	1.81				39900	4060	2.01	20 -	6195	- 43	B-104	B-120	B-139				
			77500	7900	2.12				73300	7480	2.12	20 -	6205	- 43	B-105	B-121	B-140				
28.4	4790	488	30900	3150	1.01	34.3	3970	404	29200	2980	1.01	20 -	6185	- 51	B-104	B-120	B-139				
			44100	4490	1.21				41500	4230	1.21	20 -	6190	- 51	B-104	B-120	B-139				
			44100	4490	1.39				41500	4230	1.39	20 -	6195	- 51	B-104	B-120	B-139				
24.6	5540	564	32100	3270	0.80	29.7	4590	468	30400	3100	0.80	20 -	6185	- 59	B-104	B-120	B-139				
			46000	4690	1.02				43400	4430	1.02	20 -	6190	- 59	B-104	B-120	B-139				
			46000	4690	1.25				43400	4430	1.25	20 -	6195	- 59	B-104	B-120	B-139				
			84100	8570	1.51				79700	8120	1.51	20 -	6205	- 59	B-105	B-121	B-140				
			85900	8760	2.26				81300	8290	2.51	20 -	6215	- 59	B-105	B-121	B-140				
20.4	6660	679	48600	4960	1.04	24.6	5520	563	45900	4680	1.04	20 -	6195	- 71	B-104	B-120	B-139				
16.7	8170	832	52100	5310	0.91	20.1	6770	690	49200	5010	0.91	20 -	6195	- 87	B-104	B-120	B-139				
			84100	8570	1.06				84100	8570	1.06	20 -	6205	- 87	B-105	B-121	B-140				
			96100	9790	1.31				91000	9280	1.43	20 -	6215	- 87	B-105	B-121	B-140				
			102000	10400	1.78				96400	9830	1.78	20 -	6225	- 87*2	B-106	B-122	B-141				
16.6	8190	835	84100	8570	1.13	19.7	6890	703	84100	8570	1.30	206 -	6205	- 59	B-105	B-121	B-140				
			96200	9800	1.55				91500	9330	1.83	206 -	6215	- 59	B-105	B-121	B-140				
			102000	10400	1.94				97000	9890	2.22	206 -	6225	- 59	B-106	B-122	B-141				
13.9	6380	650	55800	5690	*1	16.8	6090	621	52400	5340	*1	20 -	6190DB	- 104	B-112	B-128	B-147				
	7350	750	55400	5650	*1				6090	621	52400	5340	*1	20 -	6195DB	- 104	B-112	B-128	B-147		
	9250	943	54700	5580	0.80				7660	781	51800	5280	0.80	20 -	6195DB	- 104	B-112	B-128	B-147		
12.0	10800	1100	7580	773	59000	6010	*1	14.5	8910	909	7090	723	55700	5680	*1	20 -	6195DB	- 121	B-112	B-128	B-147
			8560	872	84100	8570	*1				7090	723	84100	8570	*1	20 -	6205DB	- 121	B-112	B-129	B-148
					84100	8570	0.80						84100	8570	0.80	20 -	6205DB	- 121	B-112	B-129	B-148
					104000	10600	1.06						101000	10300	1.28	20 -	6215DB	- 121	B-113	B-129	B-149
					113000	11600	1.25						108000	11000	1.51	20 -	6225DB	- 121	B-113	B-130	B-149
					142000	14500	1.69						135000	13800	1.69	20 -	6235DA	- 121	B-114	B-114	B-150
					142000	14500	1.74						135000	13800	2.10	20 -	6235DB	- 121	B-114	B-114	B-150
					159000	16200	1.91						150000	15300	2.30	20 -	6245DB	- 121	B-114	B-114	B-150
					194000	19800	2.12						184000	18700	2.12	20 -	6255DA	- 121	B-115	B-132	B-151
					194000	19800	2.56						184000	18700	3.08	20 -	6255DB	- 121	B-115	B-132	B-151
					237000	24200	2.91						225000	22900	3.38	20 -	6265DA	- 121	B-115	B-132	B-151
11.3	12100	1230	114000	11600	1.25	13.4	10200	1040	108000	11000	1.48	206 -	6225	- 87	B-106	B-122	B-141				
			142000	14500	1.42				135000	13800	1.60	206 -	6235	- 87	B-106	B-122	B-141				
			159000	16200	1.87				151000	15400	2.14	206 -	6245	- 87	B-107	B-123	B-142				
			196000	19900	2.57				186000	19000	2.86	206 -	6255	- 87	B-107	B-123	B-142				




GEARMOTORS

Selection Tables
15 kW

1. Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
2. Motor slippage may affect n₁ and n₂. Refer to technical data for details.
3. CNHM, CHHM, CNFM, CHFM, CNVM, and CVVM indicate types. Refer to page B-10 for details.
4. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
5. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors




18.5 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

50Hz					60Hz					Nomenclature			Page of Dimension Sheet											
Output Speed n ₂ r/min	Output Torque Tout N·m	Output Torque Tout kgf·m	Allowable Radial Load Pro N	SF	Output Speed n ₂ r/min	Output Torque Tout N·m	Output Torque Tout kgf·m	Allowable Radial Load Pro N	SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM CHHM	CNFM CHFM	CNVM CVVM									
242	695	70.8	10200	1.10	292	575	58.7	9590	1.10	25 - 6160 - 6	6160	- 6	B-103	B-119	B-138									
			10200	1.30				9590	1.30				25 - 6165 - 6	B-103	B-119	B-138								
			11500	1.49				10900	1.49				25 - 6170 - 6	B-103	B-119	B-138								
			11500	1.63				10900	1.63				25 - 6175 - 6	B-103	B-119	B-138								
181	926	94.4	11300	1.06	219	767	78.2	10700	1.06	25 - 6160 - 8	6160	- 8	B-103	B-119	B-138									
			11300	1.30				10700	1.30				25 - 6165 - 8	B-103	B-119	B-138								
			12700	1.49				12000	1.49				25 - 6170 - 8	B-103	B-119	B-138								
			12700	1.63				12000	1.63				25 - 6175 - 8	B-103	B-119	B-138								
132	1270	130	12700	1.06	159	1060	108	12100	1.06	25 - 6160 - 11	6160	- 11	B-103	B-119	B-138									
			12700	1.30				12100	1.30				25 - 6165 - 11	B-103	B-119	B-138								
			14600	1.49				13800	1.49				25 - 6170 - 11	B-103	B-119	B-138								
			14600	1.63				13800	1.63				25 - 6175 - 11	B-103	B-119	B-138								
			19500	1.90				18400	1.90				25 - 6180 - 11	B-104	B-120	B-139								
			19500	2.11				18400	2.11				25 - 6185 - 11	B-104	B-120	B-139								
			27400	2.22				25800	2.22				25 - 6190 - 11	B-104	B-120	B-139								
			27400	2.60				25800	2.60				25 - 6195 - 11	B-104	B-120	B-139								
112	1500	153	13300	1.06	135	1250	127	12600	1.06	25 - 6160 - 13	6160	- 13	B-103	B-119	B-138									
			13300	1.22				12600	1.22				25 - 6165 - 13	B-103	B-119	B-138								
			15200	1.48				14300	1.48				25 - 6170 - 13	B-103	B-119	B-138								
			15200	1.63				14300	1.63				25 - 6175 - 13	B-103	B-119	B-138								
			20300	1.90				19100	1.90				25 - 6180 - 13	B-104	B-120	B-139								
			20300	2.11				19100	2.11				25 - 6185 - 13	B-104	B-120	B-139								
			28500	2.22				26800	2.22				25 - 6190 - 13	B-104	B-120	B-139								
			28500	2.60				26800	2.60				25 - 6195 - 13	B-104	B-120	B-139								
96.7	1740	177	14000	1.01	117	1440	147	13300	1.01	25 - 6160 - 15	6160	- 15	B-103	B-119	B-138									
			14000	1.21				13300	1.22				25 - 6165 - 15	B-103	B-119	B-138								
			15800	1.38				15000	1.38				25 - 6170 - 15	B-103	B-119	B-138								
			15800	1.63				15000	1.63				25 - 6175 - 15	B-103	B-119	B-138								
			21400	1.75				20200	1.75				25 - 6180 - 15	B-104	B-120	B-139								
			21400	2.11				20200	2.11				25 - 6185 - 15	B-104	B-120	B-139								
			29900	2.22				28100	2.22				25 - 6190 - 15	B-104	B-120	B-139								
			29900	2.60				28100	2.60				25 - 6195 - 15	B-104	B-120	B-139								
85.3	1970	201	14400	1.02	103	1630	166	13600	1.02	25 - 6165 - 17	6165	- 17	B-103	B-119	B-138									
			14400	1.06				15600	1.06				25 - 6170 - 17	B-103	B-119	B-138								
			16500	1.30				15600	1.30				25 - 6175 - 17	B-103	B-119	B-138								
			16500	1.65				21300	1.65				25 - 6180 - 17	B-104	B-120	B-139								
			22600	2.06				21300	2.11				25 - 6185 - 17	B-104	B-120	B-139								
			31500	2.22				29700	2.22				25 - 6190 - 17	B-104	B-120	B-139								
			31500	2.60				29700	2.60				25 - 6195 - 17	B-104	B-120	B-139								
			69.0	2430				248	17700				1.01	83.3	2010	205	16800	1.05	25 - 6170 - 21	6170	- 21	B-103	B-119	B-138
17700	1.28	16800			1.30	25 - 6175 - 21	B-103		B-119	B-138														
24200	1.62	22800			1.62	25 - 6180 - 21	B-104		B-120	B-139														
24200	2.06	22800			2.11	25 - 6185 - 21	B-104		B-120	B-139														
33900	2.22	31900			2.22	25 - 6190 - 21	B-104		B-120	B-139														
33900	2.60	31900			2.60	25 - 6195 - 21	B-104		B-120	B-139														
58.0	2890	295			18200	1.05	70.0		2400	244	17300	1.05	25 - 6175 - 25				6175	- 25				B-103	B-119	B-138
					18200	1.30					23700	1.30										25 - 6180 - 25	B-104	B-120
			25100	1.63	23700	1.63		25 - 6185 - 25			B-104	B-120		B-139										
			25100	1.90	33300	1.90		25 - 6190 - 25			B-104	B-120		B-139										
			35400	2.19	33300	2.19		25 - 6195 - 25			B-104	B-120		B-139										
			35400	2.19	33300	2.19		25 - 6195 - 25			B-104	B-120		B-139										

- Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
- Motor slippage may affect n₁ and n₂. Refer to technical data for details.
- CNHM, CHHM, CNFM, CHFM, CNVM, and CVVM indicate types. Refer to page B-10 for details.
- Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
- "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors



n₁: Motor Speed

18.5 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

50Hz					60Hz					Nomenclature			Page of Dimension Sheet				
Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂ r/min	Output Torque Tout		Allowable Radial Load Pro		Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM	
	N-m	kgf-m	N	kgf			N-m	kgf-m	N	kgf							
50.0	3360	342	19000	1940	0.94	60.3	2780	284	18100	1840	1.02	25 -	6175	- 29	B-103	B-119	B-138
			26100	2660	1.05				24700	2520	1.05	25 -	6180	- 29	B-104	B-120	B-139
			26100	2660	1.30				24700	2520	1.30	25 -	6185	- 29	B-104	B-120	B-139
			37200	3790	1.66				35000	3570	1.66	25 -	6190	- 29	B-104	B-120	B-139
			37200	3790	2.04				35000	3570	2.04	25 -	6195	- 29	B-104	B-120	B-139
			68700	7000	2.47				65000	6630	2.47	25 -	6205	- 29	B-105	B-121	B-140
41.4	4050	413	27800	2830	1.00	50.0	3360	342	26300	2680	1.02	25 -	6180	- 35	B-104	B-120	B-139
			27800	2830	1.22				26300	2680	1.22	25 -	6185	- 35	B-104	B-120	B-139
			39200	3990	1.31				36900	3760	1.31	25 -	6190	- 35	B-104	B-120	B-139
			39200	3990	1.63				36900	3760	1.63	25 -	6195	- 35	B-104	B-120	B-139
33.7	4980	507	29500	3010	1.01	40.7	4120	420	28000	2850	1.02	25 -	6185	- 43	B-104	B-120	B-139
			42000	4290	1.13				39600	4040	1.13	25 -	6190	- 43	B-104	B-120	B-139
			42000	4290	1.46				39600	4040	1.63	25 -	6195	- 43	B-104	B-120	B-139
			77300	7880	1.72				73200	7460	1.72	25 -	6205	- 43	B-105	B-121	B-140
			78900	8050	2.44				74700	7620	2.44	25 -	6215	- 43	B-105	B-121	B-140
28.4	5900	602	30400	3100	0.82	34.3	4890	499	28900	2940	0.82	25 -	6185	- 51	B-104	B-120	B-139
			43700	4460	0.98				41300	4210	0.98	25 -	6190	- 51	B-104	B-120	B-139
			43700	4460	1.13				41300	4210	1.13	25 -	6195	- 51	B-104	B-120	B-139
24.6	6830	696	45700	4660	1.02	29.7	5660	577	43100	4400	1.02	25 -	6195	- 59	B-104	B-120	B-139
			83900	8550	1.22				79400	8100	1.22	25 -	6205	- 59	B-105	B-121	B-140
			85600	8730	1.83				81100	8270	2.04	25 -	6215	- 59	B-105	B-121	B-140
			90800	9250	2.12				86000	8760	2.44	25 -	6225	- 59	B-106	B-122	B-141
22.8	7360	751	47400	4830	1.08	27.1	6190	631	45000	4580	1.24	256 -	6195	- 43	B-104	B-120	B-139
			88400	9010	1.72				84100	8570	2.04	256 -	6215	- 43	B-105	B-121	B-140
			93700	9550	2.17				89100	9090	2.58	256 -	6225	- 43	B-106	B-122	B-141
20.4	8220	838	48100	4910	0.84	24.6	6810	694	45500	4640	0.84	25 -	6195	- 71	B-104	B-120	B-139
			95600	9740	1.06				90600	9240	1.16	25 -	6215	- 87	B-105	B-121	B-140
16.7	10100	1030	101000	10300	1.44	20.1	8340	851	96100	9790	1.44	25 -	6225	- 87	B-106	B-122	B-141
			95700	9760	1.25				91100	9290	1.49	256 -	6215	- 59	B-105	B-121	B-140
16.6	10100	1030	102000	10300	1.57	19.7	8500	866	96700	9850	1.80	256 -	6225	- 59	B-106	B-122	B-141
			127000	12900	1.87				120000	12300	2.04	256 -	6235	- 59	B-106	B-122	B-142
			104000	10600	0.86				101000	10300	1.03	25 -	6215DB	- 121	B-113	B-130	B-149
12.0	13300	1350	113000	11500	1.01	14.5	11000	1120	107000	10900	1.22	25 -	6225DB	- 121	B-113	B-130	B-149
			142000	14500	1.37				134000	13700	1.37	25 -	6235DA	- 121	B-114	B-131	B-150
			142000	14500	1.41				134000	13700	1.70	25 -	6235DB	- 121	B-114	B-131	B-150
			158000	16100	1.55				150000	15300	1.87	25 -	6245DB	- 121	B-114	B-131	B-150
			194000	19800	1.72				184000	18700	1.72	25 -	6255DA	- 121	B-115	B-132	B-151
			194000	19800	2.07				184000	18700	2.50	25 -	6255DB	- 121	B-115	B-132	B-151
			237000	24200	2.36				224000	22900	2.74	25 -	6265DA	- 121	B-115	B-132	B-151
			113000	11500	1.01				108000	11000	1.20	256 -	6225	- 87	B-106	B-122	B-141
11.3	14900	1520	142000	14400	1.15	13.4	12500	1280	135000	13700	1.30	256 -	6235	- 87	B-106	B-122	B-142
			159000	16200	1.52				151000	15400	1.74	256 -	6245	- 87	B-107	B-123	B-142
			195000	19900	2.08				186000	18900	2.32	256 -	6255	- 87	B-107	B-123	B-142
			14500	1480	122000				12500	*1	14500	1480	115000	11800	*1	25 -	6225DB
8.79	18100	1840	121000	12400	0.80	10.6	15000	1530	115000	11800	0.97	25 -	6225DB	- 165	B-113	B-130	B-149
			151000	15400	1.08				144000	14600	1.31	25 -	6235DA	- 165	B-114	B-131	B-150
			170000	17300	1.37				161000	16400	1.37	25 -	6245DA	- 165	B-114	B-131	B-150
			170000	17300	1.45				161000	16400	1.75	25 -	6245DB	- 165	B-114	B-131	B-150
			208000	21200	1.72				197000	20100	1.72	25 -	6255DA	- 165	B-115	B-132	B-151
			208000	21200	1.72				197000	20100	2.08	25 -	6255DB	- 165	B-115	B-132	B-151
			254000	25900	2.42				240000	24500	2.74	25 -	6265DA	- 165	B-115	B-132	B-151


GEARMOTORS
Selection Tables
18.5 kW

- 6. "2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- 7. Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- 8. "3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- 9. Maintain torque load during operation within "Output torque" in the table for models with "1" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables Gearmotors


Selection Tables
18.5 kW, 22 kW

18.5 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165



50Hz						60Hz						Nomenclature			Page of Dimension Sheet				
Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM		
r/min	N·m	kgf·m	N	kgf		r/min	N·m	kgf·m	N	kgf					CHHM	CHFMCNFM	CVVM		
7.44	21400	2180	159000	16200	0.92	8.97	17700	1810	151000	15400	1.11	25 - 6235DA	- 195		B-114	B-131	B-150		
			178000	18100	1.23				169000	17200	1.29				25 - 6245DA	- 195	B-114	B-131	B-150
			178000	18100	1.23				169000	17200	1.48				25 - 6245DB	- 195	B-114	B-131	B-150
			218000	22200	1.46				207000	21100	1.72				25 - 6255DA	- 195	B-115	B-132	B-151
			218000	22200	1.46				207000	21100	1.76				25 - 6255DB	- 195	B-115	B-132	B-151
			267000	27200	2.05				252000	25700	2.47	25 - 6265DA	- 195		B-115	B-132	B-151		
6.28	25300	2580	18900	1930	*1	7.58	21000	2140	18900	1930	*1	25 - 6235DA	- 231		B-114	B-131	B-150		
			189000	19300	1.02				180000	18300	1.23				25 - 6245DA	- 231	B-114	B-131	B-150
			232000	23600	1.22				219000	22400	1.48				25 - 6255DA	- 231	B-115	B-132	B-151
			276000	28100	1.82				269000	27400	2.19	25 - 6265DA	- 231		B-115	B-132	B-151		
5.31	29900	3050	198000	20200	0.86	6.41	24800	2530	188000	19200	1.04	25 - 6245DA	- 273		B-114	B-131	B-150		
			243000	24800	1.04				230000	23500	1.25				25 - 6255DA	- 273	B-115	B-132	B-151
			276000	28100	1.54				276000	28100	1.85				25 - 6265DA	- 273	B-115	B-132	B-151
4.55	35000	3570	25800	2630	*1	5.49	29000	2950	25800	2630	*1	25 - 6245DA	- 319		B-114	B-131	B-150		
			255000	26000	0.93				242000	24600	1.12				25 - 6255DA	- 319	B-115	B-132	B-151
			276000	28100	1.31				276000	28100	1.59				25 - 6265DA	- 319	B-115	B-132	B-151
			248000	25300	1.95				248000	25300	2.35				25 - 6275DA	- 319	B-115	-	B-151
3.85	41300	4210	32500	3310	*1	4.64	34300	3490	32500	3310	*1	25 - 6255DA	- 377		B-115	B-132	B-151		
			276000	28100	1.11				276000	28100	1.34				25 - 6265DA	- 377	B-115	B-132	B-151
			248000	25300	1.65				248000	25300	1.99				25 - 6275DA	- 377	B-115	-	B-151
3.07	51900	5290	276000	28100	0.89	3.70	43000	4380	276000	28100	1.07	25 - 6265DA	- 473		B-115	B-132	B-151		
			248000	25300	1.31				248000	25300	1.59				25 - 6275DA	- 473	B-115	-	B-151
2.59	61300	6250	46000	4690	*1	3.13	50800	5180	46000	4690	*1	25 - 6265DA	- 559		B-115	B-132	B-151		
			248000	25300	1.11				248000	25300	1.34				25 - 6275DA	- 559	B-115	-	B-151
2.23	71200	7250	248000	25300	0.96	2.70	59000	6010	248000	25300	1.16	25 - 6275DA	- 649		B-115	-	B-151		
1.98	80200	8170	248000	25300	0.85	2.39	66400	6770	248000	25300	1.03	25 - 6275DA	- 731		B-115	-	B-151		
1.72	68200	6950	248000	25300	*1	2.08	68200	6950	248000	25300	*1	25 - 6275DA	- 841		B-115	-	B-151		


22 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165



50Hz						60Hz						Nomenclature			Page of Dimension Sheet				
Output Speed n ₂	Output Torque Tout		Alloeeable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout		Alloeeable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM		
r/min	N·m	kgf·m	N	kgf		r/min	N·m	kgf·m	N	kgf					CHHM	CHFMCNFM	CVVM		
242	826	84.2	10100	1020	1.10	292	684	69.8	9510	969	1.10	30 - 6165	- 6		B-103	B-119	B-138		
			11500	1170	1.25				10800	1100	1.25				30 - 6170	- 6	B-103	B-119	B-138
			11500	1170	1.37				10800	1100	1.37				30 - 6175	- 6	B-103	B-119	B-138
181	1100	112	11200	1140	1.10	219	912	93.0	10600	1080	1.10	30 - 6165	- 8		B-103	B-119	B-138		
			12600	1290	1.25				11900	1220	1.25				30 - 6170	- 8	B-103	B-119	B-138
			12600	1290	1.37				11900	1220	1.37				30 - 6175	- 8	B-103	B-119	B-138

1. Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
2. Motor slippage may affect n₁ and n₂. Refer to technical data for details.
3. CNHM, CHHM, CNFM, CHFMCNFM, CNVM, and CVVM indicate types. Refer to page B-10 for details.
4. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
5. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors



22 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

n: Motor Speed

50Hz					60Hz					Nomenclature			Page of Dimension Sheet				
Output Speed n ₂ r/min	Output Torque Tout N·m kgf·m		Allowable Radial Load Pro N kgf		SF	Output Speed n ₂ r/min	Output Torque Tout N·m kgf·m		Allowable Radial Load Pro N kgf		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
132	1510	154	12600	1280	1.10	159	1250	128	11900	1220	1.10	30 - 6165	- 11	B-103	B-119	B-138	
			14500	1470	1.25				13700	1390	1.25	30 - 6170	- 11	B-103	B-119	B-138	
			14500	1470	1.37				13700	1390	1.37	30 - 6175	- 11	B-103	B-119	B-138	
			19500	1980	1.60				18300	1870	1.60	30 - 6180	- 11	B-104	B-120	B-139	
			19500	1980	1.77				18300	1870	1.77	30 - 6185	- 11	B-104	B-120	B-139	
			27300	2780	1.86				25700	2620	1.86	30 - 6190	- 11	B-104	B-120	B-139	
			27300	2780	2.19				25700	2620	2.19	30 - 6195	- 11	B-104	B-120	B-139	
112	1790	182	13100	1330	1.03	135	1480	151	12400	1270	1.03	30 - 6165	- 13	B-103	B-119	B-138	
			15000	1530	1.24				14200	1450	1.24	30 - 6170	- 13	B-103	B-119	B-138	
			15000	1530	1.37				14200	1450	1.37	30 - 6175	- 13	B-103	B-119	B-138	
			20200	2060	1.60				19100	1940	1.60	30 - 6180	- 13	B-104	B-120	B-139	
			20200	2060	1.77				19100	1940	1.77	30 - 6185	- 13	B-104	B-120	B-139	
			28400	2890	1.86				26700	2730	1.86	30 - 6190	- 13	B-104	B-120	B-139	
96.7	2060	210	13800	1400	1.02	117	1710	174	13100	1340	1.03	30 - 6165	- 15	B-103	B-119	B-138	
			15600	1590	1.16				14800	1510	1.16	30 - 6170	- 15	B-103	B-119	B-138	
			15600	1590	1.37				14800	1510	1.37	30 - 6175	- 15	B-104	B-120	B-139	
			21300	2170	1.47				20100	2050	1.47	30 - 6180	- 15	B-104	B-120	B-139	
			21300	2170	1.77				20100	2050	1.77	30 - 6185	- 15	B-104	B-120	B-139	
			29800	3040	1.86				28100	2860	1.86	30 - 6190	- 15	B-104	B-120	B-139	
85.3	2340	239	13800	1400	1.02	103	1940	198	13100	1340	1.03	30 - 6165	- 15	B-103	B-119	B-138	
			15600	1590	1.16				14800	1510	1.16	30 - 6170	- 15	B-103	B-119	B-138	
			15600	1590	1.37				14800	1510	1.37	30 - 6175	- 15	B-104	B-120	B-139	
			21300	2170	1.47				20100	2050	1.47	30 - 6180	- 15	B-104	B-120	B-139	
			21300	2170	1.77				20100	2050	1.77	30 - 6185	- 15	B-104	B-120	B-139	
			29800	3040	1.86				28100	2860	1.86	30 - 6190	- 15	B-104	B-120	B-139	
69.0	2890	295	14100	1440	0.86	83.3	2400	244	13400	1370	0.86	30 - 6165	- 17	B-103	B-119	B-138	
			16200	1650	1.10				15400	1570	1.10	30 - 6175	- 17	B-103	B-119	B-138	
			22400	2280	1.39				21200	2160	1.39	30 - 6180	- 17	B-104	B-120	B-139	
			22400	2280	1.74				21200	2160	1.77	30 - 6185	- 17	B-104	B-120	B-139	
			31400	3200	1.86				29600	3010	1.86	30 - 6190	- 17	B-104	B-120	B-139	
			31400	3200	2.19				29600	3010	2.19	30 - 6195	- 17	B-104	B-120	B-139	
58.0	3440	351	17500	1780	1.07	70.0	2850	291	16600	1690	1.10	30 - 6175	- 21	B-103	B-119	B-138	
			24000	2450	1.36				22700	2310	1.36	30 - 6180	- 21	B-104	B-120	B-139	
			24000	2450	1.73				22700	2310	1.77	30 - 6185	- 21	B-104	B-120	B-139	
			33700	3440	1.86				31800	3240	1.86	30 - 6190	- 21	B-104	B-120	B-139	
			33700	3440	2.19				31800	3240	2.19	30 - 6195	- 21	B-104	B-120	B-139	
			62900	6410	2.69				59500	6070	2.69	30 - 6205	- 21	B-105	B-121	B-140	
50.0	3990	407	17900	1830	0.89	60.3	3310	337	17000	1740	0.89	30 - 6175	- 25	B-103	B-119	B-138	
			24900	2530	1.10				23500	2400	1.10	30 - 6180	- 25	B-104	B-120	B-139	
			24900	2530	1.37				23500	2400	1.37	30 - 6185	- 25	B-104	B-120	B-139	
			35300	3590	1.60				33200	3390	1.60	30 - 6190	- 25	B-104	B-120	B-139	
			35300	3590	1.84				33200	3390	1.84	30 - 6195	- 25	B-104	B-120	B-139	
41.4	4820	491	25900	2640	1.10	50.0	3990	407	24500	2500	1.10	30 - 6185	- 29	B-104	B-120	B-139	
			37000	3770	1.40				34900	3560	1.40	30 - 6190	- 29	B-104	B-120	B-139	
			37000	3770	1.72				34900	3560	1.72	30 - 6195	- 29	B-104	B-120	B-139	
			68500	6990	2.08				64900	6610	2.08	30 - 6205	- 29	B-105	B-121	B-140	
			70000	7130	2.66				66200	6750	2.66	30 - 6215	- 29	B-105	B-121	B-140	
33.7	5920	603	27500	2810	1.03	40.7	4900	500	26000	2650	1.03	30 - 6185	- 35	B-104	B-120	B-139	
			39000	3970	1.10				36700	3750	1.10	30 - 6190	- 35	B-104	B-120	B-139	
			39000	3970	1.37				36700	3750	1.37	30 - 6195	- 35	B-104	B-120	B-139	
			29100	2970	0.85				27600	2820	0.85	30 - 6185	- 43	B-104	B-120	B-139	
			41800	4260	0.95				39400	4020	0.95	30 - 6190	- 43	B-104	B-120	B-139	
28.4	7020	716	41800	4260	1.23	34.3	5820	593	39400	4020	1.37	30 - 6195	- 43	B-104	B-120	B-139	
			77100	7860	1.45				73000	7440	1.45	30 - 6205	- 43	B-105	B-121	B-140	
			78700	8020	2.05				74600	7600	2.05	30 - 6215	- 43	B-105	B-121	B-140	
			83400	8510	2.57				79000	8050	2.57	30 - 6225	- 43	B-106	B-122	B-141	
			43400	4420	0.95				41000	4180	0.95	30 - 6195	- 51	B-104	B-120	B-139	


- "*2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- "*3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- Maintain torque load during operation within "Output torque" in the table for models with "*"1" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables Gearmotors

22 kW	Hz		n ₁ : Motor Speed														
	P		50Hz		60Hz												
	n ₁	r/min	4	6	4	6											
			1450	980	1750	1165											
			50Hz		60Hz				Nomenclature			Page of Dimension Sheet					
Output Speed n ₂	Output Torque Tout	Allowable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout	Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM		
r/min	N·m	kgf·m	N	kgf	r/min	N·m	kgf·m	N	kgf				CHHM	CHFM	CVVM		
			45300	4620	0.85			42800	4360	0.85	30 -	6195	- 59	B-104	B-120	B-139	
24.6	8120	828	83600	8520	1.03	29.7	6730	686	79200	8070	1.03	30 - 6205	- 59	B-105	B-121	B-140	
			85300	8690	1.54			80800	8240	1.71	30 -	6215	- 59	B-105	B-121	B-140	
			90500	9220	1.79			85700	8740	2.05	30 -	6225	- 59	B-106	B-122	B-141	
			84100	8570	1.06			82100	8370	1.26	306 -	6205	- 43	B-105	B-121	B-140	
22.8	8760	893	88000	8970	1.45	27.1	7370	751	83800	8540	1.72	306 -	6215	- 43	B-105	B-121	B-140
			93400	9520	1.83			88900	9060	2.17	306 -	6225	- 43	B-106	B-122	B-141	
16.7	12000	1220	101000	10300	1.21	20.1	9920	1010	95700	9760	1.21	30 - 6225	- 87	B-106	B-122	B-141	
			95200	9710	1.05			90700	9250	1.25	306 -	6215	- 59	B-105	B-121	B-140	
16.6	12000	1220	101000	10300	1.32	19.7	10100	1030	96300	9810	1.51	306 -	6225	- 59	B-106	B-122	B-141
			141000	14400	2.15			134000	13700	2.55	306 -	6245	- 59	B-107	B-123	B-142	
	11400	1160	104000	10600	*1		11400	1160	101000	10300	*1	30 -	6215DB	- 121	B-113	B-130	B-149
			112000	11400	0.85				106000	10900	1.03	30 -	6225DB	- 121	B-113	B-130	B-149
			141000	14400	1.15			134000	13700	1.15	30 - 6235DA	- 121	B-114	B-131	B-150		
			141000	14400	1.19			134000	13700	1.43	30 -	6235DB	- 121	B-114	B-131	B-150	
12.0	15800	1610	157000	16000	1.30	14.5	13100	1330	149000	15200	1.57	30 -	6245DB	- 121	B-114	B-131	B-150
			193000	19700	1.45			183000	18700	1.45	30 -	6255DA	- 121	B-115	B-132	B-151	
			193000	19700	1.74			183000	18700	2.10	30 -	6255DB	- 121	B-115	B-132	B-151	
			237000	24100	1.99			224000	22800	2.31	30 -	6265DA	- 121	B-115	B-132	B-151	
			158000	16100	1.28			150000	15300	1.46	306 -	6245	- 87	B-107	B-123	B-142	
11.3	17700	1810	195000	19800	1.75	13.4	14900	1520	185000	18900	1.95	306 -	6255	- 87	B-107	B-123	B-142
			237000	24200	2.43			226000	23000	2.43	306 -	6265	- 87	B-107	B-123	B-142	
			151000	15400	0.91			143000	14600	1.10	30 -	6235DA	- 165	B-114	B-131	B-150	
			169000	17200	1.15			160000	16300	1.15	30 - 6245DA	- 165	B-114	B-131	B-150		
			169000	17200	1.22			160000	16300	1.47	30 -	6245DB	- 165	B-114	B-131	B-150	
8.79	21500	2190	207000	21100	1.45	10.6	17800	1820	196000	20000	1.45	30 -	6255DA	- 165	B-115	B-132	B-151
			207000	21100	1.45			196000	20000	1.75	30 -	6255DB	- 165	B-115	B-132	B-151	
			253000	25800	2.03			240000	24400	2.31	30 -	6265DA	- 165	B-115	B-132	B-151	
	19600	2000	159000	16200	*1		19600	2000	150000	15300	*1	30 -	6235DA	- 195	B-114	B-131	B-150
			177000	18000	1.03			168000	17100	1.08	30 - 6245DA	- 195	B-114	B-131	B-150		
			177000	18000	1.03			168000	17100	1.25	30 -	6245DB	- 195	B-114	B-131	B-150	
7.44	25400	2590	218000	22200	1.23	8.97	21100	2150	206000	21000	1.45	30 -	6255DA	- 195	B-115	B-132	B-151
			218000	22200	1.23			206000	21000	1.48	30 -	6255DB	- 195	B-115	B-132	B-151	
			266000	27100	1.72			252000	25700	2.08	30 -	6265DA	- 195	B-115	B-132	B-151	
			188000	19200	0.86			179000	18200	1.03	30 -	6245DA	- 231	B-114	B-131	B-150	
6.28	30100	3070	231000	23500	1.03	7.58	25000	2540	219000	22300	1.24	30 - 6255DA	- 231	B-115	B-132	B-151	
			276000	28100	1.53			268000	27300	1.84	30 -	6265DA	- 231	B-115	B-132	B-151	
	25800	2630	199000	20300	*1		25800	2630	188000	19200	*1	30 -	6245DA	- 273	B-114	B-131	B-150
5.31	35600	3630	242000	24700	0.87	6.41	29500	3010	229000	23400	1.05	30 -	6255DA	- 273	B-115	B-132	B-151
			276000	28100	1.29			276000	28100	1.56	30 -	6265DA	- 273	B-115	B-132	B-151	
	32500	3310	255000	26000	*1		32500	3310	241000	24600	*1	30 -	6255DA	- 319	B-115	B-132	B-151
4.55	41600	4240	276000	28100	1.11	5.49	34500	3510	276000	28100	1.33	30 -	6265DA	- 319	B-115	B-132	B-151
			248000	25300	1.64			248000	25300	1.98	30 -	6275DA	- 319	B-115	-	B-151	
	49200	5010	276000	28100	0.94		49200	5010	276000	28100	1.13	30 -	6265DA	- 377	B-115	B-132	B-151
			248000	25300	1.39			248000	25300	1.67	30 -	6275DA	- 377	B-115	-	B-151	
	46000	4690	276000	28100	*1		46000	4690	276000	28100	*1	30 -	6265DA	- 473	B-115	B-132	B-151
3.07	61700	6290	248000	25300	1.11	3.70	51100	5210	248000	25300	1.33	30 -	6275DA	- 473	B-115	-	B-151
2.59	72900	7430	248000	25300	0.94	3.13	60400	6160	248000	25300	1.13	30 -	6275DA	- 559	B-115	-	B-151
	68200	6950	248000	25300	*1		68200	6950	248000	25300	*1	30 -	6275DA	- 649	B-115	-	B-151
2.23	84600	8630	248000	25300	0.81	2.70	70100	7150	248000	25300	0.97	30 -	6275DA	- 649	B-115	-	B-151
	68200	6950	248000	25300	*1	2.39	68200	6950	248000	25300	*1	30 -	6275DA	- 731	B-115	-	B-151

- Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
- Motor slippage may affect n₁ and n₂. Refer to technical data for details.
- CNHM, CHHM, CNFM, CHFM, CNVM, and CVVM indicate types. Refer to page B-10 for details.
- Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
- "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors




30 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

n: Motor Speed

50Hz						60Hz					Nomenclature			Page of Dimension Sheet														
Output Speed n ₂ r/min	Output Torque Tout N-m kgf-m		Allowable Radial Load Pro N kgf		SF	Output Speed n ₂ r/min	Output Torque Tout N-m kgf-m		Allowable Radial Load Pro N kgf		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM CHHM	CNFM CHFM	CNVM CVVM											
242	1130	115	11300	1150	1.00	292	933	95.1	10700	1090	1.00	40 -	6175	- 6	B-103	B-119	B-138											
181	1500	153	12400	1260	1.00	219	1240	127	11700	1200	1.00	40 -	6175	- 8	B-103	B-119	B-138											
132	2060	210	14100	1440	1.00	159	1710	174	13400	1370	1.00	40 -	6175	- 11	B-103	B-119	B-138											
			19200	1960	1.17				18200	1850	1.17							40 -	6180	- 11	B-104	B-120	B-139					
			19200	1960	1.30				18200	1850	1.30							40 -	6185	- 11	B-104	B-120	B-139					
			27100	2760	1.37				25500	2600	1.37							40 -	6190	- 11	B-104	B-120	B-139					
			27100	2760	1.60				25500	2600	1.60							40 -	6195	- 11	B-104	B-120	B-139					
			52200	5320	1.99				49400	5030	1.99							40 -	6205	- 11	B-105	B-121	B-140					
			52900	5390	2.51				50000	5100	2.51	40 -	6215	- 11	B-105	B-121	B-140											
112	2440	249	14600	1490	1.00	135	2020	206	13900	1420	1.00	40 -	6175	- 13	B-103	B-119	B-138											
			19900	2030	1.17				18800	1920	1.17							40 -	6180	- 13	B-104	B-120	B-139					
			19900	2030	1.30				18800	1920	1.30							40 -	6185	- 13	B-104	B-120	B-139					
			28200	2870	1.37				26500	2710	1.37							40 -	6190	- 13	B-104	B-120	B-139					
			28200	2870	1.60				26500	2710	1.60							40 -	6195	- 13	B-104	B-120	B-139					
			21500	2130	1.08				19800	2020	1.08							40 -	6180	- 15	B-104	B-120	B-139					
			20900	2130	1.30				19800	2020	1.30	40 -	6185	- 15	B-104	B-120	B-139											
96.7	2820	287	29500	3010	1.37	117	2330	238	27800	2840	1.37	40 -	6190	- 15	B-104	B-120	B-139											
			29500	3010	1.60				27800	2840	1.60							40 -	6195	- 15	B-104	B-120	B-139					
			56000	5710	1.99				53000	5410	1.99							40 -	6205	- 15	B-105	B-121	B-140					
			56800	5790	2.51				53800	5480	2.51							40 -	6215	- 15	B-105	B-121	B-140					
			15700	1600	0.80				14900	1520	0.80							40 -	6175	- 17	B-103	B-119	B-138					
			22000	2240	1.02				20800	2120	1.02							40 -	6180	- 17	B-104	B-120	B-139					
			22000	2240	1.27				20800	2120	1.30	40 -	6185	- 17	B-104	B-120	B-139											
85.3	3190	325	31100	3170	1.37	103	2640	270	29300	2990	1.37	40 -	6190	- 17	B-104	B-120	B-139											
			31100	3170	1.60				29300	2990	1.60							40 -	6195	- 17	B-104	B-120	B-139					
			23600	2410	1.00				22400	2280	1.00							40 -	6180	- 21	B-104	B-120	B-139					
			23600	2410	1.27				22400	2280	1.30							40 -	6185	- 21	B-104	B-120	B-139					
			33500	3410	1.37				31500	3220	1.37							40 -	6190	- 21	B-104	B-120	B-139					
			33500	3410	1.60				31500	3220	1.60							40 -	6195	- 21	B-104	B-120	B-139					
69.0	3940	402	62700	6390	1.97	83.3	3270	333	59300	6050	1.97	40 -	6205	- 21	B-105	B-121	B-140											
			64100	6530	2.51				60700	6180	2.51							40 -	6215	- 21	B-105	B-121	B-140					
			24400	2490	1.00				23100	2360	1.00							40 -	6185	- 25	B-104	B-120	B-139					
			34900	3560	1.17				32900	3360	1.17							40 -	6190	- 25	B-104	B-120	B-139					
			34900	3560	1.35				32900	3360	1.35							40 -	6195	- 25	B-104	B-120	B-139					
			25300	2580	0.80				24000	2450	0.80							40 -	6185	- 29	B-104	B-120	B-139					
58.0	4690	478	36600	3730	1.02	70.0	3890	396	34500	3520	1.02	40 -	6190	- 29	B-104	B-120	B-139											
			36600	3730	1.26				34500	3520	1.26							40 -	6195	- 29	B-104	B-120	B-139					
			68200	6950	1.52				64600	6590	1.52							40 -	6205	- 29	B-105	B-121	B-140					
			69600	7090	1.95				65900	6720	1.95							40 -	6215	- 29	B-105	B-121	B-140					
			73700	7520	2.51				69800	7120	2.51							40 -	6225	- 29	B-106	B-122	B-141					
			37700	3850	1.09				35800	3650	1.30							406 -	6190	- 21	B-104	B-120	B-139					
50.0	5440	555	37700	3850	1.36	60.3	4510	460	35800	3650	1.60	406 -	6195	- 21	B-104	B-120	B-139											
			71700	7310	2.14				68200	6960	2.51							406 -	6215	- 21	B-105	B-121	B-140					
			38400	3920	1.00				36300	3700	1.00							40 -	6195	- 35	B-104	B-120	B-139					
			76300	7770	1.15				72600	7400	1.32							406 -	6205	- 29	B-105	B-121	B-140					
			77800	7930	1.57				74100	7550	1.87							406 -	6215	- 29	B-105	B-121	B-140					
			82500	8410	1.87				78500	8000	2.22							406 -	6225	- 29	B-106	B-122	B-141					
46.7	5830	595	41100	4190	0.90	55.5	4910	500	38900	3970	1.00	40 -	6195	- 43	B-104	B-120	B-139											
			76600	7810	1.06				72600	7400	1.06							40 -	6205	- 43	B-105	B-121	B-140					
			78200	7970	1.51				74100	7560	1.51							40 -	6215	- 43	B-105	B-121	B-140					
			83000	8460	1.88				78600	8010	1.88							40 -	6225	- 43	B-106	B-122	B-141					
			84600	8620	1.13				80300	8180	1.26							40 -	6215	- 59	B-105	B-121	B-140					
			89800	9150	1.31				85200	8680	1.51							40 -	6225	- 59	B-106	B-122	B-141					
41.4	6570	670	87200	8890	1.06	50.0	5440	555	83100	8480	1.26	406 -	6215	- 43	B-105	B-121	B-140											
			92600	9440	1.34				88300	9000	1.59							406 -	6225	- 43	B-106	B-122	B-141					

- "*2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- "*3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- Maintain torque load during operation within "Output torque" in the table for models with "*" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables Gearmotors




30 kW	n ₁ : Motor Speed					
	Hz		50Hz		60Hz	
	P		4	6	4	6
n ₁ r/min		1450	980	1750	1165	

50Hz						60Hz					Nomenclature			Page of Dimension Sheet						
Output Speed n ₂ r/min	Output Torque Tout N·m	Output Torque Tout kgf·m	Allowable Radial Load Pro		SF	Output Speed n ₂ r/min	Output Torque Tout N·m	Output Torque Tout kgf·m	Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM			
			N	kgf					N	kgf					CHHM	CHFMC	CVVM			
16.6	16400	1670	129000	13200	2.16	19.7	13800	1410	123000	12500	2.51	406-	6245	- 43	B-107	B-123	B-142			
			125000	12800	1.15				119000	12200	1.26	406-	6235	- 59	B-106	B-122	B-141			
			140000	14300	1.57				134000	13600	1.87	406-	6245	- 59	B-107	B-123	B-142			
			173000	17600	1.89				164000	16800	2.16	406-	6255	- 59	B-107	B-123	B-142			
12.0	21500	2190	13500	1370	113000	11500	*1	14.5	17800	1820	182000	18600	1.06	40 -	6225DB	- 121	B-113	B-130	B-149	
			140000	14300	0.87	133000	13500							1.05	40 -	6235DB	- 121	B-114	B-131	B-150
			156000	15900	0.95	148000	15100							1.15	40 -	6245DB	- 121	B-114	B-131	B-150
			192000	19600	1.06	182000	18600							1.06	40 -	6255DA	- 121	B-115	B-132	B-151
			192000	19600	1.28	182000	18600							1.54	40 -	6255DB	- 121	B-115	B-132	B-151
236000	24000	1.46	223000	22700	1.69	40 -	6265DA	- 121	B-115	B-132	B-151									
11.3	24200	2460	193000	19700	1.28	13.4	20300	2070	184000	18800	1.43	406-	6255	- 87	B-107	B-123	B-142			
			236000	24100	1.78				225000	22900	1.78	406-	6265	- 87	B-107	B-123	B-142			
8.79	29300	2990	19600	2000	151000	15400	*1	10.6	24300	2480	195000	19900	1.06	40 -	6235DB	- 165	B-114	B-131	B-150	
			167000	17000	0.89	159000	16200							1.08	40 -	6245DB	- 165	B-114	B-131	B-150
			206000	21000	1.06	195000	19900							1.28	40 -	6255DA	- 165	B-115	B-132	B-151
			206000	21000	1.06	195000	19900							1.28	40 -	6255DB	- 165	B-115	B-132	B-151
252000	25700	1.49	239000	24300	1.69	40 -	6265DA	- 165	B-115	B-132	B-151									
7.44	34700	3530	26200	2680	177000	18000	*1	8.97	28700	2930	205000	20900	1.08	40 -	6245DB	- 195	B-114	B-131	B-150	
			216000	22000	0.90	205000	20900							1.06	40 -	6255DA	- 195	B-115	B-132	B-151
			216000	22000	0.90	205000	20900							1.08	40 -	6255DB	- 195	B-115	B-132	B-151
			265000	27000	1.26	251000	25600							1.52	40 -	6265DA	- 195	B-115	B-132	B-151
6.28	31000	3160	25800	2630	189000	19300	*1	7.58	34000	3470	267000	27200	1.35	40 -	6245DB	- 231	B-114	B-131	B-150	
			231000	23500	*1	218000	22200							*1	40 -	6255DA	- 231	B-115	B-132	B-151
			276000	28100	1.12	267000	27200							1.35	40 -	6265DA	- 231	B-115	B-132	B-151
5.31	48500	4950	31000	3160	243000	24700	*1	6.41	40200	4100	276000	28100	1.14	40 -	6255DA	- 273	B-115	B-132	B-151	
			276000	28100	0.95	229000	23400							*1	40 -	6265DA	- 273	B-115	B-132	B-151
4.55	56700	5780	46000	4690	276000	28100	*1	5.49	47000	4790	276000	28100	0.98	40 -	6265DA	- 319	B-115	B-132	B-151	
			276000	28100	0.81	276000	28100							0.98	40 -	6265DA	- 319	B-115	B-132	B-151
248000	25300	1.20	248000	25300	1.45	40 -	6275DA	- 319	B-115	-	B-151									
3.85	67000	6830	46000	4690	276000	28100	*1	4.64	55500	5660	248000	25300	1.23	40 -	6265DA	- 377	B-115	B-132	B-151	
			276000	28100	*1	276000	28100							*1	40 -	6275DA	- 377	B-115	-	B-151
3.07	84100	8570	68200	6950	248000	25300	*1	3.70	69700	7100	248000	25300	0.98	40 -	6275DA	- 473	B-115	-	B-151	
			248000	25300	0.81	248000	25300							0.98	40 -	6275DA	- 473	B-115	-	B-151
2.59	68200	6950	248000	25300	*1	3.13	68200	6950	248000	25300	*1	40 -	6275DA	- 559	B-115	-	B-151			

1. Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
2. Motor slippage may affect n₁ and n₂. Refer to technical data for details.
3. CNHM, CHHM, CNFM, CHFMC, CNVM, and CVVM indicate types. Refer to page B-10 for details.
4. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
5. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors



CHHM/CNHM

CHF/CNFM

CVVM/CNVM

37 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

n: Motor Speed

50Hz					60Hz					Nomenclature			Page of Dimension Sheet				
Output Speed n ₂ r/min	Output Torque Tout N-m kgf-m		Allowable Radial Load Pro N kgf		SF	Output Speed n ₂ r/min	Output Torque Tout N-m kgf-m		Allowable Radial Load Pro N kgf		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
132	2550	260	19000	1940	1.05	159	2110	215	18000	1830	1.05	50 -	6185	- 11	B-104	B-120	B-139
			27000	2750	1.11				25400	2590	1.11	50 -	6190	- 11	B-104	B-120	B-139
			27000	2750	1.30				25400	2590	1.30	50 -	6195	- 11	B-104	B-120	B-139
			52000	5310	1.61				49300	5020	1.61	50 -	6205	- 11	B-105	B-121	B-140
			52700	5380	2.04				49900	5090	2.04	50 -	6215	- 11	B-105	B-121	B-140
			56000	5700	2.69				53000	5400	2.69	50 -	6225	- 11	B-106	B-122	B-141
112	3010	307	19700	2010	1.05	135	2490	254	18600	1900	1.05	50 -	6185	- 13	B-104	B-120	B-139
			28000	2850	1.11				26400	2690	1.11	50 -	6190	- 13	B-104	B-120	B-139
			28000	2850	1.30				26400	2690	1.30	50 -	6195	- 13	B-104	B-120	B-139
96.7	3470	354	20600	2100	1.05	117	2880	293	19500	1990	1.05	50 -	6185	- 15	B-104	B-120	B-139
			29300	2990	1.11				27700	2820	1.11	50 -	6190	- 15	B-104	B-120	B-139
			29300	2990	1.30				27700	2820	1.30	50 -	6195	- 15	B-104	B-120	B-139
			55900	5700	1.61				52900	5390	1.61	50 -	6205	- 15	B-105	B-121	B-140
			56600	5770	2.04				53600	5470	2.04	50 -	6215	- 15	B-105	B-121	B-140
			60400	6160	2.69				57200	5830	2.69	50 -	6225	- 15	B-106	B-122	B-141
85.3	3940	401	21600	2210	1.03	103	3260	332	20500	2090	1.05	50 -	6185	- 17	B-104	B-120	B-139
			30900	3150	1.11				29100	2970	1.11	50 -	6190	- 17	B-104	B-120	B-139
			30900	3150	1.30				29100	2970	1.30	50 -	6195	- 17	B-104	B-120	B-139
69.0	4860	496	23300	2370	1.03	83.3	4030	411	22100	2250	1.05	50 -	6185	- 21	B-104	B-120	B-139
			33200	3380	1.11				31300	3190	1.11	50 -	6190	- 21	B-104	B-120	B-139
			33200	3380	1.30				31300	3190	1.30	50 -	6195	- 21	B-104	B-120	B-139
			62500	6370	1.60				59200	6030	1.60	50 -	6205	- 21	B-105	B-121	B-140
			63800	6510	2.04				60500	6170	2.04	50 -	6215	- 21	B-105	B-121	B-140
			67500	6880	2.55				63900	6510	2.55	50 -	6225	- 21	B-106	B-122	B-141
65.3	5140	524	32900	3360	1.11	77.7	4320	441	31300	3190	1.11	506 -	6190	- 15	B-104	B-120	B-139
			32900	3360	1.30				31300	3190	1.30	506 -	6195	- 15	B-104	B-120	B-139
			62600	6380	1.61				59500	6070	1.61	506 -	6205	- 15	B-105	B-121	B-140
			63400	6460	2.04				60300	6150	2.04	506 -	6215	- 15	B-105	B-121	B-140
58.0	5790	590	23900	2440	0.81	70.0	4800	489	22700	2320	0.81	50 -	6185	- 25	B-104	B-120	B-139
			34600	3530	0.95				32700	3330	0.95	50 -	6190	- 25	B-104	B-120	B-139
			34600	3530	1.09				32700	3330	1.09	50 -	6195	- 25	B-104	B-120	B-139
50.0	6710	684	36200	3690	1.02	60.3	5560	567	34200	3490	1.02	50 -	6195	- 29	B-104	B-120	B-139
			67900	6920	1.24				64400	6560	1.24	50 -	6205	- 29	B-105	B-121	B-140
			69300	7060	1.58				65700	6700	1.58	50 -	6215	- 29	B-105	B-121	B-140
			73400	7490	2.04				69600	7090	2.04	50 -	6225	- 29	B-106	B-122	B-141
			75500	7690	2.06				71800	7320	2.45	506 -	6225	- 21	B-106	B-122	B-141
46.7	7190	733	37300	3800	1.11	55.5	6050	617	35500	3610	1.30	506 -	6195	- 21	B-104	B-120	B-139
			71400	7280	1.74				68000	6930	2.04	506 -	6215	- 21	B-105	B-121	B-140
			75500	7690	2.06				71800	7320	2.45	506 -	6225	- 21	B-106	B-122	B-141
41.4	8100	826	38000	3870	0.81	50.0	6710	684	35900	3660	0.81	50 -	6195	- 35	B-104	B-120	B-139
			77300	7880	1.27				73700	7510	1.51	506 -	6215	- 29	B-105	B-121	B-140
			82000	8360	1.51				78100	7970	1.80	506 -	6225	- 29	B-106	B-122	B-141
33.8	9930	1010	103000	10500	1.90	40.2	8360	852	97900	9980	2.04	506 -	6235	- 29	B-106	B-122	B-141
			77700	7920	1.22				73800	7520	1.22	50 -	6215	- 43	B-105	B-121	B-140
			82500	8410	1.53				78300	7980	1.53	50 -	6225	- 43	B-106	B-122	B-141
24.6	13700	1390	89200	9090	1.06	29.7	11300	1150	84700	8630	1.22	50 -	6225	- 59	B-106	B-122	B-141
22.8	14700	1500	129000	13100	1.75	27.1	12400	1260	122000	12500	2.04	506 -	6245	- 43	B-107	B-123	B-142
16.6	20200	2060	140000	14200	1.28	19.7	17000	1730	133000	13500	1.52	506 -	6245	- 59	B-107	B-123	B-142
			172000	17600	1.54				164000	16700	1.75	506 -	6255	- 59	B-107	B-123	B-142
			211000	21500	2.28				201000	20500	2.55	506 -	6265	- 59	B-107	B-123	B-142

GEARMOTORS

Selection Tables
37 kW


- "*2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- "*3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- Maintain torque load during operation within "Output torque" in the table for models with "*" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables Gearmotors

37 kW

n: Motor Speed

Hz		50Hz		60Hz	
P		4	6	4	6
n ₁	r/min	1450	980	1750	1165




50Hz						60Hz						Nomenclature			Page of Dimension Sheet		
Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
r/min	N·m	kgf·m	N	kgf		r/min	N·m	kgf·m	N	kgf					CHHM	CHF	CVVM
12.0	18700	1910	141000	14300	*1	14.5	18700	1910	133000	13500	*1	50 - 6235DB	- 121	B-114	B-131	B-150	
	20500	2090	156000	15900	*1		20500	2090	148000	15000	*1	50 - 6245DB	- 121	B-114	B-131	B-150	
	26500	2710	191000	19500	1.04		22000	2240	181000	18500	1.25	50 - 6255DB	- 121	B-115	B-132	B-151	
11.3	29800	3040	192000	19600	1.04	13.4	25100	2560	183000	18700	1.16	506 - 6265	- 87	B-107	B-123	B-142	
			236000	24000	1.44					224000	22900	1.44	506 - 6265	- 87	B-107	B-123	B-142
8.79	26200	2680	168000	17100	*1	10.6	26200	2680	158000	16100	*1	50 - 6245DB	- 165	B-114	B-131	B-150	
	36200	3690	205000	20900	0.86		30000	3060	194000	19800	1.04	50 - 6255DB	- 165	B-115	B-132	B-151	
7.44	31200	3180	216000	22100	*1	8.97	31200	3180	204000	20800	*1	50 - 6265DA	- 195	B-115	B-132	B-151	
	42800	4360	263000	26800	1.02		35400	3610	250000	25400	1.23	50 - 6265DA	- 195	B-115	B-132	B-151	
6.28	50700	5160	276000	28100	0.91	7.58	42000	4280	266000	27100	1.10	50 - 6265DA	- 231	B-115	B-132	B-151	
5.31	46000	4690	276000	28100	*1	6.41	46000	4690	276000	28100	*1	50 - 6265DA	- 273	B-115	B-132	B-151	
4.55	70000	7130	248000	25300	0.97	5.49	58000	5910	248000	25300	1.18	50 - 6275DA	- 319	B-115	-	B-151	
	68200	6950	248000	25300	*1		68200	6950	248000	25300	*1	50 - 6275DA	- 377	B-115	-	B-151	
3.85	82700	8430	248000	25300	0.82	4.64	68500	6980	248000	25300	1.00	50 - 6275DA	- 377	B-115	-	B-151	

45 kW

n: Motor Speed


Hz		50Hz		60Hz	
P		4	6	4	6
n ₁	r/min	1450	980	1750	1165



50Hz						60Hz						Nomenclature			Page of Dimension Sheet		
Output Speed n ₂	Output Torque Tout		Alloeaable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout		Alloeaable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
r/min	N·m	kgf·m	N	kgf		r/min	N·m	kgf·m	N	kgf					CHHM	CHF	CVVM
132	3100	316	26800	2730	1.07	159	2570	262	25300	2570	1.07	60 - 6195	- 11	B-104	B-120	B-139	
			51900	5290	1.33				49200	5010	1.33	60 - 6205	- 11	B-105	B-121	B-140	
			52600	5360	1.67				49800	5080	1.67	60 - 6215	- 11	B-105	B-121	B-140	
112	3660	373	27700	2830	1.07	135	3030	309	26200	2670	1.07	60 - 6225	- 11	B-106	B-122	B-141	
			29000	2960	1.07				27400	2800	1.07	60 - 6195	- 13	B-104	B-120	B-139	
			55700	5680	1.33				52800	5380	1.33	60 - 6205	- 15	B-105	B-121	B-140	
96.7	4220	431	56500	5750	1.67	117	3500	357	53500	5450	1.67	60 - 6215	- 15	B-105	B-121	B-140	
			60200	6140	2.21				57000	5820	2.21	60 - 6225	- 15	B-106	B-122	B-141	
			21200	2160	0.85				20200	2060	0.87	60 - 6185	- 17	B-104	B-120	B-139	
85.3	4790	488	30600	3120	1.07	103	3970	404	28900	2950	1.07	60 - 6195	- 17	B-104	B-120	B-139	
			22800	2330	0.85				21700	2210	0.87	60 - 6185	- 21	B-104	B-120	B-139	
			32900	3350	0.91				31100	3170	0.91	60 - 6190	- 21	B-104	B-120	B-139	
69.0	5910	603	32900	3350	1.07	83.3	4900	499	31100	3170	1.07	60 - 6195	- 21	B-104	B-120	B-139	
			62200	6340	1.32				59000	6010	1.32	60 - 6205	- 21	B-105	B-121	B-140	
			63600	6480	1.67				60300	6140	1.67	60 - 6215	- 21	B-105	B-121	B-140	
			67200	6850	2.09				63700	6490	2.09	60 - 6225	- 21	B-106	B-122	B-141	
65.3	6250	637	62300	6350	1.33	77.7	5260	536	59300	6050	1.33	606 - 6205	- 15	B-105	B-121	B-140	
			63100	6430	1.67				60100	6130	1.67	606 - 6215	- 15	B-105	B-121	B-140	
			67400	6870	2.21				64200	6540	2.21	606 - 6225	- 15	B-106	B-122	B-141	
58.0	7040	718	34200	3490	0.90	70.0	5830	595	32400	3300	0.90	60 - 6195	- 25	B-104	B-120	B-139	
50.0	8170	832	35700	3640	0.84	60.3	6770	690	33900	3450	0.84	60 - 6195	- 29	B-104	B-120	B-139	
			67600	6890	1.02				64100	6530	1.02	60 - 6205	- 29	B-105	B-121	B-140	
			68900	7030	1.30				65400	6660	1.30	60 - 6215	- 29	B-105	B-121	B-140	
			73100	7450	1.67				69300	7070	1.67	60 - 6225	- 29	B-106	B-122	B-141	

1. Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
2. Motor slippage may affect n₁ and n₂. Refer to technical data for details.
3. CNHM, CHHM, CNFM, CHF, CNVM, and CVVM indicate types. Refer to page B-10 for details.
4. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
5. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors




45 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

n₁: Motor Speed

50Hz					60Hz					Nomenclature			Page of Dimension Sheet					
Output Speed n ₂ r/min	Output Torque Tout N-m kgf-m		Allowable Radial Load Pro N kgf		SF	Output Speed n ₂ r/min	Output Torque Tout N-m kgf-m		Allowable Radial Load Pro N kgf		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM	
46.7	8750	892	69500	7080	1.06	55.5	7360	750	66200	6750	1.22	606-	6205	- 21	B-105	B-121	B-140	
			71000	7240	1.43				67700	6900	1.67	606-	6215	- 21	B-105	B-121	B-140	
			75100	7660	1.69				71500	7290	2.01	606-	6225	- 21	B-106	B-122	B-141	
			94100	9590	2.16				89500	9130	2.17	606-	6235	- 21	B-106	B-122	B-141	
33.8	12100	1230	76800	7830	1.05	40.2	10200	1040	73200	7460	1.24	606-	6215	- 29	B-105	B-121	B-140	
			102000	10400	1.56				97500	9940	1.67	606-	6235	- 29	B-106	B-122	B-141	
			114000	11700	2.09				109000	11100	2.09	606-	6245	- 29	B-107	B-123	B-142	
33.7	12100	1230	77200	7870	1.00	40.7	10000	1020	73300	7470	1.00	60 -	6215	- 43	B-105	B-121	B-140	
			82000	8360	1.26				77800	7940	1.26	60 -	6225	- 43	B-106	B-122	B-141	
			114000	11600	1.06				108000	11100	1.21	606-	6235	- 43	B-106	B-122	B-141	
22.8	17900	1830	128000	13100	1.44	27.1	15100	1540	122000	12400	1.67	606-	6245	- 43	B-107	B-123	B-142	
			157000	16000	1.73				150000	15300	1.98	606-	6255	- 43	B-107	B-123	B-142	
			193000	19700	2.51				184000	18700	2.51	606-	6265	- 43	B-107	B-123	B-142	
			139000	14100	1.05				132000	13500	1.25	606-	6245	- 59	B-107	B-123	B-142	
16.6	24600	2510	210000	21400	1.87	19.7	20700	2110	200000	20400	2.09	606-	6265	- 59	B-107	B-123	B-142	
			190000	19400	0.85				180000	18400	1.03	60 -	6255DB	- 121	B-115	B-132	B-151	
12.0	32300	3290	234000	23800	0.97	14.5	26700	2730	222000	22600	1.13	60 -	6265DA	- 121	B-115	B-132	B-151	
11.3	36200	3690	235000	23900	1.19	13.4	30500	3110	223000	22800	1.19	606-	6265	- 87	B-107	B-123	B-142	
8.79	44000	4490	250000	25500	0.98	10.6	36500	3720	237000	24200	1.13	60 -	6265DA	- 165	B-115	B-132	B-151	
7.44	52000	5300	262000	26700	0.84	8.97	43100	4390	248000	25300	1.01	60 -	6265DA	- 195	B-115	B-132	B-151	
6.28	46000	4690	276000	28100	*1	7.58	46000	4690	265000	27000	*1	60 -	6265DA	- 231	B-115	B-132	B-151	
4.55	85100	8670	68200	6950	248000	25300	*1	68200	6950	248000	25300	*1	60 -	6275DA	- 319	B-115	-	B-151
			248000	25300	0.80	5.49	70500	7190	248000	25300	0.97	60 -	6275DA	- 319	B-115	-	B-151	

GEARMOTORS
Selection Tables
45 kW, 55 kW



55 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165


n₁: Motor Speed

50Hz					60Hz					Nomenclature			Page of Dimension Sheet				
Output Speed n ₂ r/min	Output Torque Tout N-m kgf-m		Alloable Radial Load Pro N kgf		SF	Output Speed n ₂ r/min	Output Torque Tout N-m kgf-m		Alloable Radial Load Pro N kgf		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
132	3790	386	51700	5270	1.09	159	3140	320	49000	5000	1.09	75 -	6205	- 11	B-105	B-121	B-140
			52400	5340	1.37				49700	5060	1.37	75 -	6215	- 11	B-105	B-121	B-140
			55600	5670	1.81				52700	5370	1.81	75 -	6225	- 11	B-106	B-122	B-141
96.7	5160	526	55500	5660	1.09	117	4280	436	52600	5360	1.09	75 -	6205	- 15	B-105	B-121	B-140
			56200	5730	1.37				53300	5430	1.37	75 -	6215	- 15	B-105	B-121	B-140
			60000	6120	1.81				56900	5800	1.81	75 -	6225	- 15	B-106	B-122	B-141
89.1	5600	571	57800	5900	1.09	106	4710	480	55100	5610	1.09	756-	6205	- 11 *2	-	-	-
			58600	5970	1.37				55800	5690	1.37	756-	6215	- 11 *2	-	-	-
			62200	6340	1.81				59300	6040	1.81	756-	6225	- 11 *2	-	-	-
69.0	7230	737	61900	6310	1.08	83.3	5990	610	58700	5980	1.08	75 -	6205	- 21	B-105	B-121	B-140
			63300	6450	1.37				60000	6120	1.37	75 -	6215	- 21	B-105	B-121	B-140
			66900	6820	1.71				63400	6470	1.71	75 -	6225	- 21	B-106	B-122	B-141
65.3	7640	779	62000	6320	1.09	77.7	6420	655	59000	6020	1.09	756-	6205	- 15 *2	-	-	-
			62800	6400	1.37				59800	6100	1.37	756-	6215	- 15 *2	-	-	-
			67100	6840	1.81				63900	6510	1.81	756-	6225	- 15 *2	-	-	-

- "*2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- "*3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- Maintain torque load during operation within "Output torque" in the table for models with "*1" in the SF column. They cannot be operated with 100% motor rating.


Selection Tables Gearmotors

55 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165



50Hz						60Hz						Nomenclature			Page of Dimension Sheet		
Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
r/min	N·m	kgf·m	N	kgf		r/min	N·m	kgf·m	N	kgf					CHHM	CHFMCNFM	CVVM
50.0	9980	1020	68500	6980	1.06	60.3	8270	843	65000	6630	1.06	75 -	6215	- 29	B-105	B-121	B-140
			72700	7410	1.37				69000	7030	1.37	75 -	6225	- 29	B-106	B-122	B-141
			70500	7190	1.17				67200	6860	1.37	756-	6215	- 21 *2	-	-	-
46.7	10700	1090	74700	7610	1.38	55.5	8990	917	71200	7250	1.65	756-	6225	- 21 *2	-	-	-
			93700	9550	1.77				89200	9090	1.77	756-	6235	- 21	B-106	B-122	B-141
			80900	8240	1.02				77200	7870	1.21	756-	6225	- 29 *2	-	-	-
33.8	14800	1510	114000	11600	1.71	40.2	12400	1270	108000	11100	1.71	756-	6245	- 29	B-107	B-123	B-142
			141000	14300	2.15				134000	13600	2.15	756-	6255	- 29	B-107	B-123	B-142
33.7	14800	1510	81400	8290	1.03	40.7	12300	1250	77300	7880	1.03	75 -	6225	- 43	B-106	B-122	B-141
			127000	13000	1.18				121000	12400	1.37	756-	6245	- 43	B-107	B-123	B-142
22.8	21900	2230	157000	16000	1.42	27.1	18400	1880	149000	15200	1.62	756-	6255	- 43	B-107	B-123	B-142
			192000	19600	2.05				183000	18700	2.05	756-	6265	- 43	B-107	B-123	B-142
			170000	17400	1.03				162000	16500	1.18	756-	6255	- 59	B-107	B-123	B-142
16.6	30000	3060	209000	21400	1.53	19.7	25300	2580	199000	20300	1.71	756-	6265	- 59	B-107	B-123	B-142
			248000	25300	2.27				248000	25300	2.40	756-	6275	- 59 *2	-	-	-


75 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165



50Hz						60Hz						Nomenclature			Page of Dimension Sheet		
Output Speed n ₂	Output Torque Tout		Alloable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout		Alloable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
r/min	N·m	kgf·m	N	kgf		r/min	N·m	kgf·m	N	kgf					CHHM	CHFMCNFM	CVVM
132	5160	526	55300	5640	1.33	159	4280	436	52400	5340	1.33	100-	6225	- 11 *2	-	-	-
96.7	7040	718	59600	6070	1.33	117	5830	595	56500	5760	1.33	100-	6225	- 15 *2	-	-	-
			77600	7910	1.51				73900	7530	1.51	1006-	6235	- 11 *2	-	-	-
89.1	7640	779	86500	8810	1.76	106	6420	655	82300	8390	1.76	1006-	6245	- 11 *2	-	-	-
			66300	6760	1.26				62900	6420	1.26	100-	6225	- 21 *2	-	-	-
69.0	9850	1000	82900	8450	1.51	83.3	8170	832	78900	8050	1.51	1006-	6235	- 15 *2	-	-	-
			92800	9460	1.76				88300	9000	1.76	1006-	6245	- 15 *2	-	-	-
50.0	13600	1390	71800	7320	1.00	60.3	11300	1150	68200	6960	1.00	100-	6225	- 29 *2	-	-	-
			92800	9460	1.30				88500	9020	1.30	1006-	6235	- 21 *2	-	-	-
46.7	14600	1490	104000	10600	1.60	55.5	12300	1250	98700	10100	1.60	1006-	6245	- 21 *2	-	-	-
			127000	12900	2.01				121000	12300	2.01	1006-	6255	- 21 *2	-	-	-
			113000	11500	1.26				108000	11000	1.26	1006-	6245	- 29 *2	-	-	-
33.8	20100	2050	139000	14200	1.57	40.2	16900	1730	133000	13500	1.57	1006-	6255	- 29 *2	-	-	-
			172000	17500	2.12				163000	16600	2.12	1006-	6265	- 29 *2	-	-	-
			155000	15800	1.04				148000	15100	1.19	1006-	6255	- 43 *2	-	-	-
22.8	29900	3040	191000	19500	1.51	27.1	25100	2560	182000	18600	1.51	1006-	6265	- 43 *2	-	-	-
			248000	25300	2.01				248000	25300	2.01	1006-	6275	- 43 *2	-	-	-
			208000	21200	1.12				198000	20200	1.26	1006-	6265	- 59 *2	-	-	-
16.6	41000	4180	248000	25300	1.67	19.7	34500	3510	248000	25300	1.76	1006-	6275	- 59 *2	-	-	-

1. Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
2. Motor slippage may affect n₁ and n₂. Refer to technical data for details.
3. CNHM, CHHM, CNFM, CHFMCNFM, CNVM, and CVVM indicate types. Refer to page B-10 for details.
4. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
5. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.

Selection Tables Gearmotors




CHHM/CNHM CHF/CNFM CVVM/CNVM

90 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165

n₁: Motor Speed

50Hz						60Hz						Nomenclature			Page of Dimension Sheet		
Output Speed n ₂ r/min	Output Torque Tout N-m kgf-m		Allowable Radial Load Pro N kgf		SF	Output Speed n ₂ r/min	Output Torque Tout N-m kgf-m		Allowable Radial Load Pro N kgf		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
89.1	9170	934	77300	7880	1.26	106	7710	786	73600	7500	1.26	1256-	6235	- 11 *2	-	-	-
			86100	8780	1.47				82000	8360	1.47	1256-	6245	- 11 *2	-	-	-
			106000	10800	1.68				101000	10300	1.68	1256-	6255	- 11 *2	-	-	-
65.3	12500	1270	82400	8400	1.26	77.7	10500	1070	78500	8010	1.26	1256-	6235	- 15 *2	-	-	-
			92300	9410	1.47				87900	8960	1.47	1256-	6245	- 15 *2	-	-	-
			113000	11600	1.68				108000	11000	1.68	1256-	6255	- 15 *2	-	-	-
46.7	17500	1780	92200	9400	1.08	55.5	14700	1500	88000	8970	1.08	1256-	6235	- 21 *2	-	-	-
			103000	10500	1.33				98200	10000	1.33	1256-	6245	- 21 *2	-	-	-
			126000	12900	1.68				120000	12300	1.68	1256-	6255	- 21 *2	-	-	-
33.8	24200	2460	112000	11400	1.05	40.2	20300	2070	107000	10900	1.05	1256-	6245	- 29 *2	-	-	-
			139000	14100	1.31				132000	13500	1.31	1256-	6255	- 29 *2	-	-	-
			171000	17400	1.77				163000	16600	1.77	1256-	6265	- 29 *2	-	-	-
22.8	35800	3650	190000	19400	1.26	27.1	30100	3070	181000	18500	1.26	1256-	6265	- 43 *2	-	-	-
			248000	25300	1.68				248000	25300	1.68	1256-	6275	- 43 *2	-	-	-
16.6	49200	5010	248000	25300	1.39	19.7	41400	4220	248000	25300	1.47	1256-	6275	- 59 *2	-	-	-

GEARMOTORS

Selection Tables
90 kW, 110 kW

CHHM/CNHM CHF/CNFM CVVM/CNVM

110 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165


n₁: Motor Speed

50Hz						60Hz						Nomenclature			Page of Dimension Sheet		
Output Speed n ₂ r/min	Output Torque Tout N-m kgf-m		Alloable Radial Load Pro N kgf		SF	Output Speed n ₂ r/min	Output Torque Tout N-m kgf-m		Alloable Radial Load Pro N kgf		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
89.1	11200	1140	85700	8730	1.20	106	9420	961	81600	8320	1.20	1506-	6245	- 11 *2	-	-	-
			105000	10700	1.37				100000	10200	1.37	1506-	6255	- 11 *2	-	-	-
65.3	15300	1560	91700	9350	1.20	77.7	12800	1310	87500	8910	1.20	1506-	6245	- 15 *2	-	-	-
			113000	11500	1.37				108000	11000	1.37	1506-	6255	- 15 *2	-	-	-
46.7	21400	2180	102000	10400	1.09	55.5	18000	1830	97500	9940	1.09	1506-	6245	- 21 *2	-	-	-
			126000	12800	1.37				120000	12200	1.37	1506-	6255	- 21 *2	-	-	-
33.8	29500	3010	138000	14000	1.07	40.2	24800	2530	131000	13400	1.07	1506-	6255	- 29 *2	-	-	-
			170000	17300	1.45				162000	16500	1.45	1506-	6265	- 29 *2	-	-	-
22.8	43800	4460	189000	19300	1.03	27.1	36800	3750	180000	18400	1.03	1506-	6265	- 43 *2	-	-	-

- "*2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- "*3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- Maintain torque load during operation within "Output torque" in the table for models with "*1" in the SF column. They cannot be operated with 100% motor rating.

Selection Tables Gearmotors

132 kW	Hz		50Hz		60Hz	
	P		4	6	4	6
	n ₁	r/min	1450	980	1750	1165



50Hz						60Hz					Nomenclature			Page of Dimension Sheet			
Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Output Speed n ₂	Output Torque Tout		Allowable Radial Load Pro		SF	Input Capacity Symbol	Frame Size	Reduction Ratio	CNHM	CNFM	CNVM
r/min	N·m	kgf·m	N	kgf		r/min	N·m	kgf·m	N	kgf					CHHM	CHFV	CVVM
89.1	13400	1370	105000	10700	1.14	106	11300	1150	99900	10200	1.14	1756-	6255	- 11 *2	-	-	-
			129000	13100	1.33				123000	12500	1.33	1756-	6265	- 11 *2	-	-	-
65.3	18300	1870	112000	11500	1.14	77.7	15400	1570	107000	10900	1.14	1756-	6255	- 15 *2	-	-	-
			138000	14000	1.33				131000	13400	1.33	1756-	6265	- 15 *2	-	-	-
46.7	25700	2620	125000	12700	1.14	55.5	21600	2200	119000	12100	1.14	1756-	6255	- 21 *2	-	-	-
			154000	15700	1.30				146000	14900	1.30	1756-	6265	- 21 *2	-	-	-
33.8	35400	3610	169000	17200	1.20	40.2	29800	3040	161000	16400	1.20	1756-	6265	- 29 *2	-	-	-

GEARMOTORS

Selection Tables
132 kW


- Combinations in **bold** are the recommended models for operations for 10 hours/day with uniform load (service factor is about 1.0 for motor rating at 50Hz).
- Motor slippage may affect n₁ and n₂. Refer to technical data for details.
- CNHM, CHHM, CNFM, CHFV, CNVM, and CVVM indicate types. Refer to page B-10 for details.
- Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
- "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.
- "*2" indicate models manufactured with reducer and motor separately mounted on a common baseplate (horizontal shaft direction) or on an adaptor (vertical shaft direction). Consult us for details, including dimensions.
- Allowable radial load (Pro) is the value at the midpoint of the slow speed shaft.
- "*3" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- Maintain torque load during operation within "Output torque" in the table for models with "*" in the SF column. They cannot be operated with 100% motor rating.

B CYCLO® GEARMOTORS

3. Dimension Tables

Dimension Tables Gearmotors (Universal Direction, Foot-Mount)

CNHM^{Note 1} - 606□ to 609□

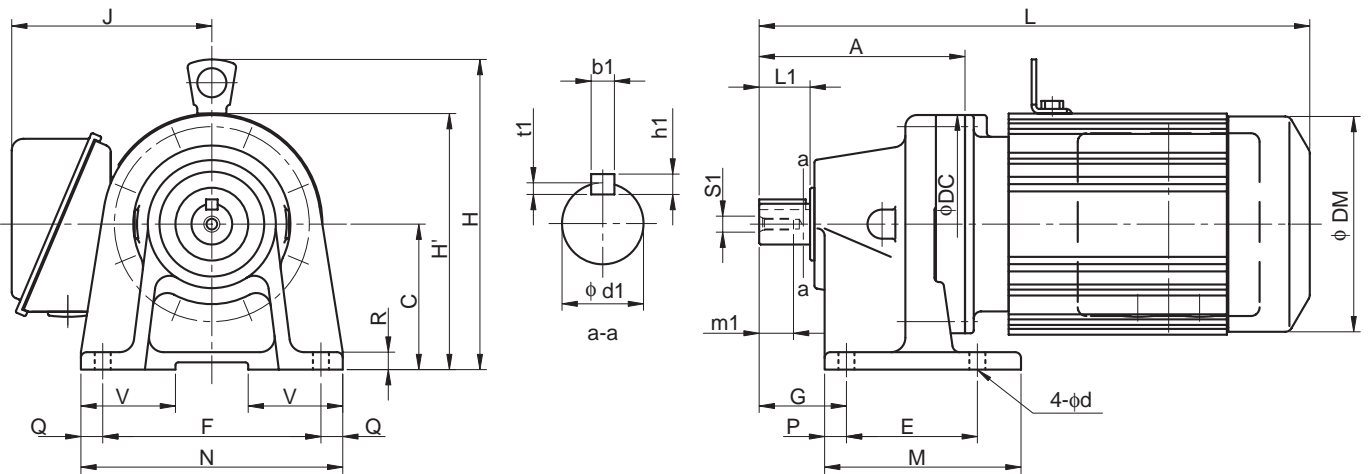


Frame size <small>Note 4</small>	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft <small>Note 2, 3, 6</small>						
														d1	L1	b1	h1	t1	S1	m1
606□	92	80	110	60	120	41	84	144	12	12	10	35	9	14	25	5	5	3	M5	16
607□	98	80	110	60	120	47	84	144	12	12	10	35	9	18	30	6	6	3.5	M6	16
608□	129	90	134	75	120	52	99	144	12	12	13	37	9	22	35	6	6	3.5	M6	16
609□	142	100	150	90	150	60	135	180	15	15	12	40	11	28	35	8	7	4	M8	20

Model <small>Note 4, 5</small>	Motor		Standard							With Brake					
	kW	P	L	H	H'	J	DM	W(kg)	L	H	H'	J	DM	W(kg)	
CNHM01 - 606□ - (B) - Ratio	0.1	4	254	-	140	130	119	7	261	-	138	130	124	8	
CNHM02 - 606□ - (B) - Ratio	0.2	4	272	-	138	130	124	8	300	-	138	130	124	9	
CNHM03 - 606□ - (B) - Ratio	0.25	4	272	-	138	130	124	8	300	-	138	130	124	9	
CNHM01 - 607□ - (B) - Ratio	0.1	4	260	-	140	130	119	7	267	-	138	130	124	8	
CNHM02 - 607□ - (B) - Ratio	0.2	4	278	-	138	130	124	8	306	-	138	130	124	9	
CNHM03 - 607□ - (B) - Ratio	0.25	4	278	-	138	130	124	8	306	-	138	130	124	9	
CNHM05 - 607□ - (B) - Ratio	0.4	4	294	-	138	130	124	9	326	-	138	130	124	10	
CNHM01 - 608□ - (B) - Ratio	0.1	4	286	-	157	130	119	10	293	-	157	130	124	11	
CNHM02 - 608□ - (B) - Ratio	0.2	4	304	-	157	130	124	11	332	-	157	130	124	12	
CNHM03 - 608□ - (B) - Ratio	0.25	4	304	-	157	130	124	11	332	-	157	130	124	12	
CNHM05 - 608□ - (B) - Ratio	0.4	4	320	-	157	130	124	13	352	-	157	130	124	14	
CNHM08 - 608□ - (B) - Ratio	0.55	4	361	203	-	140	148	17	404	203	-	140	148	18	
CNHM1 - 608□ - (B) - Ratio	0.75	4	361	203	-	140	148	17	404	203	-	140	148	18	
CNHM01 - 609□ - (B) - Ratio	0.1	4	304	-	175	130	119	12	311	-	175	130	124	14	
CNHM02 - 609□ - (B) - Ratio	0.2	4	322	-	175	130	124	13	350	-	175	130	124	15	
CNHM03 - 609□ - (B) - Ratio	0.25	4	322	-	175	130	124	13	350	-	175	130	124	15	
CNHM05 - 609□ - (B) - Ratio	0.4	4	338	-	175	130	124	14	370	-	175	130	124	16	
CNHM08 - 609□ - (B) - Ratio	0.55	4	379	213	-	140	148	18	422	213	-	140	148	21	
CNHM1 - 609□ - (B) - Ratio	0.75	4	379	213	-	140	148	18	422	213	-	140	148	21	
CNHM1H - 609□ - (B) - Ratio	1.1	4	412	220	-	145	160	21	474	220	-	145	160	26	
CNHM2 - 609□ - (B) - Ratio	1.5	4	412	220	-	145	160	21	474	220	-	145	160	26	

Note: 1. □ indicates motor capacity.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables Gearmotors (Universal Direction, Foot-Mount)

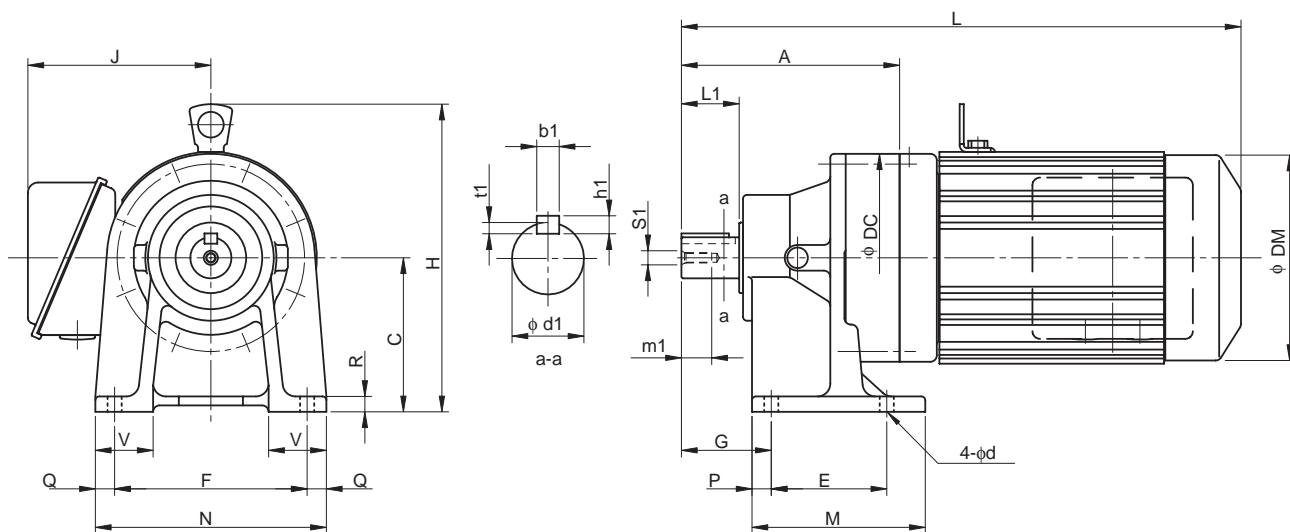CNHM^{Note 1} - 610□ to 612□

GEARMOTORS

Dimension Tables
CNHM

Frame size <small>Note 4</small>	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft <small>Note 2, 3, 6</small>						
														d1	L1	b1	h1	t1	S1	m1
610□	156	100	150	90	150	60	135	180	15	15	12	40	11	28	35	8	7	4	M8	20
611□	170	120	162	90	150	70	135	180	15	15	12	45	11	32	45	10	8	5	M8	20
612□	186	120	204	115	190	82	155	230	20	20	15	55	14	38	55	10	8	5	M8	20

Model <small>Note 4, 5</small>	Motor		Standard					With Brake				
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CNHM02 -610□ - (B) - Ratio	0.2	4	336	207	130	124	18	364	207	130	124	20
CNHM03 -610□ - (B) - Ratio	0.25	4	336	207	130	124	18	364	207	130	124	20
CNHM05 -610□ - (B) - Ratio	0.4	4	352	207	130	124	19	384	207	130	124	21
CNHM08 -610□ - (B) - Ratio	0.55	4	393	213	140	148	23	436	213	140	148	26
CNHM1 -610□ - (B) - Ratio	0.75	4	393	213	140	148	23	436	213	140	148	26
CNHM1H -610□ - (B) - Ratio	1.1	4	426	220	145	160	27	488	220	145	160	32
CNHM2 -610□ - (B) - Ratio	1.5	4	426	220	145	160	27	488	220	145	160	32
CNHM3 -610□ - (B) - Ratio	2.2	4	446	226	152	173	31	509	226	152	173	37
CNHM05 -611□ - (B) - Ratio	0.4	4	363	236	130	124	20	394	236	130	124	21
CNHM08 -611□ - (B) - Ratio	0.55	4	403	236	140	148	23	452	236	140	148	26
CNHM1 -611□ - (B) - Ratio	0.75	4	403	236	140	148	23	452	236	140	148	26
CNHM1H -611□ - (B) - Ratio	1.1	4	436	240	145	160	26	493	240	145	160	31
CNHM2 -611□ - (B) - Ratio	1.5	4	436	240	145	160	26	493	240	145	160	31
CNHM3 -611□ - (B) - Ratio	2.2	4	456	246	152	173	30	519	246	152	173	36
CNHM4 -611□ - (B) - Ratio	3.0	4	491	266	168	212	40	563	266	168	212	50
CNHM5 -611□ - (B) - Ratio	3.7	4	491	266	168	212	40	563	266	168	212	50
CNHM05 -612□ - (B) - Ratio	0.4	4	387	257	130	124	30	419	257	130	124	32
CNHM08 -612□ - (B) - Ratio	0.55	4	423	233	140	148	32	466	233	140	148	35
CNHM1 -612□ - (B) - Ratio	0.75	4	423	233	140	148	32	466	233	140	148	35
CNHM1H -612□ - (B) - Ratio	1.1	4	456	240	145	160	36	518	240	145	160	41
CNHM2 -612□ - (B) - Ratio	1.5	4	456	240	145	160	36	518	240	145	160	41
CNHM3 -612□ - (B) - Ratio	2.2	4	476	246	152	173	40	539	246	152	173	47
CNHM4 -612□ - (B) - Ratio	3.0	4	499	266	168	212	50	571	266	168	212	60
CNHM5 -612□ - (B) - Ratio	3.7	4	499	266	168	212	50	571	266	168	212	60
CNHM8 -612□ - (B) - Ratio	5.5	4	543	266	168	212	57	615	266	168	212	67

Note: 4. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.


5. "B" after the frame size indicates models equipped with brake.

6. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

7. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

CHHM^{Note 1} - 613□ to 614□

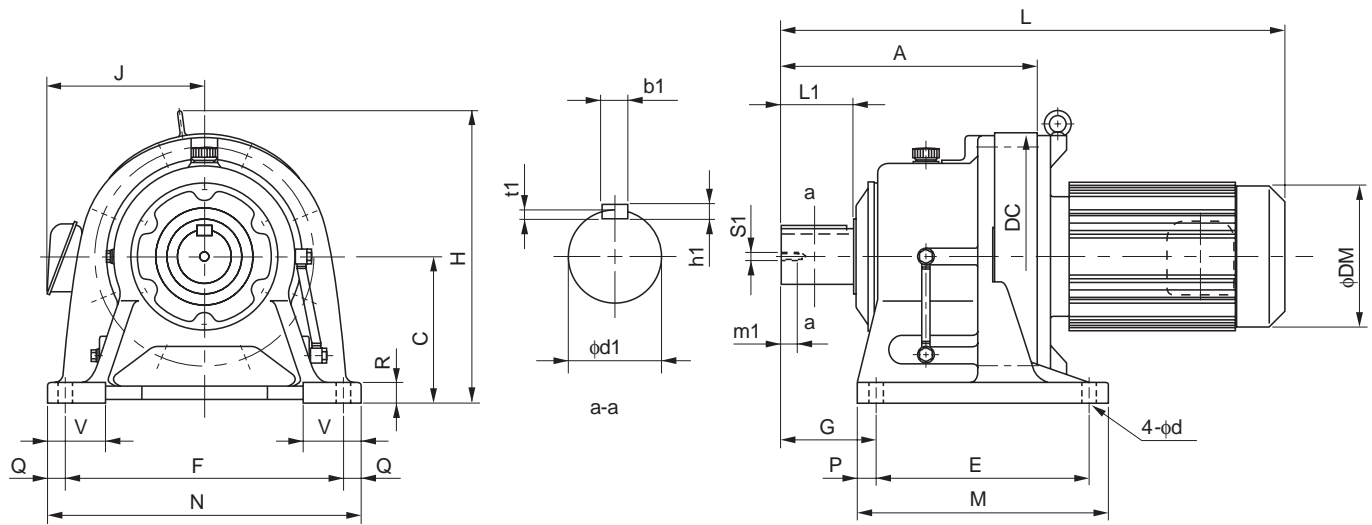


Frame size <small>Note 4</small>	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft <small>Note 2, 3, 6</small>						
														d1	L1	b1	h1	t1	S1	m1
613□	240	150	230	145	290	100	195	330	25	20	22	65	18	50	70	14	9	5.5	M10	18
614□	260	150	230	145	290	120	195	330	25	20	22	65	18	50	90	14	9	5.5	M10	18

Model <small>Note 4, 5</small>	Motor		Standard					With Brake				
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM08 - 613□ - (B) - Ratio	0.55	4	477	265	140	148	51	520	265	140	148	54
CHHM1 - 613□ - (B) - Ratio	0.75	4	477	265	140	148	51	520	265	140	148	54
CHHM1H - 613□ - (B) - Ratio	1.1	4	510	268	145	160	55	572	268	145	160	60
CHHM2 - 613□ - (B) - Ratio	1.5	4	510	268	145	160	55	572	268	145	160	60
CHHM3 - 613□ - (B) - Ratio	2.2	4	530	274	152	173	58	593	274	152	173	65
CHHM4 - 613□ - (B) - Ratio	3.0	4	553	296	168	212	68	625	296	168	212	78
CHHM5 - 613□ - (B) - Ratio	3.7	4	553	296	168	212	68	625	296	168	212	78
CHHM8 - 613□ - (B) - Ratio	5.5	4	597	296	168	212	75	669	296	168	212	85
CHHM10 - 613□ - (B) - Ratio	7.5	4	620	323	213	251	90	715	323	213	251	108
CHHM15 - 613□ - (B) - Ratio	11	4	680	323	213	251	104	775	323	213	251	121
CHHM1 - 614□ - (B) - Ratio	0.75	4	497	268	140	148	52	540	268	140	148	55
CHHM1H - 614□ - (B) - Ratio	1.1	4	530	268	145	160	56	592	268	145	160	61
CHHM2 - 614□ - (B) - Ratio	1.5	4	530	268	145	160	56	592	268	145	160	61
CHHM3 - 614□ - (B) - Ratio	2.2	4	550	274	152	173	59	613	274	152	173	66
CHHM4 - 614□ - (B) - Ratio	3.0	4	573	296	168	212	69	645	296	168	212	79
CHHM5 - 614□ - (B) - Ratio	3.7	4	573	296	168	212	69	645	296	168	212	79
CHHM8 - 614□ - (B) - Ratio	5.5	4	617	296	168	212	76	689	296	168	212	86
CHHM10 - 614□ - (B) - Ratio	7.5	4	640	323	213	251	91	735	323	213	251	109
CHHM15 - 614□ - (B) - Ratio	11	4	700	323	213	251	104	795	323	213	251	122
CHHM20 - 614□ - (B) - Ratio	15	4	790	358	261	324	156	880	321	261	324	190

Note: 1. □ indicates motor capacity.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

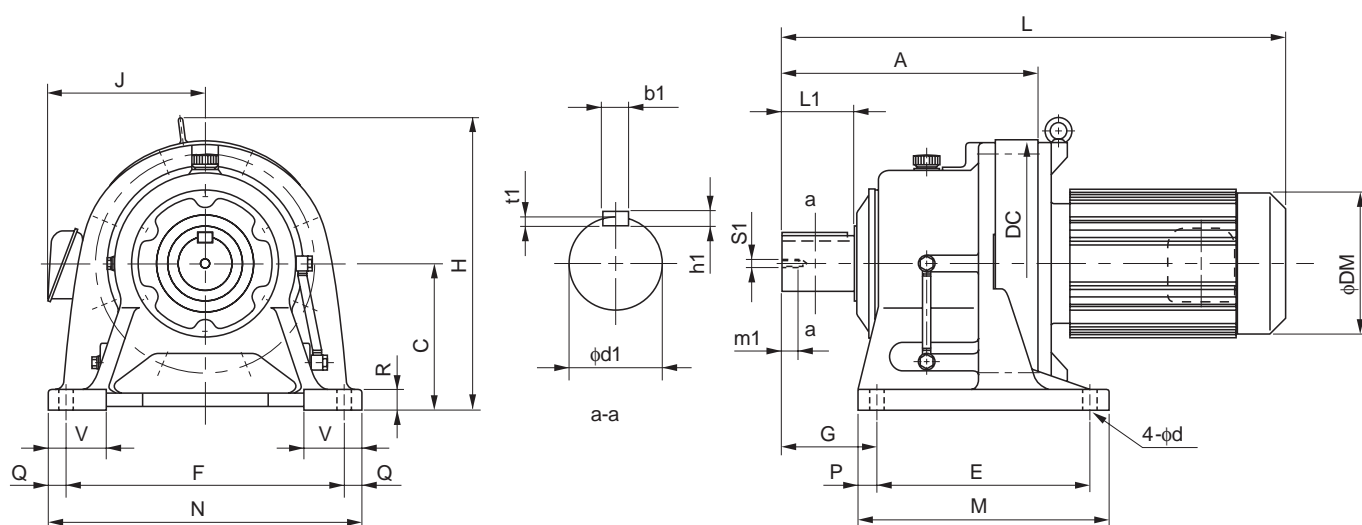CHHM^{Note 1} - 616□ to 617□

GEARMOTORS

Dimension Tables
CHHM

Frame size <small>Note 4</small>	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft <small>Note 2, 3, 6</small>						
														d1	L1	b1	h1	t1	S1	m1
616□	308	160	300	150	370	139	238	410	44	20	25	75	18	60	90	18	11	7	M10	18
617□	352	200	340	275	380	125	335	430	30	25	30	80	22	70	90	20	12	7.5	M12	24


Model <small>Note 4, 5</small>	Motor		Standard					With Brake				
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM1H - 616□ - (B) - Ratio	1.1	4	583	310	145	160	93	645	310	145	160	99
CHHM2 - 616□ - (B) - Ratio	1.5	4	583	310	145	160	93	645	310	145	160	99
CHHM3 - 616□ - (B) - Ratio	2.2	4	598	310	152	173	96	661	310	152	173	103
CHHM4 - 616□ - (B) - Ratio	3.0	4	621	310	168	212	105	693	310	168	212	116
CHHM5 - 616□ - (B) - Ratio	3.7	4	621	310	168	212	105	693	310	168	212	116
CHHM8 - 616□ - (B) - Ratio	5.5	4	665	310	168	212	112	737	310	168	212	123
CHHM10 - 616□ - (B) - Ratio	7.5	4	693	333	213	251	128	788	333	213	251	146
CHHM15 - 616□ - (B) - Ratio	11	4	753	333	213	251	142	848	333	213	251	160
*CHHM20 - 616□ - (B) - Ratio	15	4	838	368	261	324	195	928	368	261	324	230
*CHHM25 - 616□ - (B) - Ratio	18.5	4	933	368	328	394	267	1098	368	328	394	323
*CHHM30 - 616□ - (B) - Ratio	22	4	933	368	328	394	267	1098	368	328	394	323
CHHM4 - 617□ - (B) - Ratio	3.0	4	680	403	168	212	146	752	403	168	212	157
CHHM5 - 617□ - (B) - Ratio	3.7	4	680	403	168	212	146	752	403	168	212	157
CHHM8 - 617□ - (B) - Ratio	5.5	4	724	403	168	212	153	796	403	168	212	164
CHHM10 - 617□ - (B) - Ratio	7.5	4	742	403	213	251	168	837	403	213	251	187
CHHM15 - 617□ - (B) - Ratio	11	4	802	403	213	251	182	897	403	213	251	201
CHHM20 - 617□ - (B) - Ratio	15	4	882	413	259	324	236	987	413	259	324	271
CHHM25 - 617□ - (B) - Ratio	18.5	4	977	428	328	394	304	1142	428	328	394	360
CHHM30 - 617□ - (B) - Ratio	22	4	977	428	328	394	304	1142	428	328	394	360
CHHM40 - 617□ - (B) - Ratio	30	4	977	428	328	394	321	1142	428	328	394	369

*** indicates models with bottom level of the motor lower than the reducer base.
Refer to pages B-152 and B-153 for center height options.

- Note: 4. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.
5. "B" after the frame size indicates models equipped with brake.
6. Dimension of shaft end: Refer to pages F-28 to F-29 for details.
7. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

CHHM^{Note 1} - 618□ to 619□

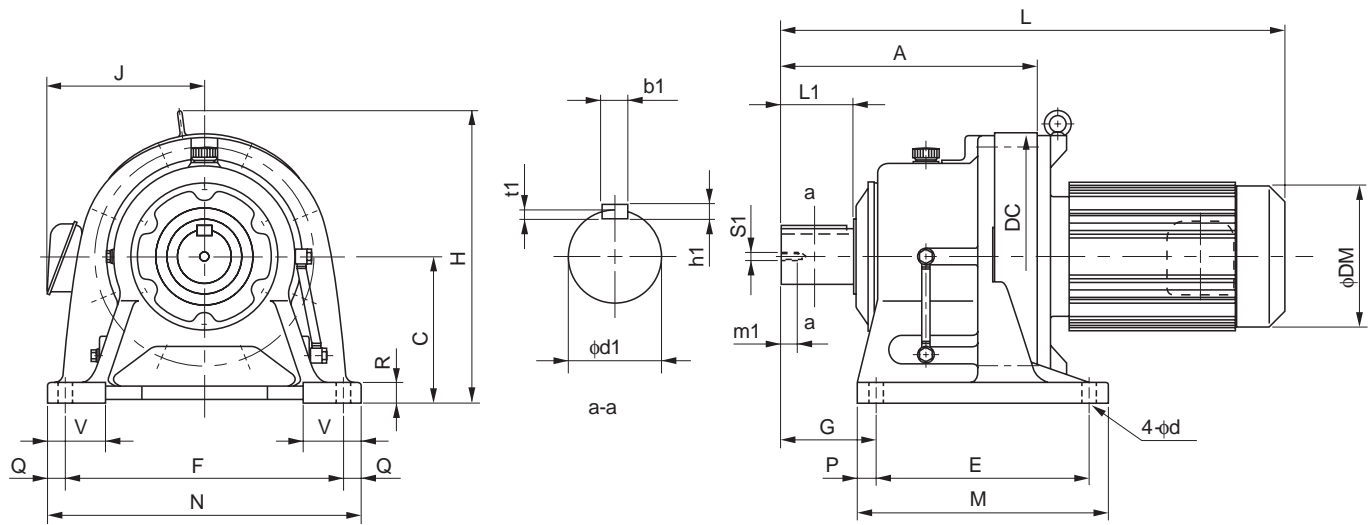


Frame size <small>Note 4</small>	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft <small>Note 2, 3, 6</small>						
														d1	L1	b1	h1	t1	S1	m1
618□	389	220	370	320	420	145	380	470	30	25	30	85	22	80	110	22	14	9	M12	24
619□	465	250	430	380	480	170	440	530	30	25	35	90	26	95	135	25	14	9	M20	34

Model <small>Note 4, 5</small>	Motor		Standard							With Brake				
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)		
CHHM4 - 618□ - (B) - Ratio	3.0	4	717	438	168	212	184	789	438	168	212	194		
CHHM5 - 618□ - (B) - Ratio	3.7	4	717	438	168	212	184	789	438	168	212	194		
CHHM8 - 618□ - (B) - Ratio	5.5	4	761	438	168	212	192	833	438	168	212	202		
CHHM10 - 618□ - (B) - Ratio	7.5	4	779	438	213	251	207	874	438	213	251	225		
CHHM15 - 618□ - (B) - Ratio	11	4	839	438	213	251	221	934	438	213	251	239		
CHHM20 - 618□ - (B) - Ratio	15	4	919	438	261	324	281	1024	438	261	324	310		
CHHM25 - 618□ - (B) - Ratio	18.5	4	1014	448	328	394	347	1179	448	328	394	398		
CHHM30 - 618□ - (B) - Ratio	22	4	1014	448	328	394	347	1179	448	328	394	398		
CHHM40 - 618□ - (B) - Ratio	30	4	1014	448	328	394	364	1179	448	328	394	407		
CHHM50 - 618□ - (B) - Ratio	37	4	1129	481	328	394	412	1344	481	328	394	509		
CHHM60 - 618□ - (B) - Ratio	45	4	1129	481	328	394	412	1344	481	328	394	509		
CHHM8 - 619□ - (B) - Ratio	5.5	4	857	511	168	212	266	929	511	168	212	276		
CHHM10 - 619□ - (B) - Ratio	7.5	4	870	511	213	251	279	965	511	213	251	297		
CHHM15 - 619□ - (B) - Ratio	11	4	930	511	213	251	293	1025	511	213	251	311		
CHHM20 - 619□ - (B) - Ratio	15	4	995	467	261	324	346	1100	467	261	324	381		
CHHM25 - 619□ - (B) - Ratio	18.5	4	1090	511	328	394	422	1255	511	328	394	467		
CHHM256 - 619□ - (B) - Ratio	18.5	6	1090	511	328	394	437	1255	511	328	394	480		
CHHM30 - 619□ - (B) - Ratio	22	4	1090	511	328	394	422	1255	511	328	394	467		
CHHM40 - 619□ - (B) - Ratio	30	4	1090	511	328	394	437	1255	511	328	394	480		
CHHM406 - 619□ - (B) - Ratio	30	6	1205	511	328	394	475	1420	511	328	394	572		
CHHM50 - 619□ - (B) - Ratio	37	4	1205	511	328	394	475	1420	511	328	394	572		
CHHM506 - 619□ - (B) - Ratio	37	6	1205	511	328	394	475	1420	511	328	394	572		
CHHM60 - 619□ - (B) - Ratio	45	4	1205	511	328	394	475	1420	511	328	394	572		

Note: 1. □ indicates motor capacity.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

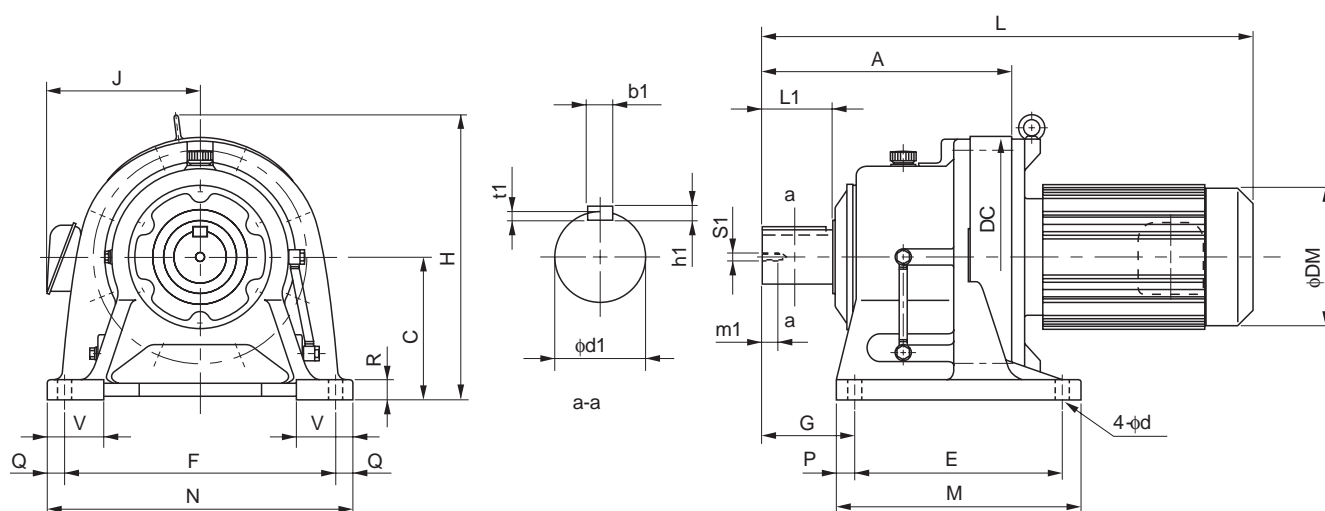CHHM^{Note 1} - 6205 to 6215

GEARMOTORS

Dimension Tables
CHHM

Frame size	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft ^{Note 2, 3, 6}						
														d1	L1	b1	h1	t1	S1	m1
6205	502	250	448	360	440	215	440	530	40	45	35	100	26	100	165	28	16	10	M20	34
6215	526	265	485	395	480	210	475	580	40	50	40	110	26	110	165	28	16	10	M20	34

Model	Note 5	Motor		Standard					With Brake				
		kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM15 - 6205	- (B) - Ratio	11	4	972	530	213	251	313	1067	530	213	251	332
CHHM20 - 6205	- (B) - Ratio	15	4	1042	530	261	324	367	1147	530	261	324	404
CHHM206 - 6205	- (B) - Ratio	15	6	1127	530	328	394	438	1292	530	328	394	484
CHHM25 - 6205	- (B) - Ratio	18.5	4	1127	530	328	394	438	1292	530	328	394	488
CHHM30 - 6205	- (B) - Ratio	22	4	1127	530	328	394	438	1292	530	328	394	488
CHHM306 - 6205	- (B) - Ratio	22	6	1127	530	328	394	451	1292	530	328	394	501
CHHM40 - 6205	- (B) - Ratio	30	4	1127	530	328	394	451	1292	530	328	394	501
CHHM406 - 6205	- (B) - Ratio	30	6	1242	530	328	394	489	1457	530	328	394	588
CHHM50 - 6205	- (B) - Ratio	37	4	1242	530	328	394	489	1457	530	328	394	588
CHHM506 - 6205	- (B) - Ratio	37	6	1242	530	328	394	489	1457	530	328	394	588
CHHM60 - 6205	- (B) - Ratio	45	4	1242	530	328	394	489	1457	530	328	394	588
CHHM606 - 6205	- (B) - Ratio	45	6	1297	575	378	484	582	-	-	-	-	-
CHHM75 - 6205	- (B) - Ratio	55	4	1297	575	378	484	582	-	-	-	-	-
CHHM15 - 6215	- (B) - Ratio	11	4	996	575	213	251	395	1091	575	213	251	414
CHHM20 - 6215	- (B) - Ratio	15	4	1066	575	261	324	450	1171	575	261	324	486
CHHM206 - 6215	- (B) - Ratio	15	6	1151	575	328	394	515	1316	575	328	394	565
CHHM25 - 6215	- (B) - Ratio	18.5	4	1151	575	328	394	515	1316	575	328	394	565
CHHM256 - 6215	- (B) - Ratio	18.5	6	1151	575	328	394	528	1316	575	328	394	578
CHHM30 - 6215	- (B) - Ratio	22	4	1151	575	328	394	515	1316	575	328	394	565
CHHM306 - 6215	- (B) - Ratio	22	6	1151	575	328	394	528	1316	575	328	394	578
CHHM40 - 6215	- (B) - Ratio	30	4	1151	575	328	394	528	1316	575	328	394	578
CHHM406 - 6215	- (B) - Ratio	30	6	1266	575	328	394	566	1481	575	328	394	666
CHHM50 - 6215	- (B) - Ratio	37	4	1266	575	328	394	566	1481	575	328	394	666
CHHM506 - 6215	- (B) - Ratio	37	6	1266	575	328	394	566	1481	575	328	394	666
CHHM60 - 6215	- (B) - Ratio	45	4	1266	575	328	394	566	1481	575	328	394	666
CHHM606 - 6215	- (B) - Ratio	45	6	1321	575	378	484	676	-	-	-	-	-
CHHM75 - 6215	- (B) - Ratio	55	4	1321	575	378	484	676	-	-	-	-	-

Note: 4. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.

5. "B" after the frame size indicates models equipped with brake.


6. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

7. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

CHHM^{Note 1} - 6225 to 6235

GEARMOTORS
Dimension Tables
CHHM

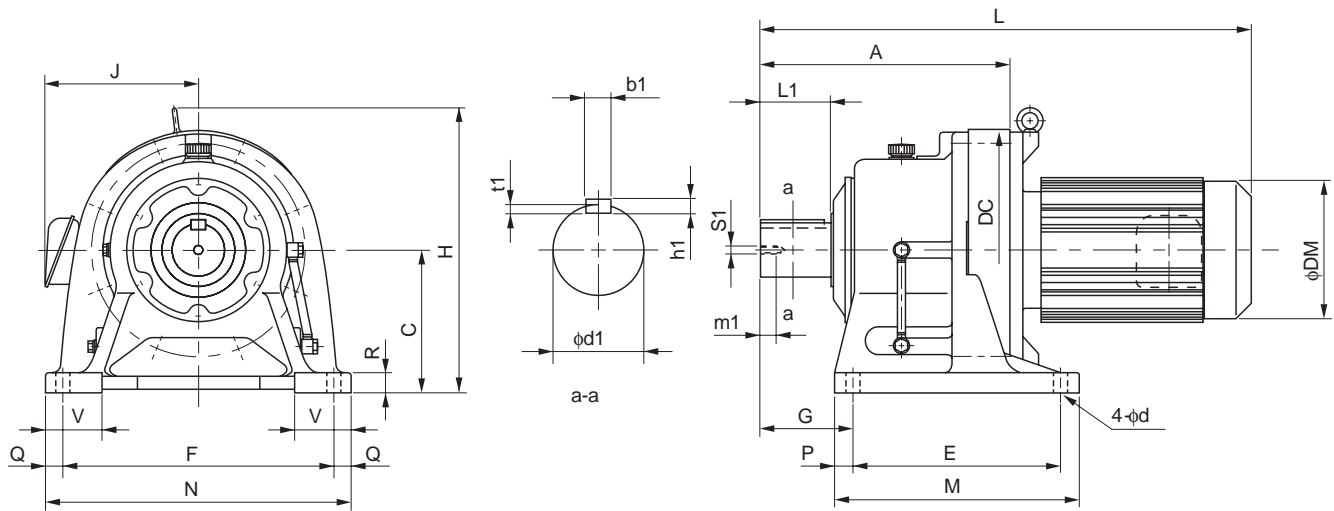


Frame size	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft Note 2, 3, 5						
														d1	L1	b1	h1	t1	S1	m1
6225	566	280	526	420	540	230	520	620	50	40	40	115	33	120	165	32	18	11	M20	34
6235	628	300	562	460	580	260	560	670	50	45	45	120	33	130	200	32	18	11	M24	41

Model	Note 4	Motor		Standard					With Brake				
		kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM206 - 6225	-(B) - Ratio	15	6	1191	610	328	394	600	1356	610	328	394	650
CHHM25 - 6225	-(B) - Ratio	18.5	4	1191	610	328	394	600	1356	610	328	394	650
CHHM256 - 6225	-(B) - Ratio	18.5	6	1191	610	328	394	613	1356	610	328	394	663
CHHM30 - 6225	-(B) - Ratio	22	4	1191	610	328	394	600	1356	610	328	394	650
CHHM306 - 6225	-(B) - Ratio	22	6	1191	610	328	394	613	1356	610	328	394	663
CHHM40 - 6225	-(B) - Ratio	30	4	1191	610	328	394	613	1356	610	328	394	663
CHHM406 - 6225	-(B) - Ratio	30	6	1306	610	328	394	651	1521	610	328	394	751
CHHM50 - 6225	-(B) - Ratio	37	4	1306	610	328	394	651	1521	610	328	394	751
CHHM506 - 6225	-(B) - Ratio	37	6	1306	610	328	394	651	1521	610	328	394	751
CHHM60 - 6225	-(B) - Ratio	45	4	1306	610	328	394	651	1521	610	328	394	751
CHHM606 - 6225	-(B) - Ratio	45	6	1361	610	378	484	750	-	-	-	-	-
CHHM75 - 6225	-(B) - Ratio	55	4	1361	610	378	484	750	-	-	-	-	-
CHHM206 - 6235	-(B) - Ratio	15	6	1253	667	328	394	698	1448	667	328	394	734
CHHM256 - 6235	-(B) - Ratio	18.5	6	1253	667	328	394	698	1448	667	328	394	748
CHHM306 - 6235	-(B) - Ratio	22	6	1253	667	328	394	698	1448	667	328	394	748
CHHM406 - 6235	-(B) - Ratio	30	6	1368	667	328	394	744	1583	667	328	394	837
CHHM506 - 6235	-(B) - Ratio	37	6	1368	667	328	394	744	1583	667	328	394	837
CHHM606 - 6235	-(B) - Ratio	45	6	1423	667	378	484	833	-	-	-	-	-
CHHM756 - 6235	-(B) - Ratio	55	6	1503	667	378	485	887	-	-	-	-	-

Note: 1. □ indicates motor capacity.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

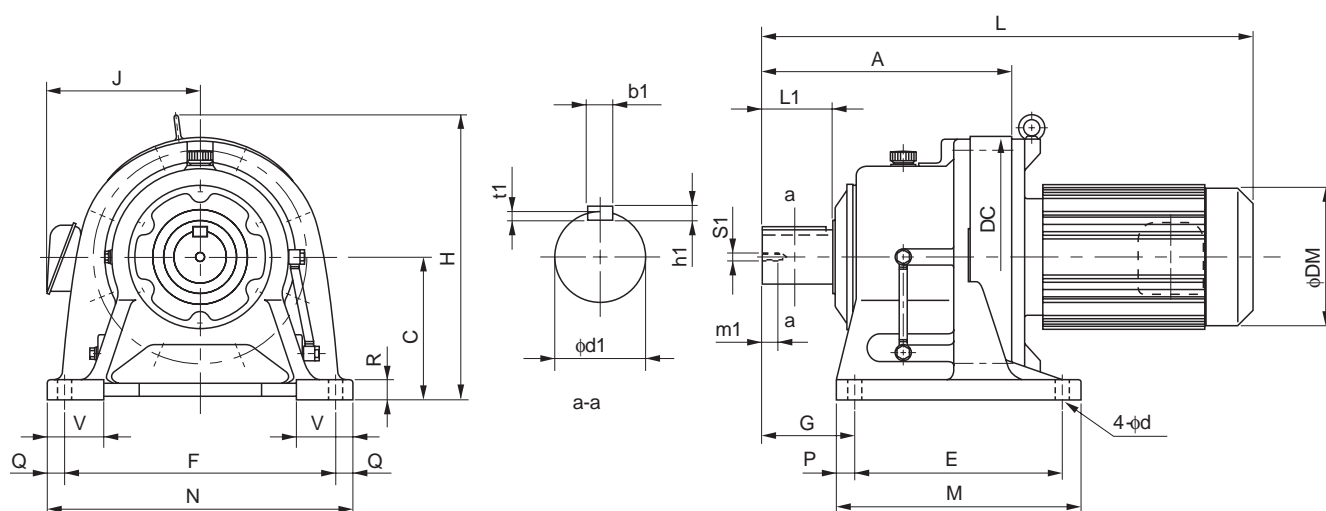CHHM^{Note 1} - 6245 to 6265

GEARMOTORS

Dimension Tables
CHHM


Frame size	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft ^{Note 2, 3, 5}						
														d1	L1	b1	h1	t1	S1	m1
6245	657	335	614	480	630	263	580	720	50	45	45	128	39	140	200	36	20	12	M24	41
6255	775	375	670	520	670	320	630	780	55	55	50	140	39	160	240	40	22	13	M30	49
6265	892	400	736	590	770	390	700	880	55	55	55	160	45	170	300	40	22	13	M30	49

Model	Note 4	Motor		Standard					With Brake				
		kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM206 - 6245	- (B) - Ratio	15	6	1282	729	328	394	824	1447	729	328	394	857
CHHM256 - 6245	- (B) - Ratio	18.5	6	1282	729	328	394	824	1447	729	328	394	871
CHHM306 - 6245	- (B) - Ratio	22	6	1282	729	328	394	824	1447	729	328	394	871
CHHM406 - 6245	- (B) - Ratio	30	6	1397	729	328	394	870	1612	729	328	394	958
CHHM506 - 6245	- (B) - Ratio	37	6	1397	729	328	394	870	1612	729	328	394	958
CHHM606 - 6245	- (B) - Ratio	45	6	1452	729	378	484	961	-	-	-	-	-
CHHM756 - 6245	- (B) - Ratio	55	6	1532	729	378	485	1010	-	-	-	-	-
CHHM206 - 6255	- (B) - Ratio	15	6	1400	815	328	394	1155	1565	815	328	394	1188
CHHM256 - 6255	- (B) - Ratio	18.5	6	1400	815	328	394	1155	1610	815	328	394	1202
CHHM306 - 6255	- (B) - Ratio	22	6	1400	815	328	394	1155	1610	815	328	394	1202
CHHM406 - 6255	- (B) - Ratio	30	6	1515	815	328	394	1200	1730	815	328	394	1288
CHHM506 - 6255	- (B) - Ratio	37	6	1515	815	328	394	1200	1730	815	328	394	1288
CHHM606 - 6255	- (B) - Ratio	45	6	1570	815	378	484	1280	-	-	-	-	-
CHHM756 - 6255	- (B) - Ratio	55	6	1650	815	378	485	1335	-	-	-	-	-
CHHM306 - 6265	- (B) - Ratio	22	6	1517	874	328	394	1400	1727	874	328	394	1447
CHHM406 - 6265	- (B) - Ratio	30	6	1632	874	328	394	1445	1847	874	328	394	1533
CHHM506 - 6265	- (B) - Ratio	37	6	1632	874	328	394	1445	1847	874	328	394	1533
CHHM606 - 6265	- (B) - Ratio	45	6	1687	874	378	484	1540	-	-	-	-	-

- Note: 4. "B" after the frame size indicates models equipped with brake.
5. Dimension of shaft end: Refer to pages F-28 to F-29 for details.
6. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Universal Direction, Foot-Mount)

CNHM - 606 DA to 612 DB

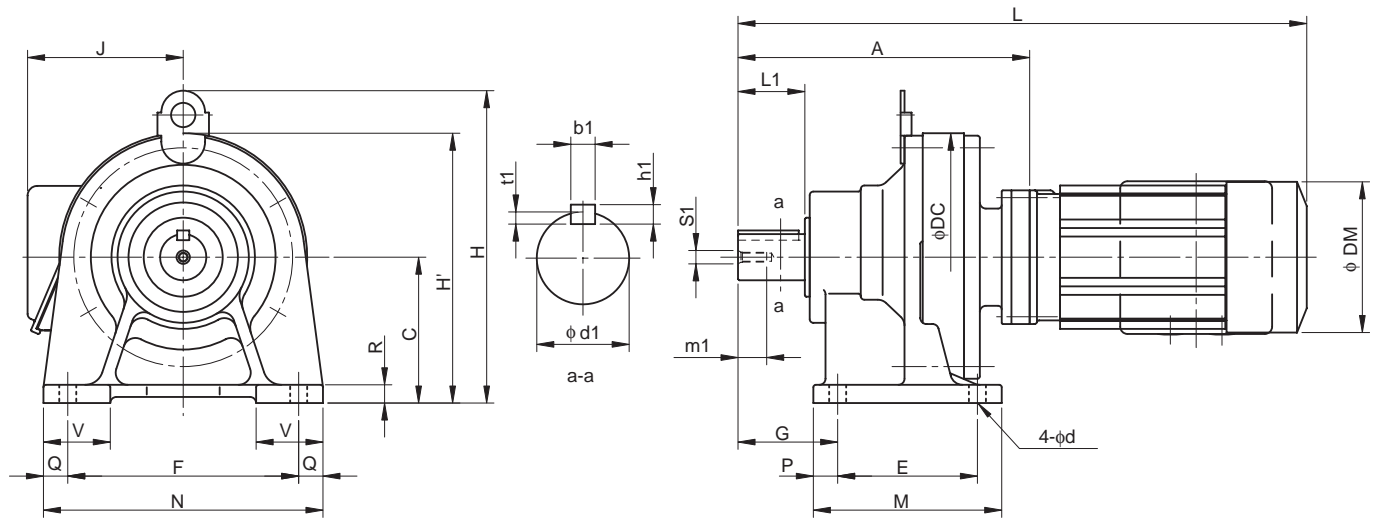


Frame size <small>Note 4</small>	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft <small>Note 2, 3, 6</small>						
														d1	L1	b1	h1	t1	S1	m1
606 DA	125	80	110	60	120	41	84	144	12	12	10	35	9	14	25	5	5	3	M5	16
607 DA	131	80	110	60	120	47	84	144	12	12	10	35	9	18	30	6	6	3.5	M6	16
609 DA	190	100	150	90	150	60	135	180	15	15	12	40	11	28	35	8	7	4	M8	20
610 DA	204	100	150	90	150	60	135	180	15	15	12	40	11	28	35	8	7	4	M8	20
612 DA	240	120	204	115	190	82	155	230	20	20	15	55	14	38	55	10	8	5	M8	20
612 DB	252	120	204	115	190	82	155	230	20	20	15	55	14	38	55	10	8	5	M8	20

Model <small>Note 4, 5</small>	Motor		Standard							With Brake					
	kW	P	L	H	H'	J	DM	W(kg)	L	H	H'	J	DM	W(kg)	
CNHM01 - 606 DA - (B) - Ratio	0.1	4	287	-	140	130	119	9	294	-	138	130	124	10	
CNHM01 - 607 DA - (B) - Ratio	0.1	4	293	-	140	130	119	9	300	-	138	130	124	10	
CNHM02 - 607 DA - (B) - Ratio	0.2	4	311	-	140	130	124	10	339	-	138	130	124	11	
CNHM01 - 609 DA - (B) - Ratio	0.1	4	352	207	-	130	119	17	359	207	-	130	124	18	
CNHM02 - 609 DA - (B) - Ratio	0.2	4	370	207	-	130	124	18	398	207	-	130	124	19	
CNHM03 - 609 DA - (B) - Ratio	0.25	4	370	207	-	130	124	18	398	207	-	130	124	19	
CNHM05 - 609 DA - (B) - Ratio	0.4	4	386	207	-	130	124	19	418	207	-	130	124	20	
CNHM01 - 610 DA - (B) - Ratio	0.1	4	366	207	-	130	119	19	373	207	-	130	124	20	
CNHM02 - 610 DA - (B) - Ratio	0.2	4	384	207	-	130	124	20	412	207	-	130	124	21	
CNHM03 - 610 DA - (B) - Ratio	0.25	4	384	207	-	130	124	20	412	207	-	130	124	21	
CNHM05 - 610 DA - (B) - Ratio	0.4	4	400	207	-	130	124	21	432	207	-	130	124	22	
CNHM01 - 612 DA - (B) - Ratio	0.1	4	402	257	-	130	119	30	409	257	-	130	124	31	
CNHM02 - 612 DA - (B) - Ratio	0.2	4	420	257	-	130	124	31	448	257	-	130	124	32	
CNHM03 - 612 DA - (B) - Ratio	0.25	4	420	257	-	130	124	31	448	257	-	130	124	32	
CNHM05 - 612 DA - (B) - Ratio	0.4	4	436	257	-	130	124	32	468	257	-	130	124	33	
CNHM01 - 612 DB - (B) - Ratio	0.1	4	414	257	-	130	119	33	421	257	-	130	124	35	
CNHM02 - 612 DB - (B) - Ratio	0.2	4	432	257	-	130	124	34	473	257	-	130	124	36	
CNHM03 - 612 DB - (B) - Ratio	0.25	4	432	257	-	130	124	34	473	257	-	130	124	36	
CNHM05 - 612 DB - (B) - Ratio	0.4	4	448	257	-	130	124	35	473	257	-	130	124	37	
CNHM08 - 612 DB - (B) - Ratio	0.55	4	489	257	-	140	148	39	532	257	-	140	148	42	
CNHM1 - 612 DB - (B) - Ratio	0.75	4	489	257	-	140	148	39	532	257	-	140	148	42	
CNHM1H - 612 DB - (B) - Ratio	1.1	4	516	257	-	145	160	42	578	257	-	145	160	47	
CNHM2 - 612 DB - (B) - Ratio	1.5	4	516	257	-	145	160	42	578	257	-	145	160	47	

Note: 1. indicates motor capacity.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

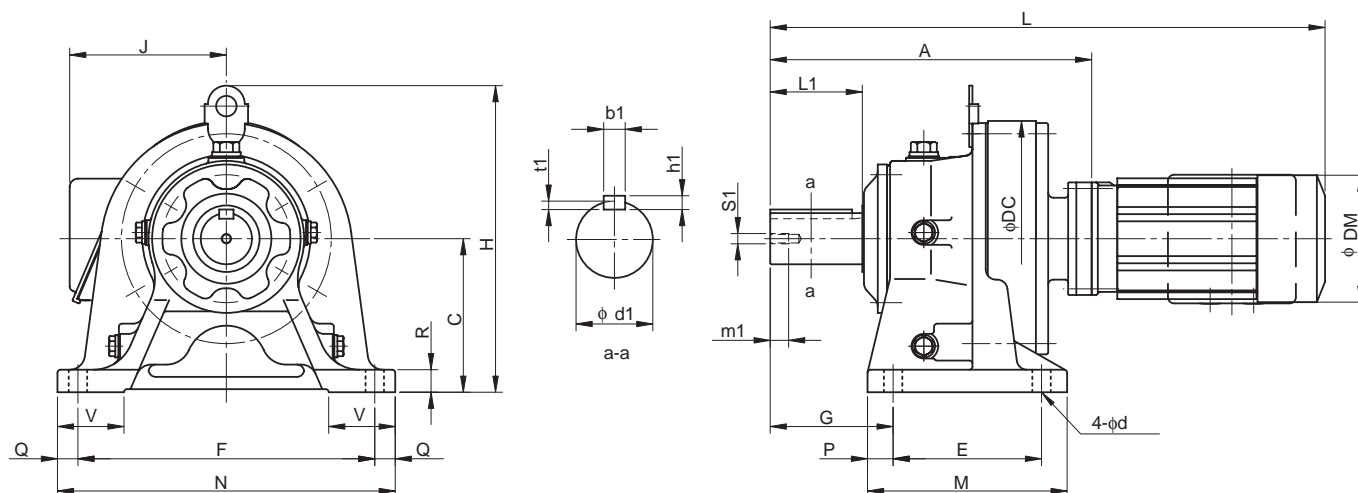CHHM^{Note 1} - 613□DA to 614□DC

Frame size <small>Note 4</small>	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft <small>Note 2, 3, 6</small>						
														d1	L1	b1	h1	t1	S1	m1
613□DA	294	150	230	145	290	100	195	330	25	20	22	65	18	50	70	14	9	5.5	M10	18
613□DB	303	150	230	145	290	100	195	330	25	20	22	65	18	50	70	14	9	5.5	M10	18
613□DC	317	150	230	145	290	100	195	330	25	20	22	65	18	50	70	14	9	5.5	M10	18
614□DA	314	150	230	145	290	120	195	330	25	20	22	65	18	50	90	14	9	5.5	M10	18
614□DB	323	150	230	145	290	120	195	330	25	20	22	65	18	50	90	14	9	5.5	M10	18
614□DC	337	150	230	145	290	120	195	330	25	20	22	65	18	50	90	14	9	5.5	M10	18

Model <small>Note 4, 5</small>	Motor		Standard					With Brake				
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM02 - 613□DA - (B) - Ratio	0.2	4	474	300	130	124	47	502	300	130	124	47
CHHM03 - 613□DA - (B) - Ratio	0.25	4	474	300	130	124	48	522	300	130	124	49
CHHM05 - 613□DA - (B) - Ratio	0.4	4	490	300	130	124	48	522	300	130	124	49
CHHM02 - 613□DB - (B) - Ratio	0.2	4	483	300	130	124	49	511	300	130	124	51
CHHM03 - 613□DB - (B) - Ratio	0.25	4	483	300	130	124	49	511	300	130	124	51
CHHM05 - 613□DB - (B) - Ratio	0.4	4	499	300	130	124	50	531	300	130	124	52
CHHM08 - 613□DB - (B) - Ratio	0.55	4	540	263	140	148	54	583	263	140	148	57
CHHM1 - 613□DB - (B) - Ratio	0.75	4	540	263	140	148	54	583	263	140	148	57
CHHM1H - 613□DB - (B) - Ratio	1.1	4	573	270	145	160	57	635	270	145	160	62
CHHM2 - 613□DB - (B) - Ratio	1.5	4	573	270	145	160	57	635	270	145	160	62
CHHM08 - 613□DC - (B) - Ratio	0.55	4	554	265	140	148	56	597	265	140	148	59
CHHM1 - 613□DC - (B) - Ratio	0.75	4	554	265	140	148	56	597	265	140	148	59
CHHM2 - 613□DC - (B) - Ratio	1.5	4	587	272	145	160	59	649	272	145	160	64
CHHM3 - 613□DC - (B) - Ratio	2.2	4	607	276	152	173	64	670	276	152	173	70
CHHM02 - 614□DA - (B) - Ratio	0.2	4	494	300	130	124	47	522	300	130	124	48
CHHM03 - 614□DA - (B) - Ratio	0.25	4	494	300	130	124	47	522	300	130	124	48
CHHM05 - 614□DA - (B) - Ratio	0.4	4	510	300	130	124	48	542	300	130	124	49
CHHM02 - 614□DB - (B) - Ratio	0.2	4	503	300	130	124	49	531	300	130	124	51
CHHM03 - 614□DB - (B) - Ratio	0.25	4	503	300	130	124	49	531	300	130	124	51
CHHM05 - 614□DB - (B) - Ratio	0.4	4	519	300	130	124	50	551	300	130	124	52
CHHM08 - 614□DB - (B) - Ratio	0.55	4	560	263	140	148	54	603	263	140	148	57
CHHM1 - 614□DB - (B) - Ratio	0.75	4	560	263	140	148	54	603	263	140	148	57
CHHM1H - 614□DB - (B) - Ratio	1.1	4	593	270	145	160	57	655	270	145	160	62
CHHM2 - 614□DB - (B) - Ratio	1.5	4	593	270	145	160	57	655	270	145	160	62
CHHM08 - 614□DC - (B) - Ratio	0.55	4	574	265	140	148	56	617	265	140	148	59
CHHM1 - 614□DC - (B) - Ratio	0.75	4	574	265	140	148	56	617	265	140	148	59
CHHM1H - 614□DC - (B) - Ratio	1.1	4	607	270	145	160	60	669	270	145	160	65
CHHM2 - 614□DC - (B) - Ratio	1.5	4	607	270	145	160	60	669	270	145	160	65
CHHM3 - 614□DC - (B) - Ratio	2.2	4	627	276	152	173	64	690	276	152	173	70

Note: 4. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.

5. "B" after the frame size indicates models equipped with brake.


6. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

7. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

CHHM - 616 DA to 618 DA

GEARMOTORS
Dimension Tables
CHHM

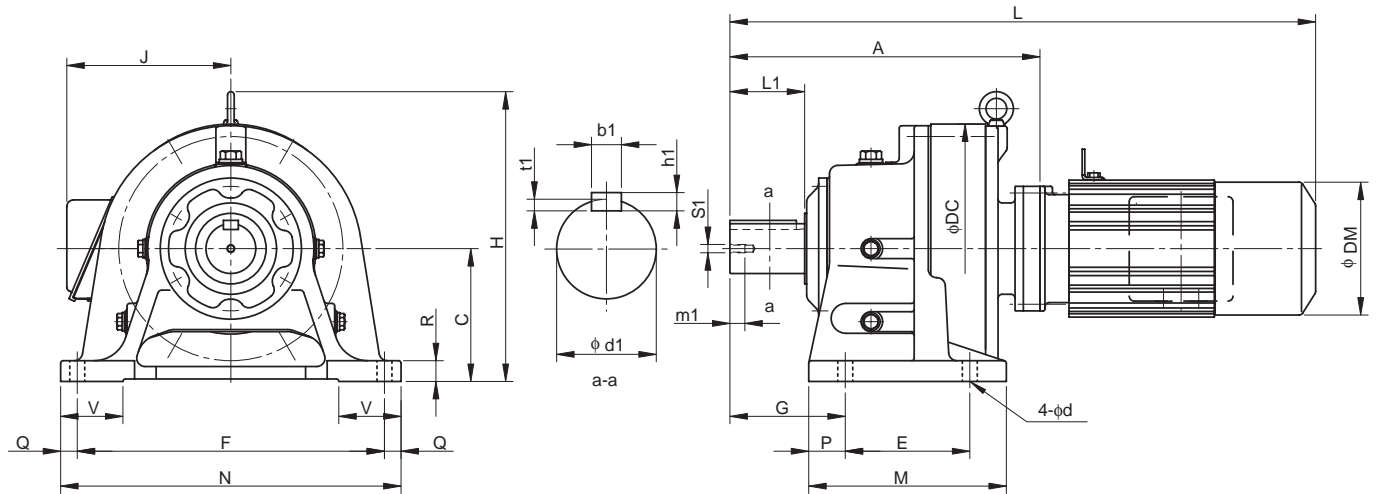


Frame size <small>Note 4</small>	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft <small>Note 2, 3, 6</small>						
														d1	L1	b1	h1	t1	S1	m1
616 DA	373	160	300	150	370	139	238	410	44	20	25	75	18	60	90	18	11	7	M10	18
616 DB	387	160	300	150	370	139	238	410	44	20	25	75	18	60	90	18	11	7	M10	18
617 DA	418	200	340	275	380	125	335	430	30	25	30	80	22	70	90	20	12	7.5	M12	24
617 DB	432	200	340	275	380	125	335	430	30	25	30	80	22	70	90	20	12	7.5	M12	24
618 DA	474	220	370	320	420	145	380	470	30	25	30	85	22	80	110	22	14	9	M12	24

Model <small>Note 4, 5</small>	Motor		Standard					With Brake				
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM02 - 616 DA - (B) - Ratio	0.2	4	553	349	130	124	90	581	349	130	124	92
CHHM03 - 616 DA - (B) - Ratio	0.25	4	553	349	130	124	90	581	349	130	124	92
CHHM05 - 616 DA - (B) - Ratio	0.4	4	569	349	130	124	91	601	349	130	124	93
CHHM08 - 616 DA - (B) - Ratio	0.55	4	610	349	140	148	95	653	349	140	148	98
CHHM1 - 616 DA - (B) - Ratio	0.75	4	610	349	140	148	95	653	349	140	148	98
CHHM1H - 616 DA - (B) - Ratio	1.1	4	643	349	145	160	99	705	349	145	160	104
CHHM2 - 616 DA - (B) - Ratio	1.5	4	643	349	145	160	99	705	349	145	160	104
CHHM08 - 616 DB - (B) - Ratio	0.55	4	624	349	140	148	97	667	349	140	148	100
CHHM1 - 616 DB - (B) - Ratio	0.75	4	624	349	140	148	97	667	349	140	148	100
CHHM1H - 616 DB - (B) - Ratio	1.1	4	657	349	145	160	101	719	349	145	160	106
CHHM2 - 616 DB - (B) - Ratio	1.5	4	657	349	145	160	101	719	349	145	160	106
CHHM3 - 616 DB - (B) - Ratio	2.2	4	677	349	152	173	105	740	349	152	173	111
CHHM02 - 617 DA - (B) - Ratio	0.2	4	598	416	130	124	120	626	416	130	124	127
CHHM03 - 617 DA - (B) - Ratio	0.25	4	598	416	130	124	120	626	416	130	124	127
CHHM05 - 617 DA - (B) - Ratio	0.4	4	614	416	130	124	126	646	416	130	124	128
CHHM08 - 617 DA - (B) - Ratio	0.55	4	655	416	140	148	130	698	416	140	148	133
CHHM1 - 617 DA - (B) - Ratio	0.75	4	655	416	140	148	130	698	416	140	148	133
CHHM1H - 617 DA - (B) - Ratio	1.1	4	688	416	145	160	133	750	416	145	160	138
CHHM2 - 617 DA - (B) - Ratio	1.5	4	688	416	145	160	133	750	416	145	160	138
CHHM08 - 617 DB - (B) - Ratio	0.55	4	669	416	140	148	127	712	416	140	148	134
CHHM1 - 617 DB - (B) - Ratio	0.75	4	669	416	140	148	127	712	416	140	148	134
CHHM1H - 617 DB - (B) - Ratio	1.1	4	702	416	145	160	136	764	416	145	160	141
CHHM2 - 617 DB - (B) - Ratio	1.5	4	702	416	145	160	136	764	416	145	160	141
CHHM3 - 617 DB - (B) - Ratio	2.2	4	722	416	152	173	140	785	416	152	173	146
CHHM05 - 618 DA - (B) - Ratio	0.4	4	670	451	130	124	171	702	451	130	124	173
CHHM08 - 618 DA - (B) - Ratio	0.55	4	711	451	140	148	175	754	451	140	148	178
CHHM1 - 618 DA - (B) - Ratio	0.75	4	711	451	140	148	175	754	451	140	148	178
CHHM1H - 618 DA - (B) - Ratio	1.1	4	744	451	145	160	179	806	451	145	160	184
CHHM2 - 618 DA - (B) - Ratio	1.5	4	744	451	145	160	179	806	451	145	160	184
CHHM3 - 618 DA - (B) - Ratio	2.2	4	764	451	152	173	183	827	451	152	173	189

Note: 1. indicates motor capacity.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

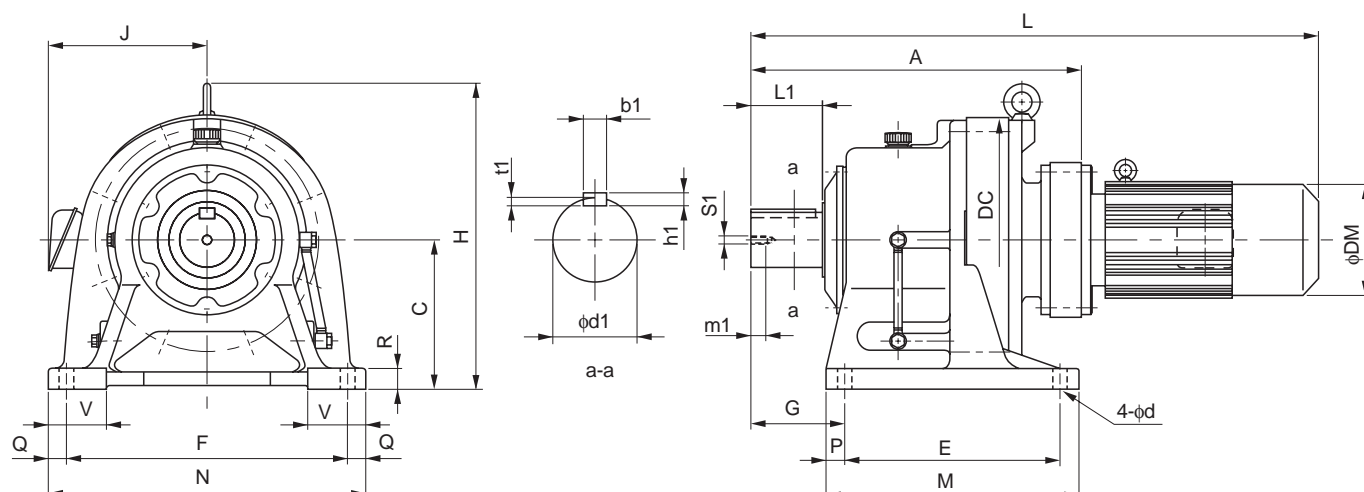CHHM^{Note 1} - 616□DC to 619□DA

GEARMOTORS

Dimension Tables
CHHM

Frame size <small>Note 4</small>	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft <small>Note 2, 3, 6</small>						
														d1	L1	b1	h1	t1	S1	m1
616□DC	389	160	300	150	370	139	238	410	44	20	25	75	18	60	90	18	11	7	M10	18
617□DC	436	200	340	275	380	125	335	430	30	25	30	80	22	70	90	20	12	7.5	M12	24
618□DB	496	220	370	320	420	145	380	470	30	25	30	85	22	80	110	22	14	9	M12	24
619□DA	556	250	430	380	480	170	440	530	30	25	35	90	26	95	135	25	14	9	M20	34

Model <small>Note 4, 5</small>	Motor		Standard					With Brake				
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM1H - 616□DC - (B) - Ratio	1.1	4	659	349	145	160	107	721	349	145	160	112
CHHM2 - 616□DC - (B) - Ratio	1.5	4	659	349	145	160	107	721	349	145	160	112
CHHM3 - 616□DC - (B) - Ratio	2.2	4	679	349	152	173	111	742	349	152	173	118
CHHM4 - 616□DC - (B) - Ratio	3.0	4	702	349	168	212	121	774	349	168	212	131
CHHM5 - 616□DC - (B) - Ratio	3.7	4	702	349	168	212	121	774	349	168	212	131
CHHM8 - 616□DC - (B) - Ratio	5.5	4	746	349	168	212	128	818	349	168	212	138
CHHM1H - 617□DC - (B) - Ratio	1.1	4	706	416	145	160	141	768	416	145	160	146
CHHM2 - 617□DC - (B) - Ratio	1.5	4	706	416	145	160	141	768	416	145	160	146
CHHM3 - 617□DC - (B) - Ratio	2.2	4	726	416	152	173	145	789	416	152	173	152
CHHM4 - 617□DC - (B) - Ratio	3.0	4	749	416	168	212	155	821	416	168	212	165
CHHM5 - 617□DC - (B) - Ratio	3.7	4	749	416	168	212	155	821	416	168	212	165
CHHM8 - 617□DC - (B) - Ratio	5.5	4	793	416	168	212	162	865	416	168	212	172
CHHM1H - 618□DB - (B) - Ratio	1.1	4	766	451	145	160	194	828	451	145	160	199
CHHM2 - 618□DB - (B) - Ratio	1.5	4	766	451	145	160	194	828	451	145	160	199
CHHM3 - 618□DB - (B) - Ratio	2.2	4	786	451	152	173	197	849	451	152	173	204
CHHM4 - 618□DB - (B) - Ratio	3.0	4	809	451	168	212	207	881	451	168	212	217
CHHM5 - 618□DB - (B) - Ratio	3.7	4	809	451	168	212	207	881	451	168	212	217
CHHM8 - 618□DB - (B) - Ratio	5.5	4	853	451	168	212	214	925	451	168	212	224
CHHM10 - 618□DB - (B) - Ratio	7.5	4	876	451	213	251	229	971	451	213	251	247
CHHM15 - 618□DB - (B) - Ratio	11	4	936	451	213	251	243	1031	451	213	251	261
CHHM1 - 619□DA - (B) - Ratio	0.75	4	793	531	140	148	250	836	531	140	148	253
CHHM1H - 619□DA - (B) - Ratio	1.1	4	826	531	145	160	254	888	531	145	160	259
CHHM2 - 619□DA - (B) - Ratio	1.5	4	826	531	145	160	254	888	531	145	160	259
CHHM3 - 619□DA - (B) - Ratio	2.2	4	846	531	152	173	258	909	531	152	173	265
CHHM4 - 619□DA - (B) - Ratio	3.0	4	869	531	168	212	268	941	531	168	212	278
CHHM5 - 619□DA - (B) - Ratio	3.7	4	869	531	168	212	268	941	531	168	212	278
CHHM8 - 619□DA - (B) - Ratio	5.5	4	913	531	168	212	275	985	531	168	212	285

Note: 4. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.


5. "B" after the frame size indicates models equipped with brake.

6. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

7. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

CHHM - 619 DB to 6215DA

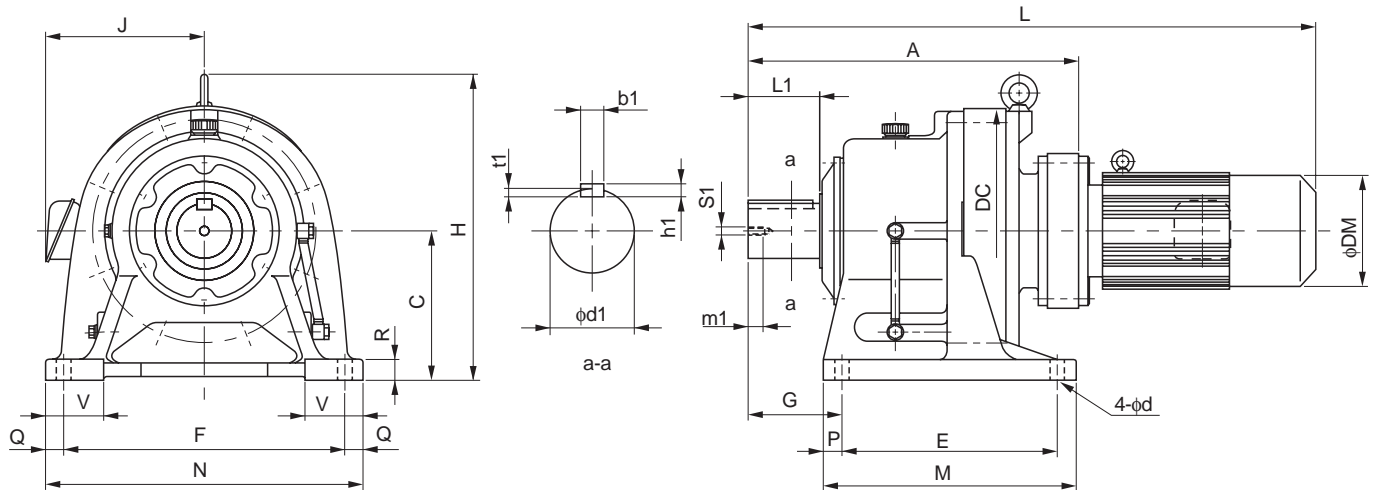


Frame size <small>Note 4</small>	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft <small>Note 2, 3, 6</small>						
														d1	L1	b1	h1	t1	S1	m1
619 DB	572	250	430	380	480	170	440	530	30	25	35	90	26	95	135	25	14	9	M20	34
6205DA	597	250	448	360	440	215	440	530	40	45	35	100	26	100	165	28	16	10	M20	34
6205DB	624	250	448	360	440	215	440	530	40	45	35	100	26	100	165	28	16	10	M20	34
6215DA	650	265	485	395	480	210	475	580	40	50	40	110	26	110	165	28	16	10	M20	34

Model <small>Note 4, 5</small>	Motor		Standard							With Brake				
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)		
CHHM2 - 619 DB - (B) - Ratio	1.5	4	842	531	145	160	261	904	531	145	160	266		
CHHM3 - 619 DB - (B) - Ratio	2.2	4	862	531	152	173	265	925	531	152	173	272		
CHHM4 - 619 DB - (B) - Ratio	3.0	4	885	531	168	212	275	957	531	168	212	285		
CHHM5 - 619 DB - (B) - Ratio	3.7	4	885	531	168	212	275	957	531	168	212	285		
CHHM8 - 619 DB - (B) - Ratio	5.5	4	929	531	168	212	282	1001	531	168	212	292		
CHHM10 - 619 DB - (B) - Ratio	7.5	4	952	531	213	251	297	1047	531	213	251	315		
CHHM15 - 619 DB - (B) - Ratio	11	4	1012	531	213	251	311	1107	531	213	251	329		
CHHM20 - 619 DB - (B) - Ratio	15	4	1102	531	261	324	363	1207	531	261	324	397		
CHHM1 - 6205DA - (B) - Ratio	0.75	4	834	530	140	148	269	877	530	140	148	272		
CHHM2 - 6205DA - (B) - Ratio	1.5	4	867	530	145	160	273	929	530	145	160	278		
CHHM3 - 6205DA - (B) - Ratio	2.2	4	887	530	152	173	277	949	530	152	173	284		
CHHM4 - 6205DA - (B) - Ratio	3.0	4	910	530	168	212	287	982	530	168	212	297		
CHHM5 - 6205DA - (B) - Ratio	3.7	4	910	530	168	212	287	982	530	168	212	297		
CHHM8 - 6205DA - (B) - Ratio	5.5	4	954	530	168	212	294	1026	530	168	212	304		
CHHM3 - 6205DB - (B) - Ratio	2.2	4	914	530	152	173	289	977	530	152	173	296		
CHHM4 - 6205DB - (B) - Ratio	3.0	4	937	530	168	212	299	1009	530	168	212	309		
CHHM5 - 6205DB - (B) - Ratio	3.7	4	937	530	168	212	299	1009	530	168	212	309		
CHHM8 - 6205DB - (B) - Ratio	5.5	4	981	530	168	212	306	1053	530	168	212	316		
CHHM10 - 6205DB - (B) - Ratio	7.5	4	1004	530	213	251	321	1099	530	213	251	339		
CHHM15 - 6205DB - (B) - Ratio	11	4	1064	530	213	251	334	1159	530	213	251	352		
CHHM20 - 6205DB - (B) - Ratio	15	4	1154	530	261	324	386	1249	530	261	324	419		
CHHM2 - 6215DA - (B) - Ratio	1.5	4	920	575	145	160	367	982	575	145	160	372		
CHHM3 - 6215DA - (B) - Ratio	2.2	4	940	575	152	173	370	1003	575	152	173	377		
CHHM4 - 6215DA - (B) - Ratio	3.0	4	963	575	168	212	380	1035	575	168	212	390		
CHHM5 - 6215DA - (B) - Ratio	3.7	4	963	575	168	212	380	1035	575	168	212	390		
CHHM8 - 6215DA - (B) - Ratio	5.5	4	1007	575	168	212	387	1079	575	168	212	397		
CHHM10 - 6215DA - (B) - Ratio	7.5	4	1030	575	213	251	402	1125	575	213	251	420		
CHHM15 - 6215DA - (B) - Ratio	11	4	1090	575	213	251	415	1185	575	213	251	433		
CHHM20 - 6215DA - (B) - Ratio	15	4	1180	575	261	324	467	1285	575	261	324	501		

Note: 1. indicates motor capacity.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

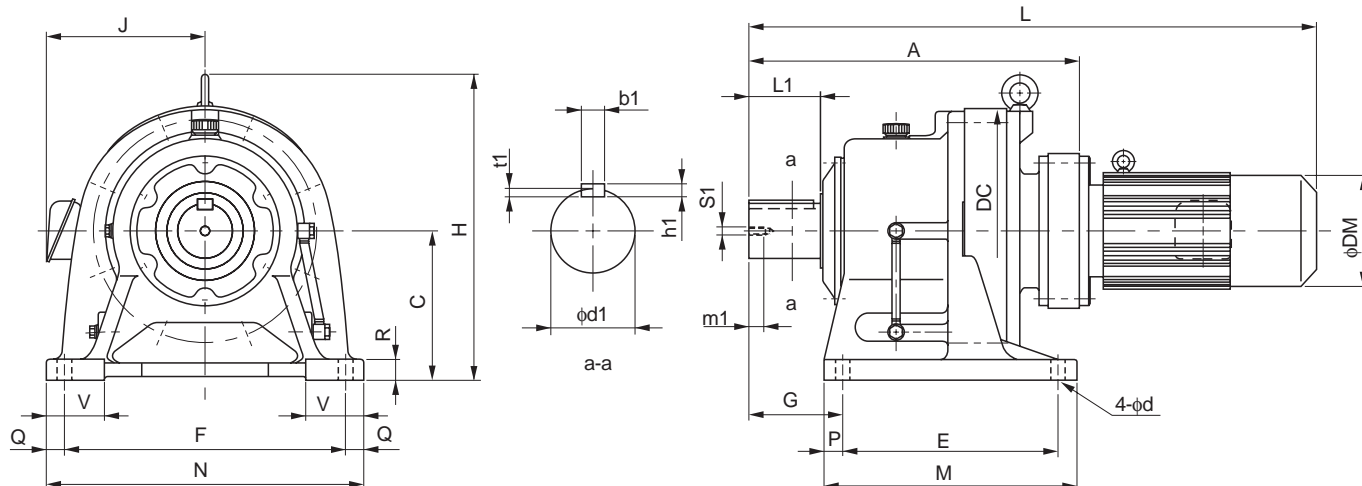CHHM^{Note 1} - 6215DB to 6225DB

GEARMOTORS

Dimension Tables
CHHM

Frame size	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft ^{Note 2, 3, 6}						
														d1	L1	b1	h1	t1	S1	m1
6215DB	675	265	485	395	480	210	475	580	40	50	40	110	26	110	165	28	16	10	M20	34
6225DA	692	280	526	420	540	230	520	620	50	40	40	115	33	120	165	32	18	11	M20	34
6225DB	735	280	526	420	540	230	520	620	50	40	40	115	33	120	165	32	18	11	M20	34

Model	Note 5	Motor		Standard					With Brake				
		kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM5	-6215DB - (B) - Ratio	3.7	4	993	575	168	212	399	1065	575	168	212	409
CHHM8	-6215DB - (B) - Ratio	5.5	4	1037	575	168	212	406	1109	575	168	212	416
CHHM10	-6215DB - (B) - Ratio	7.5	4	1060	575	213	251	422	1155	575	213	251	439
CHHM15	-6215DB - (B) - Ratio	11	4	1120	575	213	251	436	1215	575	213	251	453
CHHM20	-6215DB - (B) - Ratio	15	4	1205	575	261	324	489	1310	575	261	324	523
CHHM25	-6215DB - (B) - Ratio	18.5	4	1300	575	328	394	564	1465	575	328	394	615
CHHM30	-6215DB - (B) - Ratio	22	4	1300	575	328	394	564	1465	575	328	394	615
CHHM2	-6225DA - (B) - Ratio	1.5	4	962	610	145	160	441	1024	610	145	160	446
CHHM3	-6225DA - (B) - Ratio	2.2	4	982	610	152	173	444	1045	610	152	173	451
CHHM4	-6225DA - (B) - Ratio	3.0	4	1005	610	168	212	454	1077	610	168	212	464
CHHM5	-6225DA - (B) - Ratio	3.7	4	1005	610	168	212	454	1077	610	168	212	464
CHHM8	-6225DA - (B) - Ratio	5.5	4	1049	610	168	212	461	1121	610	168	212	471
CHHM10	-6225DA - (B) - Ratio	7.5	4	1072	610	213	251	476	1167	610	213	251	494
CHHM15	-6225DA - (B) - Ratio	11	4	1132	610	213	251	490	1227	610	213	251	508
CHHM20	-6225DA - (B) - Ratio	15	4	1222	610	261	324	542	1327	610	261	324	576
CHHM5	-6225DB - (B) - Ratio	3.7	4	1058	610	168	212	499	1130	610	168	212	510
CHHM8	-6225DB - (B) - Ratio	5.5	4	1102	610	168	212	506	1174	610	168	212	517
CHHM10	-6225DB - (B) - Ratio	7.5	4	1125	610	213	251	521	1220	610	213	251	539
CHHM15	-6225DB - (B) - Ratio	11	4	1185	610	213	251	535	1280	610	213	251	553
CHHM20	-6225DB - (B) - Ratio	15	4	1265	610	261	324	589	1370	610	261	324	623
CHHM25	-6225DB - (B) - Ratio	18.5	4	1360	610	328	394	661	1525	610	328	394	712
CHHM30	-6225DB - (B) - Ratio	22	4	1360	610	328	394	661	1525	610	328	394	712
CHHM40	-6225DB - (B) - Ratio	30	4	1360	610	328	394	678	1525	610	328	394	729

Note: 4. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.


5. "B" after the frame size indicates models equipped with brake.

6. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

7. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

CHHM □ - 6235DA to 6245DB

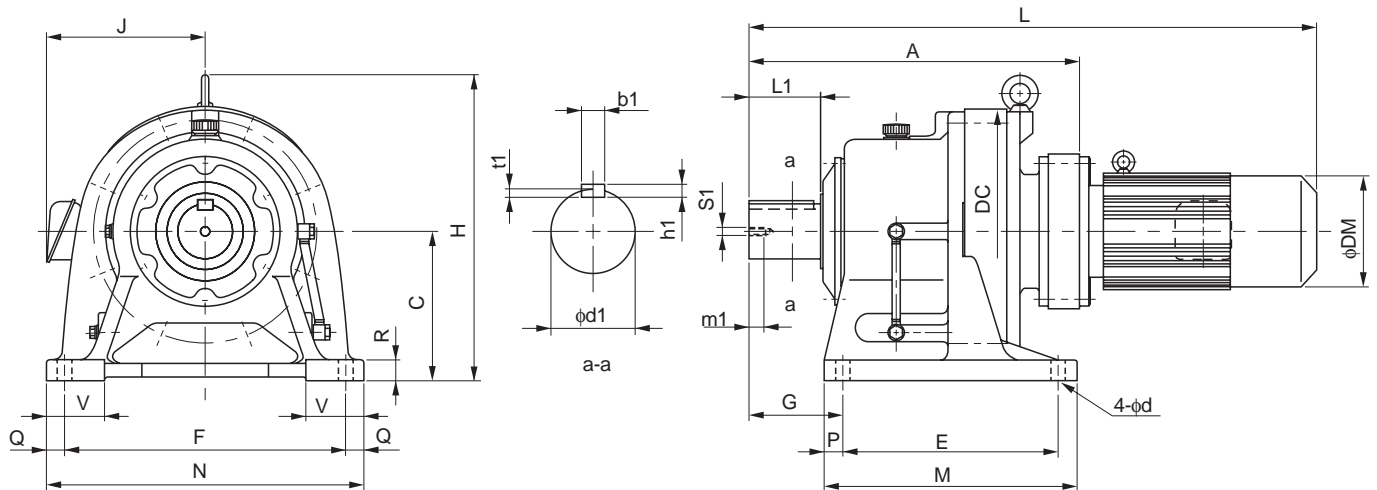


Frame size	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft Note 2, 3, 5						
														d1	L1	b1	h1	t1	S1	m1
6235DA	778	300	562	460	580	260	560	670	50	45	45	120	33	130	200	32	18	11	M24	41
6235DB	800	300	562	460	580	260	560	670	50	45	45	120	33	130	200	32	18	11	M24	41
6245DA	816	335	614	480	630	263	580	720	50	45	45	128	39	140	200	36	20	12	M24	41
6245DB	837	335	614	480	630	263	580	720	50	45	45	128	39	140	200	36	20	12	M24	41

Model	Note 4	Motor		Standard					With Brake				
		kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM3 - 6235DA - (B) - Ratio		2.2	4	1068	667	152	173	561	1131	667	152	173	567
CHHM4 - 6235DA - (B) - Ratio		3.0	4	1091	667	168	212	570	1163	667	168	212	580
CHHM5 - 6235DA - (B) - Ratio		3.7	4	1091	667	168	212	570	1163	667	168	212	580
CHHM8 - 6235DA - (B) - Ratio		5.5	4	1135	667	168	212	577	1207	667	168	212	587
CHHM10 - 6235DA - (B) - Ratio		7.5	4	1163	667	213	251	593	1258	667	213	251	610
CHHM15 - 6235DA - (B) - Ratio		11	4	1223	667	213	251	607	1318	667	213	251	624
CHHM20 - 6235DA - (B) - Ratio		15	4	1308	667	261	324	660	1413	667	261	324	624
CHHM25 - 6235DA - (B) - Ratio		18.5	4	1403	667	328	394	737	1568	667	328	394	788
CHHM30 - 6235DA - (B) - Ratio		22	4	1403	667	328	394	737	1568	667	328	394	788
CHHM15 - 6235DB - (B) - Ratio		11	4	1245	667	213	251	639	1340	667	213	251	657
CHHM20 - 6235DB - (B) - Ratio		15	4	1330	667	261	324	701	1435	667	261	324	735
CHHM25 - 6235DB - (B) - Ratio		18.5	4	1425	667	328	394	768	1590	667	328	394	819
CHHM30 - 6235DB - (B) - Ratio		22	4	1425	667	328	394	768	1590	667	328	394	819
CHHM40 - 6235DB - (B) - Ratio		30	4	1425	667	328	394	782	1590	667	328	394	825
CHHM50 - 6235DB - (B) - Ratio		37	4	1540	667	328	394	820	1755	667	328	394	917
CHHM3 - 6245DA - (B) - Ratio		2.2	4	1106	729	152	173	670	1169	729	152	173	676
CHHM4 - 6245DA - (B) - Ratio		3.0	4	1129	729	168	212	679	1201	729	168	212	689
CHHM5 - 6245DA - (B) - Ratio		3.7	4	1129	729	168	212	679	1201	729	168	212	689
CHHM8 - 6245DA - (B) - Ratio		5.5	4	1173	729	168	212	686	1245	729	168	212	696
CHHM10 - 6245DA - (B) - Ratio		7.5	4	1201	729	213	251	702	1296	729	213	251	719
CHHM15 - 6245DA - (B) - Ratio		11	4	1261	729	213	251	716	1356	729	213	251	733
CHHM20 - 6245DA - (B) - Ratio		15	4	1346	729	261	324	769	1451	729	261	324	803
CHHM25 - 6245DA - (B) - Ratio		18.5	4	1441	729	328	394	840	1606	729	328	394	891
CHHM30 - 6245DA - (B) - Ratio		22	4	1441	729	328	394	840	1606	729	328	394	891
CHHM15 - 6245DB - (B) - Ratio		11	4	1282	729	213	251	740	1377	729	213	251	758
CHHM20 - 6245DB - (B) - Ratio		15	4	1367	729	261	324	800	1472	729	261	324	834
CHHM25 - 6245DB - (B) - Ratio		18.5	4	1462	729	328	394	866	1627	729	328	394	917
CHHM30 - 6245DB - (B) - Ratio		22	4	1462	729	328	394	866	1627	729	328	394	917
CHHM40 - 6245DB - (B) - Ratio		30	4	1462	729	328	394	883	1627	729	328	394	926
CHHM50 - 6245DB - (B) - Ratio		37	4	1577	729	328	394	935	1792	729	328	394	1032

Note: 1. □ indicates motor capacity.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

CHHM - 6255DA to 6275DA

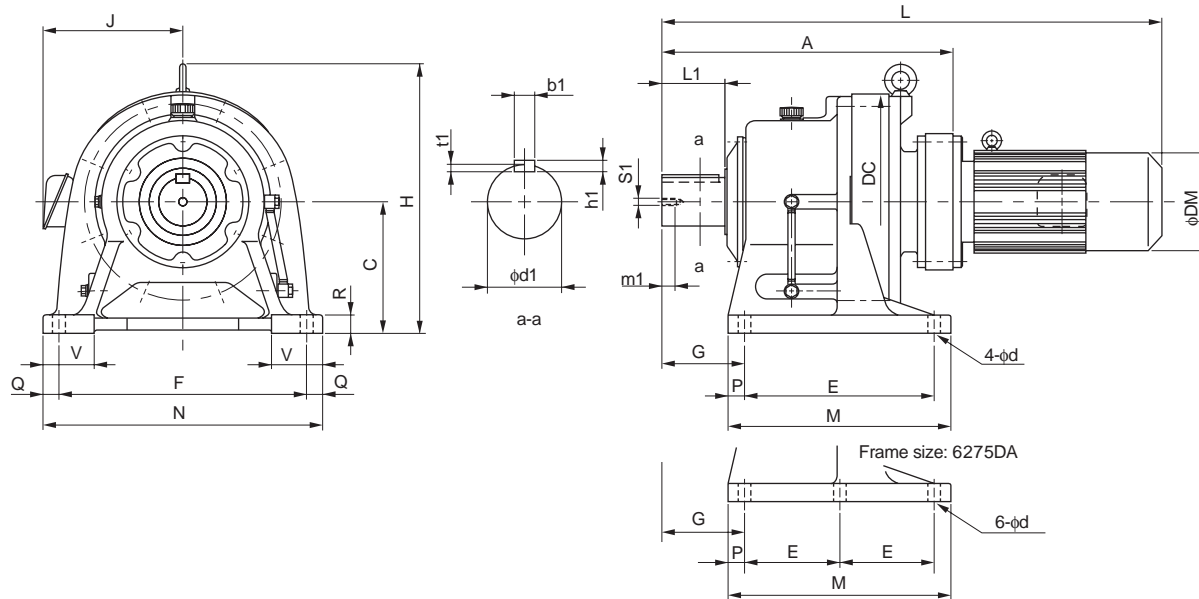

GEARMOTORS
Dimension Tables
CHHM


Frame size	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft Note 2, 3, 5						
														d1	L1	b1	h1	t1	S1	m1
6255DA	956	375	670	520	670	320	630	780	55	55	50	140	39	160	240	40	22	13	M30	49
6255DB	978	375	670	520	670	320	630	780	55	55	50	140	39	160	240	40	22	13	M30	49
6265DA	1088	400	736	590	770	390	700	880	55	55	55	160	45	170	300	40	22	13	M30	49
6275DA	1349	540	950	420	1050	485	1040	1160	100	55	60	200	45	180	330	45	25	15	M30	52

Model Note 4	Motor		Standard							With Brake				
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)		
CHHM5 - 6255DA - (B) - Ratio	3.7	4	1284	815	168	212	1031	1356	815	168	212	1041		
CHHM8 - 6255DA - (B) - Ratio	5.5	4	1328	815	168	212	1041	1400	815	168	212	1051		
CHHM10 - 6255DA - (B) - Ratio	7.5	4	1346	815	213	251	1056	1441	815	213	251	1071		
CHHM15 - 6255DA - (B) - Ratio	11	4	1406	815	213	251	1071	1501	815	213	251	1086		
CHHM20 - 6255DA - (B) - Ratio	15	4	1486	815	261	324	1121	1591	815	261	324	1157		
CHHM25 - 6255DA - (B) - Ratio	18.5	4	1581	815	328	394	1195	1746	815	328	394	1246		
CHHM30 - 6255DA - (B) - Ratio	22	4	1581	815	328	394	1195	1746	815	328	394	1246		
CHHM40 - 6255DA - (B) - Ratio	30	4	1581	815	328	394	1215	1746	815	328	394	1258		
CHHM15 - 6255DB - (B) - Ratio	11	4	1443	815	213	251	1144	1538	815	213	251	1159		
CHHM20 - 6255DB - (B) - Ratio	15	4	1508	815	261	324	1194	1613	815	261	324	1228		
CHHM25 - 6255DB - (B) - Ratio	18.5	4	1603	815	328	394	1270	1768	815	328	394	1321		
CHHM30 - 6255DB - (B) - Ratio	22	4	1603	815	328	394	1270	1768	815	328	394	1321		
CHHM40 - 6255DB - (B) - Ratio	30	4	1603	815	328	394	1285	1768	815	328	394	1328		
CHHM50 - 6255DB - (B) - Ratio	37	4	1718	815	328	394	1323	1928	815	328	394	1420		
CHHM60 - 6255DB - (B) - Ratio	45	4	1718	815	328	394	1323	1928	815	328	394	1420		
CHHM8 - 6265DA - (B) - Ratio	5.5	4	1480	874	168	212	1366	1552	874	168	212	1376		
CHHM10 - 6265DA - (B) - Ratio	7.5	4	1493	874	213	251	1381	1588	874	213	251	1401		
CHHM15 - 6265DA - (B) - Ratio	11	4	1553	874	213	251	1396	1648	874	213	251	1411		
CHHM20 - 6265DA - (B) - Ratio	15	4	1618	874	261	324	1446	1723	874	261	324	1482		
CHHM25 - 6265DA - (B) - Ratio	18.5	4	1713	874	328	394	1525	1878	874	328	394	1570		
CHHM30 - 6265DA - (B) - Ratio	22	4	1713	874	328	394	1525	1878	874	328	394	1570		
CHHM40 - 6265DA - (B) - Ratio	30	4	1713	874	328	394	1540	1878	874	328	394	1583		
CHHM50 - 6265DA - (B) - Ratio	37	4	1828	874	328	394	1575	2043	874	328	394	1672		
CHHM60 - 6265DA - (B) - Ratio	45	4	1828	874	328	394	1575	2043	874	328	394	1672		
CHHM10 - 6275DA - (B) - Ratio	7.5	4	1754	1161	213	251	2516	1849	1161	213	251	2536		
CHHM15 - 6275DA - (B) - Ratio	11	4	1814	1161	213	251	2531	1909	1161	213	251	2546		
CHHM20 - 6275DA - (B) - Ratio	15	4	1879	1161	261	324	2581	1984	1161	261	324	2617		
CHHM25 - 6275DA - (B) - Ratio	18.5	4	1974	1161	328	394	2660	2139	1161	328	394	2705		
CHHM30 - 6275DA - (B) - Ratio	22	4	1974	1161	328	394	2660	2139	1161	328	394	2705		
CHHM40 - 6275DA - (B) - Ratio	30	4	1974	1161	328	394	2670	2139	1161	328	394	2718		
CHHM50 - 6275DA - (B) - Ratio	37	4	2089	1161	328	394	2715	2304	1161	328	394	2810		
CHHM60 - 6275DA - (B) - Ratio	45	4	2089	1161	328	394	2715	2304	1161	328	394	2810		

Note: 4. "B" after the frame size indicates models equipped with brake.
 5. Dimension of shaft end: Refer to pages F-28 to F-29 for details.
 6. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Universal Direction, Flange Mount)

CNFM^{Note 1} - 606□ to 609□

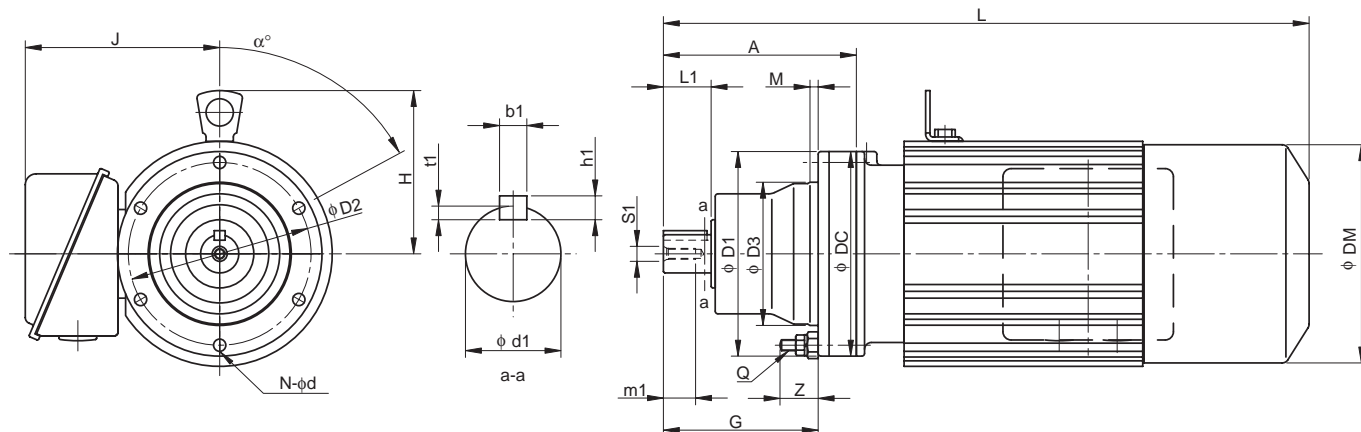


Frame size <small>Note 5</small>	A	G	D1	D2	D3	DC	Q	Z	M	N	d	α°	Output Shaft <small>Note 2, 3, 7</small>						
													d1	L1	b1	h1	t1	S1	m1
606□	92	68	110	98	80	110	M6	21	4	6	6.6	60	14	25	5	5	3	M5	16
607□	98	74	110	98	80	110	M6	21	4	6	6.6	60	18	30	6	6	3.5	M6	16
608□	129	91	134	118	95	134	M8	27	5	8	9	22.5	22	35	6	6	3.5	M6	16
609□	142	114	150	134	105	150	M8	28	6	8	9	22.5	28	35	8	7	4	M8	20

Model <small>Note 5, 6</small>	Motor		Standard					With Brake				
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CNFM01 - 606□ - (B) - Ratio	0.1	4	254	-	130	119	6.5	261	-	130	124	8
CNFM02 - 606□ - (B) - Ratio	0.2	4	272	-	130	124	7.5	300	-	130	124	9
CNFM03 - 606□ - (B) - Ratio	0.25	4	272	-	130	124	7.5	300	-	130	124	9
CNFM01 - 607□ - (B) - Ratio	0.1	4	260	-	130	119	7.5	267	-	130	124	8.5
CNFM02 - 607□ - (B) - Ratio	0.2	4	278	-	130	124	8.5	306	-	130	124	9.5
CNFM03 - 607□ - (B) - Ratio	0.25	4	278	-	130	124	8.5	306	-	130	124	9.5
CNFM05 - 607□ - (B) - Ratio	0.4	4	294	-	130	124	9.5	326	-	130	124	10.5
CNFM01 - 608□ - (B) - Ratio	0.1	4	286	-	130	119	10	293	-	130	124	11
CNFM02 - 608□ - (B) - Ratio	0.2	4	304	-	130	124	11	332	-	130	124	12
CNFM03 - 608□ - (B) - Ratio	0.25	4	304	-	130	124	11	332	-	130	124	12
CNFM05 - 608□ - (B) - Ratio	0.4	4	320	-	130	124	13	352	-	130	124	14
CNFM08 - 608□ - (B) - Ratio	0.55	4	361	113	140	148	17	404	113	140	148	18
CNFM1 - 608□ - (B) - Ratio	0.75	4	361	113	140	148	17	404	113	140	148	18
CNFM01 - 609□ - (B) - Ratio	0.1	4	304	-	130	119	11	311	-	130	124	13
CNFM02 - 609□ - (B) - Ratio	0.2	4	322	-	130	124	12	350	-	130	124	14
CNFM03 - 609□ - (B) - Ratio	0.25	4	322	-	130	124	12	350	-	130	124	14
CNFM05 - 609□ - (B) - Ratio	0.4	4	338	-	130	124	13	370	-	130	124	15
CNFM08 - 609□ - (B) - Ratio	0.55	4	379	113	140	148	17	422	113	140	148	19
CNFM1 - 609□ - (B) - Ratio	0.75	4	379	113	140	148	17	422	113	140	148	19
CNFM1H - 609□ - (B) - Ratio	1.1	4	412	120	145	160	21	474	120	145	160	25
CNFM2 - 609□ - (B) - Ratio	1.5	4	412	120	145	160	21	474	120	145	160	25

- Note: 1. □ indicates motor capacity.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."
 4. Pilot diameter ($\phi D3$): Dimension tolerance conforms to JIS B 0401-1976 "g6."

Dimension Tables Gearmotors (Universal Direction, Flange Mount)

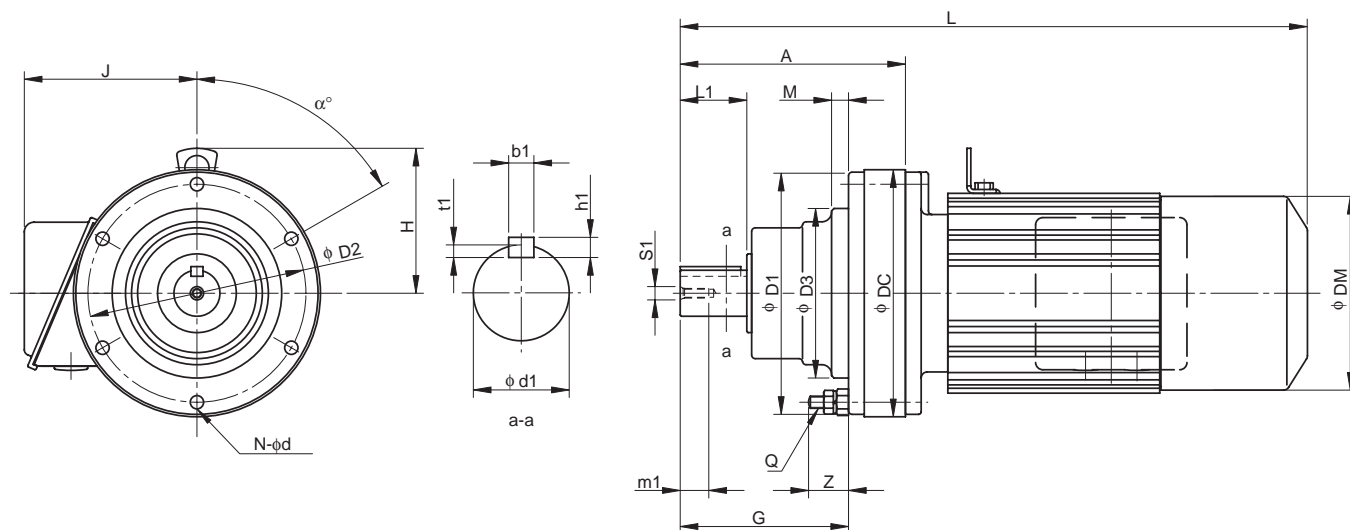CNFM^{Note 1} - 610□ to 612□

GEARMOTORS

Dimension Tables
CNFM

Frame size <small>Note 5</small>	A	G	D1	D2	D3	DC	Q	Z	M	N	d	α°	Output Shaft <small>Note 2, 3, 7</small>						
													d1	L1	b1	h1	t1	S1	m1
610□	156	114	150	134	105	150	M8	28	6	8	9	22.5	28	35	8	7	4	M8	20
611□	170	118	162	146	115	162	M8	28	6	8	9	22.5	32	45	10	8	5	M8	20
612□	186	139	200	180	140	204	M10	33	14	6	11	60	38	55	10	8	5	M8	20

Model <small>Note 5, 6</small>	Motor		Standard					With Brake				
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CNFM02 - 610□ - (B) - Ratio	0.2	4	336	-	130	124	14	364	-	130	124	16
CNFM03 - 610□ - (B) - Ratio	0.25	4	336	-	130	124	14	364	-	130	124	16
CNFM05 - 610□ - (B) - Ratio	0.4	4	352	-	130	124	15	384	-	130	124	17
CNFM08 - 610□ - (B) - Ratio	0.55	4	393	113	140	148	19	436	113	140	148	22
CNFM1 - 610□ - (B) - Ratio	0.75	4	393	113	140	148	19	436	113	140	148	22
CNFM1H - 610□ - (B) - Ratio	1.1	4	426	120	145	160	23	488	120	145	160	28
CNFM2 - 610□ - (B) - Ratio	1.5	4	426	120	145	160	23	488	120	145	160	28
CNFM3 - 610□ - (B) - Ratio	2.2	4	446	126	152	173	27	509	126	152	173	33
CNFM05 - 611□ - (B) - Ratio	0.4	4	363	-	130	124	17	394	-	130	124	18
CNFM08 - 611□ - (B) - Ratio	0.55	4	403	113	140	148	20	452	113	140	148	23
CNFM1 - 611□ - (B) - Ratio	0.75	4	403	113	140	148	20	452	113	140	148	23
CNFM1H - 611□ - (B) - Ratio	1.1	4	436	120	145	160	23	493	120	145	160	28
CNFM2 - 611□ - (B) - Ratio	1.5	4	436	120	145	160	23	493	120	145	160	28
CNFM3 - 611□ - (B) - Ratio	2.2	4	456	126	152	173	27	519	126	152	173	33
CNFM4 - 611□ - (B) - Ratio	3.0	4	491	146	168	212	37	563	146	168	212	47
CNFM5 - 611□ - (B) - Ratio	3.7	4	491	146	168	212	37	563	146	168	212	47
CNFM05 - 612□ - (B) - Ratio	0.4	4	387	113	130	124	26	419	113	130	124	28
CNFM08 - 612□ - (B) - Ratio	0.55	4	423	113	140	148	28	466	113	140	148	31
CNFM1 - 612□ - (B) - Ratio	0.75	4	423	113	140	148	28	466	113	140	148	31
CNFM1H - 612□ - (B) - Ratio	1.1	4	456	120	145	160	32	518	120	145	160	37
CNFM2 - 612□ - (B) - Ratio	1.5	4	456	120	145	160	32	518	120	145	160	37
CNFM3 - 612□ - (B) - Ratio	2.2	4	476	126	152	173	36	539	126	152	173	43
CNFM4 - 612□ - (B) - Ratio	3.0	4	499	146	168	212	46	571	146	168	212	56
CNFM5 - 612□ - (B) - Ratio	3.7	4	499	146	168	212	46	571	146	168	212	56
CNFM8 - 612□ - (B) - Ratio	5.5	4	543	146	168	212	53	615	146	168	212	63

Note: 5. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.


6. "B" after the frame size indicates models equipped with brake.

7. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

8. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Horizontal Direction, Flange Mount)

CHFM^{Note 1} - 613□ to 614□

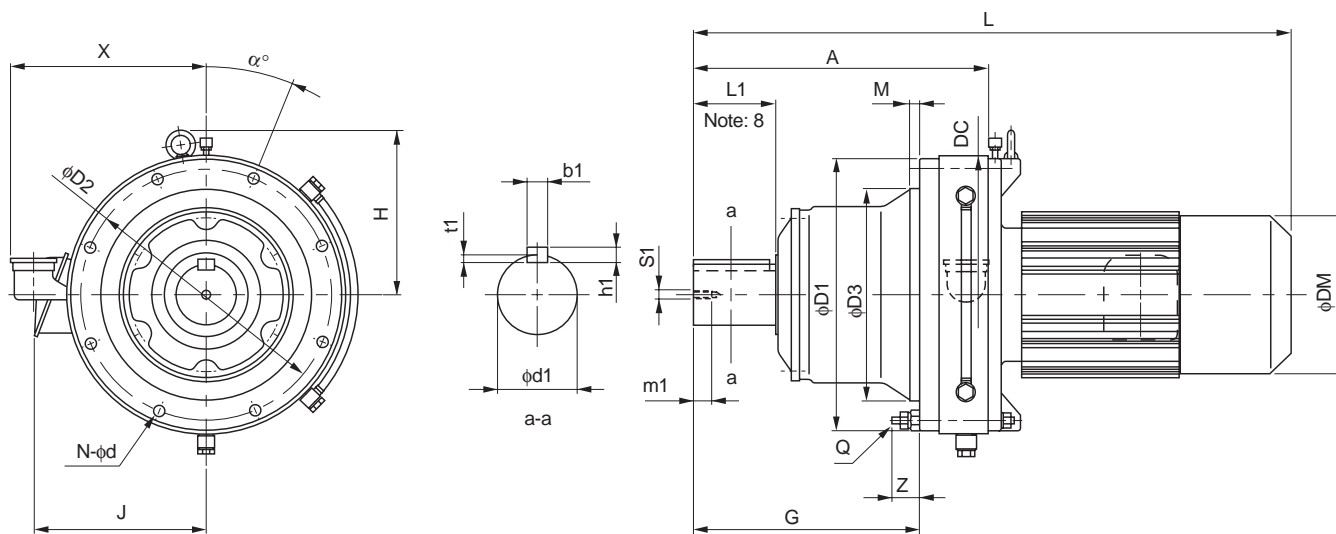


Frame size <small>Note 5</small>	A	G	D1	D2	D3	DC	Q	Z	M	N	d	α°	X	Output Shaft <small>Note 2, 3, 7</small>						
														d1	L1	b1	h1	t1	S1	m1
613□	240	178	226	205	165	230	M10	31	16	6	11	60	208	50	70	14	9	5.5	M10	18
614□	260	198	226	205	165	230	M10	31	16	6	11	60	208	50	90	14	9	5.5	M10	18

Model <small>Note 5, 6</small>	Motor		Standard					With Brake						
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)		
CHFM08 - 613□	- (B)	- Ratio	0.55	4	477	111	140	148	44	520	111	140	148	46
CHFM1 - 613□	- (B)	- Ratio	0.75	4	477	111	140	148	44	520	111	140	148	47
CHFM1H - 613□	- (B)	- Ratio	1.1	4	510	118	145	160	48	572	118	145	160	53
CHFM2 - 613□	- (B)	- Ratio	1.5	4	510	118	145	160	48	572	118	145	160	53
CHFM3 - 613□	- (B)	- Ratio	2.2	4	530	124	152	173	51	593	124	152	173	58
CHFM4 - 613□	- (B)	- Ratio	3.0	4	553	146	168	212	61	625	146	168	212	71
CHFM5 - 613□	- (B)	- Ratio	3.7	4	553	146	168	212	61	625	146	168	212	71
CHFM8 - 613□	- (B)	- Ratio	5.5	4	597	146	168	212	68	669	146	168	212	78
CHFM10 - 613□	- (B)	- Ratio	7.5	4	620	173	213	251	83	715	173	213	251	101
CHFM15 - 613□	- (B)	- Ratio	11	4	680	173	213	251	97	775	173	213	251	115
CHFM1 - 614□	- (B)	- Ratio	0.75	4	497	118	140	148	45	540	118	140	148	48
CHFM1H - 614□	- (B)	- Ratio	1.1	4	530	118	145	160	49	592	118	145	160	54
CHFM2 - 614□	- (B)	- Ratio	1.5	4	530	118	145	160	49	592	118	145	160	54
CHFM3 - 614□	- (B)	- Ratio	2.2	4	550	124	152	173	52	613	124	152	173	59
CHFM4 - 614□	- (B)	- Ratio	3.0	4	573	146	168	212	62	645	146	168	212	72
CHFM5 - 614□	- (B)	- Ratio	3.7	4	573	146	168	212	62	645	146	168	212	72
CHFM8 - 614□	- (B)	- Ratio	5.5	4	617	146	168	212	69	689	146	168	212	79
CHFM10 - 614□	- (B)	- Ratio	7.5	4	640	173	213	251	84	735	173	213	251	102
CHFM15 - 614□	- (B)	- Ratio	11	4	700	173	213	251	98	795	173	213	251	116
CHFM20 - 614□	- (B)	- Ratio	15	4	790	208	261	324	150	895	208	261	324	184

- Note: 1. □ indicates motor capacity.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."
 4. Pilot diameter (φD3): Dimension tolerance conforms to JIS B 0401-1976 "g6."

Dimension Tables Gearmotors (Horizontal Direction, Flange Mount)

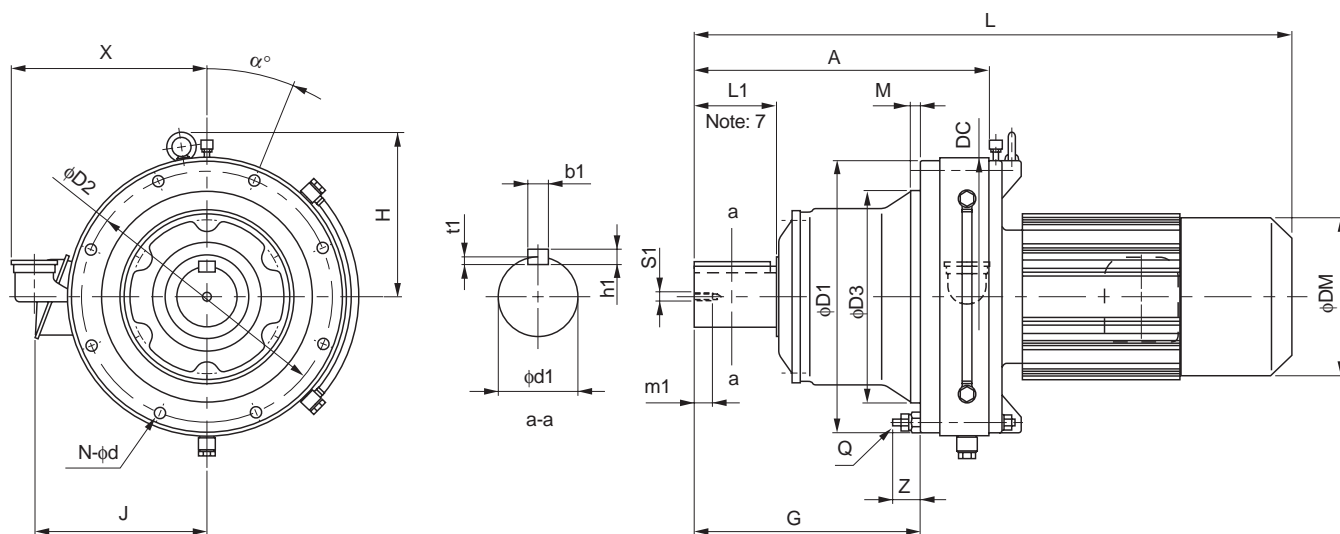CHFM^{Note 1} - 616□ to 617□

GEARMOTORS

Dimension Tables
CHFM

Frame size <small>Note 5</small>	A	G	D1	D2	D3	DC	Q	Z	M	N	d	α°	X	Output Shaft <small>Note 2, 3, 7</small>						
														d1	L1	b1	h1	t1	S1	m1
616□	308	222	296	270	200	300	M12	35	10	6	14	30	228	60	90	18	11	7	M10	18
617□	352	262	330	300	250	340	M12	41	12	8	14	22.5	243	70	90	20	12	7.5	M12	24

Model <small>Note 5, 6</small>	Motor		Standard					With Brake					
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)	
CHFM1H - 616□	- (B) - Ratio	1.1	4	583	118	145	160	76	645	118	145	160	81
CHFM2 - 616□	- (B) - Ratio	1.5	4	583	118	145	160	76	645	118	145	160	81
CHFM3 - 616□	- (B) - Ratio	2.2	4	598	124	152	173	79	661	124	152	173	85
CHFM4 - 616□	- (B) - Ratio	3.0	4	621	146	168	212	88	693	146	168	212	98
CHFM5 - 616□	- (B) - Ratio	3.7	4	621	146	168	212	88	693	146	168	212	98
CHFM8 - 616□	- (B) - Ratio	5.5	4	665	146	168	212	95	737	146	168	212	105
CHFM10 - 616□	- (B) - Ratio	7.5	4	693	173	213	251	111	788	173	213	251	128
CHFM15 - 616□	- (B) - Ratio	11	4	753	173	213	251	125	848	173	213	251	142
CHFM20 - 616□	- (B) - Ratio	15	4	838	208	261	324	178	943	208	261	324	212
CHFM25 - 616□	- (B) - Ratio	18.5	4	933	208	328	394	254	1098	208	328	394	305
CHFM30 - 616□	- (B) - Ratio	22	4	933	208	328	394	254	1098	208	328	394	305
CHFM4 - 617□	- (B) - Ratio	3.0	4	680	203	168	212	119	752	203	168	212	129
CHFM5 - 617□	- (B) - Ratio	3.7	4	680	203	168	212	119	752	203	168	212	129
CHFM8 - 617□	- (B) - Ratio	5.5	4	724	203	168	212	126	796	203	168	212	136
CHFM10 - 617□	- (B) - Ratio	7.5	4	742	203	213	251	141	837	203	213	251	159
CHFM15 - 617□	- (B) - Ratio	11	4	802	203	213	251	155	897	203	213	251	173
CHFM20 - 617□	- (B) - Ratio	15	4	882	213	261	324	209	987	213	261	324	243
CHFM25 - 617□	- (B) - Ratio	18.5	4	977	227	328	394	281	1142	227	328	394	332
CHFM30 - 617□	- (B) - Ratio	22	4	977	227	328	394	281	1142	227	328	394	332
CHFM40 - 617□	- (B) - Ratio	30	4	977	228	328	394	298	1142	228	328	394	341


Note: 5. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.

6. "B" after the frame size indicates models equipped with brake.

7. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

8. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Universal Direction, V-Flange Mount)

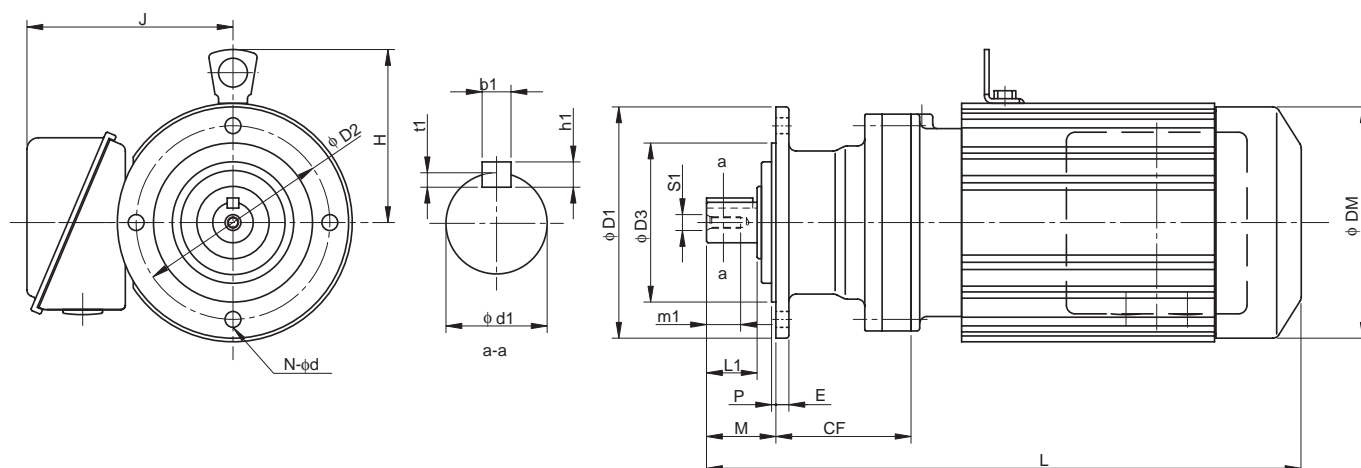CNVM^{Note 1} - 606□ to 609□

Frame size <small>Note 5</small>	CF	D1	D2	D3	M	E	P	N	d	H	Output Shaft <small>Note 2, 3, 7</small>						
											d1	L1	b1	h1	t1	S1	m1
606□	58	120	102	80	34	8	3	6	9	-	14	25	5	5	3	M5	16
607□	56	160	134	110	42	9	3	4	11	-	18	30	6	6	3.5	M6	16
608□	81	160	134	110	48	9	3	4	11	-	22	35	6	6	3.5	M6	16
609□	94	160	134	110	48	9	3	4	11	107	28	35	8	7	4	M8	20

Model <small>Note 5, 6</small>	Motor		Standard				With Brake			
	kW	P	L	J	DM	W(kg)	L	J	DM	W(kg)
CNVM01 - 606□ - (B) - Ratio	0.1	4	254	130	119	7	261	130	124	9
CNVM02 - 606□ - (B) - Ratio	0.2	4	272	130	124	8	300	130	124	10
CNVM03 - 606□ - (B) - Ratio	0.25	4	272	130	124	9	300	130	124	10
CNVM01 - 607□ - (B) - Ratio	0.1	4	260	130	119	9	267	130	124	10
CNVM02 - 607□ - (B) - Ratio	0.2	4	278	130	124	10	306	130	124	11
CNVM03 - 607□ - (B) - Ratio	0.25	4	278	130	124	10	306	130	124	11
CNVM05 - 607□ - (B) - Ratio	0.4	4	294	130	124	11	326	130	124	12
CNVM01 - 608□ - (B) - Ratio	0.1	4	286	130	119	12	293	130	124	13
CNVM02 - 608□ - (B) - Ratio	0.2	4	304	130	124	13	332	130	124	14
CNVM03 - 608□ - (B) - Ratio	0.25	4	304	130	124	13	332	130	124	14
CNVM05 - 608□ - (B) - Ratio	0.4	4	320	130	124	15	352	130	124	16
CNVM08 - 608□ - (B) - Ratio	0.55	4	361	140	148	19	404	140	148	20
CNVM1 - 608□ - (B) - Ratio	0.75	4	361	140	148	19	404	140	148	20
CNVM01 - 609□ - (B) - Ratio	0.1	4	304	130	119	13	311	130	124	15
CNVM02 - 609□ - (B) - Ratio	0.2	4	322	130	124	14	350	130	124	16
CNVM03 - 609□ - (B) - Ratio	0.25	4	322	130	124	14	350	130	124	16
CNVM05 - 609□ - (B) - Ratio	0.4	4	338	130	124	15	370	130	124	17
CNVM08 - 609□ - (B) - Ratio	0.55	4	379	140	148	19	422	140	148	22
CNVM1 - 609□ - (B) - Ratio	0.75	4	379	140	148	19	422	140	148	22
CNVM1H - 609□ - (B) - Ratio	1.1	4	412	145	160	22	474	145	160	27
CNVM2 - 609□ - (B) - Ratio	1.5	4	412	145	160	22	474	145	160	27

Note: 5. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.


6. "B" after the frame size indicates models equipped with brake.

7. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

8. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Universal Direction, V-Flange Mount)

CNVM^{Note 1} - 610□ to 612□

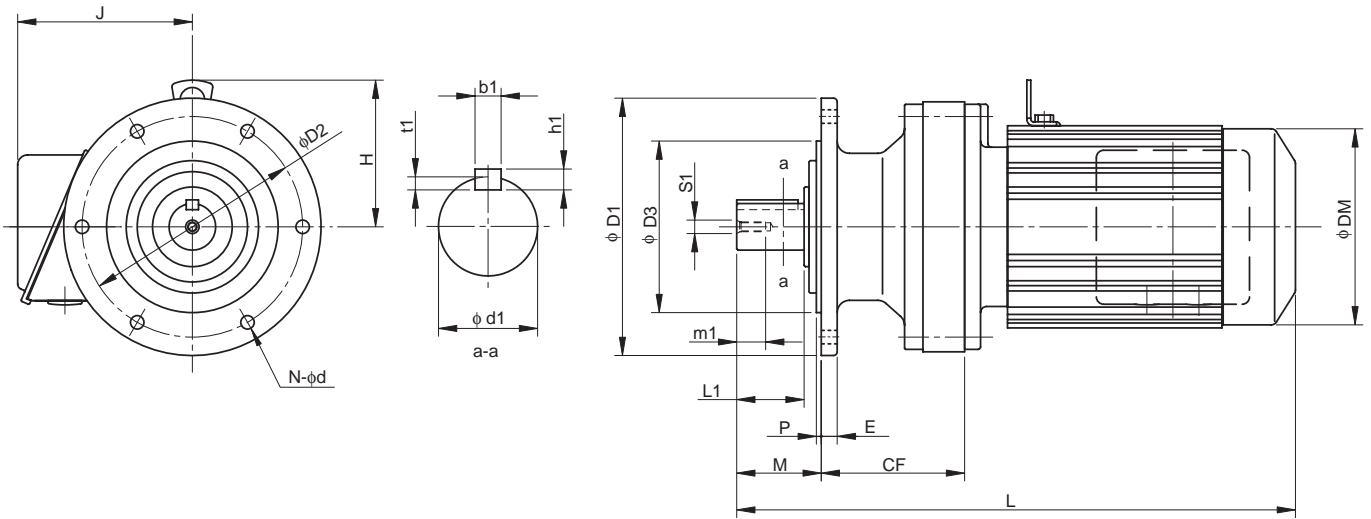


GEARMOTORS
Dimension Tables
CNVM

Frame size <small>Note 5</small>	CF	D1	D2	D3	M	E	P	N	d	H	Output Shaft <small>Note 2, 3, 7</small>						
											d1	L1	b1	h1	t1	S1	m1
610□	108	160	134	110	48	9	3	4	11	107	28	35	8	7	4	M8	20
611□	112	210	180	140	58	11	4	6	11	116	32	45	10	8	5	M8	20
612□	117	210	180	140	69	13	4	6	11	137	38	55	10	8	5	M8	20

Model <small>Note 5, 6</small>	Motor		Standard					With Brake			
	kW	P	L	J	DM	W(kg)	L	J	DM	W(kg)	
CNVM02 - 610□ - (B) - Ratio	0.2	4	336	130	124	16	364	130	124	18	
CNVM03 - 610□ - (B) - Ratio	0.25	4	336	130	124	16	364	130	124	18	
CNVM05 - 610□ - (B) - Ratio	0.4	4	352	130	124	17	384	130	124	19	
CNVM08 - 610□ - (B) - Ratio	0.55	4	393	140	148	21	436	140	148	24	
CNVM1 - 610□ - (B) - Ratio	0.75	4	393	140	148	21	436	140	148	24	
CNVM1H - 610□ - (B) - Ratio	1.1	4	426	145	160	25	488	145	160	30	
CNVM2 - 610□ - (B) - Ratio	1.5	4	426	145	160	25	488	145	160	30	
CNVM3 - 610□ - (B) - Ratio	2.2	4	446	152	173	29	509	152	173	35	
CNVM05 - 611□ - (B) - Ratio	0.4	4	363	130	124	19	394	130	124	21	
CNVM08 - 611□ - (B) - Ratio	0.55	4	403	140	148	22	452	140	148	25	
CNVM1 - 611□ - (B) - Ratio	0.75	4	403	140	148	22	452	140	148	25	
CNVM1H - 611□ - (B) - Ratio	1.1	4	436	145	160	25	493	145	160	30	
CNVM2 - 611□ - (B) - Ratio	1.5	4	436	145	160	25	493	145	160	30	
CNVM3 - 611□ - (B) - Ratio	2.2	4	456	152	173	29	519	152	173	35	
CNVM4 - 611□ - (B) - Ratio	3.0	4	491	168	212	39	563	168	212	49	
CNVM5 - 611□ - (B) - Ratio	3.7	4	491	168	212	39	563	168	212	49	
CNVM05 - 612□ - (B) - Ratio	0.4	4	387	130	124	30	419	130	124	31	
CNVM08 - 612□ - (B) - Ratio	0.55	4	423	140	148	31	466	140	148	34	
CNVM1 - 612□ - (B) - Ratio	0.75	4	423	140	148	31	466	140	148	34	
CNVM1H - 612□ - (B) - Ratio	1.1	4	456	145	160	35	518	145	160	40	
CNVM2 - 612□ - (B) - Ratio	1.5	4	456	145	160	35	518	145	160	40	
CNVM3 - 612□ - (B) - Ratio	2.2	4	476	152	173	39	539	152	173	46	
CNVM4 - 612□ - (B) - Ratio	3.0	4	499	168	212	49	571	168	212	59	
CNVM5 - 612□ - (B) - Ratio	3.7	4	499	168	212	49	571	168	212	59	
CNVM8 - 612□ - (B) - Ratio	5.5	4	543	168	212	56	615	168	212	66	

- Note: 1. □ indicates motor capacity.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."
 4. Pilot diameter ($\phi D3$): Dimension tolerance conforms to JIS B 0401-1976 "f8."

Dimension Tables Gearmotors (Vertical, Slow Speed Shaft Down, V-Flange Mount)

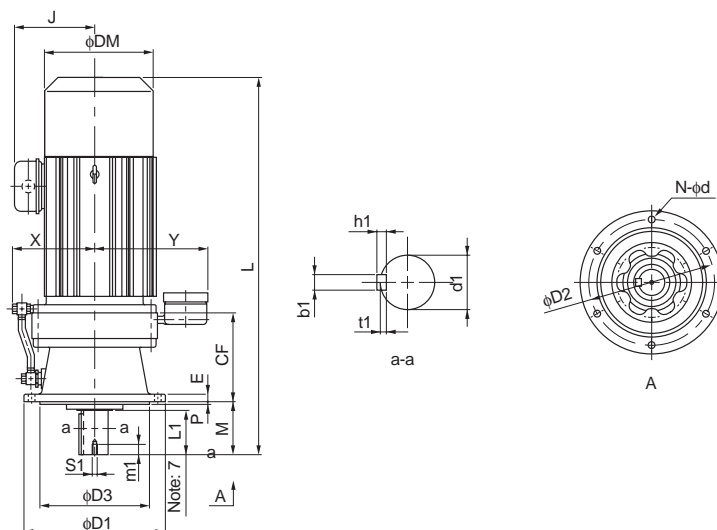CVVM^{Note 1} - 613□ to 614□

Frame size <small>Note 5</small>	CF	D1	D2	D3	M	E	P	N	d	X	Y	Output Shaft <small>Note 2, 3, 7</small>						
												d1	L1	b1	h1	t1	S1	m1
613□	164	260	230	200	76	15	4	6	11	152	233	50	61	14	9	5.5	M10	18
614□	164	260	230	200	96	15	4	6	11	152	233	50	81	14	9	5.5	M10	18

Model <small>Note 5, 6</small>	Motor		Standard					With Brake			
	kW	P	L	J	DM	W(kg)	L	J	DM	W(kg)	
CVVM08 - 613□	- (B) - Ratio	0.55	4	477	140	148	51	520	140	148	54
CVVM1 - 613□	- (B) - Ratio	0.75	4	477	140	148	51	520	140	148	54
CVVM1H - 613□	- (B) - Ratio	1.1	4	510	145	160	55	572	145	160	60
CVVM2 - 613□	- (B) - Ratio	1.5	4	510	145	160	55	572	145	160	60
CVVM3 - 613□	- (B) - Ratio	2.2	4	530	152	173	58	593	152	173	65
CVVM4 - 613□	- (B) - Ratio	3.0	4	553	168	212	68	625	168	212	78
CVVM5 - 613□	- (B) - Ratio	3.7	4	553	168	212	68	625	168	212	78
CVVM8 - 613□	- (B) - Ratio	5.5	4	597	168	212	75	669	168	212	85
CVVM10 - 613□	- (B) - Ratio	7.5	4	620	213	251	90	715	213	251	108
CVVM15 - 613□	- (B) - Ratio	11	4	680	213	251	104	775	213	251	121
CVVM1 - 614□	- (B) - Ratio	0.75	4	497	140	148	52	540	140	148	55
CVVM1H - 614□	- (B) - Ratio	1.1	4	530	145	160	56	592	145	160	61
CVVM2 - 614□	- (B) - Ratio	1.5	4	530	145	160	56	592	145	160	61
CVVM3 - 614□	- (B) - Ratio	2.2	4	550	152	173	59	613	152	173	66
CVVM4 - 614□	- (B) - Ratio	3.0	4	573	168	212	69	645	168	212	79
CVVM5 - 614□	- (B) - Ratio	3.7	4	573	168	212	69	645	168	212	79
CVVM8 - 614□	- (B) - Ratio	5.5	4	617	168	212	76	689	168	212	86
CVVM10 - 614□	- (B) - Ratio	7.5	4	640	213	251	91	735	213	251	109
CVVM15 - 614□	- (B) - Ratio	11	4	700	213	251	104	795	213	251	122
CVVM20 - 614□	- (B) - Ratio	15	4	790	261	324	156	895	261	324	190

Note: 5. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.


6. "B" after the frame size indicates models equipped with brake.

7. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

8. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Vertical, Slow Speed Shaft Down, V-Flange Mount)

CVVM^{Note 1} - 616□ to 617□

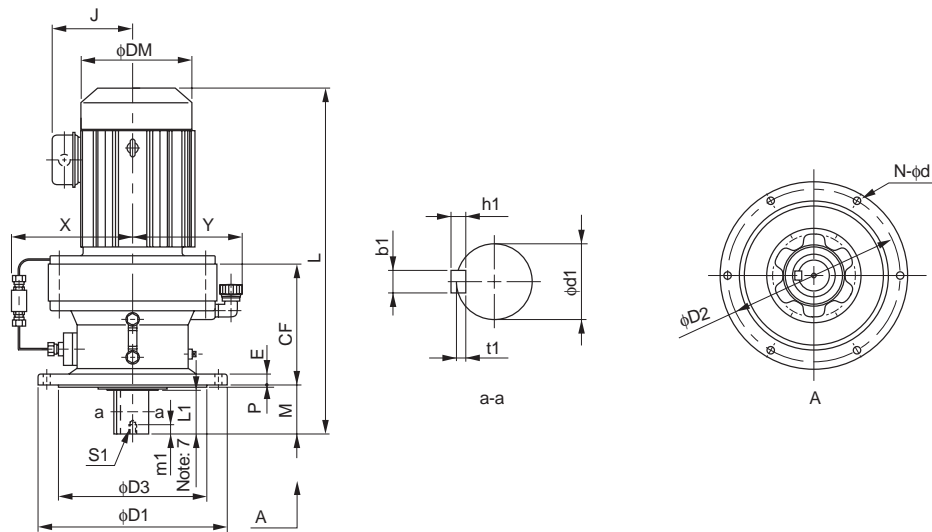


Frame size <small>Note 5</small>	CF	D1	D2	D3	M	E	P	N	d	X	Y	Output Shaft <small>Note 2, 3, 7</small>						
												d1	L1	b1	h1	t1	S1	m1
616□	219	340	310	270	89	20	4	6	11	217	200	60	80	18	11	7	M10	18
617□	258	400	360	316	94	22	5	8	14	222	225	70	84	20	12	7.5	M12	24

Model <small>Note 5, 6</small>	Motor		Standard					With Brake			
	kW	P	L	J	DM	W(kg)	L	J	DM	W(kg)	
CVVM1H - 616□	- (B) - Ratio	1.1 4	583	145	160	89	645	145	160	94	
CVVM2 - 616□	- (B) - Ratio	1.5 4	583	145	160	89	645	145	160	94	
CVVM3 - 616□	- (B) - Ratio	2.2 4	598	152	173	92	661	152	173	98	
CVVM4 - 616□	- (B) - Ratio	3.0 4	621	168	212	101	693	168	212	111	
CVVM5 - 616□	- (B) - Ratio	3.7 4	621	168	212	101	693	168	212	111	
CVVM8 - 616□	- (B) - Ratio	5.5 4	665	168	212	108	737	168	212	118	
CVVM10 - 616□	- (B) - Ratio	7.5 4	693	213	251	124	788	213	251	141	
CVVM15 - 616□	- (B) - Ratio	11 4	753	213	251	138	848	213	251	155	
CVVM20 - 616□	- (B) - Ratio	15 4	838	261	324	191	943	261	324	225	
CVVM25 - 616□	- (B) - Ratio	18.5 4	933	328	394	267	1098	328	394	318	
CVVM30 - 616□	- (B) - Ratio	22 4	933	328	394	267	1098	328	394	318	
CVVM4 - 617□	- (B) - Ratio	3.0 4	680	168	212	144	752	168	212	154	
CVVM5 - 617□	- (B) - Ratio	3.7 4	680	168	212	144	752	168	212	154	
CVVM8 - 617□	- (B) - Ratio	5.5 4	724	168	212	151	796	168	212	161	
CVVM10 - 617□	- (B) - Ratio	7.5 4	742	213	251	166	837	213	251	184	
CVVM15 - 617□	- (B) - Ratio	11 4	802	213	251	180	897	213	251	198	
CVVM20 - 617□	- (B) - Ratio	15 4	882	261	324	234	987	261	324	268	
CVVM25 - 617□	- (B) - Ratio	18.5 4	977	328	394	306	1142	328	324	357	
CVVM30 - 617□	- (B) - Ratio	22 4	977	328	394	306	1142	328	324	357	
CVVM40 - 617□	- (B) - Ratio	30 4	977	328	394	323	1142	328	324	366	

- Note: 1. □ indicates motor capacity.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."
 4. Pilot diameter (φD3): Dimension tolerance conforms to JIS B 0401-1976 "f8."

Dimension Tables Gearmotors (Vertical, Slow Speed Shaft Down, V-Flange Mount)

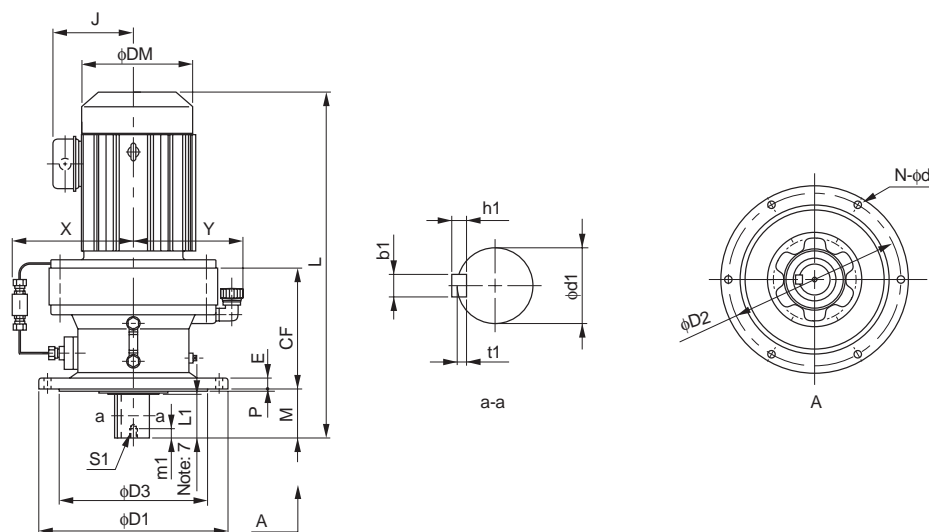CVVM^{Note 1} - 618□ to 619□

Frame size Note 5	CF	D1	D2	D3	M	E	P	N	d	X	Y	Output Shaft Note 2, 3, 7						
												d1	L1	b1	h1	t1	S1	m1
618□	279	430	390	345	110	22	5	8	18	237	240	80	100	22	14	9	M12	24
619□	320	490	450	400	145	30	6	12	18	265	270	95	125	25	14	9	M20	34

Model Note 5, 6	Motor		Standard				With Brake				
	kW	P	L	J	DM	W(kg)	L	J	DM	W(kg)	
CVVM4 - 618□	- (B) - Ratio	3.0	4	717	168	212	170	789	168	212	180
CVVM5 - 618□	- (B) - Ratio	3.7	4	717	168	212	170	789	168	212	180
CVVM8 - 618□	- (B) - Ratio	5.5	4	761	168	212	178	833	168	212	188
CVVM10 - 618□	- (B) - Ratio	7.5	4	779	213	251	193	874	213	251	211
CVVM15 - 618□	- (B) - Ratio	11	4	839	213	251	207	934	213	251	225
CVVM20 - 618□	- (B) - Ratio	15	4	919	261	324	267	1024	261	324	296
CVVM25 - 618□	- (B) - Ratio	18.5	4	1014	328	394	333	1179	328	394	384
CVVM30 - 618□	- (B) - Ratio	22	4	1014	328	394	333	1179	328	394	384
CVVM40 - 618□	- (B) - Ratio	30	4	1014	328	394	350	1179	328	394	393
CVVM50 - 618□	- (B) - Ratio	37	4	1129	328	394	398	1344	328	394	495
CVVM60 - 618□	- (B) - Ratio	45	4	1129	328	394	398	1344	328	394	495
CVVM8 - 619□	- (B) - Ratio	5.5	4	857	168	212	250	929	168	212	260
CVVM10 - 619□	- (B) - Ratio	7.5	4	870	213	251	263	965	213	251	281
CVVM15 - 619□	- (B) - Ratio	11	4	930	213	251	277	1025	213	251	295
CVVM20 - 619□	- (B) - Ratio	15	4	995	261	324	330	1100	261	324	365
CVVM25 - 619□	- (B) - Ratio	18.5	4	1090	328	394	408	1255	328	394	453
CVVM256 - 619□	- (B) - Ratio	18.5	6	1090	328	394	421	1255	328	394	466
CVVM30 - 619□	- (B) - Ratio	22	4	1090	328	394	408	1255	328	394	453
CVVM40 - 619□	- (B) - Ratio	30	4	1090	328	394	421	1255	328	394	466
CVVM406 - 619□	- (B) - Ratio	30	6	1205	328	394	459	1420	328	394	556
CVVM50 - 619□	- (B) - Ratio	37	4	1205	328	394	459	1420	328	394	556
CVVM506 - 619□	- (B) - Ratio	37	6	1205	328	394	459	1420	328	394	556
CVVM60 - 619□	- (B) - Ratio	45	4	1205	328	394	459	1420	328	394	556

Note: 5. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.


6. "B" after the frame size indicates models equipped with brake.

7. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

8. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Vertical, Slow Speed Shaft Down, V-Flange Mount)

CVVM - 6205 to 6215

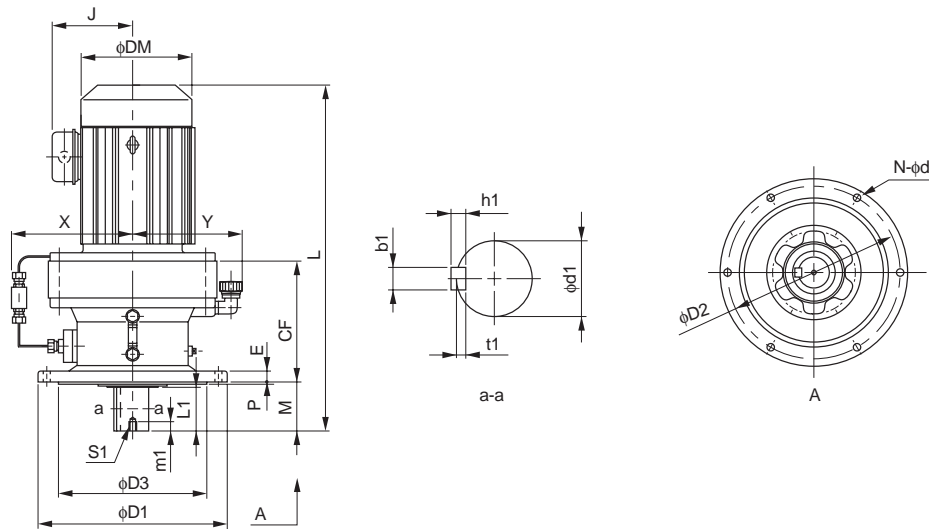

GEARMOTORS


Dimension Tables
CVVM

Frame size	CF	D1	D2	D3	M	E	P	N	d	X	Y	Output Shaft Note 2, 3, 6						
												d1	L1	b1	h1	t1	S1	m1
6205	298	455	405	355	204	30	5	8	22	341	287	100	165	28	16	10	M20	34
6215	323	490	440	390	203	35	7	8	24	348	306	110	165	28	16	10	M20	34

Model	Note 5	Motor		Standard				With Brake			
		kW	P	L	J	DM	W(kg)	L	J	DM	W(kg)
CVVM15 - 6205	(B) - Ratio	11	4	972	213	251	299	1067	213	251	317
CVVM20 - 6205	(B) - Ratio	15	4	1042	261	324	353	1147	261	324	389
CVVM206 - 6205	(B) - Ratio	15	6	1127	328	394	428	1292	328	394	473
CVVM25 - 6205	(B) - Ratio	18.5	4	1127	328	394	428	1292	328	394	473
CVVM30 - 6205	(B) - Ratio	22	4	1127	328	394	428	1292	328	394	473
CVVM306 - 6205	(B) - Ratio	22	6	1127	328	394	441	1292	328	394	486
CVVM40 - 6205	(B) - Ratio	30	4	1127	328	394	441	1292	328	394	486
CVVM406 - 6205	(B) - Ratio	30	6	1242	328	394	479	1457	328	394	573
CVVM50 - 6205	(B) - Ratio	37	4	1242	328	394	479	1457	328	394	573
CVVM506 - 6205	(B) - Ratio	37	6	1242	328	394	479	1457	328	394	573
CVVM60 - 6205	(B) - Ratio	45	4	1242	328	394	479	1457	328	394	573
CVVM606 - 6205	(B) - Ratio	45	6	1297	378	484	572	-	-	-	-
CVVM75 - 6205	(B) - Ratio	55	4	1297	378	484	572	-	-	-	-
CVVM15 - 6215	(B) - Ratio	11	4	996	213	251	377	1091	213	251	395
CVVM20 - 6215	(B) - Ratio	15	4	1066	261	324	432	1171	261	324	467
CVVM206 - 6215	(B) - Ratio	15	6	1151	328	394	501	1316	328	394	546
CVVM25 - 6215	(B) - Ratio	18.5	4	1151	328	394	501	1316	328	394	546
CVVM256 - 6215	(B) - Ratio	18.5	6	1151	328	394	514	1316	328	394	559
CVVM30 - 6215	(B) - Ratio	22	4	1151	328	394	501	1316	328	394	546
CVVM306 - 6215	(B) - Ratio	22	6	1151	328	394	514	1316	328	394	559
CVVM40 - 6215	(B) - Ratio	30	4	1151	328	394	514	1316	328	394	559
CVVM406 - 6215	(B) - Ratio	30	6	1266	328	394	569	1481	328	394	664
CVVM50 - 6215	(B) - Ratio	37	4	1266	328	394	569	1481	328	394	664
CVVM506 - 6215	(B) - Ratio	37	6	1266	328	394	569	1481	328	394	664
CVVM60 - 6215	(B) - Ratio	45	4	1266	328	394	569	1481	328	394	664
CVVM606 - 6215	(B) - Ratio	45	6	1321	378	484	662	-	-	-	-
CVVM75 - 6215	(B) - Ratio	55	4	1321	378	484	662	-	-	-	-

- Note: 1. indicates motor capacity.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."
 4. Pilot diameter (φD3): Dimension tolerance conforms to JIS B 0401-1976 "f8."

Dimension Tables Gearmotors (Vertical, Slow Speed Shaft Down, V-Flange Mount)

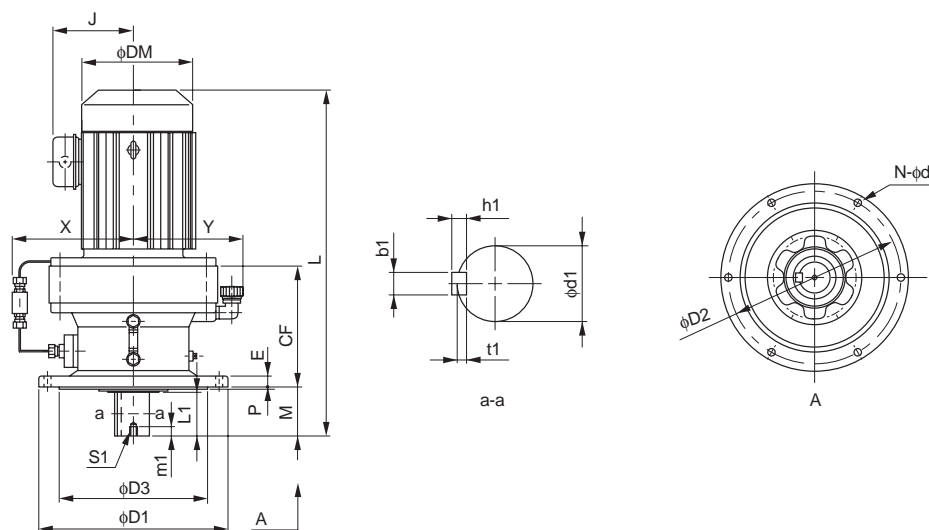
CVVM^{Note 1} - 6225 to 6235

Frame size	CF	D1	D2	D3	M	E	P	N	d	X	Y	Output Shaft <small>Note 2, 3, 6</small>						
												d1	L1	b1	h1	t1	S1	m1
6225	356	535	475	415	210	35	10	8	27	352	326	120	165	32	18	11	M20	34
6235	378	570	510	450	250	40	10	8	27	359	344	130	200	32	18	11	M24	41

Model	Note 5	Motor		Standard				With Brake			
		kW	P	L	J	DM	W(kg)	L	J	DM	W(kg)
CVVM206 - 6225	-(B) - Ratio	15	6	1191	328	394	593	1356	328	394	638
CVVM25 - 6225	-(B) - Ratio	18.5	4	1191	328	394	593	1356	328	394	638
CVVM256 - 6225	-(B) - Ratio	18.5	6	1191	328	394	606	1356	328	394	651
CVVM30 - 6225	-(B) - Ratio	22	4	1191	328	394	593	1356	328	394	638
CVVM306 - 6225	-(B) - Ratio	22	6	1191	328	394	606	1356	328	394	651
CVVM40 - 6225	-(B) - Ratio	30	4	1191	328	394	606	1356	328	394	651
CVVM406 - 6225	-(B) - Ratio	30	6	1306	328	394	660	1521	328	394	755
CVVM50 - 6225	-(B) - Ratio	37	4	1306	328	394	660	1521	328	394	755
CVVM506 - 6225	-(B) - Ratio	37	6	1306	328	394	660	1521	328	394	755
CVVM60 - 6225	-(B) - Ratio	45	4	1306	328	394	660	1521	328	394	755
CVVM606 - 6225	-(B) - Ratio	45	6	1361	378	484	743	-	-	-	-
CVVM75 - 6225	-(B) - Ratio	55	4	1361	378	484	743	-	-	-	-
CVVM206 - 6235	-(B) - Ratio	15	6	1253	328	394	653	1418	328	394	684
CVVM256 - 6235	-(B) - Ratio	18.5	6	1253	328	394	653	1418	328	394	698
CVVM306 - 6235	-(B) - Ratio	22	6	1253	328	394	653	1418	328	394	698
CVVM406 - 6235	-(B) - Ratio	30	6	1368	328	394	699	1583	328	394	787
CVVM506 - 6235	-(B) - Ratio	37	6	1368	328	394	699	1583	328	394	787
CVVM606 - 6235	-(B) - Ratio	45	6	1423	378	484	788	-	-	-	-
CVVM756 - 6235	-(B) - Ratio	55	6	1503	378	485	842	-	-	-	-

Note: 5. "B" after the frame size indicates models equipped with brake.
6. Dimension of shaft end: Refer to pages F-28 to F-29 for details.
7. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Vertical, Slow Speed Shaft Down, V-Flange Mount)

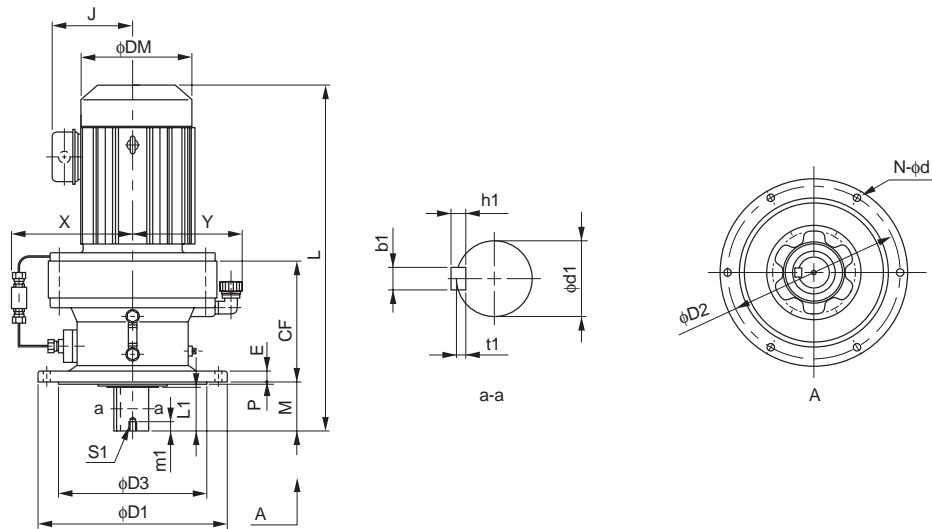CVVM^{Note 1} - 6245 to 6265

Frame size	CF	D1	D2	D3	M	E	P	N	d	X	Y	Output Shaft <small>Note 2, 3, 7</small>						
												d1	L1	b1	h1	t1	S1	m1
6245	407	635	560	485	250	40	10	8	33	370	371	140	200	36	20	12	M24	41
6255	480	685	610	535	295	45	10	8	33	426	399	160	240	40	22	13	M30	49
6265	532	750	660	570	360	50	10	8	39	460	431	170	300	40	22	13	M30	49

Model	Note 6	Motor		Standard				With Brake			
		kW	P	L	J	DM	W(kg)	L	J	DM	W(kg)
CVVM206 - 6245	- (B) - Ratio	15	6	1282	328	394	759	1447	328	394	792
CVVM256 - 6245	- (B) - Ratio	18.5	6	1282	328	394	759	1447	328	394	806
CVVM306 - 6245	- (B) - Ratio	22	6	1282	328	394	759	1447	328	394	806
CVVM406 - 6245	- (B) - Ratio	30	6	1397	328	394	805	1612	328	394	893
CVVM506 - 6245	- (B) - Ratio	37	6	1397	328	394	805	1612	328	394	893
CVVM606 - 6245	- (B) - Ratio	45	6	1452	378	484	896	-	-	-	-
CVVM756 - 6245	- (B) - Ratio	55	6	1532	378	485	945	-	-	-	-
CVVM206 - 6255	- (B) - Ratio	15	6	1400	328	394	1045	1565	328	394	1123
CVVM256 - 6255	- (B) - Ratio	18.5	6	1400	328	394	1045	1565	328	394	1137
CVVM306 - 6255	- (B) - Ratio	22	6	1400	328	394	1045	1565	328	394	1137
CVVM406 - 6255	- (B) - Ratio	30	6	1515	328	394	1090	1730	328	394	1178
CVVM506 - 6255	- (B) - Ratio	37	6	1515	328	394	1090	1730	328	394	1178
CVVM606 - 6255	- (B) - Ratio	45	6	1570	378	484	1170	-	-	-	-
CVVM756 - 6255	- (B) - Ratio	55	6	1650	378	485	1225	-	-	-	-
CVVM406 - 6265	- (B) - Ratio	22	6	1517	328	394	1350	1727	328	394	1397
CVVM406 - 6265	- (B) - Ratio	30	6	1632	328	394	1395	1847	328	394	1483
CVVM506 - 6265	- (B) - Ratio	37	6	1632	328	394	1395	1847	328	394	1483
CVVM606 - 6265	- (B) - Ratio	45	6	1687	378	484	1490	-	-	-	-


Note: 1. □ indicates motor capacity.

2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."

3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

4. Pilot diameter (φD3): Dimension tolerance conforms to JIS B 0401-1976 "f8."

Dimension Tables Gearmotors (Universal Direction, V-Flange Mount)

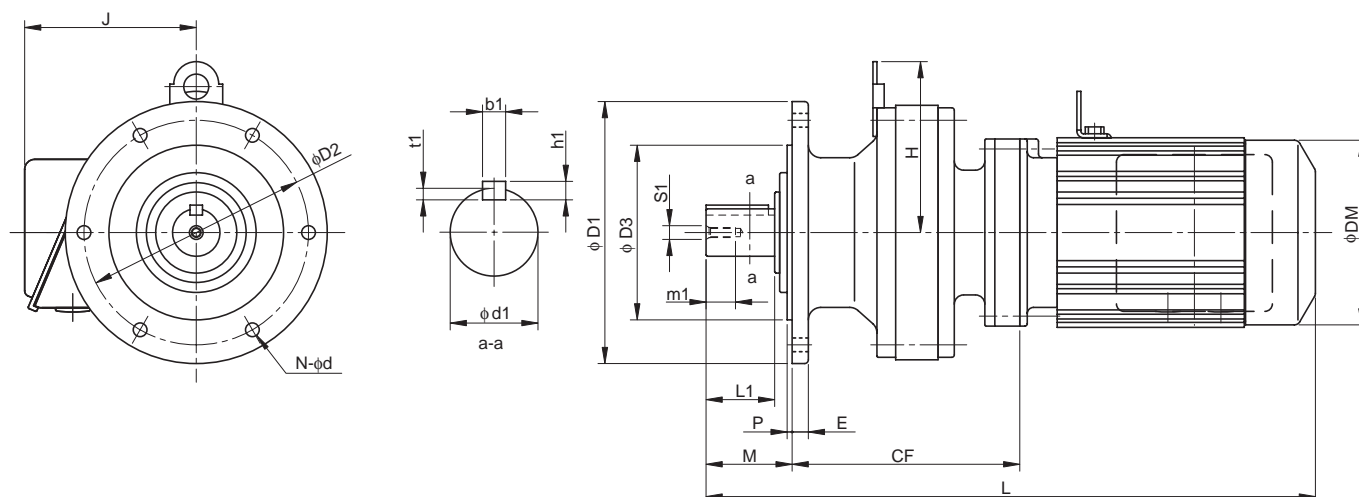CNVM^{Note 1} - 606□DA to 612□DB

GEARMOTORS

Dimension Tables
CVVM

Frame size <small>Note 5</small>	CF	D1	D2	D3	M	E	P	N	d	H	Output Shaft <small>Note 2, 3, 7</small>						
											d1	L1	b1	h1	t1	S1	m1
606□DA	91	120	102	80	34	8	3	6	9	-	14	25	5	5	3	M5	16
607□DA	89	160	134	110	42	9	3	4	11	-	18	30	6	6	3.5	M6	16
609□DA	142	160	134	110	48	9	3	4	11	107	28	35	8	7	4	M8	20
610□DA	156	160	134	110	48	9	3	4	11	107	28	35	8	7	4	M8	20
612□DA	171	210	180	140	69	13	4	6	11	137	38	55	10	8	5	M8	20
612□DB	183	210	180	140	69	13	4	6	11	-	38	55	10	8	5	M8	20

Model <small>Note 5, 6</small>	Motor		Standard				With Brake			
	kW	P	L	J	DM	W(kg)	L	J	DM	W(kg)
CNVM01 - 606□DA - (B) - Ratio	0.1	4	287	130	119	9	294	130	124	12
CNVM01 - 607□DA - (B) - Ratio	0.1	4	293	130	119	9	300	130	124	12
CNVM02 - 607□DA - (B) - Ratio	0.2	4	311	130	124	10	339	130	124	13
CNVM01 - 609□DA - (B) - Ratio	0.1	4	352	130	119	16	359	130	124	17
CNVM02 - 609□DA - (B) - Ratio	0.2	4	370	130	124	17	398	130	124	18
CNVM03 - 609□DA - (B) - Ratio	0.25	4	370	130	124	17	398	130	124	18
CNVM05 - 609□DA - (B) - Ratio	0.4	4	386	130	124	18	418	130	124	19
CNVM01 - 610□DA - (B) - Ratio	0.1	4	366	130	119	17	373	130	124	18
CNVM02 - 610□DA - (B) - Ratio	0.2	4	384	130	124	18	412	130	124	19
CNVM03 - 610□DA - (B) - Ratio	0.25	4	384	130	124	18	412	130	124	19
CNVM05 - 610□DA - (B) - Ratio	0.4	4	400	130	124	19	432	130	124	20
CNVM01 - 612□DA - (B) - Ratio	0.1	4	402	130	119	29	409	130	124	30
CNVM02 - 612□DA - (B) - Ratio	0.2	4	420	130	124	30	448	130	124	31
CNVM03 - 612□DA - (B) - Ratio	0.25	4	420	130	124	30	448	130	124	31
CNVM05 - 612□DA - (B) - Ratio	0.4	4	436	130	124	31	468	130	124	32
CNVM01 - 612□DB - (B) - Ratio	0.1	4	414	130	119	32	421	130	124	34
CNVM02 - 612□DB - (B) - Ratio	0.2	4	432	130	124	33	473	130	124	35
CNVM03 - 612□DB - (B) - Ratio	0.25	4	432	130	124	33	473	130	124	35
CNVM05 - 612□DB - (B) - Ratio	0.4	4	448	130	124	34	473	130	124	36
CNVM08 - 612□DB - (B) - Ratio	0.55	4	489	140	148	38	532	140	148	41
CNVM1 - 612□DB - (B) - Ratio	0.75	4	489	140	148	38	532	140	148	41
CNVM1H - 612□DB - (B) - Ratio	1.1	4	516	145	160	42	578	145	160	47
CNVM2 - 612□DB - (B) - Ratio	1.5	4	516	145	160	42	578	145	160	47

Note: 5. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.


6. "B" after the frame size indicates models equipped with brake.

7. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

8. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Vertical, Slow Speed Shaft Down, V-Flange Mount)

CVVM^{Note 1} - 613□DA to 614□DC

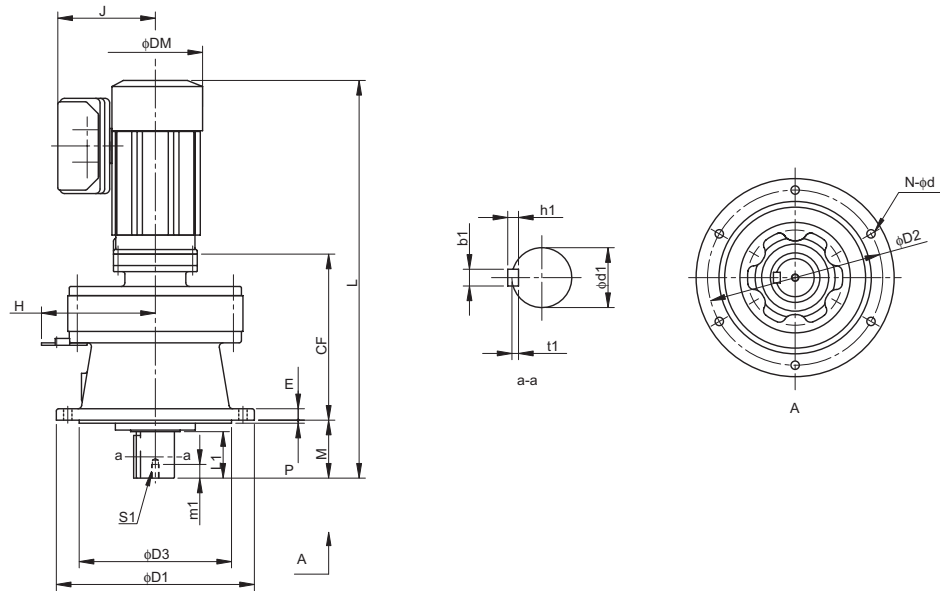


Frame size <small>Note 5</small>	CF	D1	D2	D3	M	E	P	N	d	H	Output Shaft <small>Note 2, 3, 7</small>						
											d1	L1	b1	h1	t1	S1	m1
613□DA	218	260	230	200	76	15	4	6	11	150	50	61	14	9	5.5	M10	18
613□DB	227	260	230	200	76	15	4	6	11	150	50	61	14	9	5.5	M10	18
613□DC	241	260	230	200	76	15	4	6	11	-	50	61	14	9	5.5	M10	18
614□DA	218	260	230	200	96	15	4	6	11	150	50	81	14	9	5.5	M10	18
614□DB	227	260	230	200	96	15	4	6	11	150	50	81	14	9	5.5	M10	18
614□DC	241	260	230	200	96	15	4	6	11	-	50	81	14	9	5.5	M10	18

Model <small>Note 5, 6</small>	Motor		Standard				With Brake			
	kW	P	L	J	DM	W(kg)	L	J	DM	W(kg)
CVVM02 - 613□DA - (B) - Ratio	0.2	4	474	130	124	45	502	130	124	45
CVVM03 - 613□DA - (B) - Ratio	0.25	4	494	130	124	45	522	130	124	45
CVVM05 - 613□DA - (B) - Ratio	0.4	4	490	130	124	48	522	130	124	49
CVVM02 - 613□DB - (B) - Ratio	0.2	4	483	130	124	48	511	130	124	50
CVVM03 - 613□DB - (B) - Ratio	0.25	4	483	130	124	48	511	130	124	50
CVVM05 - 613□DB - (B) - Ratio	0.4	4	499	130	124	49	531	130	124	51
CVVM08 - 613□DB - (B) - Ratio	0.55	4	540	140	148	53	583	140	148	56
CVVM1 - 613□DB - (B) - Ratio	0.75	4	540	140	148	53	583	140	148	56
CVVM1H - 613□DB - (B) - Ratio	1.1	4	573	145	160	57	635	145	160	62
CVVM2 - 613□DB - (B) - Ratio	1.5	4	573	145	160	57	635	145	160	62
CVVM08 - 613□DC - (B) - Ratio	0.55	4	554	140	148	56	597	140	148	59
CVVM1 - 613□DC - (B) - Ratio	0.75	4	554	140	148	56	597	140	148	59
CVVM2 - 613□DC - (B) - Ratio	1.5	4	587	145	160	60	649	145	160	65
CVVM3 - 613□DC - (B) - Ratio	2.2	4	607	152	173	64	670	152	173	70
CVVM02 - 614□DA - (B) - Ratio	0.2	4	494	123	124	45	522	123	124	46
CVVM03 - 614□DA - (B) - Ratio	0.25	4	494	123	124	45	522	123	124	46
CVVM05 - 614□DA - (B) - Ratio	0.4	4	510	123	124	48	542	123	124	49
CVVM02 - 614□DB - (B) - Ratio	0.2	4	503	123	124	48	531	123	124	50
CVVM03 - 614□DB - (B) - Ratio	0.25	4	503	123	124	48	531	123	124	50
CVVM05 - 614□DB - (B) - Ratio	0.4	4	519	123	124	49	551	123	124	51
CVVM08 - 614□DB - (B) - Ratio	0.55	4	560	140	148	53	603	140	148	56
CVVM1 - 614□DB - (B) - Ratio	0.75	4	560	140	148	53	603	140	148	56
CVVM1H - 614□DB - (B) - Ratio	1.1	4	593	145	160	57	655	145	160	62
CVVM2 - 614□DB - (B) - Ratio	1.5	4	593	145	160	57	655	145	160	62
CVVM08 - 614□DC - (B) - Ratio	0.55	4	574	140	148	54	617	140	148	57
CVVM1 - 614□DC - (B) - Ratio	0.75	4	574	140	148	54	617	140	148	57
CVVM1H - 614□DC - (B) - Ratio	1.1	4	607	145	160	58	669	145	160	63
CVVM2 - 614□DC - (B) - Ratio	1.5	4	607	145	160	58	669	145	160	63
CVVM3 - 614□DC - (B) - Ratio	2.2	4	627	152	173	62	690	152	173	68

- Note: 1. □ indicates motor capacity.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."
 4. Pilot diameter (φD3): Dimension tolerance conforms to JIS B 0401-1976 "f8."

Dimension Tables Gearmotors (Vertical, Slow Speed Shaft Down, V-Flange Mount)

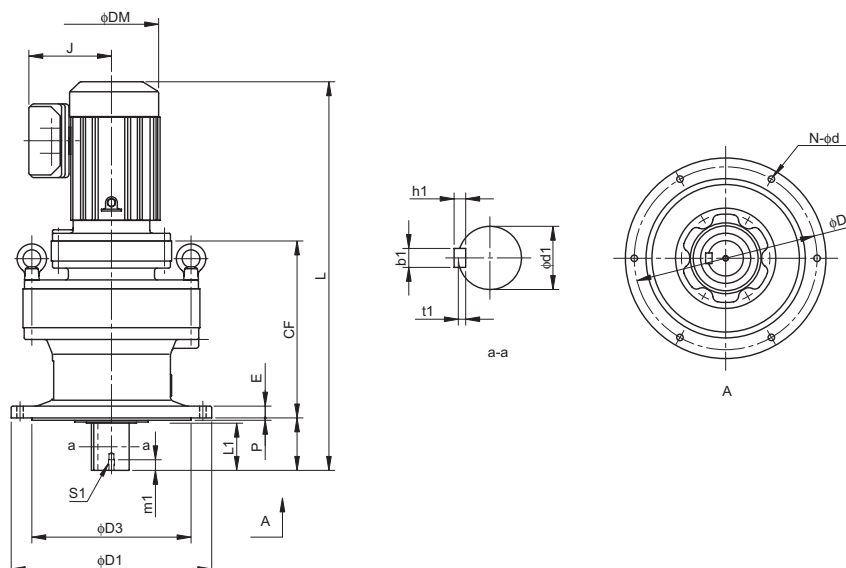CVVM^{Note 1} - 616□DA to 618□DA

Frame size <small>Note 5</small>	CF	D1	D2	D3	M	E	P	N	d	H	Output Shaft <small>Note 2, 3, 7</small>						
											d1	L1	b1	h1	t1	S1	m1
616□DA	285	340	310	270	89	20	4	6	11	-	60	80	18	11	7	M10	18
616□DB	299	340	310	270	89	20	4	6	11	-	60	80	18	11	7	M10	18
617□DA	324	400	360	316	94	22	5	8	14	-	70	84	20	12	7.5	M12	24
617□DB	338	400	360	316	94	22	5	8	14	-	70	84	20	12	7.5	M12	24
618□DA	364	430	390	345	110	22	5	8	18	-	80	100	22	14	9	M12	24

Model <small>Note 5, 6</small>	Motor		Standard				With Brake			
	kW	P	L	J	DM	W(kg)	L	J	DM	W(kg)
CVVM02 -616□DA - (B) - Ratio	0.2	4	554	130	124	84	581	130	124	86
CVVM03 -616□DA - (B) - Ratio	0.25	4	554	130	124	84	581	130	124	86
CVVM05 -616□DA - (B) - Ratio	0.4	4	570	130	124	85	601	130	124	87
CVVM08 -616□DA - (B) - Ratio	0.55	4	611	140	148	89	653	140	148	92
CVVM1 -616□DA - (B) - Ratio	0.75	4	611	140	148	89	653	140	148	92
CVVM1H -616□DA - (B) - Ratio	1.1	4	643	145	160	93	705	145	160	98
CVVM2 -616□DA - (B) - Ratio	1.5	4	643	145	160	93	705	145	160	98
CVVM08 -616□DB - (B) - Ratio	0.55	4	625	140	148	91	667	140	148	94
CVVM1 -616□DB - (B) - Ratio	0.75	4	625	140	148	91	667	140	148	94
CVVM1H -616□DB - (B) - Ratio	1.1	4	658	145	160	95	719	145	160	100
CVVM2 -616□DB - (B) - Ratio	1.5	4	658	145	160	95	719	145	160	100
CVVM3 -616□DB - (B) - Ratio	2.2	4	678	152	173	99	740	152	173	105
CVVM02 -617□DA - (B) - Ratio	0.2	4	598	130	124	120	626	130	124	122
CVVM03 -617□DA - (B) - Ratio	0.25	4	598	130	124	120	626	130	124	122
CVVM05 -617□DA - (B) - Ratio	0.4	4	614	130	124	121	646	130	124	123
CVVM08 -617□DA - (B) - Ratio	0.55	4	655	140	148	125	698	140	148	128
CVVM1 -617□DA - (B) - Ratio	0.75	4	655	140	148	125	698	140	148	128
CVVM1H -617□DA - (B) - Ratio	1.1	4	688	145	160	129	750	145	160	134
CVVM2 -617□DA - (B) - Ratio	1.5	4	688	145	160	129	750	145	160	134
CVVM08 -617□DB - (B) - Ratio	0.55	4	669	140	148	122	712	140	148	129
CVVM1 -617□DB - (B) - Ratio	0.75	4	669	140	148	122	712	140	148	129
CVVM1H -617□DB - (B) - Ratio	1.1	4	702	145	160	131	764	145	160	136
CVVM2 -617□DB - (B) - Ratio	1.5	4	702	145	160	131	764	145	160	136
CVVM3 -617□DB - (B) - Ratio	2.2	4	722	152	173	135	785	152	173	141
CVVM05 -618□DA - (B) - Ratio	0.4	4	670	130	124	154	702	130	124	156
CVVM08 -618□DA - (B) - Ratio	0.55	4	711	140	148	158	754	140	148	161
CVVM1 -618□DA - (B) - Ratio	0.75	4	711	140	148	158	754	140	148	161
CVVM1H -618□DA - (B) - Ratio	1.1	4	744	145	160	162	806	145	160	167
CVVM2 -618□DA - (B) - Ratio	1.5	4	744	145	160	162	806	145	160	167
CVVM3 -618□DA - (B) - Ratio	2.2	4	764	152	173	166	827	152	173	172

Note: 5. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.


6. "B" after the frame size indicates models equipped with brake.

7. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

8. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Vertical, Slow Speed Shaft Down, V-Flange Mount)

CVVM^{Note 1} - 616□DC to 618□DB

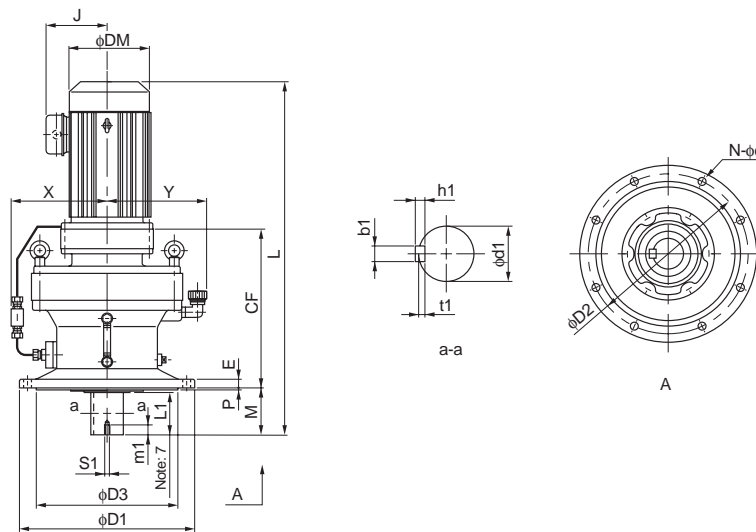


Frame size <small>Note 5</small>	CF	D1	D2	D3	M	E	P	N	d	X	Y	Output Shaft <small>Note 2, 3, 7</small>						
												d1	L1	b1	h1	t1	S1	m1
616□DC	300	340	310	270	89	20	4	6	11	196	200	60	80	18	11	7	M10	18
617□DC	342	400	360	316	94	22	5	8	14	218	225	70	84	20	12	7.5	M12	24
618□DB	386	430	390	345	110	22	5	8	18	233	240	80	100	22	14	9	M12	24

Model <small>Note 5, 6</small>	Motor		Standard				With Brake			
	kW	P	L	J	DM	W(kg)	L	J	DM	W(kg)
CVVM1H - 616□DC - (B) - Ratio	1.1	4	659	145	160	103	721	145	160	108
CVVM2 - 616□DC - (B) - Ratio	1.5	4	659	145	160	103	721	145	160	108
CVVM3 - 616□DC - (B) - Ratio	2.2	4	679	152	173	107	742	152	173	114
CVVM4 - 616□DC - (B) - Ratio	3.0	4	702	168	212	117	774	168	212	127
CVVM5 - 616□DC - (B) - Ratio	3.7	4	702	168	212	117	774	168	212	127
CVVM8 - 616□DC - (B) - Ratio	5.5	4	746	168	212	127	818	168	212	131
CVVM1H - 617□DC - (B) - Ratio	1.1	4	706	145	160	138	768	145	160	143
CVVM2 - 617□DC - (B) - Ratio	1.5	4	706	145	160	138	768	145	160	143
CVVM3 - 617□DC - (B) - Ratio	2.2	4	726	152	173	142	789	152	173	152
CVVM4 - 617□DC - (B) - Ratio	3.0	4	749	168	212	152	821	168	212	165
CVVM5 - 617□DC - (B) - Ratio	3.7	4	749	168	212	152	821	168	212	165
CVVM8 - 617□DC - (B) - Ratio	5.5	4	793	168	212	162	865	168	212	172
CVVM1H - 618□DB - (B) - Ratio	1.1	4	766	145	160	179	828	145	160	184
CVVM2 - 618□DB - (B) - Ratio	1.5	4	766	145	160	179	828	145	160	184
CVVM3 - 618□DB - (B) - Ratio	2.2	4	786	152	173	183	849	152	173	190
CVVM4 - 618□DB - (B) - Ratio	3.0	4	809	168	212	193	881	168	212	203
CVVM5 - 618□DB - (B) - Ratio	3.7	4	809	168	212	193	881	168	212	203
CVVM8 - 618□DB - (B) - Ratio	5.5	4	853	168	212	200	925	168	212	210
CVVM10 - 618□DB - (B) - Ratio	7.5	4	876	213	251	215	971	213	251	231
CVVM15 - 618□DB - (B) - Ratio	11	4	936	213	251	229	1031	213	251	247

- Note: 1. □ indicates motor capacity.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."
 4. Pilot diameter (φD3): Dimension tolerance conforms to JIS B 0401-1976 "f8."

Dimension Tables Gearmotors (Vertical, Slow Speed Shaft Down, V-Flange Mount)

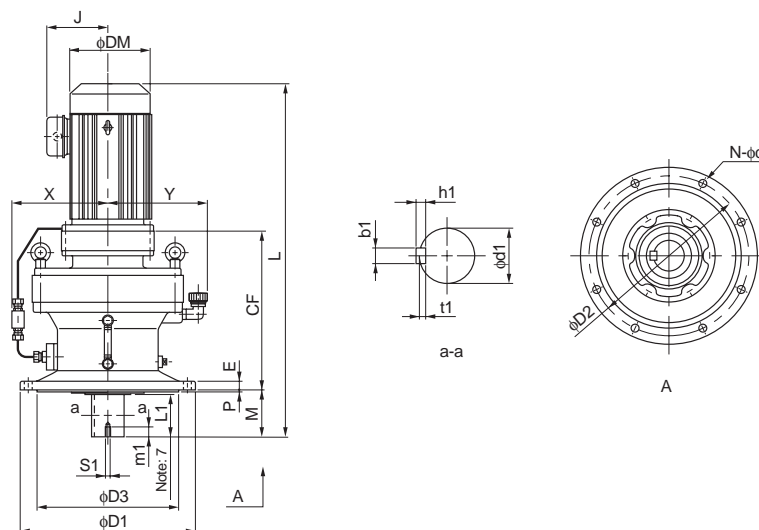CVVM^{Note 1} - 619□DA to 619□DB

Frame size <small>Note 5</small>	CF	D1	D2	D3	M	E	P	N	d	X	Y	Output Shaft <small>Note 2, 3, 7</small>						
												d1	L1	b1	h1	t1	S1	m1
619□DA	411	490	450	400	145	30	6	12	18	255	270	95	125	25	14	9	M20	34
619□DB	427	490	450	400	145	30	6	12	18	255	270	95	125	25	14	9	M20	34

Model <small>Note 5, 6</small>	Motor		Standard				With Brake			
	kW	P	L	J	DM	W(kg)	L	J	DM	W(kg)
CVVM1 - 619□DA - (B) - Ratio	0.75	4	793	140	148	238	836	140	148	241
CVVM1H - 619□DA - (B) - Ratio	1.1	4	826	145	160	242	888	145	160	247
CVVM2 - 619□DA - (B) - Ratio	1.5	4	826	145	160	242	888	145	160	247
CVVM3 - 619□DA - (B) - Ratio	2.2	4	846	152	173	246	909	152	173	253
CVVM4 - 619□DA - (B) - Ratio	3.0	4	869	168	212	256	941	168	212	266
CVVM5 - 619□DA - (B) - Ratio	3.7	4	869	168	212	256	941	168	212	266
CVVM8 - 619□DA - (B) - Ratio	5.5	4	913	168	212	263	985	168	212	273
CVVM2 - 619□DB - (B) - Ratio	1.5	4	842	145	160	249	904	145	160	254
CVVM3 - 619□DB - (B) - Ratio	2.2	4	862	152	173	253	925	152	173	260
CVVM4 - 619□DB - (B) - Ratio	3.0	4	885	168	212	263	957	168	212	273
CVVM5 - 619□DB - (B) - Ratio	3.7	4	885	168	212	263	957	168	212	273
CVVM8 - 619□DB - (B) - Ratio	5.5	4	929	168	212	270	1001	168	212	280
CVVM10 - 619□DB - (B) - Ratio	7.5	4	952	213	251	285	1047	213	251	303
CVVM15 - 619□DB - (B) - Ratio	11	4	1012	213	251	299	1107	213	251	317
CVVM20 - 619□DB - (B) - Ratio	15	4	1102	261	324	351	1207	261	324	385


Note: 5. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.

6. "B" after the frame size indicates models equipped with brake.

7. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

8. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Vertical, Slow Speed Shaft Down, V-Flange Mount)

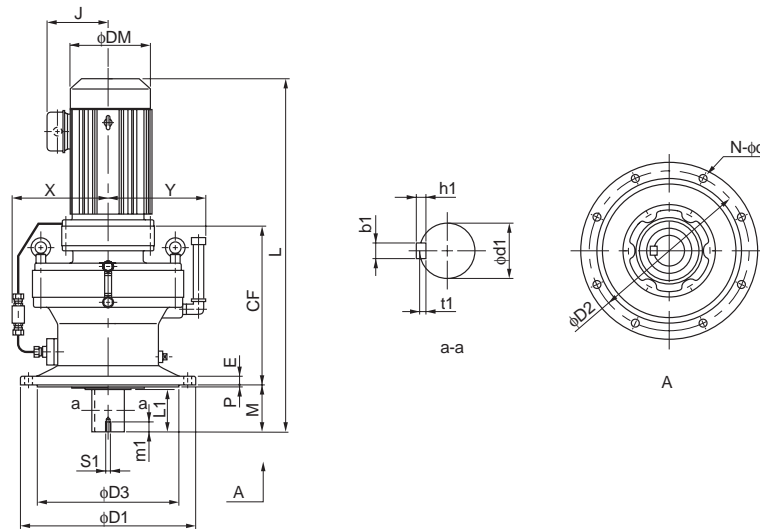CVVM^{Note 1} - 6205DA to 6215DA

Frame size	CF	D1	D2	D3	M	E	P	N	d	X	Y	Output Shaft <small>Note 2, 3, 6</small>						
												d1	L1	b1	h1	t1	S1	m1
6205DA	393	455	405	355	204	30	5	8	22	341	287	100	165	28	16	10	M20	34
6205DB	420	455	405	355	204	30	5	8	22	341	287	100	165	28	16	10	M20	34
6215DA	447	490	440	390	203	35	7	8	24	348	306	110	165	28	16	10	M20	34

Model	Note 5	Motor		Standard				With Brake			
		kW	P	L	J	DM	W(kg)	L	J	DM	W(kg)
CVVM1	- 6205DA - (B) - Ratio	0.75	4	834	140	148	254	877	140	148	257
CVVM2	- 6205DA - (B) - Ratio	1.5	4	867	145	160	257	929	145	160	263
CVVM3	- 6205DA - (B) - Ratio	2.2	4	887	152	173	262	949	152	173	269
CVVM4	- 6205DA - (B) - Ratio	3.0	4	910	168	212	272	982	168	212	282
CVVM5	- 6205DA - (B) - Ratio	3.7	4	910	168	212	272	982	168	212	282
CVVM8	- 6205DA - (B) - Ratio	5.5	4	954	168	212	279	1026	168	212	289
CVVM3	- 6205DB - (B) - Ratio	2.2	4	914	152	173	274	977	152	173	281
CVVM4	- 6205DB - (B) - Ratio	3.0	4	937	168	212	284	1009	168	212	294
CVVM5	- 6205DB - (B) - Ratio	3.7	4	937	168	212	284	1009	168	212	301
CVVM8	- 6205DB - (B) - Ratio	5.5	4	981	168	212	291	1053	168	212	324
CVVM10	- 6205DB - (B) - Ratio	7.5	4	1004	213	251	306	1099	213	251	347
CVVM15	- 6205DB - (B) - Ratio	11	4	1064	213	251	320	1159	213	251	361
CVVM20	- 6205DB - (B) - Ratio	15	4	1154	259	324	372	1249	259	324	429
CVVM2	- 6215DA - (B) - Ratio	1.5	4	920	145	160	331	982	145	160	336
CVVM3	- 6215DA - (B) - Ratio	2.2	4	940	152	173	334	1003	152	173	341
CVVM4	- 6215DA - (B) - Ratio	3.0	4	963	168	212	344	1035	168	212	354
CVVM5	- 6215DA - (B) - Ratio	3.7	4	963	168	212	344	1035	168	212	354
CVVM8	- 6215DA - (B) - Ratio	5.5	4	1007	168	212	351	1079	168	212	361
CVVM10	- 6215DA - (B) - Ratio	7.5	4	1030	213	251	366	1125	213	251	384
CVVM15	- 6215DA - (B) - Ratio	11	4	1090	213	251	380	1185	213	251	398
CVVM20	- 6215DA - (B) - Ratio	15	4	1180	161	324	432	1285	161	324	466


Note: 1. □ indicates motor capacity.

2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."

3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

4. Pilot diameter (φD3): Dimension tolerance conforms to JIS B 0401-1976 "f8."

Dimension Tables Gearmotors (Vertical, Slow Speed Shaft Down, V-Flange Mount)

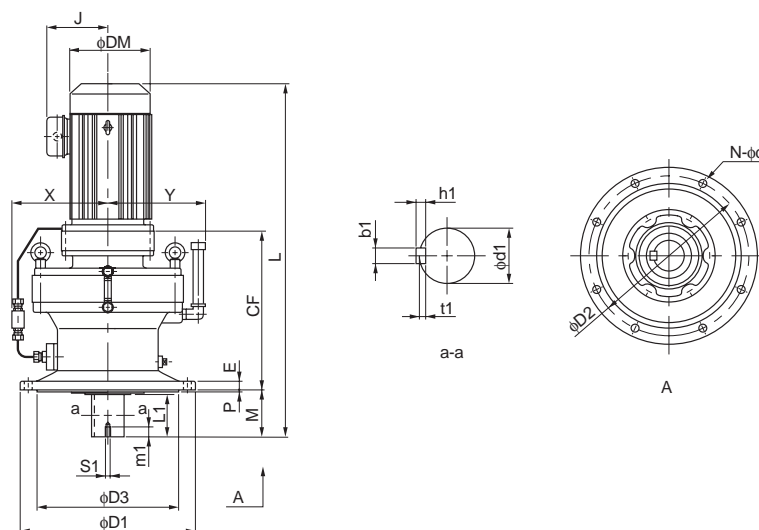CVVM^{Note 1} - 6215DB to 6225DB

Frame size	CF	D1	D2	D3	M	E	P	N	d	X	Y	Output Shaft <small>Note 2, 3, 6</small>						
												d1	L1	b1	h1	t1	S1	m1
6215DB	472	490	440	390	203	35	7	8	24	348	306	110	165	28	16	10	M20	34
6225DA	482	535	475	415	210	35	10	8	27	352	326	120	165	32	18	11	M20	34
6225DB	525	535	475	415	210	35	10	8	27	352	326	120	165	32	18	11	M20	34

Model	Note 5	Motor		Standard				With Brake			
		kW	P	L	J	DM	W(kg)	L	J	DM	W(kg)
CVVM5	- 6215DB - (B) - Ratio	3.7	4	993	168	212	377	1065	168	212	387
CVVM8	- 6215DB - (B) - Ratio	5.5	4	1037	168	212	384	1109	168	212	400
CVVM10	- 6215DB - (B) - Ratio	7.5	4	1060	213	251	400	1155	213	251	417
CVVM15	- 6215DB - (B) - Ratio	11	4	1120	213	251	414	1215	213	251	431
CVVM20	- 6215DB - (B) - Ratio	15	4	1205	261	324	467	1310	261	324	500
CVVM25	- 6215DB - (B) - Ratio	18.5	4	1300	328	394	543	1465	328	394	587
CVVM30	- 6215DB - (B) - Ratio	22	4	1300	328	394	543	1465	328	394	587
CVVM2	- 6225DA - (B) - Ratio	1.5	4	962	145	160	420	1024	145	160	425
CVVM3	- 6225DA - (B) - Ratio	2.2	4	982	152	173	423	1045	152	173	430
CVVM4	- 6225DA - (B) - Ratio	3.0	4	1005	168	212	433	1077	168	212	443
CVVM5	- 6225DA - (B) - Ratio	3.7	4	1005	168	212	433	1077	168	212	443
CVVM8	- 6225DA - (B) - Ratio	5.5	4	1049	168	212	440	1121	168	212	450
CVVM10	- 6225DA - (B) - Ratio	7.5	4	1072	213	251	455	1167	213	251	473
CVVM15	- 6225DA - (B) - Ratio	11	4	1132	213	251	469	1227	213	251	486
CVVM20	- 6225DA - (B) - Ratio	15	4	1222	261	324	521	1327	261	324	554
CVVM5	- 6225DB - (B) - Ratio	3.7	4	1058	168	212	479	1130	168	212	490
CVVM8	- 6225DB - (B) - Ratio	5.5	4	1102	168	212	486	1174	168	212	497
CVVM10	- 6225DB - (B) - Ratio	7.5	4	1125	213	251	501	1220	213	251	519
CVVM15	- 6225DB - (B) - Ratio	11	4	1185	213	251	515	1280	213	251	533
CVVM20	- 6225DB - (B) - Ratio	15	4	1265	261	324	569	1370	261	324	603
CVVM25	- 6225DB - (B) - Ratio	18.5	4	1360	328	394	661	1525	328	394	685
CVVM30	- 6225DB - (B) - Ratio	22	4	1360	328	394	661	1525	328	394	685
CVVM40	- 6225DB - (B) - Ratio	30	4	1360	328	394	678	1525	328	394	721


Note: 5. "B" after the frame size indicates models equipped with brake.

6. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

7. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Vertical, Slow Speed Shaft Down, V-Flange Mount)

CVVM^{Note 1} - 6235DA to 6245DB

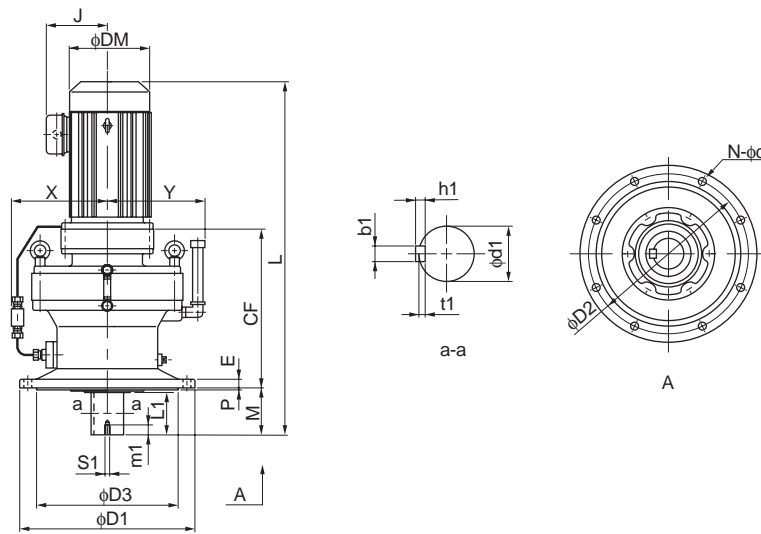

GEARMOTORS


Dimension Tables
CVVM

Frame size	CF	D1	D2	D3	M	E	P	N	d	X	Y	Output Shaft Note 2, 3, 6						
												d1	L1	b1	h1	t1	S1	m1
6235DA	529	570	510	450	250	40	10	8	27	359	344	130	200	32	18	11	M24	41
6235DB	551	570	510	450	250	40	10	8	27	359	344	130	200	32	18	11	M24	41
6245DA	566	635	560	485	250	40	10	8	33	370	371	140	200	36	20	12	M24	41
6245DB	587	635	560	485	250	40	10	8	33	370	371	140	200	36	20	12	M24	41

Model	Note 5	Motor		Standard				With Brake			
		kW	P	L	J	DM	W(kg)	L	J	DM	W(kg)
CVVM3	- 6235DA - (B) - Ratio	2.2	4	1069	152	173	523	1131	152	173	529
CVVM4	- 6235DA - (B) - Ratio	3.0	4	1091	168	212	532	1163	168	212	542
CVVM5	- 6235DA - (B) - Ratio	3.7	4	1091	168	212	532	1163	168	212	542
CVVM8	- 6235DA - (B) - Ratio	5.5	4	1135	168	212	539	1207	168	212	549
CVVM10	- 6235DA - (B) - Ratio	7.5	4	1163	213	251	555	1258	213	251	572
CVVM15	- 6235DA - (B) - Ratio	11	4	1223	213	251	569	1318	213	251	586
CVVM20	- 6235DA - (B) - Ratio	15	4	1309	261	324	622	1413	261	324	656
CVVM25	- 6235DA - (B) - Ratio	18.5	4	1403	328	394	698	1568	328	394	742
CVVM30	- 6235DA - (B) - Ratio	22	4	1403	328	394	698	1568	328	394	742
CVVM15	- 6235DB - (B) - Ratio	11	4	1245	213	251	601	1340	213	251	619
CVVM20	- 6235DB - (B) - Ratio	15	4	1330	261	324	663	1435	261	324	697
CVVM25	- 6235DB - (B) - Ratio	18.5	4	1425	328	394	730	1590	328	394	781
CVVM30	- 6235DB - (B) - Ratio	22	4	1425	328	394	730	1590	328	394	781
CVVM40	- 6235DB - (B) - Ratio	30	4	1425	328	394	744	1590	328	394	787
CVVM50	- 6235DB - (B) - Ratio	37	4	1540	328	394	792	1755	328	394	889
CVVM3	- 6245DA - (B) - Ratio	2.2	4	1106	152	173	617	1169	152	173	623
CVVM4	- 6245DA - (B) - Ratio	3.0	4	1129	168	212	626	1201	168	212	636
CVVM5	- 6245DA - (B) - Ratio	3.7	4	1129	168	212	626	1201	168	212	636
CVVM8	- 6245DA - (B) - Ratio	5.5	4	1173	168	212	633	1245	168	212	643
CVVM10	- 6245DA - (B) - Ratio	7.5	4	1201	213	251	649	1296	213	251	666
CVVM15	- 6245DA - (B) - Ratio	11	4	1261	213	251	663	1356	213	251	680
CVVM20	- 6245DA - (B) - Ratio	15	4	1346	261	324	716	1451	261	324	750
CVVM25	- 6245DA - (B) - Ratio	18.5	4	1441	328	394	792	1606	328	394	845
CVVM30	- 6245DA - (B) - Ratio	22	4	1441	328	394	792	1606	328	394	845
CVVM15	- 6245DB - (B) - Ratio	11	4	1282	213	251	690	1377	213	251	708
CVVM20	- 6245DB - (B) - Ratio	15	4	1367	261	324	750	1472	261	324	779
CVVM25	- 6245DB - (B) - Ratio	18.5	4	1462	328	394	816	1627	328	394	867
CVVM30	- 6245DB - (B) - Ratio	22	4	1462	328	394	816	1627	328	394	867
CVVM40	- 6245DB - (B) - Ratio	30	4	1462	328	394	833	1627	328	394	876
CVVM50	- 6245DB - (B) - Ratio	37	4	1577	328	394	881	1792	328	394	978

- Note: 1. □ indicates motor capacity.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."
 4. Pilot diameter ($\phi D3$): Dimension tolerance conforms to JIS B 0401-1976 "f8."

Dimension Tables Gearmotors (Vertical, Slow Speed Shaft Down, V-Flange Mount)

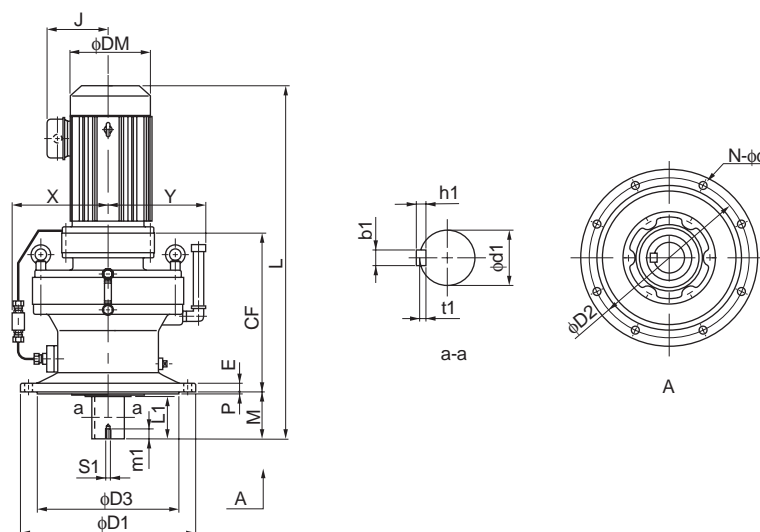CVVM^{Note 1} - 6255DA to 6275DA

Frame size	CF	D1	D2	D3	M	E	P	N	d	X	Y	Output Shaft ^{Note 2, 3, 6}						
												d1	L1	b1	h1	t1	S1	m1
6255DA	661	685	610	535	295	45	10	8	33	395	399	160	240	40	22	13	M30	49
6255DB	684	685	610	535	295	45	10	8	33	395	399	160	240	40	22	13	M30	49
6265DA	728	750	660	570	360	50	10	8	39	427	431	170	300	40	22	13	M30	49
6275DA	994	1160	1020	900	355	60	10	8	39	610	613	180	320	45	25	15	M30	52

Model	Note 5	Motor		Standard				With Brake			
		kW	P	L	J	DM	W(kg)	L	J	DM	W(kg)
CVVM5	- 6255DA - (B) - Ratio	3.7	4	1284	168	212	947	1356	168	212	957
CVVM8	- 6255DA - (B) - Ratio	5.5	4	1328	168	212	954	1400	168	212	964
CVVM10	- 6255DA - (B) - Ratio	7.5	4	1346	213	251	969	1441	213	251	984
CVVM15	- 6255DA - (B) - Ratio	11	4	1406	213	251	983	1501	213	251	998
CVVM20	- 6255DA - (B) - Ratio	15	4	1486	261	324	1041	1591	261	324	1077
CVVM25	- 6255DA - (B) - Ratio	18.5	4	1581	328	394	1110	1746	328	394	1161
CVVM30	- 6255DA - (B) - Ratio	22	4	1581	328	394	1110	1746	328	394	1161
CVVM40	- 6255DA - (B) - Ratio	30	4	1581	328	394	1129	1746	328	394	1172
CVVM15	- 6255DB - (B) - Ratio	11	4	1443	213	251	1059	1538	213	251	1074
CVVM20	- 6255DB - (B) - Ratio	15	4	1508	261	324	1109	1613	261	324	1143
CVVM25	- 6255DB - (B) - Ratio	18.5	4	1603	328	394	1185	1768	328	394	1236
CVVM30	- 6255DB - (B) - Ratio	22	4	1603	328	394	1185	1768	328	394	1236
CVVM40	- 6255DB - (B) - Ratio	30	4	1603	328	394	1200	1768	328	394	1243
CVVM50	- 6255DB - (B) - Ratio	37	4	1718	328	394	1238	1928	328	394	1335
CVVM60	- 6255DB - (B) - Ratio	45	4	1718	328	394	1238	1928	328	394	1335
CVVM8	- 6265DA - (B) - Ratio	5.5	4	1480	168	212	1296	1552	168	212	1306
CVVM10	- 6265DA - (B) - Ratio	7.5	4	1493	213	251	1309	1588	213	251	1329
CVVM15	- 6265DA - (B) - Ratio	11	4	1553	213	251	1326	1648	213	251	1341
CVVM20	- 6265DA - (B) - Ratio	15	4	1618	261	324	1376	1723	261	324	1412
CVVM25	- 6265DA - (B) - Ratio	18.5	4	1713	328	394	1455	1878	328	394	1500
CVVM30	- 6265DA - (B) - Ratio	22	4	1713	328	394	1455	1878	328	394	1500
CVVM40	- 6265DA - (B) - Ratio	30	4	1713	328	394	1470	1878	328	394	1513
CVVM50	- 6265DA - (B) - Ratio	37	4	1828	328	394	1505	2043	328	394	1598
CVVM60	- 6265DA - (B) - Ratio	45	4	1828	328	394	1505	2043	328	394	1598
CVVM10	- 6275DA - (B) - Ratio	7.5	4	1754	213	251	2694	1849	213	251	2714
CVVM15	- 6275DA - (B) - Ratio	11	4	1814	213	251	2708	1909	213	251	2723
CVVM20	- 6275DA - (B) - Ratio	15	4	1879	261	324	2761	1984	261	324	2797
CVVM25	- 6275DA - (B) - Ratio	18.5	4	1974	328	394	2840	2139	328	394	2885
CVVM30	- 6275DA - (B) - Ratio	22	4	1974	328	394	2840	2139	328	394	2885
CVVM40	- 6275DA - (B) - Ratio	30	4	1974	328	394	2855	2139	328	394	2898
CVVM50	- 6275DA - (B) - Ratio	37	4	2089	328	394	2890	2304	328	394	2983
CVVM60	- 6275DA - (B) - Ratio	45	4	2089	328	394	2890	2304	328	394	2983

Note: 5. "B" after the frame size indicates models equipped with brake.


6. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

7. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Universal Direction, Foot-Mount)

CNHM - 610H, 612H (Center Height Option)

GEARMOTORS
Dimension Tables
Center Height Option

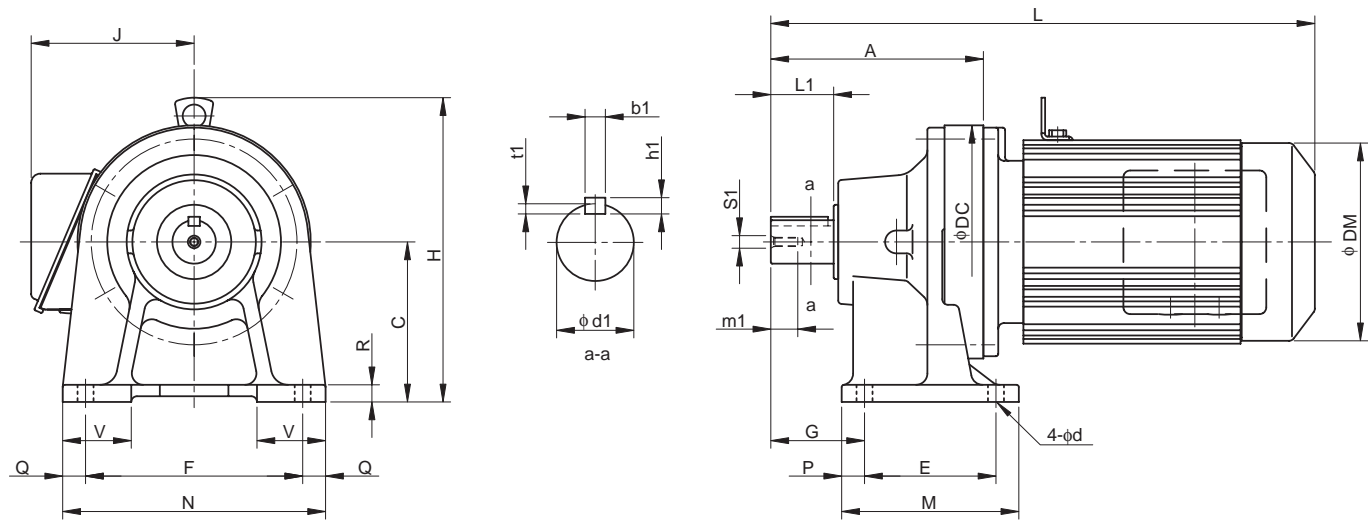


Frame size	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft Note 2, 3, 5						
														d1	L1	b1	h1	t1	S1	m1
610H	156	120	150	90	150	60	135	180	15	15	12	40	11	28	35	8	7	4	M8	20
612H	186	140	204	115	190	82	155	230	20	20	15	60	14	38	55	10	8	5	M8	20

Model	Note 4	Motor		Standard					With Brake					
		kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)	
CNHM02	- 610H	- (B) - Ratio	0.2	4	336	207	130	124	19	364	207	130	124	21
CNHM03	- 610H	- (B) - Ratio	0.25	4	336	207	130	124	19	364	207	130	124	21
CNHM05	- 610H	- (B) - Ratio	0.4	4	352	207	130	124	20	384	207	130	124	22
CNHM08	- 610H	- (B) - Ratio	0.55	4	393	213	140	148	24	436	213	140	148	27
CNHM1	- 610H	- (B) - Ratio	0.75	4	393	213	140	148	24	436	213	140	148	27
CNHM1H	- 610H	- (B) - Ratio	1.1	4	426	220	145	160	28	488	220	145	160	33
CNHM2	- 610H	- (B) - Ratio	1.5	4	426	220	145	160	28	488	220	145	160	33
CNHM3	- 610H	- (B) - Ratio	2.2	4	446	226	152	173	32	509	226	152	173	38
CNHM05	- 612H	- (B) - Ratio	0.4	4	387	257	130	124	31	419	257	130	124	33
CNHM08	- 612H	- (B) - Ratio	0.55	4	423	233	140	148	33	466	233	140	148	36
CNHM1	- 612H	- (B) - Ratio	0.75	4	423	233	140	148	33	466	233	140	148	36
CNHM1H	- 612H	- (B) - Ratio	1.1	4	456	240	145	160	37	518	240	145	160	42
CNHM2	- 612H	- (B) - Ratio	1.5	4	456	240	145	160	37	518	240	145	160	42
CNHM3	- 612H	- (B) - Ratio	2.2	4	476	246	152	173	51	539	246	152	173	48
CNHM4	- 612H	- (B) - Ratio	3.0	4	499	266	168	212	51	571	266	168	212	61
CNHM5	- 612H	- (B) - Ratio	3.7	4	499	266	168	212	51	571	266	168	212	61
CNHM8	- 612H	- (B) - Ratio	5.5	4	543	266	168	212	58	615	266	168	212	68

- Note: 1. indicates motor capacity.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

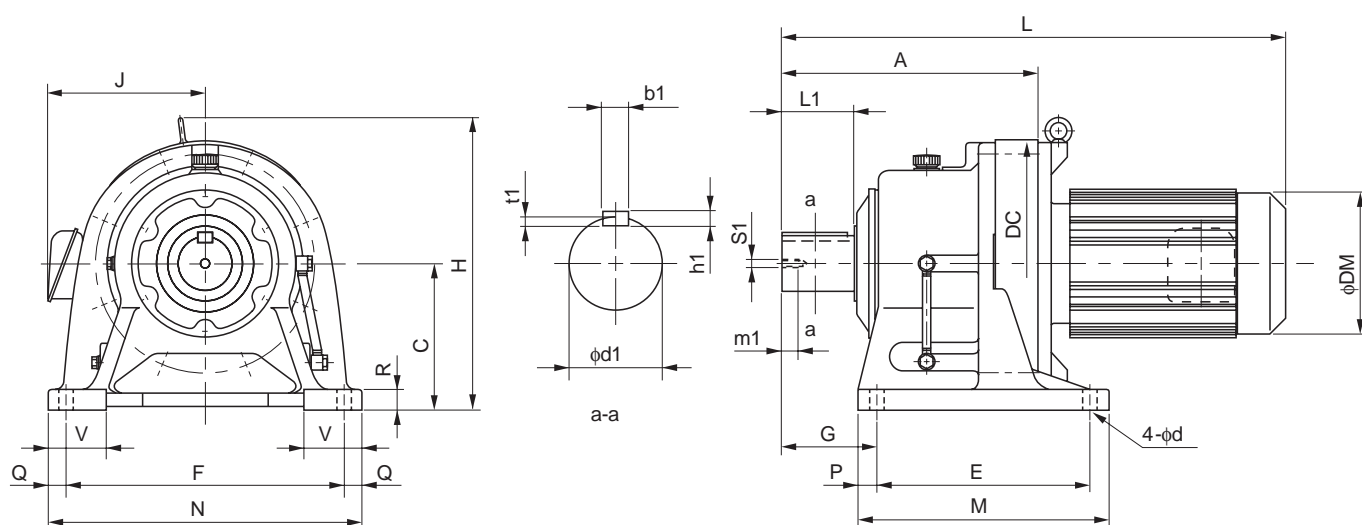CHHM^{Note 1}- 614H, 616H (Center Height Option)

GEARMOTORS

Dimension Tables
Center Height Option

Frame size	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft <small>Note 2, 3, 5</small>						
														d1	L1	b1	h1	t1	S1	m1
614H	260	160	230	145	290	120	195	330	25	20	22	65	18	50	90	14	9	5.5	M10	18
616H	308	200	300	150	370	139	238	410	44	20	25	75	18	60	90	18	11	7	M10	18

Model	Note 4	Motor		Standard					With Brake				
		kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM1 - 614H	- (B) - Ratio	0.75	4	497	268	140	148	52	540	268	140	148	57
CHHM1H - 614H	- (B) - Ratio	1.1	4	530	268	145	160	58	592	268	145	160	63
CHHM2 - 614H	- (B) - Ratio	1.5	4	530	268	145	160	58	592	268	145	160	63
CHHM3 - 614H	- (B) - Ratio	2.2	4	550	274	152	173	61	613	274	152	173	68
CHHM4 - 614H	- (B) - Ratio	3.0	4	573	296	168	212	71	645	296	168	212	81
CHHM5 - 614H	- (B) - Ratio	3.7	4	573	296	168	212	71	645	296	168	212	81
CHHM8 - 614H	- (B) - Ratio	5.5	4	617	296	168	212	78	689	296	168	212	88
CHHM10 - 614H	- (B) - Ratio	7.5	4	640	323	213	251	93	735	323	213	251	111
CHHM15 - 614H	- (B) - Ratio	11	4	700	323	213	251	107	795	323	213	251	125
*CHHM20 - 614H	- (B) - Ratio	15	4	790	358	261	324	159	880	321	261	324	193
CHHM1H - 616H	- (B) - Ratio	1.1	4	583	310	145	160	99	645	310	145	160	104
CHHM2 - 616H	- (B) - Ratio	1.5	4	583	310	145	160	99	645	310	145	160	104
CHHM3 - 616H	- (B) - Ratio	2.2	4	598	310	152	173	102	661	310	152	173	108
CHHM4 - 616H	- (B) - Ratio	3.0	4	621	310	168	212	111	693	310	168	212	121
CHHM5 - 616H	- (B) - Ratio	3.7	4	621	310	168	212	111	693	310	168	212	121
CHHM8 - 616H	- (B) - Ratio	5.5	4	665	310	168	212	118	737	310	168	212	128
CHHM10 - 616H	- (B) - Ratio	7.5	4	693	333	213	251	134	788	333	213	251	151
CHHM15 - 616H	- (B) - Ratio	11	4	753	333	213	251	148	848	333	213	251	165
CHHM20 - 616H	- (B) - Ratio	15	4	838	368	261	324	201	928	368	261	324	235
CHHM25 - 616H	- (B) - Ratio	18.5	4	933	368	328	394	277	1098	368	328	394	328
CHHM30 - 616H	- (B) - Ratio	22	4	933	368	328	394	277	1098	368	328	394	328

*** indicates models with bottom level of the motor lower than the reducer base.

Note: 4. "B" after the frame size indicates models equipped with brake.

5. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

6. Dimensions in above drawings are subject to change without notice.

C

CYCLO® SPEED REDUCERS

	Page
1. How to Select	
Standard Specifications	C-3
Model Selection	C-4
Selection of Load Factor	C-7
Nomenclature	C-9
2. Selection Tables	C-11
3. Dimension Tables	C-69

C CYCLO® SPEED REDUCER

1. How to Select

Sumitomo Drive Technologies
»» Building Tomorrow Together

CYCLO DRIVE GEAR REDUCER
CNH / CHH / CNV / CVV CYCLO 6000
CYCLO SPEED REDUCER GEAR PORTION

Sumitomo Drive Technologies
CYCLO 6000

GEAR HEAD ONLY

Sumitomo Drive Technologies

victorysystem@gmail.com
www.victorysystem.co.th
LINE OA : @hipower89
LET'S SUMITOMO GEAR MOTOR

Standard Specifications of Reducer

		CYCLO® DRIVE 6000 Series	CYCLO® DRIVE 6000SK Series (With "SK" at the end of frame size)
Lubrication		Grease or oil lubricated models	Grease lubricated models
Speed reduction		Internal planetary gear mechanism with trochoidal curved tooth profile	Involute gear mechanism
Output rotation direction		Single reduction type	Reverse rotation direction
		Duple reduction type	Same rotation direction
		(*Note the difference with single reduction type of CYCLO® DRIVE 6000 Series.)	
		*In contrast to input rotation direction.	
Ambient Conditions	Installation location	Indoors (Minimal)	
	Ambient Temperature	-10°~40°C	
	Ambient Humidity	Under 85%	
	Elevation	Under 1,000 meters	
	Atmosphere	Well ventilated location, free of corrosive gases, explosive gases, vapors and dust.	
Method of Mounting Note 1		CHH Type : slow speed shaft in horizontal direction and with foot CHF Type : slow speed shaft in horizontal direction and with flange (not for 6000SK Series) CVV Type : slow speed shaft down in vertical direction and with V-flange *Models with "N" for the second nomenclature symbol (such as CNH Type) may be mounted in any direction.	
Method of coupling with driven machine		Coupling, gears, chain sprocket or belt.	
Painting		Type : Acrylic modified phthalic Colour : Equivalent to Mancel 6.5PB 3.6/8.2.	

Note: 1. Models for universal mounting (types with N for the second digit of nomenclature) can be manufactured for following frame sizes only. Other frame sizes require indication for mounting direction.

[Frame sizes for universal mounting direction] *□ of the frame size indicates 0, 5, or H.
606□, 607□, 608□, 609□, 610□, 611□, 612□,
606□DA, 607□DA, 608□DA, 609□DA, 610□DA, 612□DA, 612□DB

Description of Our Selection Table

This is a brief description of our tables on page C-11 and after.

Upper row: Output speed (r/min)
 Lower row: Reduction ratio
 * Note that "reduction ratio = nominal ratio" for models with "SK" at the end of frame size (6000 SK Series).
 (Indicated reduction ratio is the same as actual reduction ratios for other models.)

Input speed (r/min)

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6060 ~ 6120

Frame Size	n ₂ [r/min] Ratio[Z]	n ₁ : Input Speed [r/min]												T _{out} : Allowable output torque [N·m, kgf·m]			
		242	181	132	112	96.7	85.3	69.0	58.0	50.0	41.4	33.7	28.4	24.6	2	P _{in} : Allowable input power [kW]	P _{out} : Allowable output shaft radial load [N, kgf·m]
6060	n ₁ = 1450 r/min																
	P _{in} [kW]	0.200	0.200	0.200	0.200	0.200	0.200	0.183	0.110	0.110	0.110	0.089	-	-			
	T _{out} [N·m]	7.51	10.0	13.8	16.3	18.8	21.3	24.0	17.2	20.0	24.0	24.0	-	-			
	T _{out} [kgf·m]	0.766	1.02	1.41	1.66	1.92	2.17	2.45	1.75	2.04	2.45	2.45	-	-			
	Pro[N]	798	912	1180	1180	1180	1180	1180	1180	1180	1180	1180	-	-			
6065	P _{in} [kW]	0.286	0.286	0.286	0.286	0.286	0.282	0.228	0.166	0.165	0.137	0.112	-	-			
	T _{out} [N·m]	10.7	14.3	19.7	23.3	26.9	30.0	30.0	25.9	30.0	30.0	30.0	-	-			
	T _{out} [kgf·m]	1.09	1.46	2.01	2.38	2.74	3.06	3.06	2.64	3.06	3.06	3.06	-	-			
	Pro[N]	793	904	1180	1180	1180	1180	1180	1180	1180	1180	1180	-	-			
	Pro[kgf]	80.8	92.2	120	120	120	120	120	120	120	120	120	-	-			
6070	P _{in} [kW]	0.347	0.347	0.347	0.347	0.347	0.347	0.310	0.230	0.226	0.205	0.167	0.100	0.100			
	T _{out} [N·m]	13.0	17.3	23.9	28.2	32.5	36.9	42.1	35.9	41.0	45.0	45.0	31.9	36.9			
	T _{out} [kgf·m]	1.33	1.76	2.44	2.87	3.31	3.76	4.29	3.66	4.18	4.59	4.59	3.25	3.76			
	Pro[N]	1380	1520	1690	1770	1770	1770	1770	1770	1770	1770	1770	1770	1770			
	Pro[kgf]	141	155	172	180	180	180	180	180	180	180	180	180	180			
6075	P _{in} [kW]	0.407	0.407	0.407	0.407	0.407	0.407	0.407	0.294	0.286	0.272	0.223	0.143	0.136			
	T _{out} [N·m]	15.3	20.4	28.0	33.1	38.2	43.3	53.5	46.0	52.0	59.6	60.0	45.7	50.1			
	T _{out} [kgf·m]	1.56	2.08	2.85	3.37	3.89	4.41	5.45	4.69	5.30	6.08	6.12	4.66	5.11			
	Pro[N]	1370	1510	1680	1770	1770	1770	1770	1770	1770	1770	1660	1750	1700			
	Pro[kgf]	140	154	171	180	180	180	180	180	180	180	169	178	173			
P _{in} [kW]		0.592	0.592	0.592	0.592	0.592	0.592	0.478	0.340	0.340	0.340	0.250	0.192	0.185	0.		



Frame size

First row: Allowable input capacity (kW)
 Second row: Allowable output torque (N·m)
 Third row: Allowable output torque (kgf·m)
 Fourth row: Allowable radial load at slow speed shaft (N)
 Fifth row: Allowable radial load at slow speed shaft (kgf)

REDUCERS
How to Select

Selection of Load Factor

CYCLO® SPEED REDUCER is designed for operation under uniform load for 10 hours/day.

Load factors below must be considered for operations exceeding 10 hours/day or load condition of your application. Select load factor by method (1) or (2) according to the load characteristics.

(1) Load Factor Selection by Load Classifications

[Load Factor] U: Uniform load M: Moderate shock H: Heavy shock

Table C-1 Reducer Load Factor

Daily Duty	~3 hours/day			~10 hours/day			~24 hours/day		
	U	M	H	U	M	H	U	M	H
Load Factor	0.80	1.00	1.35	1.00	1.20	1.50	1.50	1.35	1.60

Table C-2 Recommended Load Classifications

Type of APPLICATION	Type of LOAD	Type of APPLICATION	Type of LOAD	Type of APPLICATION	Type of LOAD	Type of APPLICATION	Type of LOAD
*Aerator		Elevators		slab conveyor.....	H	suction roll.....	U
Agitators.		bucket - uniform load.....	U	small waste-conveyor-belt.....	U	washers & thickeners.....	M
pure liquids.....	U	bucket - heavy load.....	M	small waste-conveyor-chain.....	M	winders.....	U
liquids & solids.....	M	centrifugal discharge.....	U	sorting table.....	M		
liquids-variable density.....	M	escalators.....	U	tipple hoist conveyor.....	M	*Printing Presses	
Blowers		*man lifts.....	U	tipple hoist drive.....	M	Pullers	
centrifugal.....	U	*passenger.....		transfer conveyors.....	M	barge haul.....	H
lobe.....	M	**Extruders(Plastics)		transfer rolls.....	M	Pumps	
vane.....	U	blow molders.....	M	tray drive.....	M	centrifugal.....	U
Brewing & Distilling		coating.....	U	trimmer feed.....	M	proportioning.....	M
bottling machinery.....	U	film.....	U	waste conveyor.....	M	reciprocating single acting, 3 or more cylinders.....	M
brew kettles, cont. duty.....	U	pipe.....	U			double acting, 2 or more cylinders M	
cookers-cont. duty.....	U	pre-plasticizers.....	M	Machine Tools		*single acting, 1 or 2 cylinders.....	
mash tubs-cont. duty.....	U	rods.....	U	bending roll.....	M	*double acting, single cylinder.....	
scale hopper, frequent starts.....	M	sheet.....	U	punch press-gear driven.....	H	rotary-gear type.....	U
Can Filling Machines.....	U	tubing.....	U	*notching press-belt driven.....		rotary-lobe, vane.....	U
*Cane Knives.....	M			plate planers.....	H		
Car Dumpers.....	H			tapping machine.....	H	Rubber & Plastics Industries	
Car Pullers.....	M			other machine tools		*crackers.....	H
Clarifiers.....	U			main drives.....	M	laboratory equipment.....	M
Classifiers.....	M			auxiliary drives.....	U	*mixing mills.....	H
Clay Working Machinery						*refiners.....	M
brick press.....	H			Metal Mills		*rubber calendars.....	M
briquette machine.....	H			draw bench carriage & main drive.....	M	*rubber mill(2 on line).....	M
clay working machinery.....	M			forming machines.....	H	*rubber mill(3 on line).....	U
pug mill.....	M			*pinch, dryer & scrubber rolls, reversing.....		*sheeter.....	M
Compressors				slitters.....	M	*tire building machines.....	
centrifugal.....	U			table conveyors-non-reversing group drives.....	M	*tire & tube press openers.....	
lobe.....	M			individual drives.....	H	*tubers & strainers.....	M
reciprocating, multi-cylinder.....	M			*table conveyors-reversing.....		*warming mills.....	M
reciprocating, single-cylinder.....	H			wire drawing & flattening machine M			
Conveyors-Uniformly Loaded or Fed				wire winding machine.....	M	Sand Muller.....	M
apron.....	U					Screeners	
assembly.....	U			Mills, Rotary Type		air washing.....	U
belt.....	U			**ball.....	M	rotary-stone or gravel.....	M
bucket.....	U			**cement kilns.....	M	traveling water intake.....	U
chain.....	U			**dryers & coolers.....	M		
flight.....	U			kilns.....	M	Sewage Disposal Equipment	
oven.....	U			**pebble.....	M	bar screens.....	U
screw.....	U			**rod, plain & wedge bar.....	M	chemical feeders.....	U
Conveyors-Heavy Duty Not Uniformly Fed				tumbling barrels.....	H	collectors, circuline or straightline.....	U
apron.....	M			Mixers		dewatering screws.....	M
assembly.....	M			concrete mixers, cont.	M	grit collectors.....	U
belt.....	M			concrete mixers, intermittent.....	M	scum breakers.....	M
bucket.....	M			constant density.....	U	slow or rapid mixers.....	M
chain.....	M			variable density.....	M	sludge collectors.....	U
flight.....	M			Oil Industry		thickeners.....	M
*live roll.....	M			chillers.....	M	vacuum filters.....	M
oven.....	M			*oil well pumping.....		Slab Pushers.....	M
reciprocating.....	H			paraffin filter press.....	M	*Steering Gear	
screw.....	M			rotary kilns.....	M	Stokers.....	U
shaker.....	H					Sugar Industry	
Cranes(Except for Dry Dock Cranes)				Paper Mills		*cane knives.....	M
main hoists.....				agitators(mixers).....	M	*crushers.....	M
*bridge travel.....				barker-auxiliaries-hydraulic.....	M	*mills.....	H
*trolley travel.....				barker-mechanical.....	M		
Crusher				barking drum.....	H	Textile Industry	
ore.....	H			beater & pulper.....	M	batchers.....	M
stone.....	H			bleacher.....	U	calendars.....	M
**sugar.....	M			calendars.....	M	cards.....	M
Dredges				calendars-super.....	H	dry cans.....	M
cable reels.....	M			converting machine, except cutters, platers.....	M	dryers.....	M
conveyors.....	M			conveyors.....	U	dyeing machinery.....	M
cutter head drives.....	H			couch.....	M	*knitting machines.....	
jig drives.....	H			cutters-platers.....	H	looms.....	M
maneuvering winches.....	M			cylinders.....	M	mangles.....	M
pumps.....	M			dryers.....	M	nappers.....	M
screen drive.....	H					pads.....	M
stackers.....	M			Paper Mills		*range drives.....	
utility winches.....	M			felt stretcher.....	M	slashers.....	M
*Dry Dock Cranes				felt whipper.....	H	soapers.....	M
				jordans.....	H	spinners.....	M
				log haul.....	H	tenter frames.....	M
				presses.....	U	washers.....	M
				pulp machine reel.....	M	winders.....	M
				stock chests.....	M	*Windlass	


Remarks: * Refer to factory.

** To be selected on basis of 24hr. service only.

Note: Table above contains reference value. Names and mechanical characteristics of the actual machine may differ from the table above.

Nomenclature

Slow Speed Shaft Direction	
Horizontal, slow speed shaft level	H
Vertical, slow speed shaft down	V
Vertical, slow speed shaft up	W
Universal mounting	N

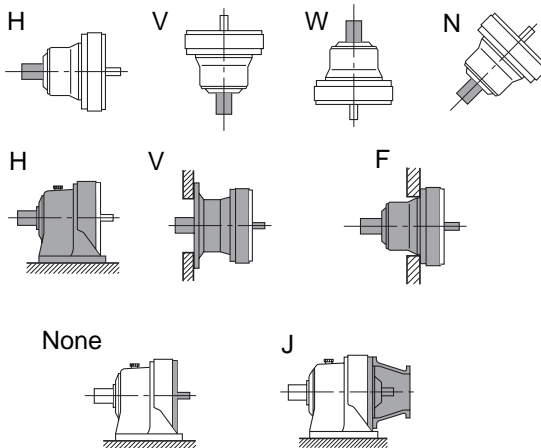

Mounting style	
Foot	H
V flange	V
Flange	F

Type of Input	
Gearmotor	M
With adaptor	JM


Special Specifications	
Standard specification	blank
Special specification	S

Shaft specification	
Metric JIS (Standard)	-
Inch size	Y
Metric DIN	G

Suffix			
Standard	-	HH Type Ceiling	H1
Light Heavy Radial	R1	Modification Left Wall	H2
High Cap. Brg. Ductile Casing	R2	Modification Right Wall	H3
Baseplate	BP	Torque Limiter	TL
Low Backlash	LB		

Frame size
(Refer to Selection
Tables starting from
page C-11.)

Nominal ratio

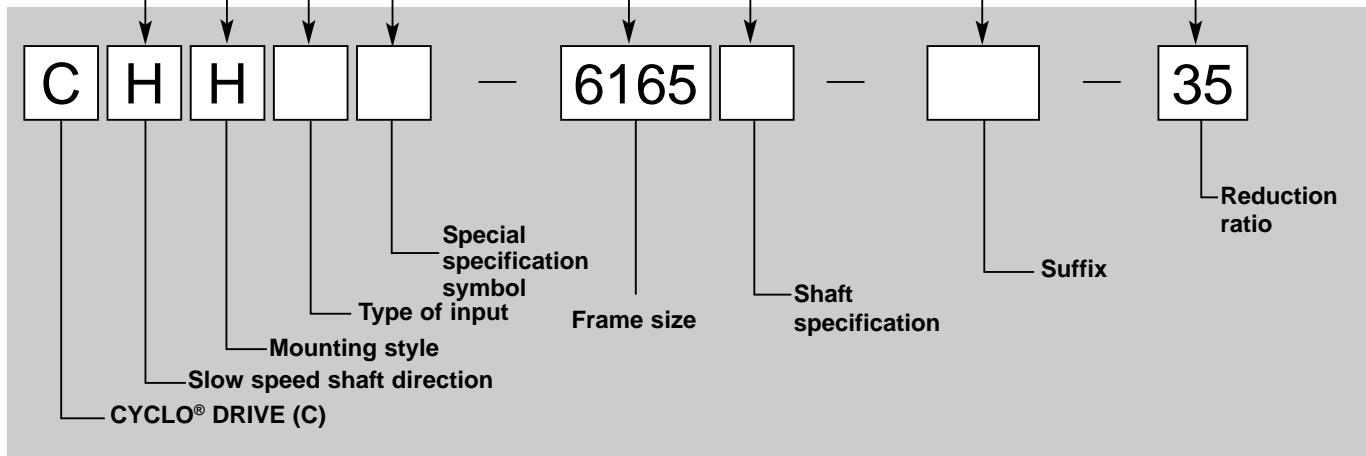

REDUCERS
How to Select

Nomenclature and Product Examples

Nomenclature Examples(Speed Reducer)

Example 1.

CNH - 6115 - 29

C:	Model	- CYCLO® DRIVE
N:	Slow speed shaft direction	- Universal direction
H:	Mounting style	- Foot
6115:	Frame size	- 6115
29:	Reduction ratio	- 29

Example 2.

CVV - 6195DA - 377

C:	Model	- CYCLO® DRIVE
V:	Slow speed shaft direction	- Vertical mounting
V:	Mounting style	- V flange
6195DA:	Frame size	- 6195DA
377:	Reduction ratio	- 377

REDUCERS


How to Select

Product and Nomenclature Symbol Examples (Speed Reducer)


Standard and various application products of CYCLO SPEED REDUCER are classified by their nomenclature symbol as below. Refer to specific catalogs or consult us for details on our application products.

CYCLO® SPEED REDUCERS


CHH
(CNH)




CHF
(CNF)




CHV
(CNV)




CVH
(CNH)




CVF
(CNF)




CVV
(CNV)




CWH
(CNH)




CHF
(CNF)



CWV
(CNV)




CHHJ




With Adaptor

CHFJ



With Adaptor


CVVJ



With Adaptor


CYCLO® SPEED REDUCERS Application Products

CHHX
(CNHX)




Input Side Hollow Shaft

CHFX
(CNFX)



Input Side Hollow Shaft

CVVX
(CNVX)




Input Side Hollow Shaft

C CYCLO® SPEED REDUCERS

2. Selection Tables

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6060 ~ 6120




Input Speed		$n_1 = 50$ r/min		n_2 : Input Speed [r/min]																T_{out} : Allowable output torque [N·m, kgf·m]	
		n_2 : Output Speed [r/min]																Pro: Allowable output shaft radial load [N, kgf]			
		P_i : Allowable input power [kW]																*Consult us for Pro of CNF and CHF type.			
Frame Size	n_2 [r/min]	Ratio[Z]																Dim. Page			
		8.33	6.25	4.55	3.85	3.33	2.94	2.38	2.00	1.72	1.43	1.16	0.980	0.847	0.704	0.575	0.420				
6060	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
		T_{out} [N·m]		T_{out} [kgf·m]		Pro[N]		Pro[kgf]		-	-	-	-	-	-	-	-	-			
6065	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
		T_{out} [N·m]		T_{out} [kgf·m]		Pro[N]		Pro[kgf]		-	-	-	-	-	-	-	-	-			
6070	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
		T_{out} [N·m]		T_{out} [kgf·m]		Pro[N]		Pro[kgf]		-	-	-	-	-	-	-	-	-			
6075	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
		T_{out} [N·m]		T_{out} [kgf·m]		Pro[N]		Pro[kgf]		-	-	-	-	-	-	-	-	-			
6080	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
		T_{out} [N·m]		T_{out} [kgf·m]		Pro[N]		Pro[kgf]		-	-	-	-	-	-	-	-	-			
6085	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
		T_{out} [N·m]		T_{out} [kgf·m]		Pro[N]		Pro[kgf]		-	-	-	-	-	-	-	-	-			
6090	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
		T_{out} [N·m]		T_{out} [kgf·m]		Pro[N]		Pro[kgf]		-	-	-	-	-	-	-	-	-			
6095	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
		T_{out} [N·m]		T_{out} [kgf·m]		Pro[N]		Pro[kgf]		-	-	-	-	-	-	-	-	-			
6100	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
		T_{out} [N·m]		T_{out} [kgf·m]		Pro[N]		Pro[kgf]		-	-	-	-	-	-	-	-	-			
6105	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
		T_{out} [N·m]		T_{out} [kgf·m]		Pro[N]		Pro[kgf]		-	-	-	-	-	-	-	-	-			
6110	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
		T_{out} [N·m]		T_{out} [kgf·m]		Pro[N]		Pro[kgf]		-	-	-	-	-	-	-	-	-			
6115	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
		T_{out} [N·m]		T_{out} [kgf·m]		Pro[N]		Pro[kgf]		-	-	-	-	-	-	-	-	-			
6120	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
		T_{out} [N·m]		T_{out} [kgf·m]		Pro[N]		Pro[kgf]		-	-	-	-	-	-	-	-	-			
Frame Size	n_2 [r/min]	Ratio[Z]																Dim. Page			
		6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119				

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.
 2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables Ratio 6 ~ 119 REDUCERS

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6125 ~ 6195



n_1 : Input Speed [r/min] T_{out} : Allowable output torque [N·m, kgf·m]
 n_2 : Output Speed [r/min] Pro: Allowable output shaft radial load [N, kgf]
 P: Allowable input power [kW] *Consult us for Pro of CNF and CHF type.

Input Speed $n_1 = 50$ r/min

Frame Size	n_2 [r/min] Ratio[Z]	8.33	6.25	4.55	3.85	3.33	2.94	2.38	2.00	1.72	1.43	1.16	0.980	0.847	0.704	0.575	0.420	Dim. Page	
6125	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CNH C-71 CNF C-76 CNV C-82	
	T_{out} [N·m]	366	574	622	630	630	630	630	630	630	630	630	630	630	592	630	-		
	T_{out} [kgf·m]	37.3	58.5	63.4	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	60.3	64.2	-		
	Pro[N]	9810	9810	9810	9810	9810	9810	9810	9810	9810	9810	9810	9810	9810	9810	9810	9560		-
	Pro[kgf]	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	975		-
6130	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72 CHF C-77 CVV C-83	
	T_{out} [N·m]	555	744	780	780	780	780	780	780	780	780	780	928	912	902	848	-		
	T_{out} [kgf·m]	56.6	75.8	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	94.6	93.0	91.9	86.4	-		
	Pro[N]	14700	14700	14700	14700	14700	14700	14700	14700	14700	14700	14700	14700	14700	14700	14700	14700		-
	Pro[kgf]	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500		-
6135	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72 CHF C-77 CVV C-83	
	T_{out} [N·m]	607	764	940	940	940	940	940	900	940	940	940	967	1050	1040	979	-		
	T_{out} [kgf·m]	61.9	77.9	95.8	95.8	95.8	95.8	95.8	91.7	95.8	95.8	95.8	98.6	107	106	99.8	-		
	Pro[N]	14700	14700	14700	14700	14700	14700	14700	14700	14700	14700	14700	14700	14700	14700	14700	14700		-
	Pro[kgf]	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500		-
6140	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72 CHF C-77 CVV C-83	
	T_{out} [N·m]	717	1150	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230		-
	T_{out} [kgf·m]	73.1	117	125	125	125	125	125	125	125	125	125	125	125	125	125	125		-
	Pro[N]	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000		-
	Pro[kgf]	1630	1630	1630	1630	1630	1630	1630	1630	1630	1630	1630	1630	1630	1630	1630	1630		-
6145	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72 CHF C-77 CVV C-83	
	T_{out} [N·m]	717	1150	1290	1370	1360	1370	1340	1370	1370	1370	1370	1370	1370	1370	1320	1250		-
	T_{out} [kgf·m]	73.1	117	131	140	139	140	137	140	140	140	140	140	140	140	135	127		-
	Pro[N]	16000	16000	16000	15900	16000	16000	16000	16000	15800	16000	15700	15700	16000	16000	16000	16000		-
	Pro[kgf]	1630	1630	1630	1620	1630	1630	1630	1630	1610	1630	1600	1600	1630	1630	1630	1630		-
6160	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72 CHF C-77 CVV C-84	
	T_{out} [N·m]	1320	1760	1760	1760	1760	1760	1760	1760	1760	1760	1740	1760	1760	1760	1760	-		
	T_{out} [kgf·m]	135	179	179	179	179	179	179	179	179	179	177	179	179	179	179	-		
	Pro[N]	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100		-
	Pro[kgf]	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250		-
6165	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72 CHF C-77 CVV C-84	
	T_{out} [N·m]	1320	1870	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2050	-		
	T_{out} [kgf·m]	135	191	214	214	214	214	214	214	214	214	214	214	214	214	209	-		
	Pro[N]	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	21800	-		
	Pro[kgf]	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2220	-		
6170	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72 CHF C-77 CVV C-84	
	T_{out} [N·m]	1860	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	-		
	T_{out} [kgf·m]	190	258	258	258	258	258	258	258	258	258	258	258	258	258	258	-		
	Pro[N]	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500		-
	Pro[kgf]	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010		-
6175	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72 CHF C-77 CVV C-84	
	T_{out} [N·m]	1860	2600	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	-		
	T_{out} [kgf·m]	190	265	321	321	321	321	321	321	321	321	321	321	321	321	321	-		
	Pro[N]	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500		-
	Pro[kgf]	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010		-
6180	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72 CHF C-77 CVV C-84	
	T_{out} [N·m]	-	-	4060	4060	4060	4060	4050	4050	4050	4050	4060	4050	4050	4050	4060	-		
	T_{out} [kgf·m]	-	-	414	414	414	414	413	413	413	413	414	413	413	413	414	-		
	Pro[N]	-	-	41700	41700	41700	41700	41700	41700	41700	41700	41700	41700	41700	41700	41700	41700		-
	Pro[kgf]	-	-	4250	4250	4250	4250	4250	4250	4250	4250	4250	4250	4250	4250	4250	4250		-
6185	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72 CHF C-77 CVV C-84	
	T_{out} [N·m]	-	-	4810	4900	4920	5000	5000	5000	5000	5000	5000	5000	5000	5000	4510	5000		-
	T_{out} [kgf·m]	-	-	490	499	502	510	510	510	510	510	510	510	510	510	460	510		-
	Pro[N]	-	-	41700	41700	41700	41700	41700	41700	41700	41700	41700	41700	41700	41600	41700	41700		-
	Pro[kgf]	-	-	4250	4250	4250	4250	4250	4250	4250	4250	4250	4250	4250	4240	4250	4250		-
6190	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72 CHF C-77 CVV C-84	
	T_{out} [N·m]	-	-	6380	6380	6380	6380	6380	6380	6380	6380	6380	6380	6380	6380	6380	6380		-
	T_{out} [kgf·m]	-	-	650	650	650	650	650	650	650	650	650	650	650	650	650	650		-
	Pro[N]	-	-	59000	58700	58900	59000	59000	59000	59000	59000	59000	59000	58700	58600	58400	58900		-
	Pro[kgf]	-	-	6010	5980	6000	6010	6010	6010	6010	6010	6010	6010	5980	5970	5950	6000		-
6195	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72 CHF C-77 CVV C-84	
	T_{out} [N·m]	-	-	7580	7630	7910	7960	7960	7960	7960	7960	7960	7960	7960	7960	7960	7960		-
	T_{out} [kgf·m]	-	-	773	778	806	811	811	811	811	811	811	811	811	811	811	811		-
	Pro[N]	-	-	59000	58200	58300	59000	59000	59000	59000	59000	58600	59000	58200	58100	58000	58400		-
	Pro[kgf]	-	-	6010	5930	5940	6010	6010	6010	6010	6010	5970	6010	5930	5920	5910	5950		-


Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.

2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6205 ~ 6275

Input Speed	$n_1 = 50$ r/min	n_1 : Input Speed [r/min]	T_{out} : Allowable output torque [N·m, kgf·m]
		n_2 : Output Speed [r/min]	Pro: Allowable output shaft radial load [N, kgf]
		P_i : Allowable input power [kW]	*Consult us for Pro of CNF and CHF type.




Selection Tables Ratio 6 ~ 119 REDUCERS

Frame Size	n_2 [r/min]	8.33	6.25	4.55	3.85	3.33	2.94	2.38	2.00	1.72	1.43	1.16	0.980	0.847	0.704	0.575	0.420	Dim. Page
	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	
6205	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	8620	-	9270	-	9270	-	9230	-	9300	-	9300	-	8760	-	
	T_{out} [kgf·m]	-	-	879	-	945	-	945	-	941	-	948	-	948	-	893	-	
	Pro[N]	-	-	84100	-	84100	-	84100	-	84100	-	84100	-	84100	-	84100	-	
	Pro[kgf]	-	-	8570	-	8570	-	8570	-	8570	-	8570	-	8570	-	8570	-	
6215	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	11400	-	12200	-	12500	-	12700	-	12700	-	12700	-	11300	-	
	T_{out} [kgf·m]	-	-	1160	-	1240	-	1270	-	1290	-	1290	-	1290	-	1150	-	
	Pro[N]	-	-	104000	-	104000	-	104000	-	104000	-	104000	-	104000	-	104000	-	
	Pro[kgf]	-	-	10600	-	10600	-	10600	-	10600	-	10600	-	10600	-	10600	-	
6225	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	13500	-	14500	-	14800	-	15000	-	16000	-	15900	-	15100	-	
	T_{out} [kgf·m]	-	-	1380	-	1480	-	1510	-	1530	-	1630	-	1620	-	1540	-	
	Pro[N]	-	-	145000	-	145000	-	145000	-	145000	-	145000	-	145000	-	145000	-	
	Pro[kgf]	-	-	14800	-	14800	-	14800	-	14800	-	14800	-	14800	-	14800	-	
6235	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	18700	-	19600	-	18900	-	18900	-	20500	-	20500	-	17200	-	
	T_{out} [kgf·m]	-	-	1910	-	2000	-	1930	-	1930	-	2090	-	2090	-	1750	-	
	Pro[N]	-	-	179000	-	179000	-	179000	-	179000	-	179000	-	179000	-	179000	-	
	Pro[kgf]	-	-	18200	-	18200	-	18200	-	18200	-	18200	-	18200	-	18200	-	
6245	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	20500	-	26200	-	25800	-	25800	-	25800	-	25800	-	22600	-	
	T_{out} [kgf·m]	-	-	2090	-	2670	-	2630	-	2630	-	2630	-	2630	-	2300	-	
	Pro[N]	-	-	208000	-	208000	-	208000	-	208000	-	208000	-	208000	-	208000	-	
	Pro[kgf]	-	-	21200	-	21200	-	21200	-	21200	-	21200	-	21200	-	21200	-	
6255	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	27500	-	31200	-	31000	-	32500	-	34500	-	34500	-	31000	-	
	T_{out} [kgf·m]	-	-	2800	-	3180	-	3160	-	3310	-	3520	-	3520	-	3160	-	
	Pro[N]	-	-	257000	-	258000	-	258000	-	258000	-	258000	-	258000	-	258000	-	
	Pro[kgf]	-	-	26200	-	26300	-	26300	-	26300	-	26300	-	26300	-	26300	-	
6265	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	31300	-	43700	-	46000	-	46000	-	46000	-	46000	-	44000	-	
	T_{out} [kgf·m]	-	-	3190	-	4450	-	4690	-	4690	-	4690	-	4690	-	4490	-	
	Pro[N]	-	-	276000	-	276000	-	276000	-	276000	-	276000	-	276000	-	276000	-	
	Pro[kgf]	-	-	28100	-	28100	-	28100	-	28100	-	28100	-	28100	-	28100	-	
6275	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72 CVV C-84
	T_{out} [N·m]	-	-	-	-	-	-	-	-	68200	-	68200	-	68200	-	68200	-	
	T_{out} [kgf·m]	-	-	-	-	-	-	-	-	6950	-	6950	-	6950	-	6950	-	
	Pro[N]	-	-	-	-	-	-	-	-	248000	-	248000	-	248000	-	245000	-	
	Pro[kgf]	-	-	-	-	-	-	-	-	25300	-	25300	-	25300	-	25000	-	

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.
 2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6060 ~ 6120




Input Speed	$n_1 = 580$ r/min	n_1 : Input Speed [r/min]									T_{out} : Allowable output torque [N·m, kgf·m]							Dim. Page
		n_2 : Output Speed [r/min]									Pro: Allowable output shaft radial load [N, kgf]							
		P_1 : Allowable input power [kW]									*Consult us for Pro of CNF and CHF type.							
Frame Size	n_2 [r/min]	96.7	72.5	52.7	44.6	38.7	34.1	27.6	23.2	20.0	16.6	13.5	11.4	9.83	8.17	6.67	4.87	
	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	
6060	P_1 [kW]	0.200	0.192	0.139	0.118	0.102	0.090	0.073	0.061	0.053	0.044	0.036	-	-	-	-	-	CNH C-71
	T_{out} [N·m]	18.8	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	-	-	-	-	-	CNF C-76
	T_{out} [kgf·m]	1.92	2.45	2.45	2.45	2.45	2.45	2.45	2.45	2.45	2.45	2.45	-	-	-	-	-	CNV C-82
	Pro[N]	1020	1010	1180	1180	1180	1180	1180	1180	1180	1180	1180	-	-	-	-	-	-
	Pro[kgf]	104	103	120	120	120	120	120	120	120	120	120	-	-	-	-	-	-
6065	P_1 [kW]	0.267	0.216	0.174	0.148	0.128	0.113	0.091	0.077	0.066	0.055	0.045	-	-	-	-	-	CNH C-71
	T_{out} [N·m]	25.0	27.1	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	-	-	-	-	-	CNF C-76
	T_{out} [kgf·m]	2.55	2.76	3.06	3.06	3.06	3.06	3.06	3.06	3.06	3.06	3.06	-	-	-	-	-	CNV C-82
	Pro[N]	958	974	1140	1180	1180	1180	1180	1180	1180	1180	1180	-	-	-	-	-	-
	Pro[kgf]	97.7	99.3	116	120	120	120	120	120	120	120	120	-	-	-	-	-	-
6070	P_1 [kW]	0.316	0.288	0.262	0.221	0.192	0.169	0.137	0.115	0.099	0.082	0.067	0.056	0.049	-	-	-	CNH C-71
	T_{out} [N·m]	29.7	36.1	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	-	-	-	CNF C-76
	T_{out} [kgf·m]	3.03	3.68	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	-	-	-	CNV C-82
	Pro[N]	1770	1770	1770	1770	1770	1770	1770	1770	1770	1770	1770	1750	1770	-	-	-	-
	Pro[kgf]	180	180	180	180	180	180	180	180	180	180	180	178	180	-	-	-	-
6075	P_1 [kW]	0.316	0.288	0.291	0.273	0.256	0.226	0.183	0.153	0.132	0.110	0.089	0.071	0.062	-	-	-	CNH C-71
	T_{out} [N·m]	29.7	36.1	50.1	55.5	60.0	60.0	60.0	60.0	60.0	60.0	60.0	56.9	57.4	-	-	-	CNF C-76
	T_{out} [kgf·m]	3.03	3.68	5.11	5.66	6.12	6.12	6.12	6.12	6.12	6.12	6.12	5.80	5.85	-	-	-	CNV C-82
	Pro[N]	1770	1770	1770	1770	1770	1770	1770	1770	1770	1770	1770	1660	1580	-	-	-	-
	Pro[kgf]	180	180	180	180	180	180	180	180	180	180	180	169	161	-	-	-	-
6080	P_1 [kW]	0.592	0.592	0.465	0.393	0.341	0.301	0.235	0.205	0.176	0.146	0.119	0.100	0.087	0.072	0.059	-	CNH C-71
	T_{out} [N·m]	55.6	74.1	80.0	80.0	80.0	80.0	77.2	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	-	CNF C-76
	T_{out} [kgf·m]	5.67	7.55	8.15	8.15	8.15	8.15	7.87	8.15	8.15	8.15	8.15	8.15	8.15	8.15	8.15	-	CNV C-82
	Pro[N]	2540	2560	2560	2560	2560	2560	2560	2560	2500	2560	2540	2480	2510	2460	2450	-	-
	Pro[kgf]	259	261	261	261	261	261	261	261	255	261	259	253	256	251	250	-	-
6085	P_1 [kW]	0.778	0.778	0.581	0.492	0.426	0.376	0.235	0.256	0.220	0.183	0.149	0.125	0.108	0.090	0.073	-	CNH C-71
	T_{out} [N·m]	73.0	97.3	100	100	100	100	77.2	100	100	100	100	100	100	100	100	-	CNF C-76
	T_{out} [kgf·m]	7.44	9.92	10.2	10.2	10.2	10.2	7.87	10.2	10.2	10.2	10.2	10.2	10.2	10.2	10.2	-	CNV C-82
	Pro[N]	2510	2560	2560	2560	2560	2560	2560	2360	2300	2420	2340	2290	2310	2260	2260	-	-
	Pro[kgf]	256	261	261	261	261	261	261	241	234	247	239	233	235	230	230	-	-
6090	P_1 [kW]	1.15	1.15	0.872	0.738	0.639	0.564	0.457	0.384	0.331	0.274	0.223	0.186	0.158	0.119	0.110	0.058	CNH C-71
	T_{out} [N·m]	108	143	150	150	150	150	150	150	150	150	150	149	146	132	150	108	CNF C-76
	T_{out} [kgf·m]	11.0	14.6	15.3	15.3	15.3	15.3	15.3	15.3	15.3	15.3	15.3	15.2	14.9	13.5	15.3	11.0	CNV C-82
	Pro[N]	3340	3340	3340	3340	3340	3340	3340	3280	3290	3300	3310	3280	3300	3310	3310	3310	-
	Pro[kgf]	340	340	340	340	340	340	340	334	335	336	337	334	336	337	337	-	-
6095	P_1 [kW]	1.47	1.34	1.05	0.984	0.852	0.752	0.609	0.499	0.441	0.365	0.297	0.192	0.158	0.119	0.131	0.058	CNH C-71
	T_{out} [N·m]	138	168	181	200	200	200	200	195	200	200	200	153	146	132	178	108	CNF C-76
	T_{out} [kgf·m]	14.1	17.1	18.5	20.4	20.4	20.4	20.4	19.9	20.4	20.4	20.4	15.6	14.9	13.5	18.1	11.0	CNV C-82
	Pro[N]	3340	3340	3340	3340	3340	3340	3340	3190	3200	3200	3220	3280	3300	3310	3270	3310	-
	Pro[kgf]	340	340	340	340	340	340	340	325	326	326	328	334	336	337	333	337	-
6100	P_1 [kW]	1.82	1.86	1.45	1.23	1.07	0.940	0.761	0.639	0.551	0.457	0.372	0.313	0.271	0.225	0.184	0.134	CNH C-71
	T_{out} [N·m]	171	233	250	250	250	250	250	250	250	250	250	250	250	250	250	250	CNF C-76
	T_{out} [kgf·m]	17.4	23.8	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	CNV C-82
	Pro[N]	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5380	5400	5360
	Pro[kgf]	550	550	550	550	550	550	550	550	550	550	550	550	550	550	548	550	546
6105	P_1 [kW]	1.82	1.86	1.79	1.48	1.28	1.13	0.913	0.767	0.661	0.548	0.446	0.372	0.321	0.238	0.220	0.139	CNH C-71
	T_{out} [N·m]	171	233	308	300	300	300	300	300	300	300	300	297	296	264	300	258	CNF C-76
	T_{out} [kgf·m]	17.4	23.8	31.4	30.6	30.6	30.6	30.6	30.6	30.6	30.6	30.6	30.3	30.2	26.9	30.6	26.3	CNV C-82
	Pro[N]	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5310	5090	5370	4780	5350	-
	Pro[kgf]	550	550	550	550	550	550	550	550	550	550	550	541	519	547	487	545	-
6110	P_1 [kW]	2.06	2.88	2.09	1.77	1.53	1.35	1.10	0.921	0.794	0.658	0.535	0.451	0.390	0.324	0.265	-	CNH C-71
	T_{out} [N·m]	193	360	360	360	360	360	360	360	360	360	360	360	360	360	360	-	CNF C-76
	T_{out} [kgf·m]	19.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	-	CNV C-82
	Pro[N]	6210	6780	7610	7610	7610	7610	7610	7340	7200	7280	7590	7590	7610	7580	7600	-	-
	Pro[kgf]	633	691	776	776	776	776	776	748	734	742	774	774	776	773	775	-	-
6115	P_1 [kW]	2.06	3.25	2.44	2.07	1.79	1.58	1.28	1.07	0.926	0.767	0.624	0.526	0.455	0.378	0.309	-	CNH C-71
	T_{out} [N·m]	193	406	420	420	420	420	420	420	420	420	420	420	420	420	420	-	CNF C-76
	T_{out} [kgf·m]	19.7	41.4	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	-	CNV C-82
	Pro[N]	6210	6720	7610	7600	7610	7500	7460	7150	7010	7090	7370	7410	7430	7390	7410	-	-
	Pro[kgf]	633	685	776	775	776	765	760	729	715	723	751	755	757	753	755	-	-
6120	P_1 [kW]	3.90	4.00	3.05	2.58	2.24	1.96	1.59	1.34	1.15	0.959	0.781	0.658	0.569	0.473	0.386	-	CNH C-71
	T_{out} [N·m]	366	501	525	525	525	520	522	525	520	525	525	525	525	525	525	-	CNF C-76
	T_{out} [kgf·m]	37.3	51.1	53.5	53.5	53.5	53.0	53.2	53.5	53.0	53.5	53.5	53.5	53.5	53.5	53.5	-	CNV C-82
	Pro[N]	6880	7620	8740	9090	9810	9810	9810	9810	9810	9810	9810	9810	9810	9810	9780	-	-
	Pro[kgf]	701	777	891	927	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	997	-	-
Frame Size	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	Dim. Page
	n_2 [r/min]	96.7	72.5	52.7	44.6	38.7	34.1	27.6	23.2	20.0	16.6	13.5	11.4	9.83	8.17	6.67	4.87	

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.
 2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6125 ~ 6195



n_1 : Input Speed [r/min]	T_{out} : Allowable output torque [N·m, kgf·m]	Input Speed	$n_1 = 580$ r/min
n_2 : Output Speed [r/min]	Pro: Allowable output shaft radial load [N, kgf]		
P: Allowable input power [kW]	*Consult us for Pro of CNF and CHF type.		

Frame Size	n_2 [r/min] Ratio[Z]	96.7	72.5	52.7	44.6	38.7	34.1	27.6	23.2	20.0	16.6	13.5	11.4	9.83	8.17	6.67	4.87	Dim. Page
		6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	
6125	P_i [kW]	3.90	4.00	3.47	3.10	2.69	2.37	1.92	1.61	1.39	1.15	0.937	0.790	0.683	0.533	0.463	-	CNH C-71 CNF C-76 CNV C-82
	T_{out} [N·m]	366	501	596	630	630	630	630	630	630	630	630	630	630	592	630	-	
	T_{out} [kgf·m]	37.3	51.1	60.8	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	60.3	64.2	-	
	Pro[N]	6880	7620	8670	8980	9710	9810	9810	9810	9810	9810	9810	9810	9810	9810	9560	-	
	Pro[kgf]	701	777	884	915	990	1000	1000	1000	1000	1000	1000	1000	1000	1000	975	-	
6130	P_i [kW]	5.91	5.94	4.53	3.84	3.32	2.93	2.37	1.99	1.72	1.42	1.16	1.16	0.988	0.813	0.623	-	CHH C-72 CHF C-77 CVV C-83
	T_{out} [N·m]	555	744	780	780	780	780	780	780	780	780	780	928	912	902	848	-	
	T_{out} [kgf·m]	56.6	75.8	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	94.6	93.0	91.9	86.4	-	
	Pro[N]	7930	8800	10200	10700	11000	11800	12700	13300	14000	14700	14700	14700	14700	14700	14700	-	
	Pro[kgf]	808	897	1040	1090	1120	1200	1290	1360	1430	1500	1500	1500	1500	1500	1500	-	
6135	P_i [kW]	6.47	6.11	5.46	4.62	4.01	3.53	2.86	2.30	2.07	1.72	1.40	1.21	1.14	0.938	0.719	-	CHH C-72 CHF C-77 CVV C-83
	T_{out} [N·m]	607	764	940	940	940	940	940	900	940	940	940	967	1050	1040	979	-	
	T_{out} [kgf·m]	61.9	77.9	95.8	95.8	95.8	95.8	95.8	91.7	95.8	95.8	95.8	98.6	107	106	99.8	-	
	Pro[N]	7870	8780	10100	10600	10900	11700	12600	13200	13900	14700	14700	14700	14700	14700	14700	-	
	Pro[kgf]	802	895	1030	1080	1110	1190	1280	1350	1420	1500	1500	1500	1500	1500	1500	-	
6140	P_i [kW]	7.64	7.80	7.12	6.02	5.22	4.61	3.73	3.13	2.70	2.24	1.82	1.54	1.33	1.10	0.900	-	CHH C-72 CHF C-77 CVV C-83
	T_{out} [N·m]	717	976	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	-	
	T_{out} [kgf·m]	73.1	99.5	125	125	125	125	125	125	125	125	125	125	125	125	125	-	
	Pro[N]	12100	13400	15000	15500	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	-	
	Pro[kgf]	1230	1370	1530	1580	1630	1630	1630	1630	1630	1630	1630	1630	1630	1630	1630	-	
6145	P_i [kW]	7.64	7.80	7.51	6.74	5.79	5.15	4.07	3.50	3.02	2.50	2.04	1.72	1.48	1.19	0.917	-	CHH C-72 CHF C-77 CVV C-83
	T_{out} [N·m]	717	976	1290	1370	1360	1370	1340	1370	1370	1370	1370	1370	1370	1320	1250	-	
	T_{out} [kgf·m]	73.1	99.5	131	140	139	140	137	140	140	140	140	140	140	135	127	-	
	Pro[N]	12100	13400	15000	15400	16000	16000	16000	16000	15800	16000	15700	15700	16000	16000	16000	-	
	Pro[kgf]	1230	1370	1530	1570	1630	1630	1630	1630	1610	1630	1600	1600	1630	1630	1630	-	
6160	P_i [kW]	14.1	14.0	10.2	8.63	7.48	6.60	5.34	4.49	3.87	3.21	2.58	2.20	1.90	1.58	1.29	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	1320	1760	1760	1760	1760	1760	1760	1760	1760	1760	1740	1760	1760	1760	1760	-	
	T_{out} [kgf·m]	135	179	179	179	179	179	179	179	179	179	177	179	179	179	179	-	
	Pro[N]	13500	15000	17300	18200	19400	20100	21700	22100	22100	22100	22100	22100	22100	22100	22100	-	
	Pro[kgf]	1380	1530	1760	1860	1980	2050	2210	2250	2250	2250	2250	2250	2250	2250	2250	-	
6165	P_i [kW]	14.1	14.9	12.2	10.3	8.95	7.90	6.39	5.37	4.63	3.84	3.12	2.63	2.28	1.89	1.51	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	1320	1870	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2050	-	
	T_{out} [kgf·m]	135	191	214	214	214	214	214	214	214	214	214	214	214	214	209	-	
	Pro[N]	13500	14900	17000	18000	19200	19900	21500	22100	22100	22100	22100	22100	22100	22100	21800	-	
	Pro[kgf]	1380	1520	1730	1830	1960	2030	2190	2250	2250	2250	2250	2250	2250	2250	2220	-	
6170	P_i [kW]	19.8	20.2	14.7	12.4	10.8	9.51	7.70	6.47	5.58	4.62	3.76	3.17	2.74	2.28	1.86	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	1860	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	-	
	T_{out} [kgf·m]	190	258	258	258	258	258	258	258	258	258	258	258	258	258	258	-	
	Pro[N]	15100	16500	19300	20300	21400	22400	24400	25400	26900	28700	29500	29500	29500	29500	29500	-	
	Pro[kgf]	1540	1680	1970	2070	2180	2280	2490	2590	2740	2930	3010	3010	3010	3010	3010	-	
6175	P_i [kW]	19.8	20.8	18.3	15.5	13.4	11.8	9.59	8.06	6.94	5.75	4.68	3.95	3.41	2.84	2.31	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	1860	2600	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	-	
	T_{out} [kgf·m]	190	265	321	321	321	321	321	321	321	321	321	321	321	321	321	-	
	Pro[N]	15100	16500	18900	19900	21000	22000	24100	25100	26600	28400	29500	29500	29500	29500	29500	-	
	Pro[kgf]	1540	1680	1930	2030	2140	2240	2460	2560	2710	2900	3010	3010	3010	3010	3010	-	
6180	P_i [kW]	-	-	23.6	20.0	17.3	15.3	12.3	10.4	8.93	7.40	6.03	5.08	4.39	3.65	2.98	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	4060	4060	4060	4060	4050	4050	4050	4050	4060	4050	4050	4050	4060	-	
	T_{out} [kgf·m]	-	-	414	414	414	414	413	413	413	413	414	413	413	413	414	-	
	Pro[N]	-	-	25600	26700	28300	30000	32600	34000	35700	38200	41200	41700	41700	41700	41700	-	
	Pro[kgf]	-	-	2610	2720	2880	3060	3320	3470	3640	3890	4200	4250	4250	4250	4250	-	
6185	P_i [kW]	-	-	27.9	24.1	19.9	18.8	15.2	12.8	11.0	9.13	7.43	6.27	5.42	4.06	3.67	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	4810	4900	4670	5000	5000	5000	5000	5000	5000	5000	5000	4510	5000	-	
	T_{out} [kgf·m]	-	-	490	499	476	510	510	510	510	510	510	510	510	460	510	-	
	Pro[N]	-	-	25200	26400	28000	29600	32200	33600	35300	37900	40800	41700	41600	41700	41700	-	
	Pro[kgf]	-	-	2570	2690	2850	3020	3280	3430	3600	3860	4160	4250	4240	4250	4250	-	
6190	P_i [kW]	-	-	37.1	31.4	27.2	24.0	19.4	16.3	14.1	11.7	9.49	8.00	6.91	5.74	4.69	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	6380	6380	6380	6380	6380	6380	6380	6380	6380	6380	6380	6380	6380	-	
	T_{out} [kgf·m]	-	-	650	650	650	650	650	650	650	650	650	650	650	650	650	-	
	Pro[N]	-	-	35500	37100	39100	41500	45100	47400	49900	52900	57200	58700	58600	58400	58900	-	
	Pro[kgf]	-	-	3620	3780	3990	4230	4600	4830	5090	5390	5830	5980	5970	5950	6000	-	
6195	P_i [kW]	-	-	44.0	36.1	33.2	29.9	24.2	20.4	17.5	14.5	11.8	9.98	8.63	7.17	5.85	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	7570	7350	7800	7960	7960	7960	7960	7960	7960	7960	7960	7960	7960	-	
	T_{out} [kgf·m]	-	-	772	749	795	811	811	811	811	811	811	811	811	811	811	-	
	Pro[N]	-	-	35100	36700	38600	41000	44600	46900	49500	52500	56700	58200	58100	58000	58400	-	
	Pro[kgf]	-	-	3580	3740	3930	4180	4550	4780	5050	5350	5780	5930	5920	5910	5950	-	
Frame Size	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	Dim. Page
	n_2 [r/min]	96.7	72.5	52.7	44.6	38.7	34.1	27.6	23.2	20.0	16.6	13.5	11.4	9.83	8.17	6.67	4.87	


Selection Tables Ratio 6 - 119 REDUCERS

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.
2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6205 ~ 6275

Input Speed	$n_1 = 580$ r/min	n_1 : Input Speed [r/min]	T_{out} : Allowable output torque [N·m, kgf·m]
		n_2 : Output Speed [r/min]	Pro: Allowable output shaft radial load [N, kgf]
		P: Allowable input power [kW]	*Consult us for Pro of CNF and CHF type.



Selection Tables
Ratio 6 ~ 119
REDUCERS

Frame Size	n_2 [r/min]	96.7	72.5	52.7	44.6	38.7	34.1	27.6	23.2	20.0	16.6	13.5	11.4	9.83	8.17	6.67	4.87	Dim. Page
	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	
6205	P_1 [kW]	-	-	46.8	-	39.5	-	28.2	-	20.3	-	13.8	-	10.1	-	6.43	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	8050	-	9270	-	9270	-	9230	-	9300	-	9300	-	8760	-	
	T_{out} [kgf·m]	-	-	821	-	945	-	945	-	941	-	948	-	948	-	893	-	
	Pro[N]	-	-	67300	-	72500	-	81600	-	84100	-	84100	-	84100	-	84100	-	
	Pro[kgf]	-	-	6860	-	7390	-	8320	-	8570	-	8570	-	8570	-	8570	-	
6215	P_1 [kW]	-	-	64.0	-	51.9	-	38.1	-	27.9	-	18.8	-	13.7	-	8.28	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	11000	-	12200	-	12500	-	12700	-	12700	-	12700	-	11300	-	
	T_{out} [kgf·m]	-	-	1120	-	1240	-	1270	-	1290	-	1290	-	1290	-	1150	-	
	Pro[N]	-	-	67300	-	72600	-	82500	-	90200	-	102000	-	104000	-	104000	-	
	Pro[kgf]	-	-	6860	-	7400	-	8410	-	9190	-	10400	-	10600	-	10600	-	
6225	P_1 [kW]	-	-	74.7	-	61.7	-	45.1	-	33.2	-	23.8	-	17.2	-	11.1	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	12900	-	14500	-	14800	-	15000	-	16000	-	15900	-	15100	-	
	T_{out} [kgf·m]	-	-	1310	-	1480	-	1510	-	1530	-	1630	-	1620	-	1540	-	
	Pro[N]	-	-	71100	-	77100	-	86900	-	95200	-	108000	-	118000	-	133000	-	
	Pro[kgf]	-	-	7250	-	7860	-	8860	-	9700	-	11000	-	12000	-	13600	-	
6235	P_1 [kW]	-	-	99.9	-	83.6	-	57.5	-	41.7	-	30.5	-	22.2	-	12.6	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	17200	-	19600	-	18900	-	18900	-	20500	-	20500	-	17200	-	
	T_{out} [kgf·m]	-	-	1750	-	2000	-	1930	-	1930	-	2090	-	2090	-	1750	-	
	Pro[N]	-	-	88800	-	95300	-	108000	-	119000	-	133000	-	146000	-	166000	-	
	Pro[kgf]	-	-	9050	-	9710	-	11000	-	12100	-	13600	-	14900	-	16900	-	
6245	P_1 [kW]	-	-	117	-	112	-	78.5	-	56.9	-	38.4	-	28.0	-	16.6	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	20200	-	26200	-	25800	-	25800	-	25800	-	25800	-	22600	-	
	T_{out} [kgf·m]	-	-	2060	-	2670	-	2630	-	2630	-	2630	-	2630	-	2300	-	
	Pro[N]	-	-	98600	-	106000	-	119000	-	131000	-	149000	-	163000	-	185000	-	
	Pro[kgf]	-	-	10100	-	10800	-	12100	-	13400	-	15200	-	16600	-	18900	-	
6255	P_1 [kW]	-	-	151	-	133	-	94.4	-	71.6	-	51.3	-	37.4	-	22.8	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	25900	-	31200	-	31000	-	32500	-	34500	-	34500	-	31000	-	
	T_{out} [kgf·m]	-	-	2640	-	3180	-	3160	-	3310	-	3520	-	3520	-	3160	-	
	Pro[N]	-	-	121000	-	130000	-	146000	-	161000	-	182000	-	200000	-	226000	-	
	Pro[kgf]	-	-	12300	-	13300	-	14900	-	16400	-	18600	-	20400	-	23000	-	
6265	P_1 [kW]	-	-	175	-	175	-	140	-	101	-	68.4	-	49.8	-	32.3	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	30100	-	41000	-	46000	-	46000	-	46000	-	46000	-	44000	-	
	T_{out} [kgf·m]	-	-	3070	-	4180	-	4690	-	4690	-	4690	-	4690	-	4490	-	
	Pro[N]	-	-	148000	-	158000	-	177000	-	197000	-	222000	-	243000	-	274000	-	
	Pro[kgf]	-	-	15100	-	16100	-	18000	-	20100	-	22600	-	24800	-	27900	-	
6275	P_1 [kW]	-	-	-	-	-	-	-	-	150	-	101	-	73.9	-	50.1	-	CHH C-72 CVV C-84
	T_{out} [N·m]	-	-	-	-	-	-	-	-	68200	-	68200	-	68200	-	68200	-	
	T_{out} [kgf·m]	-	-	-	-	-	-	-	-	6950	-	6950	-	6950	-	6950	-	
	Pro[N]	-	-	-	-	-	-	-	-	228000	-	248000	-	248000	-	245000	-	
	Pro[kgf]	-	-	-	-	-	-	-	-	23200	-	25300	-	25300	-	25000	-	

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.
2. Refer to pages F-15~16 for allowable radial load for input shaft.


Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6060 ~ 6120

Input Speed	$n_1 = 720$ r/min	n_1 : Input Speed [r/min]									T_{out} : Allowable output torque [N·m, kgf·m]							Dim. Page	
		120	90.0	65.5	55.4	48.0	42.4	34.3	28.8	24.8	20.6	16.7	14.1	12.2	10.1	8.28	6.05		Pro: Allowable output shaft radial load [N, kgf]
Frame Size	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119		
6060	P_i [kW]	0.200	0.200	0.173	0.147	0.127	0.112	0.091	0.076	0.066	0.054	0.044	-	-	-	-	-	-	CNH C-71
	T_{out} [N·m]	15.1	20.2	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	-	-	-	-	-	-	CNF C-76
	T_{out} [kgf·m]	1.54	2.06	2.45	2.45	2.45	2.45	2.45	2.45	2.45	2.45	2.45	-	-	-	-	-	-	CNV C-82
	Pro[N]	999	1050	1180	1180	1180	1180	1180	1180	1180	1180	1180	-	-	-	-	-	-	
	Pro[kgf]	102	107	120	120	120	120	120	120	120	120	120	-	-	-	-	-	-	
6065	P_i [kW]	0.286	0.259	0.216	0.183	0.159	0.140	0.113	0.095	0.082	0.068	0.055	-	-	-	-	-	-	CNH C-71
	T_{out} [N·m]	21.6	26.1	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	-	-	-	-	-	-	CNF C-76
	T_{out} [kgf·m]	2.20	2.66	3.06	3.06	3.06	3.06	3.06	3.06	3.06	3.06	3.06	-	-	-	-	-	-	CNV C-82
	Pro[N]	987	985	1140	1180	1180	1180	1180	1180	1180	1180	1180	-	-	-	-	-	-	
	Pro[kgf]	101	100	116	120	120	120	120	120	120	120	120	-	-	-	-	-	-	
6070	P_i [kW]	0.347	0.325	0.325	0.275	0.238	0.210	0.170	0.143	0.123	0.102	0.083	0.070	0.061	-	-	-	-	CNH C-71
	T_{out} [N·m]	26.2	32.8	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	-	-	-	-	CNF C-76
	T_{out} [kgf·m]	2.67	3.34	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	-	-	-	-	CNV C-82
	Pro[N]	1710	1770	1770	1770	1770	1770	1770	1770	1770	1770	1770	1750	1770	-	-	-	-	
	Pro[kgf]	174	180	180	180	180	180	180	180	180	180	180	178	180	-	-	-	-	
6075	P_i [kW]	0.376	0.325	0.344	0.322	0.317	0.280	0.227	0.190	0.164	0.136	0.111	0.089	0.077	-	-	-	-	CNH C-71
	T_{out} [N·m]	28.4	32.8	47.7	52.7	60.0	60.0	60.0	60.0	60.0	60.0	60.0	56.9	57.4	-	-	-	-	CNF C-76
	T_{out} [kgf·m]	2.90	3.34	4.86	5.37	6.12	6.12	6.12	6.12	6.12	6.12	6.12	5.80	5.85	-	-	-	-	CNV C-82
	Pro[N]	1700	1770	1770	1770	1770	1770	1770	1770	1770	1770	1770	1660	1580	-	-	-	-	
	Pro[kgf]	173	180	180	180	180	180	180	180	180	180	180	169	161	-	-	-	-	
6080	P_i [kW]	0.592	0.592	0.577	0.488	0.423	0.373	0.292	0.254	0.219	0.181	0.148	0.124	0.108	0.089	0.073	-	-	CNH C-71
	T_{out} [N·m]	44.8	59.7	80.0	80.0	80.0	80.0	77.2	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	-	-	CNF C-76
	T_{out} [kgf·m]	4.57	6.09	8.15	8.15	8.15	8.15	7.87	8.15	8.15	8.15	8.15	8.15	8.15	8.15	8.15	-	-	CNV C-82
	Pro[N]	2380	2560	2560	2560	2560	2560	2560	2560	2500	2560	2540	2480	2510	2460	2450	-	-	
	Pro[kgf]	243	261	261	261	261	261	261	261	255	261	259	253	256	251	250	-	-	
6085	P_i [kW]	0.778	0.778	0.683	0.610	0.529	0.467	0.292	0.317	0.274	0.227	0.185	0.156	0.135	0.112	0.091	-	-	CNH C-71
	T_{out} [N·m]	58.8	78.4	94.7	100	100	100	77.2	100	100	100	100	100	100	100	100	-	-	CNF C-76
	T_{out} [kgf·m]	5.99	7.99	9.65	10.2	10.2	10.2	7.87	10.2	10.2	10.2	10.2	10.2	10.2	10.2	10.2	-	-	CNV C-82
	Pro[N]	2350	2530	2560	2560	2560	2560	2360	2300	2420	2340	2290	2310	2260	2260	-	-	-	
	Pro[kgf]	240	258	261	261	261	261	241	234	247	239	233	235	230	230	-	-	-	
6090	P_i [kW]	1.15	1.15	1.08	0.916	0.794	0.700	0.567	0.476	0.410	0.340	0.277	0.231	0.196	0.148	0.137	0.072	-	CNH C-71
	T_{out} [N·m]	86.7	116	150	150	150	150	150	150	150	150	149	146	132	150	108	-	-	CNF C-76
	T_{out} [kgf·m]	8.84	11.8	15.3	15.3	15.3	15.3	15.3	15.3	15.3	15.3	15.2	14.9	13.5	15.3	11.0	-	-	CNV C-82
	Pro[N]	3340	3340	3340	3340	3340	3340	3280	3290	3300	3310	3280	3300	3310	3310	3310	-	-	
	Pro[kgf]	340	340	340	340	340	340	340	334	335	336	337	334	336	337	337	-	-	
6095	P_i [kW]	1.52	1.52	1.24	1.19	1.06	0.934	0.756	0.588	0.547	0.453	0.369	0.239	0.196	0.148	0.154	0.072	-	CNH C-71
	T_{out} [N·m]	115	153	172	196	200	200	200	185	200	200	200	153	146	132	169	108	-	CNF C-76
	T_{out} [kgf·m]	11.7	15.6	17.5	20.0	20.4	20.4	20.4	18.9	20.4	20.4	20.4	15.6	14.9	13.5	17.2	11.0	-	CNV C-82
	Pro[N]	3340	3340	3340	3340	3340	3340	3210	3200	3200	3220	3280	3300	3310	3280	3310	-	-	
	Pro[kgf]	340	340	340	340	340	340	327	326	326	328	334	336	337	334	337	-	-	
6100	P_i [kW]	2.26	2.20	1.80	1.53	1.32	1.17	0.945	0.794	0.684	0.567	0.461	0.389	0.336	0.279	0.228	0.167	-	CNH C-71
	T_{out} [N·m]	171	222	250	250	250	250	250	250	250	250	250	250	250	250	250	250	-	CNF C-76
	T_{out} [kgf·m]	17.4	22.6	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	-	CNV C-82
	Pro[N]	5080	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5380	5400	5360	-
	Pro[kgf]	518	550	550	550	550	550	550	550	550	550	550	550	550	550	548	550	546	-
6105	P_i [kW]	2.26	2.20	2.22	1.83	1.59	1.40	1.13	0.952	0.821	0.680	0.554	0.462	0.398	0.295	0.274	0.172	-	CNH C-71
	T_{out} [N·m]	171	222	308	300	300	300	300	300	300	300	300	297	296	264	300	258	-	CNF C-76
	T_{out} [kgf·m]	17.4	22.6	31.4	30.6	30.6	30.6	30.6	30.6	30.6	30.6	30.6	30.3	30.2	26.9	30.6	26.3	-	CNV C-82
	Pro[N]	5080	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5310	5090	5370	4780	5350	-	
	Pro[kgf]	518	550	550	550	550	550	550	550	550	550	550	541	519	547	487	545	-	
6110	P_i [kW]	2.56	3.55	2.60	2.20	1.90	1.68	1.36	1.14	0.985	0.816	0.664	0.560	0.484	0.402	0.328	-	-	CNH C-71
	T_{out} [N·m]	193	358	360	360	360	360	360	360	360	360	360	360	360	360	360	-	-	CNF C-76
	T_{out} [kgf·m]	19.7	36.5	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	-	-	CNV C-82
	Pro[N]	5760	6280	7260	7550	7610	7610	7610	7340	7200	7280	7590	7590	7610	7580	7600	-	-	
	Pro[kgf]	587	640	740	770	776	776	776	748	734	742	774	774	776	773	775	-	-	
6115	P_i [kW]	2.56	3.92	3.03	2.56	2.22	1.96	1.59	1.33	1.15	0.952	0.775	0.654	0.565	0.469	0.383	-	-	CNH C-71
	T_{out} [N·m]	193	395	420	420	420	420	420	420	420	420	420	420	420	420	420	-	-	CNF C-76
	T_{out} [kgf·m]	19.7	40.3	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	-	-	CNV C-82
	Pro[N]	5760	6230	7180	7480	7610	7500	7460	7150	7010	7090	7370	7410	7430	7390	7410	-	-	
	Pro[kgf]	587	635	732	762	776	765	760	729	715	723	751	755	757	753	755	-	-	
6120	P_i [kW]	4.85	4.72	3.79	3.20	2.78	2.43	1.97	1.67	1.42	1.19	0.969	0.817	0.706	0.587	0.479	-	-	CNH C-71
	T_{out} [N·m]	366	476	525	525	525	520	522	525	520									

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6125 ~ 6195



n_1 : Input Speed [r/min]
 n_2 : Output Speed [r/min]
 P: Allowable input power [kW]

T_{out} : Allowable output torque [N·m, kgf·m]
 Pro: Allowable output shaft radial load [N, kgf]
 *Consult us for Pro of CNF and CHF type.

Input Speed

 $n_1 = 720$ r/min

Frame Size	n_2 [r/min] Ratio[Z]	120	90.0	65.5	55.4	48.0	42.4	34.3	28.8	24.8	20.6	16.7	14.1	12.2	10.1	8.28	6.05	Dim. Page
		6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	
6125	P_i [kW]	4.85	4.72	4.09	3.69	3.33	2.94	2.38	2.00	1.72	1.43	1.16	0.980	0.847	0.661	0.575	-	- - - - -
	T_{out} [N·m]	366	476	567	605	630	630	630	630	630	630	630	630	630	592	630	-	
	T_{out} [kgf·m]	37.3	48.5	57.8	61.7	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	60.3	64.2	-	
	Pro[N]	6380	7080	8050	8340	8990	9130	9810	9810	9810	9810	9810	9810	9810	9810	9560	-	
	Pro[kgf]	650	722	821	850	916	931	1000	1000	1000	1000	1000	1000	1000	1000	975	-	
6130	P_i [kW]	7.19	7.07	5.63	4.76	4.13	3.64	2.95	2.48	2.13	1.77	1.44	1.43	1.23	1.01	0.774	-	- - - - -
	T_{out} [N·m]	543	713	780	780	780	780	780	780	780	780	780	780	920	912	902	848	
	T_{out} [kgf·m]	55.4	72.7	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	93.8	93.0	91.9	86.4	-	
	Pro[N]	7350	8170	9450	9920	10200	11000	11800	12300	13000	13800	14700	14700	14700	14700	14700	-	
	Pro[kgf]	749	833	963	1010	1040	1120	1200	1250	1330	1410	1500	1500	1500	1500	1500	-	
6135	P_i [kW]	7.87	7.27	6.78	5.74	4.97	4.39	3.55	2.86	2.57	2.13	1.73	1.49	1.41	1.16	0.893	-	- - - - -
	T_{out} [N·m]	595	733	940	940	940	940	940	900	940	940	940	959	1050	1040	979	-	
	T_{out} [kgf·m]	60.7	74.7	95.8	95.8	95.8	95.8	95.8	91.7	95.8	95.8	95.8	97.8	107	106	99.8	-	
	Pro[N]	7290	8150	9300	9790	10100	10900	11700	12200	12900	13600	14700	14700	14700	14700	14700	-	
	Pro[kgf]	743	831	948	998	1030	1110	1190	1240	1310	1390	1500	1500	1500	1500	1500	-	
6140	P_i [kW]	9.48	9.20	8.84	7.48	6.48	5.72	4.63	3.89	3.35	2.78	2.26	1.91	1.65	1.37	1.12	-	- - - - -
	T_{out} [N·m]	717	928	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	-	
	T_{out} [kgf·m]	73.1	94.6	125	125	125	125	125	125	125	125	125	125	125	125	125	-	
	Pro[N]	11300	12600	14100	14500	15100	15900	16000	16000	16000	16000	16000	16000	16000	16000	16000	-	
	Pro[kgf]	1150	1280	1440	1480	1540	1620	1630	1630	1630	1630	1630	1630	1630	1630	1630	-	
6145	P_i [kW]	9.48	9.20	9.32	8.36	7.18	6.40	5.06	4.35	3.75	3.11	2.53	2.13	1.84	1.48	1.14	-	- - - - -
	T_{out} [N·m]	717	928	1290	1370	1360	1370	1340	1370	1370	1370	1370	1370	1370	1370	1320	1250	
	T_{out} [kgf·m]	73.1	94.6	131	140	139	140	137	140	140	140	140	140	140	140	135	127	
	Pro[N]	11300	12600	14000	14400	15100	15800	16000	16000	15800	16000	15700	15700	16000	16000	16000	-	
	Pro[kgf]	1150	1280	1430	1470	1540	1610	1630	1630	1610	1630	1600	1600	1630	1630	1630	-	
6160	P_i [kW]	17.5	17.4	12.7	10.7	9.29	8.19	6.63	5.57	4.80	3.98	3.20	2.73	2.36	1.96	1.60	-	- - - - -
	T_{out} [N·m]	1320	1760	1760	1760	1760	1760	1760	1760	1760	1760	1740	1760	1760	1760	1760	-	
	T_{out} [kgf·m]	135	179	179	179	179	179	179	179	179	179	177	179	179	179	179	-	
	Pro[N]	12500	13800	16000	16900	18000	18600	20100	21200	22100	22100	22100	22100	22100	22100	22100	-	
	Pro[kgf]	1270	1410	1630	1720	1830	1900	2050	2160	2250	2250	2250	2250	2250	2250	2250	-	
6165	P_i [kW]	17.5	17.8	15.2	12.8	11.1	9.80	7.94	6.67	5.75	4.76	3.88	3.27	2.82	2.35	1.87	-	- - - - -
	T_{out} [N·m]	1320	1790	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2050	-	
	T_{out} [kgf·m]	135	182	214	214	214	214	214	214	214	214	214	214	214	214	209	-	
	Pro[N]	12500	13800	15800	16600	17700	18400	19900	21000	22000	22100	22100	22100	22100	22100	21800	-	
	Pro[kgf]	1270	1410	1610	1690	1800	1880	2030	2140	2240	2250	2250	2250	2250	2250	2220	-	
6170	P_i [kW]	24.6	25.1	18.3	15.4	13.4	11.8	9.56	8.03	6.92	5.74	4.67	3.94	3.40	2.83	2.31	-	- - - - -
	T_{out} [N·m]	1860	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	-	
	T_{out} [kgf·m]	190	258	258	258	258	258	258	258	258	258	258	258	258	258	258	-	
	Pro[N]	13900	15200	17900	18800	19800	20700	22600	23600	25000	26600	28500	29500	29500	29500	29500	-	
	Pro[kgf]	1420	1550	1820	1920	2020	2110	2300	2410	2550	2710	2910	3010	3010	3010	3010	-	
6175	P_i [kW]	24.6	25.8	22.7	19.2	16.7	14.7	11.9	10.00	8.62	7.14	5.81	4.90	4.24	3.52	2.87	-	- - - - -
	T_{out} [N·m]	1860	2600	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	-	
	T_{out} [kgf·m]	190	265	321	321	321	321	321	321	321	321	321	321	321	321	321	-	
	Pro[N]	13900	15200	17500	18400	19400	20400	22300	23300	24600	26300	28200	29500	29500	29500	29500	-	
	Pro[kgf]	1420	1550	1780	1880	1980	2080	2270	2380	2510	2680	2870	3010	3010	3010	3010	-	
6180	P_i [kW]	-	-	29.3	24.8	21.5	19.0	15.3	12.9	11.1	9.19	7.49	6.30	5.45	4.53	3.70	-	- - - - -
	T_{out} [N·m]	-	-	4060	4060	4060	4060	4050	4050	4050	4050	4060	4050	4050	4050	4060	-	
	T_{out} [kgf·m]	-	-	414	414	414	414	413	413	413	413	414	413	413	413	414	-	
	Pro[N]	-	-	23700	24800	26200	27800	30200	31500	33100	35500	38200	39700	41700	41700	41700	-	
	Pro[kgf]	-	-	2420	2530	2670	2830	3080	3210	3370	3620	3890	4050	4250	4250	4250	-	
6185	P_i [kW]	-	-	34.7	29.9	23.5	22.4	18.9	15.9	13.7	11.3	9.23	7.78	6.73	5.05	4.56	-	- - - - -
	T_{out} [N·m]	-	-	4810	4900	4440	4790	5000	5000	5000	5000	5000	5000	5000	4510	5000	-	
	T_{out} [kgf·m]	-	-	490	499	453	488	510	510	510	510	510	510	510	460	510	-	
	Pro[N]	-	-	23300	24400	26000	27400	29800	31200	32700	35100	37800	39400	41300	41700	41700	-	
	Pro[kgf]	-	-	2380	2490	2650	2790	3040	3180	3330	3580	3850	4020	4210	4250	4250	-	
6190	P_i [kW]	-	-	41.0	38.9	33.8	29.8	24.1	20.3	17.5	14.5	11.8	9.93	8.58	7.13	5.82	-	- - - - -
	T_{out} [N·m]	-	-	5680	6380	6380	6380	6380	6380	6380	6380	6380	6380	6380	6380	6380	-	
	T_{out} [kgf·m]	-	-	579	650	650	650	650	650	650	650	650	650	650	650	650	-	
	Pro[N]	-	-	33200	34300	36300	38500	41800	44000	46300	49100	53100	55500	58300	58400	58900	-	
	Pro[kgf]	-	-	3380	3500	3700	3920	4260	4490	4720	5010	5410	5660	5940	5950	6000	-	
6195	P_i [kW]	-	-	48.1	42.6	39.2	37.2	30.1	25.3	21.8	18.0	14.7	12.4	10.7	8.90	7.26	-	- - - - -
	T_{out} [N·m]	-	-	6670	6980	7410	7960	7960	7960	7960	7960	7960	7960	7960	7960	7960	-	
	T_{out} [kgf·m]	-	-	680	712	755	811	811	811	811	811	811	811	811	811	811	-	
	Pro[N]	-	-	32800	34100	35800	37900	41400	43500	45900	48700	52600	55000	57900	58000	58400	-	
	Pro[kgf]	-	-	3340	3480	3650	3860	4220	4430	4680	4960	5360	5610	5900	5910	5950	-	
Frame Size	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	Dim. Page
	n_2 [r/min]	120	90.0	65.5	55.4	48.0	42.4	34.3	28.8	24.8	20.6	16.7	14.1	12.2	10.1	8.28	6.05	


Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.

2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6205 ~ 6275

Input Speed	$n_1 = 720$ r/min	n_1 : Input Speed [r/min]	T_{out} : Allowable output torque [N·m, kgf·m]
		n_2 : Output Speed [r/min]	Pro: Allowable output shaft radial load [N, kgf]
		P_i : Allowable input power [kW]	*Consult us for Pro of CNF and CHF type.




Selection Tables Ratio 6 - 119 REDUCERS

Frame Size	n_2 [r/min]	120	90.0	65.5	55.4	48.0	42.4	34.3	28.8	24.8	20.6	16.7	14.1	12.2	10.1	8.28	6.05	Dim. Page
6205	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	
	P_i [kW]	-	-	55.2	-	49.0	-	35.0	-	25.3	-	17.2	-	12.5	-	7.99	-	CHH C-72
	T_{out} [N·m]	-	-	7650	-	9270	-	9270	-	9230	-	9300	-	9300	-	8760	-	CHF C-77
	T_{out} [kgf·m]	-	-	780	-	945	-	945	-	941	-	948	-	948	-	893	-	CVW C-84
	Pro[N]	-	-	63000	-	67800	-	76300	-	83600	-	84100	-	84100	-	84100	-	
	Pro[kgf]	-	-	6420	-	6910	-	7780	-	8520	-	8570	-	8570	-	8570	-	
6215	P_i [kW]	-	-	75.3	-	64.4	-	47.2	-	34.6	-	23.3	-	17.0	-	10.3	-	CHH C-72
	T_{out} [N·m]	-	-	10400	-	12200	-	12500	-	12700	-	12700	-	12700	-	11300	-	CHF C-77
	T_{out} [kgf·m]	-	-	1060	-	1240	-	1270	-	1290	-	1290	-	1290	-	1150	-	CVW C-84
	Pro[N]	-	-	63000	-	67900	-	77200	-	84400	-	95800	-	104000	-	104000	-	
	Pro[kgf]	-	-	6420	-	6920	-	7870	-	8600	-	9770	-	10600	-	10600	-	
6225	P_i [kW]	-	-	88.1	-	76.6	-	55.9	-	41.2	-	29.5	-	21.4	-	13.7	-	CHH C-72
	T_{out} [N·m]	-	-	12200	-	14500	-	14800	-	15000	-	16000	-	15900	-	15100	-	CHF C-77
	T_{out} [kgf·m]	-	-	1240	-	1480	-	1510	-	1530	-	1630	-	1620	-	1540	-	CVW C-84
	Pro[N]	-	-	66600	-	72100	-	81200	-	89000	-	101000	-	110000	-	124000	-	
	Pro[kgf]	-	-	6790	-	7350	-	8280	-	9070	-	10300	-	11200	-	12600	-	
6235	P_i [kW]	-	-	113	-	104	-	71.4	-	51.7	-	37.6	-	27.3	-	15.7	-	CHH C-72
	T_{out} [N·m]	-	-	15700	-	19600	-	18900	-	18900	-	20400	-	20300	-	17200	-	CHF C-77
	T_{out} [kgf·m]	-	-	1600	-	2000	-	1930	-	1930	-	2080	-	2070	-	1750	-	CVW C-84
	Pro[N]	-	-	83400	-	89000	-	101000	-	111000	-	125000	-	137000	-	155000	-	
	Pro[kgf]	-	-	8500	-	9070	-	10300	-	11300	-	12700	-	14000	-	15800	-	
6245	P_i [kW]	-	-	132	-	132	-	97.5	-	70.6	-	47.6	-	34.7	-	20.7	-	CHH C-72
	T_{out} [N·m]	-	-	18300	-	24900	-	25800	-	25800	-	25800	-	25800	-	22600	-	CHF C-77
	T_{out} [kgf·m]	-	-	1870	-	2540	-	2630	-	2630	-	2630	-	2630	-	2300	-	CVW C-84
	Pro[N]	-	-	92600	-	98800	-	112000	-	123000	-	139000	-	152000	-	173000	-	
	Pro[kgf]	-	-	9440	-	10100	-	11400	-	12500	-	14200	-	15500	-	17600	-	
6255	P_i [kW]	-	-	151	-	151	-	117	-	88.9	-	61.5	-	44.9	-	28.3	-	CHH C-72
	T_{out} [N·m]	-	-	20900	-	28500	-	31000	-	32500	-	33300	-	33400	-	31000	-	CHF C-77
	T_{out} [kgf·m]	-	-	2130	-	2910	-	3160	-	3310	-	3390	-	3400	-	3160	-	CVW C-84
	Pro[N]	-	-	114000	-	122000	-	136000	-	151000	-	170000	-	187000	-	211000	-	
	Pro[kgf]	-	-	11600	-	12400	-	13900	-	15400	-	17300	-	19100	-	21500	-	
6265	P_i [kW]	-	-	175	-	175	-	172	-	126	-	84.9	-	61.9	-	40.2	-	CHH C-72
	T_{out} [N·m]	-	-	24200	-	33000	-	45400	-	46000	-	46000	-	46000	-	44000	-	CHF C-77
	T_{out} [kgf·m]	-	-	2470	-	3360	-	4630	-	4690	-	4690	-	4690	-	4490	-	CVW C-84
	Pro[N]	-	-	140000	-	149000	-	166000	-	184000	-	208000	-	228000	-	257000	-	
	Pro[kgf]	-	-	14300	-	15200	-	16900	-	18800	-	21200	-	23200	-	26200	-	
6275	P_i [kW]	-	-	-	-	-	-	-	-	159	-	126	-	91.7	-	53.4	-	CHH C-72
	T_{out} [N·m]	-	-	-	-	-	-	-	-	58100	-	68200	-	68200	-	58600	-	CHF C-77
	T_{out} [kgf·m]	-	-	-	-	-	-	-	-	5920	-	6950	-	6950	-	5970	-	CVW C-84
	Pro[N]	-	-	-	-	-	-	-	-	214000	-	248000	-	248000	-	240000	-	
	Pro[kgf]	-	-	-	-	-	-	-	-	21800	-	25300	-	25300	-	24500	-	
Frame Size	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	Dim. Page
	n_2 [r/min]	120	90.0	65.5	55.4	48.0	42.4	34.3	28.8	24.8	20.6	16.7	14.1	12.2	10.1	8.28	6.05	

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.
 2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6125 ~ 6195



n_1 : Input Speed [r/min]	T_{out} : Allowable output torque [N·m, kgf·m]	Input Speed	$n_1 = 870$ r/min
n_2 : Output Speed [r/min]	Pro: Allowable output shaft radial load [N, kgf]		
P: Allowable input power [kW]	*Consult us for Pro of CNF and CHF type.		

Frame Size	n_2 [r/min]	145	109	79.1	66.9	58.0	51.2	41.4	34.8	30.0	24.9	20.2	17.1	14.7	12.3	10.0	7.31	Dim. Page		
	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119			
6125	P_i [kW]	5.84	5.45	4.73	4.27	4.03	3.55	2.88	2.42	2.08	1.73	1.40	1.18	1.02	0.770	0.694	-	- CNH C-71 CNF C-76 CNV C-82		
	T_{out} [N·m]	366	455	542	579	630	630	630	630	630	630	630	630	630	630	570	630		-	
	T_{out} [kgf·m]	37.3	46.4	55.2	59.0	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	58.1	64.2		-	
	Pro[N]	5960	6640	7550	7820	8400	8540	9440	9810	9810	9810	9810	9810	9810	9810	9810	9560		-	
	Pro[kgf]	608	677	770	797	856	871	962	1000	1000	1000	1000	1000	1000	1000	1000	975		-	
6130	P_i [kW]	8.31	8.17	6.80	5.75	4.99	4.40	3.56	2.99	2.58	2.14	1.74	1.65	1.43	1.19	0.935	-	- C HH C-72 CHF C-77 CVW C-83		
	T_{out} [N·m]	520	682	780	780	780	780	780	780	780	780	780	880	880	880	848	-		-	
	T_{out} [kgf·m]	53.0	69.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	89.7	89.7	89.7	86.4	-		-	
	Pro[N]	6890	7660	8830	9270	9520	10300	11000	11500	12200	12900	13900	14500	14700	14700	14700	14700		-	-
	Pro[kgf]	702	781	900	945	970	1050	1120	1170	1240	1310	1420	1480	1500	1500	1500	1500		-	-
6135	P_i [kW]	9.10	8.40	8.19	6.92	6.01	5.30	4.29	3.45	3.11	2.58	2.10	1.72	1.65	1.37	1.08	-	- C HH C-72 CHF C-77 CVW C-83		
	T_{out} [N·m]	569	701	940	938	940	940	940	900	940	940	940	917	1010	1010	979	-		-	
	T_{out} [kgf·m]	58.0	71.5	95.8	95.6	95.8	95.8	95.8	91.7	95.8	95.8	95.8	93.5	103	103	99.8	-		-	
	Pro[N]	6830	7640	8680	9150	9400	10100	10900	11500	12100	12800	13800	14400	14700	14700	14700	14700		-	-
	Pro[kgf]	696	779	885	933	958	1030	1110	1170	1230	1300	1410	1470	1500	1500	1500	1500		-	-
6140	P_i [kW]	11.2	10.6	10.7	9.04	7.83	6.91	5.59	4.70	4.05	3.36	2.73	2.30	1.99	1.65	1.35	-	- C HH C-72 CHF C-77 CVW C-83		
	T_{out} [N·m]	698	887	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	-		-	
	T_{out} [kgf·m]	71.2	90.4	125	125	125	125	125	125	125	125	125	125	125	125	125	-		-	
	Pro[N]	10700	11900	13300	13600	14300	15000	16000	16000	16000	16000	16000	16000	16000	16000	16000	-		-	
	Pro[kgf]	1090	1210	1360	1390	1460	1530	1630	1630	1630	1630	1630	1630	1630	1630	1630	-		-	
6145	P_i [kW]	11.2	10.6	11.0	10.1	8.68	7.73	6.11	5.26	4.53	3.75	3.06	2.50	2.15	1.77	1.38	-	- C HH C-72 CHF C-77 CVW C-83		
	T_{out} [N·m]	698	887	1260	1370	1360	1370	1340	1370	1370	1370	1370	1370	1330	1320	1310	1250		-	-
	T_{out} [kgf·m]	71.2	90.4	128	140	139	140	137	140	140	140	140	136	135	134	127	-		-	
	Pro[N]	10700	11900	13300	13600	14200	14900	16000	16000	15800	16000	15700	15900	16000	16000	16000	16000		-	-
	Pro[kgf]	1090	1210	1360	1390	1450	1520	1630	1630	1610	1630	1600	1620	1630	1630	1630	1630		-	-
6160	P_i [kW]	20.3	19.7	15.3	12.9	11.2	9.90	8.01	6.73	5.80	4.81	3.87	3.30	2.85	2.37	1.93	-	- C HH C-72 CHF C-77 CVW C-84		
	T_{out} [N·m]	1270	1640	1760	1760	1760	1760	1760	1760	1760	1760	1740	1760	1760	1760	1760	-		-	
	T_{out} [kgf·m]	129	167	179	179	179	179	179	179	179	179	177	179	179	179	179	-		-	
	Pro[N]	11700	13000	14900	15800	16800	17400	18800	19800	20800	22100	22100	22100	22100	22100	22100	22100		-	-
	Pro[kgf]	1190	1330	1520	1610	1710	1770	1920	2020	2120	2250	2250	2250	2250	2250	2250	2250		-	-
6165	P_i [kW]	21.2	20.6	18.3	15.5	13.4	11.8	9.59	8.06	6.94	5.75	4.68	3.95	3.41	2.84	2.26	-	- C HH C-72 CHF C-77 CVW C-84		
	T_{out} [N·m]	1320	1720	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2050	-		-	
	T_{out} [kgf·m]	135	175	214	214	214	214	214	214	214	214	214	214	214	214	209	-		-	
	Pro[N]	11600	12900	14700	15500	16600	17200	18600	19600	20500	21900	22100	22100	22100	22100	21800	-		-	
	Pro[kgf]	1180	1310	1500	1580	1690	1750	1900	2000	2090	2230	2250	2250	2250	2250	2220	-		-	
6170	P_i [kW]	27.6	27.6	22.1	18.6	16.2	14.3	11.6	9.70	8.37	6.93	5.64	4.76	4.11	3.42	2.79	-	- C HH C-72 CHF C-77 CVW C-84		
	T_{out} [N·m]	1730	2300	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	-		-	
	T_{out} [kgf·m]	176	234	258	258	258	258	258	258	258	258	258	258	258	258	258	-		-	
	Pro[N]	13100	14400	16700	17500	18500	19400	21200	22100	23400	24900	26600	27900	29400	29500	29500	-		-	
	Pro[kgf]	1340	1470	1700	1780	1890	1980	2160	2250	2390	2540	2710	2840	3000	3010	3010	-		-	
6175	P_i [kW]	29.7	30.1	27.5	23.2	20.1	17.8	14.4	12.1	10.4	8.63	7.02	5.92	5.12	4.25	3.47	-	- C HH C-72 CHF C-77 CVW C-84		
	T_{out} [N·m]	1860	2510	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	-		-	
	T_{out} [kgf·m]	190	256	321	321	321	321	321	321	321	321	321	321	321	321	321	-		-	
	Pro[N]	13000	14200	16300	17100	18000	19000	20800	21800	23000	24600	26300	27600	29100	29500	29500	-		-	
	Pro[kgf]	1330	1450	1660	1740	1830	1940	2120	2220	2340	2510	2680	2810	2970	3010	3010	-		-	
6180	P_i [kW]	-	-	35.2	29.9	26.0	22.9	18.5	15.5	13.4	11.1	9.05	7.62	6.58	5.47	4.48	-	- C HH C-72 CHF C-77 CVW C-84		
	T_{out} [N·m]	-	-	4040	4060	4060	4060	4050	4050	4050	4050	4060	4050	4050	4050	4060	-		-	
	T_{out} [kgf·m]	-	-	412	414	414	414	413	413	413	413	414	413	413	413	414	-		-	
	Pro[N]	-	-	22100	23100	24500	26000	28200	29500	31000	33200	35800	37200	39000	41600	41700	-		-	
	Pro[kgf]	-	-	2250	2350	2500	2650	2870	3010	3160	3380	3650	3790	3980	4240	4250	-		-	
6185	P_i [kW]	-	-	39.0	36.2	27.2	25.8	22.8	19.2	16.5	13.7	11.2	9.40	8.13	6.10	5.51	-	- C HH C-72 CHF C-77 CVW C-84		
	T_{out} [N·m]	-	-	4470	4900	4250	4580	5000	5000	5000	5000	5000	5000	5000	4510	5000	-		-	
	T_{out} [kgf·m]	-	-	456	499	433	467	510	510	510	510	510	510	510	460	510	-		-	
	Pro[N]	-	-	21900	22700	24400	25700	27900	29100	30600	32900	35400	36900	38700	41500	41700	-		-	
	Pro[kgf]	-	-	2230	2310	2490	2620	2840	2970	3120	3350	3610	3760	3940	4230	4250	-		-	
6190	P_i [kW]	-	-	41.0	41.0	40.8	36.0	29.1	24.5	21.1	17.5	14.2	12.0	10.4	8.62	7.03	-	- C HH C-72 CHF C-77 CVW C-84		
	T_{out} [N·m]	-	-	4700	5560	6380	6380	6380	6380	6380	6380	6380	6380	6380	6380	6380	-		-	
	T_{out} [kgf·m]	-	-	479	567	650	650	650	650	650	650	650	650	650	650	650	-		-	
	Pro[N]	-	-	31400	32400	33900	36000	39200	41200	43400	46000	49700	52000	54600	58100	58900	-		-	
	Pro[kgf]	-	-	3200	3300	3460	3670	4000	4200	4420	4690	5070	5300	5570	5920	6000	-		-	
6195	P_i [kW]	-	-	48.1	48.1	45.3	44.9	36.3	30.5	26.3	21.8	17.8	15.0	12.9	10.8	8.77	-	- C HH C-72 CHF C-77 CVW C-84		
	T_{out} [N·m]	-	-	5520	6520	7090	7960	7960	7960	7960	7960	7960	7960	7960	7960	7960	-		-	
	T_{out} [kgf·m]	-	-	563	665	723	811	811	811	811	811	811	811	811	811	811	-		-	
	Pro[N]	-	-	31100	32000	33600	35400	38700	40700	42900	45500	49200	51500	54200	57600	58400	-		-	
	Pro[kgf]	-	-	3170	3260	3430	3610	3940	4150	4370	4640	5020	5250	5520	5870	5950	-		-	


REDUCERS
Selection Tables
Ratio 6 - 119

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.
2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6205 ~ 6275

Input Speed	$n_1 = 870$ r/min	n_1 : Input Speed [r/min]	T_{out} : Allowable output torque [N·m, kgf·m]
		n_2 : Output Speed [r/min]	Pro: Allowable output shaft radial load [N, kgf]
		P_i : Allowable input power [kW]	*Consult us for Pro of CNF and CHF type.




Selection Tables Ratio 6 - 119 REDUCERS

Frame Size	n_2 [r/min]	145	109	79.1	66.9	58.0	51.2	41.4	34.8	30.0	24.9	20.2	17.1	14.7	12.3	10.0	7.31	Dim. Page
	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	
6205	P_i [kW]	-	-	59.7	-	58.3	-	42.4	-	30.5	-	20.7	-	15.1	-	9.65	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	6850	-	9130	-	9270	-	9230	-	9300	-	9300	-	8760	-	
	T_{out} [kgf·m]	-	-	698	-	931	-	945	-	941	-	948	-	948	-	893	-	
	Pro[N]	-	-	59700	-	63900	-	72000	-	78800	-	84100	-	84100	-	84100	-	
	Pro[kgf]	-	-	6090	-	6510	-	7340	-	8030	-	8570	-	8570	-	8570	-	
6215	P_i [kW]	-	-	75.3	-	75.3	-	57.1	-	41.8	-	28.2	-	20.6	-	12.4	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	8640	-	11800	-	12500	-	12700	-	12700	-	12700	-	11300	-	
	T_{out} [kgf·m]	-	-	881	-	1200	-	1270	-	1290	-	1290	-	1290	-	1150	-	
	Pro[N]	-	-	59900	-	64000	-	72700	-	79500	-	90300	-	98700	-	104000	-	
	Pro[kgf]	-	-	6110	-	6520	-	7410	-	8100	-	9200	-	10100	-	10600	-	
6225	P_i [kW]	-	-	99.5	-	92.6	-	67.6	-	49.7	-	35.7	-	25.8	-	16.6	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	11400	-	14500	-	14800	-	15000	-	16000	-	15900	-	15100	-	
	T_{out} [kgf·m]	-	-	1160	-	1480	-	1510	-	1530	-	1630	-	1620	-	1540	-	
	Pro[N]	-	-	63000	-	67900	-	76500	-	83900	-	95100	-	104000	-	117000	-	
	Pro[kgf]	-	-	6420	-	6920	-	7800	-	8550	-	9690	-	10600	-	11900	-	
6235	P_i [kW]	-	-	113	-	113	-	86.3	-	62.5	-	43.4	-	31.6	-	18.9	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	13000	-	17700	-	18900	-	18900	-	19500	-	19400	-	17200	-	
	T_{out} [kgf·m]	-	-	1330	-	1800	-	1930	-	1930	-	1990	-	1980	-	1750	-	
	Pro[N]	-	-	79200	-	84300	-	95400	-	105000	-	118000	-	129000	-	146000	-	
	Pro[kgf]	-	-	8070	-	8590	-	9720	-	10700	-	12000	-	13100	-	14900	-	
6245	P_i [kW]	-	-	132	-	132	-	118	-	85.3	-	57.5	-	41.9	-	25.0	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	15100	-	20600	-	25800	-	25800	-	25800	-	25800	-	22600	-	
	T_{out} [kgf·m]	-	-	1540	-	2100	-	2630	-	2630	-	2630	-	2630	-	2300	-	
	Pro[N]	-	-	88000	-	94000	-	105000	-	116000	-	131000	-	144000	-	163000	-	
	Pro[kgf]	-	-	8970	-	9580	-	10700	-	11800	-	13400	-	14700	-	16600	-	
6255	P_i [kW]	-	-	151	-	151	-	142	-	107	-	71.1	-	51.9	-	34.2	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	17300	-	23600	-	31000	-	32500	-	31900	-	31900	-	31000	-	
	T_{out} [kgf·m]	-	-	1760	-	2410	-	3160	-	3310	-	3250	-	3250	-	3160	-	
	Pro[N]	-	-	108000	-	116000	-	128000	-	142000	-	161000	-	176000	-	199000	-	
	Pro[kgf]	-	-	11000	-	11800	-	13000	-	14500	-	16400	-	17900	-	20300	-	
6265	P_i [kW]	-	-	175	-	175	-	172	-	152	-	103	-	74.8	-	48.5	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	20100	-	27300	-	37600	-	46000	-	46000	-	46000	-	44000	-	
	T_{out} [kgf·m]	-	-	2050	-	2780	-	3830	-	4690	-	4690	-	4690	-	4490	-	
	Pro[N]	-	-	132000	-	141000	-	158000	-	174000	-	196000	-	215000	-	242000	-	
	Pro[kgf]	-	-	13500	-	14400	-	16100	-	17700	-	20000	-	21900	-	24700	-	
6275	P_i [kW]	-	-	-	-	-	-	-	-	159	-	151	-	111	-	53.4	-	CHH C-72 CVV C-84
	T_{out} [N·m]	-	-	-	-	-	-	-	-	48100	-	67600	-	68200	-	48500	-	
	T_{out} [kgf·m]	-	-	-	-	-	-	-	-	4900	-	6890	-	6950	-	4940	-	
	Pro[N]	-	-	-	-	-	-	-	-	203000	-	248000	-	248000	-	227000	-	
	Pro[kgf]	-	-	-	-	-	-	-	-	20700	-	25300	-	25300	-	23100	-	

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.
 2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6060 ~ 6120




Input Speed		n ₁ = 980 r/min			n ₂ : Input Speed [r/min]											n ₂ : Output Speed [r/min]	P ₁ : Allowable input power [kW]	T _{out} : Allowable output torque [N·m, kgf·m]	Pro: Allowable output shaft radial load [N, kgf]	*Consult us for Pro of CNF and CHF type.
Frame Size	Ratio[Z]	163	123	89.1	75.4	65.3	57.6	46.7	39.2	33.8	28.0	22.8	19.2	16.6	13.8	11.3	8.24	Dim. Page		
6060	P ₁ [kW]	0.200	0.200	0.200	0.199	0.173	0.152	0.123	0.104	0.089	0.074	0.060	-	-	-	-	-	CNH C-71 CNF C-76 CNV C-82		
	T _{out} [N·m]	11.1	14.8	20.4	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	-	-	-	-	-			
	T _{out} [kgf·m]	1.13	1.51	2.08	2.45	2.45	2.45	2.45	2.45	2.45	2.45	2.45	-	-	-	-	-			
	Pro[N]	905	1030	1180	1180	1180	1180	1180	1180	1180	1180	1180	-	-	-	-	-			
	Pro[kgf]	92.3	105	120	120	120	120	120	120	120	120	120	-	-	-	-	-			
6065	P ₁ [kW]	0.286	0.286	0.286	0.249	0.216	0.191	0.154	0.130	0.112	0.093	0.075	-	-	-	-	-	CNH C-71 CNF C-76 CNV C-82		
	T _{out} [N·m]	15.9	21.2	29.2	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	-	-	-	-	-			
	T _{out} [kgf·m]	1.62	2.16	2.98	3.06	3.06	3.06	3.06	3.06	3.06	3.06	3.06	-	-	-	-	-			
	Pro[N]	897	1020	1160	1180	1180	1180	1180	1180	1180	1180	1180	-	-	-	-	-			
	Pro[kgf]	91.4	104.0	118	120	120	120	120	120	120	120	120	-	-	-	-	-			
6070	P ₁ [kW]	0.347	0.347	0.347	0.347	0.324	0.286	0.231	0.194	0.168	0.139	0.113	0.095	0.082	-	-	-	CNH C-71 CNF C-76 CNV C-82		
	T _{out} [N·m]	19.3	25.7	35.3	41.7	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	-	-	-			
	T _{out} [kgf·m]	1.97	2.62	3.60	4.25	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	-	-	-			
	Pro[N]	1550	1710	1770	1770	1770	1770	1770	1770	1770	1770	1770	1750	1770	-	-	-			
	Pro[kgf]	158	174	180	180	180	180	180	180	180	180	180	178	180	-	-	-			
6075	P ₁ [kW]	0.407	0.386	0.407	0.407	0.404	0.381	0.309	0.245	0.223	0.185	0.151	0.119	0.101	-	-	-	CNH C-71 CNF C-76 CNV C-82		
	T _{out} [N·m]	22.6	28.6	41.4	49.0	56.1	60.0	60.0	56.8	60.0	60.0	60.0	56.4	55.1	-	-	-			
	T _{out} [kgf·m]	2.30	2.92	4.22	4.99	5.72	6.12	6.12	5.79	6.12	6.12	6.12	5.75	5.62	-	-	-			
	Pro[N]	1540	1700	1770	1770	1770	1770	1770	1770	1770	1770	1770	1660	1590	1620	-	-			
	Pro[kgf]	157	173	180	180	180	180	180	180	180	180	180	169	162	165	-	-			
6080	P ₁ [kW]	0.592	0.592	0.592	0.592	0.576	0.508	0.397	0.340	0.298	0.247	0.201	0.169	0.146	0.120	0.090	-	CNH C-71 CNF C-76 CNV C-82		
	T _{out} [N·m]	32.9	43.9	60.3	71.3	80.0	80.0	77.2	78.7	80.0	80.0	80.0	80.0	80.0	78.9	72.5	-			
	T _{out} [kgf·m]	3.35	4.48	6.15	7.27	8.15	8.15	7.87	8.02	8.15	8.15	8.15	8.15	8.15	8.04	7.39	-			
	Pro[N]	2160	2330	2560	2560	2560	2560	2560	2560	2500	2560	2540	2480	2510	2470	2510	-			
	Pro[kgf]	220	238	261	261	261	261	261	261	255	261	259	253	256	252	256	-			
6085	P ₁ [kW]	0.778	0.778	0.778	0.778	0.720	0.635	0.397	0.432	0.372	0.309	0.251	0.212	0.183	0.152	0.121	-	CNH C-71 CNF C-76 CNV C-82		
	T _{out} [N·m]	43.2	57.6	79.2	93.6	100	100	77.2	100	100	100	100	100	100	100	97.6	-			
	T _{out} [kgf·m]	4.40	5.87	8.07	9.54	10.2	10.2	7.87	10.2	10.2	10.2	10.2	10.2	10.2	10.2	9.95	-			
	Pro[N]	2140	2310	2530	2560	2560	2560	2560	2360	2300	2420	2340	2290	2310	2260	2280	-			
	Pro[kgf]	218	235	258	261	261	261	261	241	234	247	239	233	235	230	232	-			
6090	P ₁ [kW]	1.15	1.15	1.15	1.15	1.08	0.953	0.758	0.648	0.559	0.463	0.377	0.315	0.267	0.201	0.186	0.098	CNH C-71 CNF C-76 CNV C-82		
	T _{out} [N·m]	63.7	84.9	117	138	150	150	147	150	150	150	149	146	132	150	108	-			
	T _{out} [kgf·m]	6.49	8.65	11.9	14.1	15.3	15.3	15.0	15.3	15.3	15.3	15.3	15.2	14.9	13.5	15.3	11.0			
	Pro[N]	3180	3340	3340	3340	3340	3340	3340	3280	3290	3300	3310	3280	3300	3310	3310	3310			
	Pro[kgf]	324	340	340	340	340	340	340	340	334	335	336	337	334	336	337	337			
6095	P ₁ [kW]	1.52	1.52	1.52	1.51	1.44	1.27	1.03	0.745	0.698	0.610	0.471	0.325	0.267	0.201	0.195	0.098	CNH C-71 CNF C-76 CNV C-82		
	T _{out} [N·m]	84.2	112	154	182	200	200	200	172	187	198	187	153	146	132	157	108			
	T _{out} [kgf·m]	8.58	11.4	15.7	18.6	20.4	20.4	20.4	17.5	19.1	20.2	19.1	15.6	14.9	13.5	16.0	11.0			
	Pro[N]	3130	3340	3340	3340	3340	3340	3340	3240	3220	3210	3240	3280	3300	3310	3300	3310			
	Pro[kgf]	319	340	340	340	340	340	340	330	328	327	330	334	336	337	336	337			
6100	P ₁ [kW]	2.35	2.35	2.35	2.08	1.80	1.59	1.29	1.08	0.931	0.772	0.628	0.530	0.458	0.380	0.310	0.210	CNH C-71 CNF C-76 CNV C-82		
	T _{out} [N·m]	130	174	239	250	250	250	250	250	250	250	250	250	250	250	250	231			
	T _{out} [kgf·m]	13.3	17.7	24.4	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	23.5			
	Pro[N]	4620	5130	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5380	5400	5370			
	Pro[kgf]	471	523	550	550	550	550	550	550	550	550	550	550	550	548	550	547			
6105	P ₁ [kW]	3.02	2.78	2.86	2.49	2.16	1.91	1.54	1.30	1.12	0.926	0.754	0.629	0.530	0.402	0.372	0.235	CNH C-71 CNF C-76 CNV C-82		
	T _{out} [N·m]	168	206	291	300	300	300	300	300	300	300	300	297	290	264	300	258			
	T _{out} [kgf·m]	17.1	21.0	29.7	30.6	30.6	30.6	30.6	30.6	30.6	30.6	30.6	30.3	29.6	26.9	30.6	26.3			
	Pro[N]	4570	5090	5400	5400	5400	5400	5400	5400	5400	5400	5400	5310	5260	5370	4780	5350			
	Pro[kgf]	466	519	550	550	550	550	550	550	550	550	550	541	536	547	487	545			
6110	P ₁ [kW]	3.48	3.55	3.54	2.99	2.59	2.29	1.85	1.56	1.34	1.11	0.904	0.762	0.659	0.548	0.447	-	CNH C-71 CNF C-76 CNV C-82		
	T _{out} [N·m]	193	263	360	360	360	360	360	360	360	360	360	360	360	360	360	-			
	T _{out} [kgf·m]	19.7	26.8	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	-			
	Pro[N]	5180	5740	6510	6770	7260	7370	7610	7340	7200	7280	7590	7590	7610	7580	7600	-			
	Pro[kgf]	528	585	664	690	740	751	776	748	734	742	774	774	776	773	775	-			
6115	P ₁ [kW]	3.48	3.92	3.92	3.49	3.02	2.67	2.16	1.81	1.56	1.30	1.06	0.890	0.769	0.639	0.521	-	CNH C-71 CNF C-76 CNV C-82		
	T _{out} [N·m]	193	290	399	420	420	420	420	420	420	420	420	420	420	420	420	-			
	T _{out} [kgf·m]	19.7	29.6	40.7	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	-			
	Pro[N]	5180	5700	6460	6700	7190	7300	7460	7150	7010	7090	7370	7410	7430	7390	7410	-			
	Pro[kgf]	528	581	659	683	733	744	760	729	715	723	751	755	757	753	755	-			
6120	P ₁ [kW]	5.07	5.07	5.07	4.36	3.78	3.30	2.68	2.27	1.94	1.62	1.32	1.11	0.961	0.799	0.652	-	CNH C-71 CNF C-76 CNV C-82		
	T _{out} [N·m]	282	375	516	525	525	520	522	525	520	525	525	525	525	525	525	-			
	T _{out} [kgf·m]	28.7	38.2	52.6	53.5	53.5	53.0	53.2	53.5	53.0	53.5	53.5	53.5	53.5	53.5	53.5	-			
	Pro[N]	5810	6450	7260	7540	8160	8280	9150	9640	9810	9810	9810	9810	9810	9810	9780	-			
	Pro[kgf]	592	657	740	769	832	844	933	983	1000	1000	1000	1000	1000	1000	997	-			
Frame Size	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	Dim. Page		
	n ₂ [r/min]	163	123	89.1	75.4	65.3	57.6	46.7	39.2	33.8	28.0	22.8	19.2	16.6	13.8	11.3	8.24			

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.
2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6125 ~ 6195




n_1 : Input Speed [r/min]	T_{out} : Allowable output torque [N·m, kgf·m]	Input Speed	$n_1 = 980$ r/min
n_2 : Output Speed [r/min]	Pro: Allowable output shaft radial load [N, kgf]		
P: Allowable input power [kW]	*Consult us for Pro of CNF and CHF type.		

Frame Size	n_2 [r/min] Ratio[Z]	163	123	89.1	75.4	65.3	57.6	46.7	39.2	33.8	28.0	22.8	19.2	16.6	13.8	11.3	8.24	Dim. Page
		6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	
6125	P_i [kW]	6.40	5.97	5.18	4.68	4.54	4.00	3.24	2.72	2.35	1.94	1.58	1.33	1.15	0.843	0.761	-	- - - - -
	T_{out} [N·m]	355	442	527	563	630	630	630	630	630	630	630	630	630	554	613	-	
	T_{out} [kgf·m]	36.2	45.1	53.7	57.4	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	56.5	62.5	-	
	Pro[N]	5730	6380	7250	7510	8050	8180	9050	9540	9810	9810	9810	9810	9810	9810	9590	-	
	Pro[kgf]	584	650	739	766	821	834	923	972	1000	1000	1000	1000	1000	1000	978	-	
6130	P_i [kW]	9.10	8.95	7.66	6.48	5.62	4.96	4.01	3.37	2.91	2.41	1.96	1.81	1.57	1.30	1.05	-	- - - - -
	T_{out} [N·m]	505	663	780	780	780	780	780	780	780	780	780	855	855	855	848	-	
	T_{out} [kgf·m]	51.5	67.6	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	87.2	87.2	87.2	86.4	-	
	Pro[N]	6620	7350	8460	8890	9130	9840	10600	11100	11700	12400	13300	13900	14600	14700	14700	-	
	Pro[kgf]	675	749	862	906	931	1000	1080	1130	1190	1260	1360	1420	1490	1500	1500	-	
6135	P_i [kW]	9.96	9.20	9.23	7.58	6.77	5.97	4.84	3.89	3.50	2.90	2.36	1.89	1.81	1.50	1.22	-	- - - - -
	T_{out} [N·m]	553	682	940	912	940	940	940	900	940	940	940	892	987	987	979	-	
	T_{out} [kgf·m]	56.4	69.5	95.8	93.0	95.8	95.8	95.8	91.7	95.8	95.8	95.8	90.9	101	101	99.8	-	
	Pro[N]	6560	7330	8310	8780	9010	9720	10500	11000	11600	12200	13200	13900	14500	14700	14700	-	
	Pro[kgf]	669	747	847	895	918	991	1070	1120	1180	1240	1350	1420	1480	1500	1500	-	
6140	P_i [kW]	12.2	11.6	12.0	10.2	8.82	7.78	6.30	5.29	4.56	3.78	3.08	2.59	2.24	1.86	1.52	-	- - - - -
	T_{out} [N·m]	678	863	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	-	
	T_{out} [kgf·m]	69.1	88.0	125	125	125	125	125	125	125	125	125	125	125	125	125	-	
	Pro[N]	10300	11400	12800	13100	13800	14400	15500	16000	16000	16000	16000	16000	16000	16000	16000	-	
	Pro[kgf]	1050	1160	1300	1340	1410	1470	1580	1630	1630	1630	1630	1630	1630	1630	1630	-	
6145	P_i [kW]	12.2	11.6	12.1	11.4	9.78	8.71	6.88	5.92	5.10	4.23	3.44	2.74	2.36	1.94	1.55	-	- - - - -
	T_{out} [N·m]	678	863	1230	1370	1360	1370	1340	1370	1370	1370	1370	1290	1290	1280	1250	-	
	T_{out} [kgf·m]	69.1	88.0	125	140	139	140	137	140	140	140	140	131	131	130	127	-	
	Pro[N]	10300	11400	12800	13100	13700	14400	15400	16000	15800	16000	15700	15900	16000	16000	16000	-	
	Pro[kgf]	1050	1160	1300	1340	1400	1470	1570	1630	1610	1630	1600	1620	1630	1630	1630	-	
6160	P_i [kW]	20.3	19.7	17.2	14.6	12.6	11.2	9.03	7.58	6.54	5.42	4.36	3.72	3.21	2.67	2.18	-	- - - - -
	T_{out} [N·m]	1130	1460	1760	1760	1760	1760	1760	1760	1760	1760	1740	1760	1760	1760	1760	-	
	T_{out} [kgf·m]	115	149	179	179	179	179	179	179	179	179	177	179	179	179	179	-	
	Pro[N]	11300	12600	14300	15100	16100	16700	18100	19000	19900	21200	22100	22100	22100	22100	22100	-	
	Pro[kgf]	1150	1280	1460	1540	1640	1700	1850	1940	2030	2160	2250	2250	2250	2250	2250	-	
6165	P_i [kW]	23.8	22.5	20.6	17.4	15.1	13.3	10.8	9.07	7.82	6.48	5.28	4.45	3.84	3.19	2.55	-	- - - - -
	T_{out} [N·m]	1320	1670	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2050	-	
	T_{out} [kgf·m]	135	170	214	214	214	214	214	214	214	214	214	214	214	214	209	-	
	Pro[N]	11100	12400	14100	14900	15900	16500	17800	18800	19700	21000	22100	22100	22100	22100	21800	-	
	Pro[kgf]	1130	1260	1440	1520	1620	1680	1810	1920	2010	2140	2250	2250	2250	2250	2220	-	
6170	P_i [kW]	27.6	27.6	24.8	21.0	18.2	16.1	13.0	10.9	9.42	7.81	6.36	5.36	4.63	3.85	3.14	-	- - - - -
	T_{out} [N·m]	1530	2040	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	-	
	T_{out} [kgf·m]	156	208	258	258	258	258	258	258	258	258	258	258	258	258	258	-	
	Pro[N]	12700	13900	16000	16800	17700	18600	20300	21200	22400	23900	25600	26800	28200	29500	29500	-	
	Pro[kgf]	1290	1420	1630	1710	1800	1900	2070	2160	2280	2440	2610	2730	2870	3010	3010	-	
6175	P_i [kW]	30.1	30.1	30.1	26.2	22.3	20.0	16.2	13.6	11.7	9.72	7.91	6.67	5.77	4.79	3.91	-	- - - - -
	T_{out} [N·m]	1670	2230	3070	3150	3100	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	-	
	T_{out} [kgf·m]	170	227	313	321	316	321	321	321	321	321	321	321	321	321	321	-	
	Pro[N]	12600	13800	15600	16400	17300	18200	20000	20800	22100	23600	25200	26500	27900	29500	29500	-	
	Pro[kgf]	1280	1410	1590	1670	1760	1860	2040	2120	2250	2410	2570	2700	2840	3010	3010	-	
6180	P_i [kW]	-	-	35.2	33.7	29.2	25.8	20.8	17.5	15.1	12.5	10.2	8.58	7.42	6.16	5.04	-	- - - - -
	T_{out} [N·m]	-	-	3580	4060	4060	4060	4050	4050	4050	4050	4060	4050	4050	4050	4060	-	
	T_{out} [kgf·m]	-	-	365	414	414	414	413	413	413	413	414	413	413	413	414	-	
	Pro[N]	-	-	21400	22200	23400	24900	27100	28300	29700	31900	34300	35700	37400	39900	41700	-	
	Pro[kgf]	-	-	2180	2260	2390	2540	2760	2880	3030	3250	3500	3640	3810	4070	4250	-	
6185	P_i [kW]	-	-	39.0	39.0	29.8	28.3	25.7	21.6	18.6	15.4	12.6	10.6	9.15	6.87	6.21	-	- - - - -
	T_{out} [N·m]	-	-	3970	4690	4130	4450	5000	5000	5000	5000	5000	5000	5000	4510	5000	-	
	T_{out} [kgf·m]	-	-	405	478	421	454	510	510	510	510	510	510	510	460	510	-	
	Pro[N]	-	-	21200	21900	23400	24700	26700	27900	29300	31500	33900	35400	37100	39800	41700	-	
	Pro[kgf]	-	-	2160	2230	2390	2520	2720	2840	2990	3210	3460	3610	3780	4060	4250	-	
6190	P_i [kW]	-	-	41.0	41.0	41.0	40.5	32.8	27.6	23.8	19.7	16.0	13.5	11.7	9.71	7.92	-	- - - - -
	T_{out} [N·m]	-	-	4180	4930	5690	6380	6380	6380	6380	6380	6380	6380	6380	6380	6380	-	
	T_{out} [kgf·m]	-	-	426	503	580	650	650	650	650	650	650	650	650	650	650	-	
	Pro[N]	-	-	30300	31300	32700	34500	37600	39500	41600	44100	47700	49900	52400	55800	58900	-	
	Pro[kgf]	-	-	3090	3190	3330	3520	3830	4030	4240	4500	4860	5090	5340	5690	6000	-	
6195	P_i [kW]	-	-	48.1	48.1	48.1	48.1	40.9	34.4	29.6	24.6	20.0	16.9	14.6	12.1	9.88	-	- - - - -
	T_{out} [N·m]	-	-	4900	5790	6680	7570	7960	7960	7960	7960	7960	7960	7960	7960	7960	-	
	T_{out} [kgf·m]	-	-	499	590	681	772	811	811	811	811	811	811	811	811	811	-	
	Pro[N]	-	-	30000	31000	32300	34100	37100	39000	41200	43700	47200	49400	52000	55300	58400	-	
	Pro[kgf]																	

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6205 ~ 6275

Input Speed	$n_1 = 980$ r/min	n_1 : Input Speed [r/min]	T_{out} : Allowable output torque [N·m, kgf·m]
		n_2 : Output Speed [r/min]	Pro: Allowable output shaft radial load [N, kgf]
		P: Allowable input power [kW]	*Consult us for Pro of CNF and CHF type.



Selection Tables Ratio 6 - 119 REDUCERS


Frame Size	n_2 [r/min]	163	123	89.1	75.4	65.3	57.6	46.7	39.2	33.8	28.0	22.8	19.2	16.6	13.8	11.3	8.24	Dim. Page
	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	
6205	P_1 [kW]	-	-	59.7	-	59.7	-	47.7	-	34.4	-	23.4	-	17.0	-	10.9	-	CNH C-72
	T_{out} [N·m]	-	-	6080	-	8290	-	9270	-	9230	-	9300	-	9300	-	8760	-	CHF C-77
	T_{out} [kgf·m]	-	-	620	-	845	-	945	-	941	-	948	-	948	-	893	-	CVV C-84
	Pro[N]	-	-	57700	-	61800	-	69400	-	76000	-	84100	-	84100	-	84100	-	
	Pro[kgf]	-	-	5880	-	6300	-	7070	-	7750	-	8570	-	8570	-	8570	-	
6215	P_1 [kW]	-	-	75.3	-	75.3	-	64.3	-	47.1	-	31.8	-	23.2	-	14.0	-	CNH C-72
	T_{out} [N·m]	-	-	7670	-	10500	-	12500	-	12700	-	12700	-	12700	-	11300	-	CHF C-77
	T_{out} [kgf·m]	-	-	782	-	1070	-	1270	-	1290	-	1290	-	1290	-	1150	-	CVV C-84
	Pro[N]	-	-	58000	-	62000	-	70100	-	76600	-	87100	-	95100	-	104000	-	
	Pro[kgf]	-	-	5910	-	6320	-	7150	-	7810	-	8880	-	9690	-	10600	-	
6225	P_1 [kW]	-	-	99.5	-	99.5	-	76.1	-	56.0	-	40.2	-	29.1	-	18.7	-	CNH C-72
	T_{out} [N·m]	-	-	10100	-	13800	-	14800	-	15000	-	16000	-	15900	-	15100	-	CHF C-77
	T_{out} [kgf·m]	-	-	1030	-	1410	-	1510	-	1530	-	1630	-	1620	-	1540	-	CVV C-84
	Pro[N]	-	-	61000	-	65500	-	73700	-	80800	-	91700	-	100000	-	113000	-	
	Pro[kgf]	-	-	6220	-	6680	-	7510	-	8240	-	9350	-	10200	-	11500	-	
6235	P_1 [kW]	-	-	113	-	113	-	97.2	-	70.4	-	47.6	-	34.6	-	21.3	-	CNH C-72
	T_{out} [N·m]	-	-	11500	-	15700	-	18900	-	18900	-	18900	-	18900	-	17200	-	CHF C-77
	T_{out} [kgf·m]	-	-	1170	-	1600	-	1930	-	1930	-	1930	-	1930	-	1750	-	CVV C-84
	Pro[N]	-	-	76700	-	81700	-	91900	-	101000	-	114000	-	125000	-	141000	-	
	Pro[kgf]	-	-	7820	-	8330	-	9370	-	10300	-	11600	-	12700	-	14400	-	
6245	P_1 [kW]	-	-	132	-	132	-	120	-	94.2	-	64.8	-	47.2	-	28.1	-	CNH C-72
	T_{out} [N·m]	-	-	13400	-	18300	-	23300	-	25300	-	25800	-	25800	-	22600	-	CHF C-77
	T_{out} [kgf·m]	-	-	1370	-	1870	-	2380	-	2580	-	2630	-	2630	-	2300	-	CVV C-84
	Pro[N]	-	-	85200	-	91100	-	102000	-	112000	-	126000	-	138000	-	157000	-	
	Pro[kgf]	-	-	8690	-	9290	-	10400	-	11400	-	12800	-	14100	-	16000	-	
6255	P_1 [kW]	-	-	151	-	151	-	151	-	118	-	77.9	-	56.8	-	38.5	-	CNH C-72
	T_{out} [N·m]	-	-	15300	-	20900	-	29300	-	31800	-	31000	-	31000	-	31000	-	CHF C-77
	T_{out} [kgf·m]	-	-	1560	-	2130	-	2990	-	3240	-	3160	-	3160	-	3160	-	CVV C-84
	Pro[N]	-	-	104000	-	112000	-	124000	-	137000	-	155000	-	170000	-	192000	-	
	Pro[kgf]	-	-	10600	-	11400	-	12600	-	14000	-	15800	-	17300	-	19600	-	
6265	P_1 [kW]	-	-	175	-	175	-	172	-	159	-	113	-	84.2	-	53.4	-	CNH C-72
	T_{out} [N·m]	-	-	17800	-	24300	-	33400	-	42700	-	45000	-	46000	-	43000	-	CHF C-77
	T_{out} [kgf·m]	-	-	1810	-	2480	-	3400	-	4350	-	4590	-	4690	-	4380	-	CVV C-84
	Pro[N]	-	-	128000	-	137000	-	152000	-	168000	-	189000	-	207000	-	234000	-	
	Pro[kgf]	-	-	13000	-	14000	-	15500	-	17100	-	19300	-	21100	-	23900	-	
6275	P_1 [kW]	-	-	-	-	-	-	-	-	159	-	151	-	125	-	53.4	-	CNH C-72
	T_{out} [N·m]	-	-	-	-	-	-	-	-	42700	-	60000	-	68200	-	43000	-	CHF C-77
	T_{out} [kgf·m]	-	-	-	-	-	-	-	-	4350	-	6120	-	6950	-	4380	-	CVV C-84
	Pro[N]	-	-	-	-	-	-	-	-	196000	-	248000	-	248000	-	219000	-	
	Pro[kgf]	-	-	-	-	-	-	-	-	20000	-	25300	-	25300	-	22300	-	
Frame Size	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	Dim. Page
	n_2 [r/min]	163	123	89.1	75.4	65.3	57.6	46.7	39.2	33.8	28.0	22.8	19.2	16.6	13.8	11.3	8.24	

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.
 2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6060 ~ 6120

Input Speed	$n_1 = 1165$ r/min	n_1 : Input Speed [r/min]	T_{out} : Allowable output torque [N·m, kgf·m]
		n_2 : Output Speed [r/min]	Pro: Allowable output shaft radial load [N, kgf]
		P_i : Allowable input power [kW]	*Consult us for Pro of CNF and CHF type.



Selection Tables
Ratio 6 ~ 119
REDUCERS


Frame Size	n_2 [r/min] Ratio[Z]	194	146	106	89.6	77.7	68.5	55.5	46.6	40.2	33.3	27.1	22.8	19.7	16.4	13.4	9.79	Dim. Page	
		6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119		
6060	P_i [kW]	0.200	0.200	0.200	0.200	0.200	0.181	0.147	0.110	0.106	0.088	0.072	-	-	-	-	-	CNH C-71	
	T_{out} [N·m]	9.35	12.5	17.1	20.2	23.4	24.0	24.0	21.4	24.0	24.0	24.0	-	-	-	-	-	CNF C-76	
	T_{out} [kgf·m]	0.953	1.27	1.74	2.06	2.39	2.45	2.45	2.18	2.45	2.45	2.45	-	-	-	-	-	CNV C-82	
	Pro[N]	857	978	1180	1180	1180	1180	1180	1180	1180	1180	1180	-	-	-	-	-	-	
	Pro[kgf]	87.4	100	120	120	120	120	120	120	120	120	120	-	-	-	-	-	-	
6065	P_i [kW]	0.286	0.286	0.286	0.286	0.257	0.227	0.183	0.154	0.133	0.110	0.090	-	-	-	-	-	CNH C-71	
	T_{out} [N·m]	13.4	17.8	24.5	29.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	-	-	-	-	-	CNF C-76	
	T_{out} [kgf·m]	1.37	1.81	2.50	2.96	3.06	3.06	3.06	3.06	3.06	3.06	3.06	-	-	-	-	-	CNV C-82	
	Pro[N]	850	968	1180	1180	1180	1180	1180	1180	1180	1180	1180	-	-	-	-	-	-	
	Pro[kgf]	86.6	98.7	120	120	120	120	120	120	120	120	120	-	-	-	-	-	-	
6070	P_i [kW]	0.347	0.347	0.347	0.347	0.347	0.340	0.275	0.230	0.199	0.165	0.134	0.100	0.098	-	-	-	CNH C-71	
	T_{out} [N·m]	16.2	21.6	29.7	35.1	40.5	45.0	45.0	44.7	45.0	45.0	45.0	39.7	45.0	-	-	-	CNF C-76	
	T_{out} [kgf·m]	1.65	2.20	3.03	3.58	4.13	4.59	4.59	4.56	4.59	4.59	4.59	4.05	4.59	-	-	-	CNV C-82	
	Pro[N]	1470	1620	1770	1770	1770	1770	1770	1770	1770	1770	1770	1770	1770	-	-	-	-	
	Pro[kgf]	150	165	180	180	180	180	180	180	180	180	180	180	180	-	-	-	-	
6075	P_i [kW]	0.407	0.407	0.407	0.407	0.407	0.407	0.367	0.280	0.264	0.220	0.179	0.136	0.115	-	-	-	CNH C-71	
	T_{out} [N·m]	19.0	25.3	34.9	41.2	47.5	53.9	60.0	54.6	59.6	60.0	60.0	54.2	52.9	-	-	-	CNF C-76	
	T_{out} [kgf·m]	1.94	2.58	3.56	4.20	4.84	5.49	6.12	5.57	6.08	6.12	6.12	5.52	5.39	-	-	-	CNV C-82	
	Pro[N]	1470	1610	1770	1770	1770	1770	1770	1770	1770	1770	1770	1660	1630	1660	-	-	-	
	Pro[kgf]	150	164	180	180	180	180	180	180	180	180	180	169	166	169	-	-	-	
6080	P_i [kW]	0.592	0.592	0.592	0.592	0.592	0.592	0.472	0.340	0.340	0.294	0.239	0.192	0.174	0.120	0.090	-	CNH C-71	
	T_{out} [N·m]	27.7	36.9	50.7	60.0	69.2	78.4	77.2	66.2	76.8	80.0	80.0	76.3	80.0	66.3	61.0	-	CNF C-76	
	T_{out} [kgf·m]	2.82	3.76	5.17	6.12	7.05	7.99	7.87	6.75	7.83	8.15	8.15	7.78	8.15	6.76	6.22	-	CNV C-82	
	Pro[N]	2050	2210	2430	2560	2560	2560	2560	2560	2530	2560	2560	2540	2510	2510	2560	2560	-	
	Pro[kgf]	209	225	248	261	261	261	261	261	258	261	261	259	256	256	261	261	-	
6085	P_i [kW]	0.778	0.778	0.778	0.778	0.778	0.755	0.472	0.475	0.443	0.356	0.294	0.241	0.218	0.181	0.121	-	CNH C-71	
	T_{out} [N·m]	36.3	48.5	66.6	78.7	90.8	100	77.2	92.4	100	97.1	98.4	95.8	100	100	82.1	-	CNF C-76	
	T_{out} [kgf·m]	3.70	4.94	6.79	8.02	9.26	10.2	7.87	9.42	10.2	9.90	10.0	9.77	10.2	10.2	8.37	-	CNV C-82	
	Pro[N]	2030	2190	2400	2560	2560	2560	2560	2450	2300	2460	2360	2330	2310	2260	2430	-	-	
	Pro[kgf]	207	223	245	261	261	261	261	250	234	251	241	238	235	230	248	-	-	
6090	P_i [kW]	1.15	1.15	1.15	1.15	1.15	1.13	0.758	0.671	0.625	0.550	0.435	0.332	0.298	0.239	0.211	0.117	CNH C-71	
	T_{out} [N·m]	53.6	71.4	98.2	116	134	150	124	131	141	150	146	132	137	132	143	108	CNF C-76	
	T_{out} [kgf·m]	5.46	7.28	10.0	11.8	13.7	15.3	12.6	13.4	14.4	15.3	14.9	13.5	14.0	13.5	14.6	11.0	CNV C-82	
	Pro[N]	3010	3340	3340	3340	3340	3340	3340	3320	3310	3300	3320	3320	3320	3320	3310	3330	3310	-
	Pro[kgf]	307	340	340	340	340	340	340	338	337	336	338	338	338	338	337	339	337	-
6095	P_i [kW]	1.52	1.52	1.52	1.52	1.52	1.51	1.22	0.850	0.784	0.696	0.537	0.361	0.298	0.239	0.223	0.117	CNH C-71	
	T_{out} [N·m]	70.8	94.4	130	153	177	200	200	166	177	190	180	143	137	132	151	108	CNF C-76	
	T_{out} [kgf·m]	7.22	9.62	13.3	15.6	18.0	20.4	20.4	16.9	18.0	19.4	18.3	14.6	14.0	13.5	15.4	11.0	CNV C-82	
	Pro[N]	2980	3290	3340	3340	3340	3340	3340	3250	3240	3220	3260	3290	3320	3310	3310	3310	3310	-
	Pro[kgf]	304	335	340	340	340	340	340	331	330	328	332	335	338	337	337	337	337	-
6100	P_i [kW]	2.35	2.35	2.35	2.35	2.14	1.89	1.53	1.27	1.11	0.917	0.747	0.560	0.516	0.436	0.369	0.210	CNH C-71	
	T_{out} [N·m]	110	146	201	238	250	250	250	247	250	250	250	222	237	241	250	195	CNF C-76	
	T_{out} [kgf·m]	11.2	14.9	20.5	24.3	25.5	25.5	25.5	25.2	25.5	25.5	25.5	22.6	24.2	24.6	25.5	19.9	CNV C-82	
	Pro[N]	4380	4870	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5390	5400	5390	-
	Pro[kgf]	446	496	550	550	550	550	550	550	550	550	550	550	550	550	549	550	549	-
6105	P_i [kW]	3.18	3.18	3.18	2.96	2.57	2.27	1.83	1.54	1.33	1.10	0.896	0.699	0.603	0.448	0.425	0.262	CNH C-71	
	T_{out} [N·m]	149	198	272	300	300	300	300	300	300	300	300	278	277	248	288	243	CNF C-76	
	T_{out} [kgf·m]	15.2	20.2	27.7	30.6	30.6	30.6	30.6	30.6	30.6	30.6	30.6	28.3	28.2	25.3	29.4	24.8	CNV C-82	
	Pro[N]	4320	4800	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5380	5090	5360	-
	Pro[kgf]	440	489	550	550	550	550	550	550	550	550	550	550	550	550	548	519	546	-
6110	P_i [kW]	3.55	3.55	3.55	3.55	3.08	2.72	2.20	1.85	1.59	1.32	1.08	0.906	0.784	0.651	0.531	-	CNH C-71	
	T_{out} [N·m]	166	221	304	359	360	360	360	360	360	360	360	360	360	360	360	-	CNF C-76	
	T_{out} [kgf·m]	16.9	22.5	31.0	36.6	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	-	CNV C-82	
	Pro[N]	4910	5450	6180	6370	6830	6930	7390	7340	7200	7280	7590	7590	7610	7580	7600	-	-	
	Pro[kgf]	501	556	630	649	696	706	753	748	734	742	774	774	776	773	775	-	-	
6115	P_i [kW]	3.92	3.92	3.92	3.90	3.60	3.17	2.57	2.16	1.86	1.54	1.25	1.06	0.914	0.758	0.620	-	CNH C-71	
	T_{out} [N·m]	183	244	336	395	420	420	420	420	420	420	420	420	420	420	420	-	CNF C-76	
	T_{out} [kgf·m]	18.7	24.9	34.3	40.3	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	-	CNV C-82	
	Pro[N]	4890	5420	6150	6330	6760	6870	7320	7150	7010	7090	7370	7410	7430	7420	7410	-	-	
	Pro[kgf]	498	552	627	645	689	700	746	729	715	723	751	755	757	756	755	-	-	
6120	P_i [kW]	5.07	5.07	5.07	5.07	4.49	3.93	3.19	2.70	2.30	1.93	1.57	1.32	1.14	0.950	0.775	-	CNH C-71	
	T_{out} [N·m]	237	316	434	513	525	520	522	525	520	525	525	525	525	525	525	-	CNF C-76	
	T_{out} [kgf·m]	24.2	32.2	44.2	52.3	53.5	53.0	53.2	53.5	53.0	53.5	53.5	53.5	53.5	53.5	53.5	-	CNV C-82	
	Pro[N]	5510	6130	6910	7100	7670	7790	8610	9070	9470	9810	9810	9810	9810	9810	9810	9780	-	
	Pro[kgf]	562	625	704	724	782	794	878	925	965	1000	1000	1000	1000	1000	1000	997	-	
Frame Size	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	Dim. Page	
	n_2 [r/min]	194	146	106	89.6	77.7	68.5	55.5	46.6	40.2	33.3	27.1	22.8	19.7	16.4	13.4	9.79		

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.

2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6125 ~ 6195



n_1 : Input Speed [r/min] n_2 : Output Speed [r/min] P: Allowable input power [kW]	T_{out} : Allowable output torque [N·m, kgf·m] Pro: Allowable output shaft radial load [N, kgf] *Consult us for Pro of CNF and CHF type.	Input Speed $n_1 = 1165$ r/min
--	--	--

Frame Size	n_2 [r/min] Ratio[Z]	194	146	106	89.6	77.7	68.5	55.5	46.6	40.2	33.3	27.1	22.8	19.7	16.4	13.4	9.79	Dim. Page	
		6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119		
6125	P_i [kW]	6.96	6.82	5.91	5.34	5.39	4.76	3.85	3.24	2.79	2.31	1.88	1.59	1.37	0.963	0.868	-	CNH C-71 CNF C-76 CNV C-82	
	T_{out} [N·m]	325	425	506	540	630	630	630	630	630	630	630	630	630	532	588	-		
	T_{out} [kgf·m]	33.1	43.3	51.6	55.0	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	54.2	59.9	-		
	Pro[N]	5420	6010	6840	7080	7560	7690	8510	8980	9380	9810	9810	9810	9810	9810	9650	-		
	Pro[kgf]	552	613	697	722	771	784	867	915	956	1000	1000	1000	1000	1000	984	-		
6130	P_i [kW]	9.39	9.39	9.11	7.70	6.68	5.89	4.77	4.01	3.45	2.86	2.33	2.07	1.79	1.49	1.21	-	CHH C-72 CHF C-77 CVW C-83	
	T_{out} [N·m]	439	585	780	780	780	780	780	780	780	780	780	821	821	821	821	-		
	T_{out} [kgf·m]	44.8	59.6	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	83.7	83.7	83.7	83.7	-		
	Pro[N]	6290	6980	7940	8360	8580	9260	9960	10400	11000	11600	12600	13100	13800	14700	14700	-		
	Pro[kgf]	641	712	809	852	875	944	1020	1060	1120	1180	1280	1340	1410	1500	1500	-		
6135	P_i [kW]	11.3	10.5	10.7	8.65	8.05	7.10	5.69	4.62	4.13	3.45	2.81	2.16	2.06	1.71	1.40	-	CHH C-72 CHF C-77 CVW C-83	
	T_{out} [N·m]	528	654	916	876	940	940	930	900	933	940	940	856	948	948	948	-		
	T_{out} [kgf·m]	53.8	66.7	93.4	89.3	95.8	95.8	94.8	91.7	95.1	95.8	95.8	87.3	96.6	96.6	96.6	-		
	Pro[N]	6190	6910	7820	8280	8460	9140	9840	10300	10900	11500	12400	13100	13700	14600	14700	-		
	Pro[kgf]	631	704	797	844	862	932	1000	1050	1110	1170	1260	1340	1400	1490	1500	-		
6140	P_i [kW]	13.0	13.0	13.0	12.1	10.5	9.25	7.49	6.29	5.42	4.49	3.66	3.08	2.67	2.22	1.81	-	CHH C-72 CHF C-77 CVW C-83	
	T_{out} [N·m]	609	811	1120	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	-		
	T_{out} [kgf·m]	62.1	82.7	114	125	125	125	125	125	125	125	125	125	125	125	125	-		
	Pro[N]	9820	10900	12200	12400	13100	13700	14700	15400	15800	16000	16000	16000	16000	16000	16000	-		
	Pro[kgf]	1000	1110	1240	1260	1340	1400	1500	1570	1610	1630	1630	1630	1630	1630	1630	-		
6145	P_i [kW]	13.9	13.3	13.8	13.5	11.6	10.3	8.02	7.04	6.07	5.03	3.95	3.13	2.69	2.22	1.83	-	CHH C-72 CHF C-77 CVW C-83	
	T_{out} [N·m]	651	828	1180	1360	1360	1370	1310	1370	1370	1370	1370	1320	1240	1240	1240	-		
	T_{out} [kgf·m]	66.4	84.4	120	139	139	140	134	140	140	140	140	135	126	126	125	126		-
	Pro[N]	9800	10900	12100	12400	13000	13600	14600	15400	15700	16000	15900	16000	16000	16000	16000	16000		-
	Pro[kgf]	999	1110	1230	1260	1330	1390	1490	1570	1600	1630	1620	1630	1630	1630	1630	1630		-
6160	P_i [kW]	20.3	19.7	19.7	17.3	15.0	13.1	10.7	9.01	7.77	6.44	5.18	4.42	3.82	3.17	2.59	-	CHH C-72 CHF C-77 CVW C-84	
	T_{out} [N·m]	948	1230	1690	1760	1760	1730	1760	1760	1760	1760	1760	1740	1760	1760	1760	-		
	T_{out} [kgf·m]	96.6	125	172	179	179	176	179	179	179	179	179	177	179	179	179	-		
	Pro[N]	10800	12000	13500	14200	15100	15700	17000	17900	18700	20000	21500	22100	22100	22100	22100	22100		-
	Pro[kgf]	1100	1220	1380	1450	1540	1600	1730	1820	1910	2040	2190	2250	2250	2250	2250	2250		-
6165	P_i [kW]	24.1	24.1	24.1	20.7	18.0	15.9	12.8	10.8	9.30	7.70	6.27	5.29	4.57	3.80	3.03	-	CHH C-72 CHF C-77 CVW C-84	
	T_{out} [N·m]	1120	1500	2060	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2050	-		
	T_{out} [kgf·m]	114	153	210	214	214	214	214	214	214	214	214	214	214	214	209	-		
	Pro[N]	10600	11800	13200	14000	14900	15500	16800	17700	18500	19800	21200	22100	22100	22100	21800	-		
	Pro[kgf]	1080	1200	1350	1430	1520	1580	1710	1800	1890	2020	2160	2250	2250	2250	2220	-		
6170	P_i [kW]	27.6	27.6	27.6	25.0	21.7	19.1	15.5	13.0	11.2	9.28	7.56	6.37	5.51	4.58	3.73	-	CHH C-72 CHF C-77 CVW C-84	
	T_{out} [N·m]	1290	1720	2360	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	-		
	T_{out} [kgf·m]	131	175	241	258	258	258	258	258	258	258	258	258	258	258	258	-		
	Pro[N]	12100	13300	15100	15800	16600	17400	19100	19900	21100	22500	24100	25200	26500	28200	29500	-		
	Pro[kgf]	1230	1360	1540	1610	1690	1770	1950	2030	2150	2290	2460	2570	2700	2870	3010	-		
6175	P_i [kW]	30.1	30.1	30.1	30.1	25.4	23.8	19.3	16.2	13.9	11.6	9.41	7.93	6.86	5.70	4.65	-	CHH C-72 CHF C-77 CVW C-84	
	T_{out} [N·m]	1410	1880	2580	3050	2970	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	-		
	T_{out} [kgf·m]	144	192	263	311	303	321	321	321	321	321	321	321	321	321	321	-		
	Pro[N]	12000	13200	14900	15400	16300	17000	18700	19600	20700	22100	23700	24900	26200	27900	29500	-		
	Pro[kgf]	1220	1350	1520	1570	1660	1730	1910	2000	2110	2250	2420	2540	2670	2840	3010	-		
6180	P_i [kW]	-	-	35.2	35.2	32.4	30.6	24.8	20.8	17.9	14.9	12.1	10.2	8.82	7.33	5.99	-	CHH C-72 CHF C-77 CVW C-84	
	T_{out} [N·m]	-	-	3020	3560	3780	4050	4050	4050	4050	4050	4060	4050	4050	4050	4060	-		
	T_{out} [kgf·m]	-	-	308	363	385	413	413	413	413	413	414	413	413	413	414	-		
	Pro[N]	-	-	20300	21000	22100	23400	25500	26600	27900	30000	32300	33600	35300	37600	40600	-		
	Pro[kgf]	-	-	2070	2140	2250	2390	2600	2710	2840	3060	3290	3430	3600	3830	4140	-		
6185	P_i [kW]	-	-	39.0	39.0	34.0	32.3	30.6	25.7	22.1	18.3	14.9	12.6	10.9	8.16	7.38	-	CHH C-72 CHF C-77 CVW C-84	
	T_{out} [N·m]	-	-	3340	3950	3970	4280	5000	5000	5000	5000	5000	5000	5000	4510	5000	-		
	T_{out} [kgf·m]	-	-	340	403	405	436	510	510	510	510	510	510	510	460	510	-		
	Pro[N]	-	-	20200	20900	22000	23300	25100	26200	27600	29700	31900	33300	34900	37400	40300	-		
	Pro[kgf]	-	-	2060	2130	2240	2380	2560	2670	2810	3030	3250	3390	3560	3810	4110	-		
6190	P_i [kW]	-	-	41.0	41.0	41.0	41.0	39.0	32.8	28.3	23.4	18.8	16.1	13.9	11.5	9.42	-	CHH C-72 CHF C-77 CVW C-84	
	T_{out} [N·m]	-	-	3510	4150	4790	5430	6380	6380	6380	6380	6310	6380	6380	6380	6380	-		
	T_{out} [kgf·m]	-	-	358	423	488	554	650	650	650	650	643	650	650	650	650	-		
	Pro[N]	-	-	28700	29700	31100	32800	35400	37200	39200	41600	44900	47000	49400	52500	56800	-		
	Pro[kgf]	-	-	2930	3030	3170	3340	3610	3790	4000	4240	4580	4790	5040	5350	5790	-		
6195	P_i [kW]	-	-	48.1	48.1	48.1	48.1	48.1	40.5	35.2	29.2	23.0	20.0	17.3	14.4	11.7	-	CHH C-72 CHF C-77 CVW C-84	
	T_{out} [N·m]	-	-	4120	4870	5620	6370	7870	7880	7960	7960	7960	7960	7960	7960	7960	-		
	T_{out} [kgf·m]	-	-	420	496	573	649	802	803	811	811	784	811	811	811	811	-		
	Pro[N]	-	-	28500	29500	30800	32400	34900	36700	38700	41100	44500	46500	49000	52100	56300	-		
	Pro[kgf]	-	-	2910	3010	3140	3300	3560	3740	3940	4190	4540	4740	4990	5310	5740	-		


Selection Tables Ratio 6 - 119 REDUCERS

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.
 2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6205 ~ 6275

Input Speed	$n_1 = 1165$ r/min	n_1 : Input Speed [r/min]	T_{out} : Allowable output torque [N·m, kgf·m]
		n_2 : Output Speed [r/min]	Pro: Allowable output shaft radial load [N, kgf]
		P: Allowable input power [kW]	*Consult us for Pro of CNF and CHF type.




Selection Tables Ratio 6 ~ 119 REDUCERS

Frame Size	n_2 [r/min]	194	146	106	89.6	77.7	68.5	55.5	46.6	40.2	33.3	27.1	22.8	19.7	16.4	13.4	9.79	Dim. Page
6205	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	
	P_1 [kW]	-	-	59.7	-	59.7	-	54.7	-	39.6	-	27.8	-	19.5	-	12.9	-	CHH C-72
	T_{out} [N·m]	-	-	5110	-	6970	-	8950	-	8950	-	9300	-	8950	-	8760	-	CHF C-77
	T_{out} [kgf·m]	-	-	521	-	710	-	912	-	912	-	948	-	912	-	893	-	CVW C-84
	Pro[N]	-	-	55000	-	58900	-	65800	-	72100	-	81600	-	84100	-	84100	-	
	Pro[kgf]	-	-	5610	-	6000	-	6710	-	7350	-	8320	-	8570	-	8570	-	
6215	P_1 [kW]	-	-	75.3	-	75.3	-	75.3	-	56.0	-	37.8	-	27.5	-	16.6	-	CHH C-72
	T_{out} [N·m]	-	-	6450	-	8800	-	12300	-	12700	-	12700	-	12700	-	11300	-	CHF C-77
	T_{out} [kgf·m]	-	-	657	-	897	-	1250	-	1290	-	1290	-	1290	-	1150	-	CVW C-84
	Pro[N]	-	-	55300	-	59200	-	66400	-	72600	-	82500	-	90100	-	102000	-	
	Pro[kgf]	-	-	5640	-	6030	-	6770	-	7400	-	8410	-	9180	-	10400	-	
6225	P_1 [kW]	-	-	99.5	-	99.5	-	90.5	-	66.6	-	47.8	-	33.3	-	22.2	-	CHH C-72
	T_{out} [N·m]	-	-	8520	-	11600	-	14800	-	15000	-	16000	-	15300	-	15100	-	CHF C-77
	T_{out} [kgf·m]	-	-	869	-	1180	-	1510	-	1530	-	1630	-	1560	-	1540	-	CVW C-84
	Pro[N]	-	-	58200	-	62600	-	69800	-	76500	-	86800	-	95000	-	107000	-	
	Pro[kgf]	-	-	5930	-	6380	-	7120	-	7800	-	8850	-	9680	-	10900	-	
6235	P_1 [kW]	-	-	113	-	113	-	97.5	-	75.3	-	54.3	-	37.7	-	24.0	-	CHH C-72
	T_{out} [N·m]	-	-	9680	-	13200	-	15900	-	17000	-	18200	-	17300	-	16200	-	CHF C-77
	T_{out} [kgf·m]	-	-	987	-	1350	-	1620	-	1730	-	1860	-	1760	-	1650	-	CVW C-84
	Pro[N]	-	-	73100	-	77900	-	87700	-	96000	-	108000	-	119000	-	134000	-	
	Pro[kgf]	-	-	7450	-	7940	-	8940	-	9790	-	11000	-	12100	-	13700	-	
6245	P_1 [kW]	-	-	132	-	132	-	120	-	94.2	-	75.3	-	56.2	-	32.1	-	CHH C-72
	T_{out} [N·m]	-	-	11300	-	15400	-	19600	-	21300	-	25200	-	25800	-	21700	-	CHF C-77
	T_{out} [kgf·m]	-	-	1150	-	1570	-	2000	-	2170	-	2570	-	2630	-	2210	-	CVW C-84
	Pro[N]	-	-	81200	-	86900	-	97100	-	107000	-	120000	-	131000	-	149000	-	
	Pro[kgf]	-	-	8280	-	8860	-	9900	-	10900	-	12200	-	13400	-	15200	-	
6255	P_1 [kW]	-	-	151	-	151	-	151	-	118	-	88.9	-	64.8	-	42.9	-	CHH C-72
	T_{out} [N·m]	-	-	12900	-	17600	-	24600	-	26700	-	29800	-	29800	-	29000	-	CHF C-77
	T_{out} [kgf·m]	-	-	1310	-	1790	-	2510	-	2720	-	3040	-	3040	-	2960	-	CVW C-84
	Pro[N]	-	-	99600	-	107000	-	118000	-	131000	-	147000	-	161000	-	182000	-	
	Pro[kgf]	-	-	10200	-	10900	-	12000	-	13400	-	15000	-	16400	-	18600	-	
6265	P_1 [kW]	-	-	175	-	175	-	172	-	159	-	113	-	94.2	-	53.4	-	CHH C-72
	T_{out} [N·m]	-	-	15000	-	20400	-	28100	-	35900	-	37800	-	43300	-	36200	-	CHF C-77
	T_{out} [kgf·m]	-	-	1530	-	2080	-	2860	-	3660	-	3850	-	4410	-	3690	-	CVW C-84
	Pro[N]	-	-	122000	-	130000	-	145000	-	160000	-	180000	-	197000	-	222000	-	
	Pro[kgf]	-	-	12400	-	13300	-	14800	-	16300	-	18300	-	20100	-	22600	-	
6275	P_1 [kW]	-	-	-	-	-	-	-	-	159	-	151	-	132	-	53.4	-	CHH C-72
	T_{out} [N·m]	-	-	-	-	-	-	-	-	35900	-	50500	-	60600	-	36200	-	CHF C-77
	T_{out} [kgf·m]	-	-	-	-	-	-	-	-	3660	-	5150	-	6180	-	3690	-	CVW C-84
	Pro[N]	-	-	-	-	-	-	-	-	186000	-	248000	-	247000	-	208000	-	
	Pro[kgf]	-	-	-	-	-	-	-	-	19000	-	25300	-	25200	-	21200	-	
Frame Size	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	Dim. Page
	n_2 [r/min]	194	146	106	89.6	77.7	68.5	55.5	46.6	40.2	33.3	27.1	22.8	19.7	16.4	13.4	9.79	

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.
 2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6125 ~ 6195



n_1 : Input Speed [r/min]	T_{out} : Allowable output torque [N·m, kgf·m]	Input Speed	$n_1 = 1450$ r/min
n_2 : Output Speed [r/min]	Pro: Allowable output shaft radial load [N, kgf]		
P: Allowable input power [kW]	*Consult us for Pro of CNF and CHF type.		

Frame Size	n_2 [r/min] Ratio[Z]	242	181	132	112	96.7	85.3	69.0	58.0	50.0	41.4	33.7	28.4	24.6	20.4	16.7	12.2	Dim. Page
		6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	
6125	P_i [kW]	6.96	6.95	5.92	5.92	5.92	5.66	4.79	3.96	3.47	2.88	2.34	1.97	1.62	1.14	1.03	-	- CNH C-71 CNF C-76 CNV C-82
	T_{out} [N·m]	261	348	407	482	556	602	630	619	630	630	630	630	598	506	559	-	
	T_{out} [kgf·m]	26.6	35.5	41.5	49.1	56.7	61.4	64.2	63.1	64.2	64.2	64.2	64.2	61.0	51.6	57.0	-	
	Pro[N]	5080	5640	6420	6600	7060	7130	7870	8310	8680	9220	9810	9810	9810	9810	9710	-	
	Pro[kgf]	518	575	654	673	720	727	802	847	885	940	1000	1000	1000	1000	990	-	
6130	P_i [kW]	9.39	9.39	9.39	9.39	7.78	7.27	5.94	4.99	4.30	3.56	2.90	2.44	2.11	1.76	1.42	-	- CHH C-72 CHF C-77 CVW C-83
	T_{out} [N·m]	353	470	646	764	731	774	780	780	780	780	780	780	780	780	772	-	
	T_{out} [kgf·m]	36.0	47.9	65.9	77.9	74.5	78.9	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	78.7	-	
	Pro[N]	5910	6560	7460	7740	7980	8570	9220	9640	10200	10800	11600	12200	12800	13600	14700	-	
	Pro[kgf]	602	669	760	789	813	874	940	983	1040	1100	1180	1240	1300	1390	1500	-	
6135	P_i [kW]	11.3	11.3	11.3	10.2	8.97	8.29	6.72	5.75	4.88	4.11	3.35	2.55	2.44	2.03	1.65	-	- CHH C-72 CHF C-77 CVW C-83
	T_{out} [N·m]	424	566	778	832	842	882	883	900	886	900	900	813	900	900	900	-	
	T_{out} [kgf·m]	43.2	57.7	79.3	84.8	85.8	89.9	90.0	91.7	90.3	91.7	91.7	82.9	91.7	91.7	91.7	-	
	Pro[N]	5830	6470	7340	7680	7890	8490	9140	9550	10100	10700	11500	12100	12700	13600	14700	-	
	Pro[kgf]	594	660	748	783	804	865	932	973	1030	1090	1170	1230	1290	1390	1500	-	
6140	P_i [kW]	13.0	13.0	13.0	13.0	12.0	10.1	8.66	6.89	5.95	5.21	3.94	3.43	2.96	2.43	1.98	-	- CHH C-72 CHF C-77 CVW C-83
	T_{out} [N·m]	489	652	896	1060	1130	1070	1140	1080	1080	1140	1060	1090	1090	1080	1080	-	
	T_{out} [kgf·m]	49.8	66.5	91.3	108	115	109	116	110	110	116	108	111	111	110	110	-	
	Pro[N]	9230	10200	11400	11700	12200	12800	13700	14500	14800	15900	16000	16000	16000	16000	16000	-	
	Pro[kgf]	941	1040	1160	1190	1240	1300	1400	1480	1510	1620	1630	1630	1630	1630	1630	-	
6145	P_i [kW]	15.1	15.1	15.1	15.1	14.5	12.0	9.49	7.91	7.53	6.26	4.67	3.70	3.18	2.62	2.16	-	- CHH C-72 CHF C-77 CVW C-83
	T_{out} [N·m]	569	758	1040	1230	1360	1280	1250	1240	1370	1370	1260	1180	1170	1160	1170	-	
	T_{out} [kgf·m]	58.0	77.3	106	125	139	130	127	126	140	140	128	120	119	118	119	-	
	Pro[N]	9200	10200	11400	11600	12100	12800	13700	14400	14700	15800	16000	16000	16000	16000	16000	-	
	Pro[kgf]	938	1040	1160	1180	1230	1300	1400	1470	1500	1610	1630	1630	1630	1630	1630	-	
6160	P_i [kW]	20.3	19.7	19.7	19.7	18.7	13.1	12.9	9.86	9.56	8.01	6.45	5.50	4.42	3.47	3.22	-	- CHH C-72 CHF C-77 CVW C-84
	T_{out} [N·m]	762	986	1360	1600	1760	1390	1700	1540	1740	1760	1740	1760	1630	1540	1760	-	
	T_{out} [kgf·m]	77.7	101	139	163	179	142	173	157	177	179	177	179	166	157	179	-	
	Pro[N]	10100	11300	12700	13200	14000	14800	15800	16700	17300	18500	19900	20800	22100	22100	22100	-	
	Pro[kgf]	1030	1150	1290	1350	1430	1510	1610	1700	1760	1890	2030	2120	2250	2250	2250	-	
6165	P_i [kW]	24.1	24.1	24.1	22.6	22.4	18.8	16.0	13.4	11.4	9.59	7.81	6.58	5.69	4.73	3.77	-	- CHH C-72 CHF C-77 CVW C-84
	T_{out} [N·m]	903	1200	1660	1840	2100	2000	2100	2100	2070	2100	2100	2100	2100	2100	2050	-	
	T_{out} [kgf·m]	92.0	122	169	188	214	204	214	214	211	214	214	214	214	214	209	-	
	Pro[N]	9990	11100	12500	13100	13800	14300	15500	16300	17100	18300	19600	20600	22100	22100	21800	-	
	Pro[kgf]	1020	1130	1270	1340	1410	1460	1580	1660	1740	1870	2000	2100	2250	2250	2220	-	
6170	P_i [kW]	27.6	27.6	27.6	27.3	25.5	19.7	18.6	15.6	13.5	11.2	9.08	7.66	6.62	5.50	4.57	-	- CHH C-72 CHF C-77 CVW C-84
	T_{out} [N·m]	1040	1380	1900	2220	2390	2090	2440	2440	2440	2440	2440	2440	2440	2450	2490	-	
	T_{out} [kgf·m]	106	141	194	226	244	213	249	249	249	249	249	249	249	250	254	-	
	Pro[N]	11300	12500	14200	14700	15400	16400	17700	18500	19500	20800	22300	23400	24600	26200	28100	-	
	Pro[kgf]	1150	1270	1450	1500	1570	1670	1800	1890	1990	2120	2270	2390	2510	2670	2860	-	
6175	P_i [kW]	30.1	30.1	30.1	30.1	30.1	24.1	23.6	19.5	17.4	14.4	11.3	9.87	8.29	6.98	5.62	-	- CHH C-72 CHF C-77 CVW C-84
	T_{out} [N·m]	1130	1510	2070	2450	2820	2560	3100	3050	3150	3150	3040	3150	3060	3100	3060	-	
	T_{out} [kgf·m]	115	154	211	250	287	261	316	311	321	321	310	321	312	316	312	-	
	Pro[N]	11300	12400	14100	14600	15100	16100	17300	18100	19200	20500	22000	23000	24300	25800	27800	-	
	Pro[kgf]	1150	1260	1440	1490	1540	1640	1760	1850	1960	2090	2240	2340	2480	2630	2830	-	
6180	P_i [kW]	-	-	35.2	35.2	32.4	30.6	30.0	24.1	19.5	18.5	15.1	12.0	9.75	8.80	7.15	-	- CHH C-72 CHF C-77 CVW C-84
	T_{out} [N·m]	-	-	2420	2860	3040	3250	3940	3760	3540	4050	4050	3830	3600	3910	3890	-	
	T_{out} [kgf·m]	-	-	247	292	310	331	402	383	361	413	413	390	367	399	397	-	
	Pro[N]	-	-	19100	19800	20800	22000	23600	24700	26100	27800	29900	31200	32800	34900	37700	-	
	Pro[kgf]	-	-	1950	2020	2120	2240	2410	2520	2660	2830	3050	3180	3340	3560	3840	-	
6185	P_i [kW]	-	-	39.0	39.0	39.0	38.2	38.1	30.1	24.1	22.6	18.6	15.1	12.0	9.79	8.59	-	- CHH C-72 CHF C-77 CVW C-84
	T_{out} [N·m]	-	-	2680	3170	3660	4060	5000	4710	4360	4950	5000	4810	4430	4350	4680	-	
	T_{out} [kgf·m]	-	-	273	323	373	414	510	480	444	505	510	490	452	443	477	-	
	Pro[N]	-	-	19000	19600	20500	21600	23200	24400	25800	27500	29500	30900	32500	34800	37400	-	
	Pro[kgf]	-	-	1940	2000	2090	2200	2360	2490	2630	2800	3010	3150	3310	3550	3810	-	
6190	P_i [kW]	-	-	41.0	41.0	41.0	41.0	41.0	35.2	30.7	24.3	20.9	18.2	15.3	13.5	11.7	-	- CHH C-72 CHF C-77 CVW C-84
	T_{out} [N·m]	-	-	2820	3330	3850	4360	5390	5500	5570	5320	5640	5800	5640	6000	6380	-	
	T_{out} [kgf·m]	-	-	287	339	392	444	549	561	568	542	575	591	575	612	650	-	
	Pro[N]	-	-	26900	27800	29200	30700	33000	34700	36500	38800	41800	43700	46000	48800	52600	-	
	Pro[kgf]	-	-	2740	2830	2980	3130	3360	3540	3720	3960	4260	4450	4690	4970	5360	-	
6195	P_i [kW]	-	-	48.1	48.1	48.1	48.1	48.1	40.5	37.8	30.1	27.1	20.9	18.8	15.6	13.6	-	- CHH C-72 CHF C-77 CVW C-84
	T_{out} [N·m]	-	-	3310	3910	4510	5120	6320	6330	6860	6600	7300	6680	6950	6930	7420	-	
	T_{out} [kgf·m]	-	-	337	399	460	522	644	645	699	673	744	681	708	706	756	-	
	Pro[N]	-	-	26700	27600	28900	30500	32700	34400	36200	38400	41400	43500	45700	48500	52300	-	
	Pro[kgf]	-	-	2720	2810	2950	3110	3330	3510	3690	3910	4220	4430	4660	4940	5330	-	
Frame Size	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	Dim. Page
	n_2 [r/min]	242	181	132	112	96.7	85.3	69.0	58.0	50.0	41.4	33.7	28.4	24.6	20.4	16.7	12.2	


Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.

2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6205 ~ 6275

Input Speed	$n_1 = 1450$ r/min	n_1 : Input Speed [r/min]	T_{out} : Allowable output torque [N·m, kgf·m]
		n_2 : Output Speed [r/min]	Pro: Allowable output shaft radial load [N, kgf]
		P_i : Allowable input power [kW]	*Consult us for Pro of CNF and CHF type.



Selection Tables Ratio 6 - 119 REDUCERS

Frame Size	n_2 [r/min]	242	181	132	112	96.7	85.3	69.0	58.0	50.0	41.4	33.7	28.4	24.6	20.4	16.7	12.2	Dim. Page
6205	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	
	P_i [kW]	-	-	59.7	-	59.7	-	59.2	-	45.7	-	31.8	-	22.6	-	15.9	-	CHH C-72
	T_{out} [N·m]	-	-	4110	-	5600	-	7780	-	8280	-	8550	-	8340	-	8650	-	CHF C-77
	T_{out} [kgf·m]	-	-	419	-	571	-	793	-	844	-	872	-	850	-	882	-	CVV C-84
	Pro[N]	-	-	51700	-	55400	-	61800	-	67500	-	76500	-	83500	-	84100	-	
6215	P_i [kW]	-	-	75.3	-	75.3	-	75.3	-	58.5	-	45.2	-	33.9	-	19.7	-	CHH C-72
	T_{out} [N·m]	-	-	5190	-	7070	-	9900	-	10600	-	12200	-	12500	-	10700	-	CHF C-77
	T_{out} [kgf·m]	-	-	529	-	721	-	1010	-	1080	-	1240	-	1270	-	1090	-	CVV C-84
	Pro[N]	-	-	52000	-	55700	-	62600	-	68300	-	77200	-	84200	-	95400	-	
	Pro[kgf]	-	-	5300	-	5680	-	6380	-	6960	-	7870	-	8580	-	9720	-	
6225	P_i [kW]	-	-	99.5	-	99.5	-	94.2	-	75.3	-	56.5	-	39.3	-	26.7	-	CHH C-72
	T_{out} [N·m]	-	-	6850	-	9330	-	12400	-	13700	-	15200	-	14500	-	14600	-	CHF C-77
	T_{out} [kgf·m]	-	-	698	-	951	-	1260	-	1400	-	1550	-	1480	-	1490	-	CVV C-84
	Pro[N]	-	-	54800	-	59000	-	65700	-	71800	-	81300	-	89000	-	100000	-	
	Pro[kgf]	-	-	5590	-	6010	-	6700	-	7320	-	8290	-	9070	-	10200	-	
6235	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72
	T_{out} [N·m]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHF C-77
	T_{out} [kgf·m]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CVV C-84
	Pro[N]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	Pro[kgf]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
6245	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72
	T_{out} [N·m]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHF C-77
	T_{out} [kgf·m]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CVV C-84
	Pro[N]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	Pro[kgf]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
6255	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72
	T_{out} [N·m]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHF C-77
	T_{out} [kgf·m]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CVV C-84
	Pro[N]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	Pro[kgf]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
6265	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72
	T_{out} [N·m]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHF C-77
	T_{out} [kgf·m]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CVV C-84
	Pro[N]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	Pro[kgf]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
6275	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHH C-72
	T_{out} [N·m]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CHF C-77
	T_{out} [kgf·m]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CVV C-84
	Pro[N]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	Pro[kgf]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Frame Size	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	Dim. Page
	n_2 [r/min]	242	181	132	112	96.7	85.3	69.0	58.0	50.0	41.4	33.7	28.4	24.6	20.4	16.7	12.2	

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.
 2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6060 ~ 6120


Input Speed		n ₁ = 1750 r/min			n ₂ : Input Speed [r/min]														T _{out} : Allowable output torque [N·m, kgf·m]	Pro: Allowable output shaft radial load [N, kgf]
		P ₁ : Allowable input power [kW]														*Consult us for Pro of CNF and CHF type.				
Frame Size	n ₂ [r/min]	Ratio[Z]														Dim. Page				
		292	219	159	135	117	103	83.3	70.0	60.3	50.0	40.7	34.3	29.7	24.6		20.1	14.7		
6060	P ₁ [kW]	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.110	0.110	0.110	0.090	-	-	-	-	-			
	T _{out} [N·m]	6.22	8.29	11.4	13.5	15.6	17.6	21.8	14.3	16.5	20.0	20.1	-	-	-	-	-			
	T _{out} [kgf·m]	0.634	0.845	1.16	1.38	1.59	1.79	2.22	1.46	1.68	2.04	2.05	-	-	-	-	-			
	Pro[N]	751	859	1170	1180	1180	1180	1180	1180	1180	1180	1180	-	-	-	-	-			
	Pro[kgf]	76.6	88	119	120	120	120	120	120	120	120	120	-	-	-	-	-			
6065	P ₁ [kW]	0.286	0.286	0.286	0.286	0.286	0.286	0.234	0.166	0.166	0.143	0.113	-	-	-	-	-			
	T _{out} [N·m]	8.91	11.9	16.3	19.3	22.3	25.2	25.4	21.5	24.9	26.0	25.2	-	-	-	-	-			
	T _{out} [kgf·m]	0.908	1.21	1.66	1.97	2.27	2.57	2.59	2.19	2.54	2.65	2.57	-	-	-	-	-			
	Pro[N]	747	852	1150	1180	1180	1180	1180	1180	1180	1180	1180	-	-	-	-	-			
	Pro[kgf]	76.1	86.9	117	120	120	120	120	120	120	120	120	-	-	-	-	-			
6070	P ₁ [kW]	0.347	0.347	0.347	0.347	0.347	0.347	0.320	0.230	0.226	0.211	0.170	0.100	0.100	-	-	-			
	T _{out} [N·m]	10.8	14.4	19.8	23.4	27.0	30.5	34.9	29.8	34.0	38.3	37.8	26.4	30.6	-	-	-			
	T _{out} [kgf·m]	1.10	1.47	2.02	2.39	2.75	3.11	3.56	3.04	3.47	3.90	3.85	2.69	3.12	-	-	-			
	Pro[N]	1300	1430	1600	1690	1690	1770	1770	1770	1770	1770	1770	1770	1770	-	-	-			
	Pro[kgf]	133	146	163	172	172	180	180	180	180	180	180	180	180	-	-	-			
6075	P ₁ [kW]	0.407	0.407	0.407	0.407	0.407	0.407	0.407	0.294	0.286	0.279	0.226	0.143	0.136	-	-	-			
	T _{out} [N·m]	12.7	16.9	23.2	27.4	31.6	35.9	44.3	38.1	43.0	50.6	50.4	37.9	41.5	-	-	-			
	T _{out} [kgf·m]	1.29	1.72	2.36	2.79	3.22	3.66	4.52	3.88	4.38	5.16	5.14	3.86	4.23	-	-	-			
	Pro[N]	1290	1420	1590	1670	1680	1770	1770	1770	1770	1770	1770	1770	1770	-	-	-			
	Pro[kgf]	131	145	162	170	171	180	180	180	180	180	180	180	180	-	-	-			
6080	P ₁ [kW]	0.592	0.592	0.592	0.592	0.592	0.592	0.478	0.340	0.340	0.340	0.250	0.192	0.185	0.120	0.090	-			
	T _{out} [N·m]	18.4	24.6	33.8	39.9	46.1	52.2	52.1	44.1	51.1	61.7	55.7	50.8	56.5	44.2	40.6	-			
	T _{out} [kgf·m]	1.88	2.51	3.45	4.07	4.70	5.32	5.31	4.50	5.21	6.29	5.68	5.18	5.76	4.51	4.14	-			
	Pro[N]	1800	1940	2140	2300	2370	2480	2440	2530	2560	2560	2560	2560	2560	2560	2560	2560			
	Pro[kgf]	183	198	218	234	242	253	249	258	261	261	261	261	261	261	261	261			
6085	P ₁ [kW]	0.778	0.778	0.778	0.778	0.778	0.778	0.550	0.475	0.467	0.467	0.294	0.241	0.234	0.202	0.121	-			
	T _{out} [N·m]	24.2	32.3	44.4	52.4	60.5	68.5	59.9	61.5	70.2	84.8	65.5	63.7	71.4	74.4	54.7	-			
	T _{out} [kgf·m]	2.47	3.29	4.53	5.34	6.17	6.98	6.11	6.27	7.16	8.64	6.68	6.49	7.28	7.58	5.58	-			
	Pro[N]	1790	1930	2120	2280	2350	2450	2430	2500	2550	2560	2560	2560	2560	2560	2500	2560			
	Pro[kgf]	182	197	216	232	240	250	248	255	260	261	261	261	261	261	255	261			
6090	P ₁ [kW]	1.15	1.15	1.15	1.15	1.15	1.15	0.758	0.671	0.625	0.612	0.435	0.332	0.309	0.252	0.211	0.125			
	T _{out} [N·m]	35.7	47.5	65.4	77.3	89.1	101	82.5	86.9	94.0	111	97.0	87.7	94.5	92.6	95.3	77.1			
	T _{out} [kgf·m]	3.64	4.84	6.67	7.88	9.08	10.3	8.41	8.86	9.58	11.3	9.89	8.94	9.63	9.44	9.71	7.86			
	Pro[N]	2650	2950	3340	3340	3340	3340	3340	3340	3340	3340	3340	3340	3340	3340	3340	3340			
	Pro[kgf]	270	301	340	340	340	340	340	340	340	340	340	340	340	340	340	340			
6095	P ₁ [kW]	1.52	1.52	1.52	1.52	1.52	1.52	1.52	0.866	0.784	0.758	0.603	0.422	0.373	0.301	0.301	0.151			
	T _{out} [N·m]	47.1	62.8	86.4	102	118	134	165	112	118	137	134	112	114	111	136	93.0			
	T _{out} [kgf·m]	4.80	6.40	8.81	10.4	12.0	13.7	16.8	11.4	12.0	14.0	13.7	11.4	11.6	11.3	13.9	9.48			
	Pro[N]	2630	2910	3300	3300	3280	3290	3260	3340	3340	3320	3340	3340	3340	3340	3340	3340			
	Pro[kgf]	268	297	336	336	334	335	332	340	340	338	340	340	340	340	340	340			
6100	P ₁ [kW]	2.35	2.35	2.35	2.35	2.35	1.99	1.93	1.27	1.21	0.975	0.780	0.560	0.516	0.436	0.433	0.210			
	T _{out} [N·m]	73.0	97.4	134	158	183	175	210	165	182	177	174	148	158	160	195	130			
	T _{out} [kgf·m]	7.44	9.93	13.7	16.1	18.7	17.8	21.4	16.8	18.6	18.0	17.7	15.1	16.1	16.3	19.9	13.3			
	Pro[N]	3850	4290	4860	5050	5330	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400			
	Pro[kgf]	392	437	495	515	543	550	550	550	550	550	550	550	550	550	550	550			
6105	P ₁ [kW]	3.18	3.18	3.18	3.18	3.18	2.46	2.34	1.67	1.59	1.20	1.08	0.776	0.708	0.561	0.565	0.286			
	T _{out} [N·m]	98.9	132	181	214	247	216	254	217	239	217	242	205	217	207	255	177			
	T _{out} [kgf·m]	10.1	13.5	18.5	21.8	25.2	22.0	25.9	22.1	24.4	22.1	24.7	20.9	22.1	21.1	26.0	18.0			
	Pro[N]	3820	4240	4800	4980	5250	5380	5380	5380	5380	5380	5380	5380	5380	5380	5400	5400			
	Pro[kgf]	389	432	489	508	535	548	548	548	548	548	548	548	548	548	550	550			
6110	P ₁ [kW]	3.55	3.55	3.55	3.55	3.55	3.18	2.72	1.91	1.90	1.50	1.30	0.944	0.859	0.669	0.661	-			
	T _{out} [N·m]	110	147	202	239	276	280	297	248	286	273	290	249	263	246	298	-			
	T _{out} [kgf·m]	11.2	15.0	20.6	24.4	28.1	28.5	30.3	25.3	29.2	27.8	29.6	25.4	26.8	25.1	30.4	-			
	Pro[N]	4320	4810	5470	5650	6010	6090	6470	6660	6840	7360	7610	7610	7610	7610	7610	7610			
	Pro[kgf]	440	490	558	576	613	621	660	679	697	750	776	776	776	776	776	776			
6115	P ₁ [kW]	3.92	3.92	3.92	3.90	3.90	3.90	3.11	2.22	2.22	1.81	1.52	1.11	1.01	0.758	0.758	-			
	T _{out} [N·m]	122	163	223	263	303	344	339	288	334	328	338	294	309	279	342	-			
	T _{out} [kgf·m]	12.4	16.6	22.7	26.8	30.9	35.1	34.6	29.4	34.0	33.4	34.5	30.0	31.5	28.4	34.9	-			
	Pro[N]	4310	4790	5450	5620	5970	6020	6430	6620	6800	7310	7610	7610	7610	7610	7610	7610			
	Pro[kgf]	439	488	556	573	609	614	655	675	693	745	776	776	776	776	776	776			
6120	P ₁ [kW]	5.07	5.07	5.07	5.07	5.07	5.07	3.96	3.09	2.99	2.49	1.91	1.72	1.30	0.957	0.944	-			
	T _{out} [N·m]	158	210	289	342	394	447	431	400	450	453	427	454	399	352	426	-			
	T _{out} [kgf·m]	16.1	21.4	29.5	34.9	40.2	45.6	43.9	40.8	45.9	46.2	43.5	46.3	40.7	35.9	43.4	-			
	Pro[N]	4860	5410	6130	6310	6760	6810	7540	7970	8280	8790	9430	9810	9810	9810	9810	9810			
	Pro[kgf]	495	551	625	643	689	694	769	812	844	896	961	1000	1000	1000	1000	1000			
Frame Size	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119			
	n ₂ [r/min]	292	219	159	135	117	103	83.3	70.0	60.3	50.0	40.7	34.3	29.7	24.6	20.1	14.7			

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.

2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6125 ~ 6195



n_1 : Input Speed [r/min]	T_{out} : Allowable output torque [N·m, kgf·m]	Input Speed	$n_1 = 1750$ r/min
n_2 : Output Speed [r/min]	Pro: Allowable output shaft radial load [N, kgf]		
P: Allowable input power [kW]	*Consult us for Pro of CNF and CHF type.		

Frame Size	n_2 [r/min] Ratio[Z]	292	219	159	135	117	103	83.3	70.0	60.3	50.0	40.7	34.3	29.7	24.6	20.1	14.7	Dim. Page
		6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	
6125	P_i [kW]	5.81	6.95	5.92	5.92	5.92	5.66	4.88	3.96	3.77	3.18	2.38	2.28	1.62	1.20	1.13	-	CNH C-71 CNF C-76 CNV C-82
	T_{out} [N·m]	181	288	338	399	460	499	532	513	566	577	531	602	495	441	510	-	
	T_{out} [kgf·m]	18.5	29.4	34.5	40.7	46.9	50.9	54.2	52.3	57.7	58.8	54.1	61.4	50.5	45.0	52.0	-	
	Pro[N]	4840	5340	6080	6250	6700	6760	7450	7870	8170	8670	9340	9740	9790	9790	9810	-	
	Pro[kgf]	493	544	620	637	683	689	759	802	833	884	952	993	998	998	1000	-	
6130	P_i [kW]	9.39	9.39	9.39	9.39	7.78	7.27	6.14	5.16	4.48	3.71	2.99	2.54	2.19	1.83	1.42	-	CHH C-72 CHF C-77 CVW C-83
	T_{out} [N·m]	292	389	535	633	605	641	669	669	674	673	668	672	669	674	640	-	
	T_{out} [kgf·m]	29.8	39.7	54.5	64.5	61.7	65.3	68.2	68.2	68.7	68.6	68.1	68.5	68.2	68.7	65.2	-	
	Pro[N]	5590	6210	7060	7330	7550	8120	8710	9100	9610	10200	11000	11500	12100	12900	13900	-	
	Pro[kgf]	570	633	720	747	770	828	888	928	980	1040	1120	1170	1230	1310	1420	-	
6135	P_i [kW]	11.3	11.3	11.3	11.3	8.97	8.29	7.53	5.95	5.64	4.25	3.77	2.93	2.52	2.17	1.91	-	CHH C-72 CHF C-77 CVW C-83
	T_{out} [N·m]	352	469	645	762	697	730	820	771	848	771	840	775	772	799	861	-	
	T_{out} [kgf·m]	35.9	47.8	65.7	77.7	71.0	74.4	83.6	78.6	86.4	78.6	85.6	79.0	78.7	81.4	87.8	-	
	Pro[N]	5520	6140	6970	7230	7480	8050	8590	9030	9480	10100	10800	11400	12000	12800	13800	-	
	Pro[kgf]	563	626	710	737	762	821	876	920	966	1030	1100	1160	1220	1300	1410	-	
6140	P_i [kW]	13.0	13.0	13.0	13.0	12.0	10.1	8.66	6.89	5.95	5.21	3.94	3.43	2.96	2.43	1.98	-	CHH C-72 CHF C-77 CVW C-83
	T_{out} [N·m]	405	540	743	878	933	888	943	893	895	945	879	906	905	895	893	-	
	T_{out} [kgf·m]	41.3	55.0	75.7	89.5	95.1	90.5	96.1	91.0	91.2	96.3	89.6	92.4	92.3	91.2	91.0	-	
	Pro[N]	8750	9690	10900	11100	11600	12200	13000	13700	14000	15100	15800	16000	16000	16000	16000	-	
	Pro[kgf]	892	988	1110	1130	1180	1240	1330	1400	1430	1540	1610	1630	1630	1630	1630	-	
6145	P_i [kW]	15.1	15.1	15.1	15.1	15.1	12.0	11.0	7.91	7.53	7.53	5.39	4.22	3.65	3.03	2.48	-	CHH C-72 CHF C-77 CVW C-83
	T_{out} [N·m]	471	628	864	1020	1170	1060	1190	1030	1130	1370	1200	1120	1120	1110	1120	-	
	T_{out} [kgf·m]	48.0	64.0	88.1	104	119	108	121	105	115	140	122	114	114	113	114	-	
	Pro[N]	8720	9650	10800	11000	11500	12100	12900	13700	14000	14900	15600	16000	16000	16000	16000	-	
	Pro[kgf]	889	984	1100	1120	1170	1230	1310	1400	1430	1520	1590	1630	1630	1630	1630	-	
6160	P_i [kW]	20.3	19.7	19.7	19.7	18.7	13.1	12.9	9.86	10.5	9.67	7.45	5.75	4.42	3.47	3.47	-	CHH C-72 CHF C-77 CVW C-84
	T_{out} [N·m]	631	817	1120	1330	1460	1150	1400	1280	1580	1760	1660	1520	1350	1280	1570	-	
	T_{out} [kgf·m]	64.3	83.3	114	136	149	117	143	130	161	179	169	155	138	130	160	-	
	Pro[N]	9550	10700	12000	12500	13300	14000	14900	15800	16300	17300	18700	19600	21900	22000	21800	-	
	Pro[kgf]	973	1090	1220	1270	1360	1430	1520	1610	1660	1760	1910	2000	2230	2240	2220	-	
6165	P_i [kW]	24.1	24.1	24.1	22.6	22.6	18.8	16.1	15.1	11.4	11.4	7.91	7.53	5.75	5.65	3.90	-	CHH C-72 CHF C-77 CVW C-84
	T_{out} [N·m]	748	997	1370	1520	1760	1660	1750	1950	1720	2070	1760	1990	1760	2080	1760	-	
	T_{out} [kgf·m]	76.2	102	140	155	179	169	178	199	175	211	179	203	179	212	179	-	
	Pro[N]	9460	10500	11900	12400	13100	13600	14700	15300	16200	17100	18600	19300	21700	21500	21700	-	
	Pro[kgf]	964	1070	1210	1260	1340	1390	1500	1560	1650	1740	1900	1970	2210	2190	2210	-	
6170	P_i [kW]	27.6	27.6	27.6	27.3	25.5	19.7	19.5	15.8	14.3	12.0	9.75	8.39	7.15	5.92	4.81	-	CHH C-72 CHF C-77 CVW C-84
	T_{out} [N·m]	859	1140	1570	1840	1980	1730	2120	2050	2150	2180	2170	2220	2190	2180	2170	-	
	T_{out} [kgf·m]	87.6	116	160	188	202	176	216	209	219	222	221	226	223	222	221	-	
	Pro[N]	10700	11800	13500	14000	14600	15500	16700	17500	18400	19600	21000	22000	23200	24600	26500	-	
	Pro[kgf]	1090	1200	1380	1430	1490	1580	1700	1780	1880	2000	2140	2240	2360	2510	2700	-	
6175	P_i [kW]	30.1	30.1	30.1	30.1	30.1	24.1	24.1	19.5	18.8	15.1	11.3	11.3	8.29	7.15	5.62	-	CHH C-72 CHF C-77 CVW C-84
	T_{out} [N·m]	937	1250	1720	2030	2340	2120	2620	2530	2830	2730	2520	2990	2540	2630	2540	-	
	T_{out} [kgf·m]	95.5	127	175	207	239	216	267	258	288	278	257	305	259	268	259	-	
	Pro[N]	10700	11700	13400	13900	14400	15300	16400	17200	18100	19300	20900	21600	23000	24400	26300	-	
	Pro[kgf]	1090	1190	1370	1420	1470	1560	1670	1750	1850	1970	2130	2200	2340	2490	2680	-	
6180	P_i [kW]	-	-	35.2	35.2	32.4	30.6	30.0	24.1	19.5	18.8	15.1	12.0	9.75	8.80	7.15	-	CHH C-72 CHF C-77 CVW C-84
	T_{out} [N·m]	-	-	2010	2370	2520	2690	3270	3120	2930	3410	3360	3170	2980	3240	3220	-	
	T_{out} [kgf·m]	-	-	205	242	257	274	333	318	299	348	343	323	304	330	328	-	
	Pro[N]	-	-	18000	18700	19700	20800	22400	23400	24600	26300	28300	29500	31000	33000	35600	-	
	Pro[kgf]	-	-	1830	1910	2010	2120	2280	2390	2510	2680	2880	3010	3160	3360	3630	-	
6185	P_i [kW]	-	-	39.0	39.0	39.0	39.0	39.0	30.1	24.1	22.6	18.8	15.1	12.0	9.79	8.59	-	CHH C-72 CHF C-77 CVW C-84
	T_{out} [N·m]	-	-	2220	2630	3030	3440	4250	3910	3620	4100	4200	3980	3670	3610	3870	-	
	T_{out} [kgf·m]	-	-	226	268	309	351	433	399	369	418	428	406	374	368	394	-	
	Pro[N]	-	-	17900	18600	19500	20500	22000	23100	24400	26000	27900	29200	30700	32800	35400	-	
	Pro[kgf]	-	-	1820	1900	1990	2090	2240	2350	2490	2650	2840	2980	3130	3340	3610	-	
6190	P_i [kW]	-	-	41.0	41.0	41.0	41.0	41.0	35.2	30.7	24.3	20.9	18.2	15.3	13.5	11.8	-	CHH C-72 CHF C-77 CVW C-84
	T_{out} [N·m]	-	-	2340	2760	3190	3610	4460	4560	4620	4410	4670	4810	4670	4980	5320	-	
	T_{out} [kgf·m]	-	-	239	281	325	368	455	465	471	450	476	490	476	508	542	-	
	Pro[N]	-	-	25300	26300	27500	29000	31200	32800	34500	36600	39500	41300	43400	46000	49600	-	
	Pro[kgf]	-	-	2580	2680	2800	2960	3180	3340	3520	3730	4030	4210	4420	4690	5060	-	
6195	P_i [kW]	-	-	48.1	48.1	48.1	48.1	48.1	40.5	37.8	30.1	30.1	20.9	18.8	15.6	13.6	-	CHH C-72 CHF C-77 CVW C-84
	T_{out} [N·m]	-	-	2740	3240	3740	4240	5240	5240	5680	5470	6720	5540	5760	5740	6150	-	
	T_{out} [kgf·m]	-	-	279	330	381	432	534	534	579	558	685	565	587	585	627	-	
	Pro[N]	-	-	25200	26100	27300	28800	31000	32600	34200	36300	38900	41100	43100	45800	49400	-	
	Pro[kgf]	-	-	2570	2660	2780	2940	3160	3320	3490	3700	3970	4190	4390	4670	5040	-	


Selection Tables Ratio 6 ~ 119 REDUCERS

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.
2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer

Single Reduction Ratio 6 ~ 119 Frame Size: 6205 ~ 6275

Input Speed	$n_1 = 1750$ r/min	n_1 : Input Speed [r/min]	T_{out} : Allowable output torque [N·m, kgf·m]
		n_2 : Output Speed [r/min]	Pro: Allowable output shaft radial load [N, kgf]
		P_i : Allowable input power [kW]	*Consult us for Pro of CNF and CHF type.



Selection Tables
Ratio 6 ~ 119
REDUCERS

Frame Size	n_2 [r/min]	292	219	159	135	117	103	83.3	70.0	60.3	50.0	40.7	34.3	29.7	24.6	20.1	14.7	Dim. Page
6205	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	CHH C-72 CHF C-77 CVV C-84
	P_i [kW]	-	-	59.7	-	59.7	-	59.2	-	45.7	-	31.8	-	22.6	-	15.9	-	
	T_{out} [N·m]	-	-	3400	-	4640	-	6450	-	6860	-	7090	-	6910	-	7170	-	
	T_{out} [kgf·m]	-	-	347	-	473	-	657	-	699	-	723	-	704	-	731	-	
	Pro[N]	-	-	48900	-	52500	-	58600	-	64100	-	72500	-	79200	-	84100	-	
6215	P_i [kW]	-	-	75.3	-	75.3	-	75.3	-	58.5	-	45.2	-	37.7	-	21.4	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	4300	-	5860	-	8200	-	8790	-	10100	-	11500	-	9650	-	
	T_{out} [kgf·m]	-	-	438	-	597	-	836	-	896	-	1030	-	1170	-	984	-	
	Pro[N]	-	-	49300	-	52900	-	59500	-	64900	-	73300	-	79700	-	90300	-	
	Pro[kgf]	-	-	5030	-	5390	-	6070	-	6620	-	7470	-	8120	-	9200	-	
6225	P_i [kW]	-	-	99.5	-	99.5	-	94.2	-	75.3	-	56.5	-	45.2	-	26.7	-	CHH C-72 CHF C-77 CVV C-84
	T_{out} [N·m]	-	-	5670	-	7730	-	10300	-	11300	-	12600	-	13800	-	12100	-	
	T_{out} [kgf·m]	-	-	578	-	788	-	1050	-	1150	-	1280	-	1410	-	1230	-	
	Pro[N]	-	-	52100	-	56100	-	62500	-	68200	-	77200	-	84100	-	95200	-	
	Pro[kgf]	-	-	5310	-	5720	-	6370	-	6950	-	7870	-	8570	-	9700	-	
6235	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	T_{out} [N·m]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	T_{out} [kgf·m]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	Pro[N]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	Pro[kgf]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
6245	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	T_{out} [N·m]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	T_{out} [kgf·m]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	Pro[N]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	Pro[kgf]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
6255	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	T_{out} [N·m]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	T_{out} [kgf·m]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	Pro[N]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	Pro[kgf]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
6265	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	T_{out} [N·m]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	T_{out} [kgf·m]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	Pro[N]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	Pro[kgf]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
6275	P_i [kW]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	T_{out} [N·m]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	T_{out} [kgf·m]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	Pro[N]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	Pro[kgf]	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Frame Size	Ratio[Z]	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	Dim. Page
	n_2 [r/min]	292	219	159	135	117	103	83.3	70.0	60.3	50.0	40.7	34.3	29.7	24.6	20.1	14.7	

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.
2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer

Double Reduction Ratio 104,121 ~ 7569 Frame Size: 6060DA ~ 6130DA

Input Speed	$n_1 = 1450$ r/min	n_1 : Input Speed [r/min]	T_{out} : Allowable output torque [N·m, kgf·m]
		n_2 : Output Speed [r/min]	Pro: Allowable output shaft radial load [N, kgf]
		P_1 : Allowable input power [kW]	*Consult us for Pro of CNF and CHF type.


Frame Size	n_2 [r/min]	13.9	12.0	10.1	8.79	7.44	6.28	5.31	4.55	3.85	3.07	2.59	2.23	1.98	1.72
	Ratio[Z]	104	121	143	165	195	231	273	319	377	473	559	649	731	841
6060DA	P_1 [kW]	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	-	0.100	0.100
	T_{out} [N·m]	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	-	24.0	24.0
	T_{out} [kgf·m]	2.45	2.45	2.45	2.45	2.45	2.45	2.45	2.45	2.45	2.45	2.45	-	2.45	2.45
	Pro[N]	1180	1180	1180	1180	1180	1180	1180	1180	1180	1180	1180	-	1180	1180
	Pro[kgf]	120	120	120	120	120	120	120	120	120	120	120	-	120	120
6065DA	P_1 [kW]	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	-	0.100	0.100
	T_{out} [N·m]	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	-	30.0	30.0
	T_{out} [kgf·m]	3.06	3.06	3.06	3.06	3.06	3.06	3.06	3.06	3.06	3.06	3.06	-	3.06	3.06
	Pro[N]	1180	1140	1180	1180	1180	1180	1180	1180	1180	1180	1180	-	1180	1180
	Pro[kgf]	120	116	120	120	120	120	120	120	120	120	120	-	120	120
6070DA	P_1 [kW]	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100
	T_{out} [N·m]	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0
	T_{out} [kgf·m]	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59
	Pro[N]	1770	1770	1770	1770	1770	1770	1770	1770	1770	1770	1770	1770	1770	1770
	Pro[kgf]	180	180	180	180	180	180	180	180	180	180	180	180	180	180
6075DA	P_1 [kW]	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100
	T_{out} [N·m]	60.0	50.8	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	57.4	60.0	60.0
	T_{out} [kgf·m]	6.12	5.18	6.12	6.12	6.12	6.12	6.12	6.12	6.12	6.12	6.12	5.85	6.12	6.12
	Pro[N]	1770	1770	1770	1770	1770	1770	1770	1770	1770	1770	1660	1660	1580	1660
	Pro[kgf]	180	180	180	180	180	180	180	180	180	180	169	169	161	169
6090DA	P_1 [kW]	0.243	0.209	0.177	0.153	0.130	0.110	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100
	T_{out} [N·m]	150	150	150	150	150	150	150	150	150	150	150	146	150	150
	T_{out} [kgf·m]	15.3	15.3	15.3	15.3	15.3	15.3	15.3	15.3	15.3	15.3	15.3	14.9	15.3	15.3
	Pro[N]	3340	3340	3340	3340	3340	3340	3340	3290	3290	3290	3310	3310	3300	3310
	Pro[kgf]	340	340	340	340	340	340	340	336	336	336	338	338	336	338
6095DA	P_1 [kW]	0.293	0.224	0.216	0.204	0.173	0.146	0.124	0.106	0.100	0.100	0.100	-	0.100	0.100
	T_{out} [N·m]	181	160	183	200	200	200	200	200	200	200	200	-	200	200
	T_{out} [kgf·m]	18.4	16.4	18.7	20.4	20.4	20.4	20.4	20.4	20.4	20.4	20.4	-	20.4	20.4
	Pro[N]	3340	3340	3340	3340	3340	3340	3340	3200	3200	3220	3220	-	3220	3200
	Pro[kgf]	340	340	340	340	340	340	340	326	326	328	328	-	328	326
6100DA	P_1 [kW]	0.406	0.349	0.295	0.256	0.216	0.183	0.154	0.132	0.112	0.100	0.100	0.100	0.100	0.100
	T_{out} [N·m]	250	250	250	250	250	250	250	250	250	250	250	250	250	250
	T_{out} [kgf·m]	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5
	Pro[N]	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400
	Pro[kgf]	550	550	550	550	550	550	550	550	550	550	550	550	550	550
6105DA	P_1 [kW]	0.429	0.429	0.354	0.307	0.260	0.219	0.185	0.159	0.134	0.107	0.100	0.100	0.100	0.100
	T_{out} [N·m]	265	308	300	300	300	300	300	300	300	300	300	296	300	300
	T_{out} [kgf·m]	27.0	31.4	30.6	30.6	30.6	30.6	30.6	30.6	30.6	30.6	30.6	30.2	30.6	30.6
	Pro[N]	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5090	5400	5400
	Pro[kgf]	550	550	550	550	550	550	550	550	550	550	550	519	550	550
6120DA	P_1 [kW]	-	-	0.429	0.429	0.429	0.381	0.322	0.275	0.233	0.187	0.158	0.136	0.121	0.104
	T_{out} [N·m]	-	-	364	420	496	522	522	520	520	525	525	525	525	520
	T_{out} [kgf·m]	-	-	37.1	42.8	50.6	53.2	53.2	53.0	53.0	53.5	53.5	53.5	53.5	53.0
	Pro[N]	-	-	9810	9810	9810	9810	9810	9810	9810	9810	9810	9810	9810	9810
	Pro[kgf]	-	-	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
6120DB	P_1 [kW]	0.852	0.732	0.619	0.537	0.454	0.381	-	-	-	-	-	-	-	-
	T_{out} [N·m]	525	525	525	525	525	522	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	53.5	53.5	53.5	53.5	53.5	53.2	-	-	-	-	-	-	-	-
	Pro[N]	9810	9810	9810	9810	9810	9810	-	-	-	-	-	-	-	-
	Pro[kgf]	1000	1000	1000	1000	1000	1000	-	-	-	-	-	-	-	-
6125DA	P_1 [kW]	-	-	-	-	-	0.429	0.389	0.333	0.282	0.225	0.190	0.164	0.145	0.126
	T_{out} [N·m]	-	-	-	-	-	588	630	630	630	630	630	630	630	630
	T_{out} [kgf·m]	-	-	-	-	-	59.9	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2
	Pro[N]	-	-	-	-	-	9810	9810	9810	9810	9810	9810	9810	9810	9810
	Pro[kgf]	-	-	-	-	-	1000	1000	1000	1000	1000	1000	1000	1000	1000
6125DB	P_1 [kW]	1.02	0.867	0.743	0.644	0.545	0.460	0.389	0.333	-	-	-	-	-	-
	T_{out} [N·m]	630	622	630	630	630	630	630	630	-	-	-	-	-	-
	T_{out} [kgf·m]	64.2	63.4	64.2	64.2	64.2	64.2	64.2	64.2	-	-	-	-	-	-
	Pro[N]	9810	9810	9810	9810	9810	9810	9810	9810	-	-	-	-	-	-
	Pro[kgf]	1000	1000	1000	1000	1000	1000	1000	1000	-	-	-	-	-	-
6130DA	P_1 [kW]	-	-	-	-	-	-	0.429	0.413	0.349	0.278	0.235	0.237	0.200	0.200
	T_{out} [N·m]	-	-	-	-	-	-	695	780	780	780	780	912	780	780
	T_{out} [kgf·m]	-	-	-	-	-	-	70.8	79.5	79.5	79.5	79.5	93.0	79.5	79.5
	Pro[N]	-	-	-	-	-	-	14700	14700	14700	14700	14700	14700	14700	14700
	Pro[kgf]	-	-	-	-	-	-	1500	1500	1500	1500	1500	1500	1500	1500
Frame Size	Ratio[Z]	104	121	143	165	195	231	273	319	377	473	559	649	731	841
	n_2 [r/min]	13.9	12.0	10.1	8.79	7.44	6.28	5.31	4.55	3.85	3.07	2.59	2.23	1.98	1.72

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.

2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables Ratio 104,121 ~ 7569 REDUCERS

Selection Tables 6000 Series Reducer



Input Speed

 $n_1 = 1450$ r/min

1.45	1.16	0.980	0.784	0.702	0.572	0.476	0.417	0.327	0.282	0.235	0.192	n_2 [r/min]	Dim. Page	Frame Size
1003	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177	7569	Ratio[Z]		
-	0.100	-	0.100	-	-	-	-	-	-	-	-	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6060DA
-	24.0	-	24.0	-	-	-	-	-	-	-	-	T _{OUT} [N•m]		
-	2.45	-	2.45	-	-	-	-	-	-	-	-	T _{OUT} [kgf•m]		
-	1180	-	1180	-	-	-	-	-	-	-	-	Pro[N]		
-	120	-	120	-	-	-	-	-	-	-	-	Pro[kgf]		
-	0.100	-	0.100	-	-	-	-	-	-	-	-	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6065DA
-	30.0	-	30.0	-	-	-	-	-	-	-	-	T _{OUT} [N•m]		
-	3.06	-	3.06	-	-	-	-	-	-	-	-	T _{OUT} [kgf•m]		
-	1180	-	1180	-	-	-	-	-	-	-	-	Pro[N]		
-	120	-	120	-	-	-	-	-	-	-	-	Pro[kgf]		
0.100	0.100	-	0.100	0.100	0.100	-	-	-	-	-	-	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6070DA
45.0	45.0	-	45.0	45.0	45.0	-	-	-	-	-	-	T _{OUT} [N•m]		
4.59	4.59	-	4.59	4.59	4.59	-	-	-	-	-	-	T _{OUT} [kgf•m]		
1770	1770	-	1770	1770	1770	-	-	-	-	-	-	Pro[N]		
180	180	-	180	180	180	-	-	-	-	-	-	Pro[kgf]		
0.100	0.100	-	0.100	0.100	0.100	-	-	-	-	-	-	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6075DA
57.4	60.0	-	60.0	57.4	57.4	-	-	-	-	-	-	T _{OUT} [N•m]		
5.85	6.12	-	6.12	5.85	5.85	-	-	-	-	-	-	T _{OUT} [kgf•m]		
1580	1660	-	1660	1580	1580	-	-	-	-	-	-	Pro[N]		
161	169	-	169	161	161	-	-	-	-	-	-	Pro[kgf]		
0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	-	-	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6090DA
146	150	150	150	146	146	150	146	150	150	-	-	T _{OUT} [N•m]		
14.9	15.3	15.3	15.3	14.9	14.9	15.3	14.9	15.3	15.3	-	-	T _{OUT} [kgf•m]		
3300	3310	3310	3310	3300	3300	3310	3300	3310	3310	-	-	Pro[N]		
336	338	338	338	336	336	338	336	338	338	-	-	Pro[kgf]		
-	0.100	0.100	0.100	-	-	0.100	-	0.100	0.100	-	-	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6095DA
-	200	193	200	-	-	192	-	192	192	-	-	T _{OUT} [N•m]		
-	20.4	19.6	20.4	-	-	19.6	-	19.6	19.6	-	-	T _{OUT} [kgf•m]		
-	3220	3240	3220	-	-	3240	-	3240	3240	-	-	Pro[N]		
-	328	330	328	-	-	330	-	330	330	-	-	Pro[kgf]		
0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	-	-	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6100DA
250	250	250	250	250	250	250	250	250	250	-	-	T _{OUT} [N•m]		
25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	-	-	T _{OUT} [kgf•m]		
5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	-	-	Pro[N]		
550	550	550	550	550	550	550	550	550	550	-	-	Pro[kgf]		
0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	-	-	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6105DA
296	300	300	300	296	296	300	296	300	300	-	-	T _{OUT} [N•m]		
30.2	30.6	30.6	30.6	30.2	30.2	30.6	30.2	30.6	30.6	-	-	T _{OUT} [kgf•m]		
5090	5400	4780	5400	5090	5090	4780	5090	4780	4780	-	-	Pro[N]		
519	550	488	550	519	519	488	519	488	488	-	-	Pro[kgf]		
0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	-	-	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6120DA
525	525	525	525	525	525	525	525	525	525	-	-	T _{OUT} [N•m]		
53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5	-	-	T _{OUT} [kgf•m]		
9810	9810	9780	9810	9810	9810	9780	9810	9780	9780	-	-	Pro[N]		
1000	1000	997	1000	1000	1000	997	1000	997	997	-	-	Pro[kgf]		
-	-	-	-	-	-	-	-	-	-	0.100	0.100	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6120DB
-	-	-	-	-	-	-	-	-	-	525	525	T _{OUT} [N•m]		
-	-	-	-	-	-	-	-	-	-	53.5	53.5	T _{OUT} [kgf•m]		
-	-	-	-	-	-	-	-	-	-	9780	9780	Pro[N]		
-	-	-	-	-	-	-	-	-	-	997	997	Pro[kgf]		
0.106	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	-	-	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6125DA
630	630	630	630	630	630	630	630	630	630	-	-	T _{OUT} [N•m]		
64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	-	-	T _{OUT} [kgf•m]		
9810	9810	9560	9810	9810	9810	9560	9810	9560	9560	-	-	Pro[N]		
1000	1000	974	1000	1000	1000	974	1000	974	974	-	-	Pro[kgf]		
-	-	-	-	-	-	-	-	-	-	0.100	0.100	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6125DB
-	-	-	-	-	-	-	-	-	-	630	630	T _{OUT} [N•m]		
-	-	-	-	-	-	-	-	-	-	64.2	64.2	T _{OUT} [kgf•m]		
-	-	-	-	-	-	-	-	-	-	9560	9560	Pro[N]		
-	-	-	-	-	-	-	-	-	-	974	974	Pro[kgf]		
0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	-	-	P _i [kW]	CHH C-74 CHF C-79 CVV C-86	6130DA
912	780	848	780	912	912	848	912	848	848	-	-	T _{OUT} [N•m]		
93.0	79.5	86.5	79.5	93.0	93.0	86.5	93.0	86.5	86.5	-	-	T _{OUT} [kgf•m]		
14700	14700	14700	14700	14700	14700	14700	14700	14700	14700	-	-	Pro[N]		
1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	-	-	Pro[kgf]		
1003	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177	7569	Ratio[Z]	Dim. Page	Frame Size
1.45	1.16	0.980	0.784	0.702	0.572	0.476	0.417	0.327	0.282	0.235	0.192	n_2 [r/min]		

Note: 3. Necessary input power for starting is printed in bold face. Do not exceed allowable output torque after startup.

Selection Tables 6000 Series Reducer

Double Reduction Ratio 104,121 ~ 7569 Frame Size: 6130DB ~ 6160DB

Input Speed	$n_1 = 1450$ r/min	n_1 : Input Speed [r/min]	T_{out} : Allowable output torque [N·m, kgf·m]
		n_2 : Output Speed [r/min]	Pro: Allowable output shaft radial load [N, kgf]
		P_i : Allowable input power [kW]	*Consult us for Pro of CNF and CHF type.


Frame Size	n_2 [r/min]	13.9	12.0	10.1	8.79	7.44	6.28	5.31	4.55	3.85	3.07	2.59	2.23	1.98	1.72
	Ratio[Z]	104	121	143	165	195	231	273	319	377	473	559	649	731	841
6130DB	P_i [kW]	1.27	1.09	0.920	0.798	0.675	0.570	0.482	0.413	0.349	-	-	-	-	-
	T_{out} [N·m]	780	780	780	780	780	780	780	780	780	-	-	-	-	-
	T_{out} [kgf·m]	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	-	-	-	-	-
	Pro[N]	14700	14700	14700	14700	14700	14700	14700	14700	14700	-	-	-	-	-
	Pro[kgf]	1500	1500	1500	1500	1500	1500	1500	1500	1500	-	-	-	-	-
6130DC	P_i [kW]	1.27	-	-	-	-	-	-	-	-	-	-	-	-	-
	T_{out} [N·m]	780	-	-	-	-	-	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	79.5	-	-	-	-	-	-	-	-	-	-	-	-	-
	Pro[N]	14700	-	-	-	-	-	-	-	-	-	-	-	-	-
	Pro[kgf]	1500	-	-	-	-	-	-	-	-	-	-	-	-	-
6135DA	P_i [kW]	-	-	-	-	-	-	-	0.429	0.421	0.335	0.284	0.273	0.217	0.200
	T_{out} [N·m]	-	-	-	-	-	-	-	812	940	940	940	1050	940	940
	T_{out} [kgf·m]	-	-	-	-	-	-	-	82.8	95.8	95.8	95.8	107	95.8	95.8
	Pro[N]	-	-	-	-	-	-	-	14700	14700	14700	14700	14700	14700	14700
	Pro[kgf]	-	-	-	-	-	-	-	1500	1500	1500	1500	1500	1500	1500
6135DB	P_i [kW]	1.52	1.31	1.11	0.961	0.813	0.686	0.581	0.497	0.421	0.335	-	-	-	-
	T_{out} [N·m]	940	940	940	940	940	940	940	940	940	940	-	-	-	-
	T_{out} [kgf·m]	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	-	-	-	-
	Pro[N]	14700	14700	14700	14700	14700	14700	14700	14700	14700	14700	-	-	-	-
	Pro[kgf]	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	-	-	-	-
6135DC	P_i [kW]	1.52	1.31	-	-	-	-	-	-	-	-	-	-	-	-
	T_{out} [N·m]	940	940	-	-	-	-	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	95.8	95.8	-	-	-	-	-	-	-	-	-	-	-	-
	Pro[N]	14700	14700	-	-	-	-	-	-	-	-	-	-	-	-
	Pro[kgf]	1500	1500	-	-	-	-	-	-	-	-	-	-	-	-
6140DA	P_i [kW]	-	-	-	-	-	-	-	-	0.429	0.429	0.370	0.318	0.283	0.246
	T_{out} [N·m]	-	-	-	-	-	-	-	-	960	1200	1230	1230	1230	1230
	T_{out} [kgf·m]	-	-	-	-	-	-	-	-	97.8	123	125	125	125	125
	Pro[N]	-	-	-	-	-	-	-	-	16000	16000	16000	16000	16000	16000
	Pro[kgf]	-	-	-	-	-	-	-	-	1630	1630	1630	1630	1630	1630
6140DB	P_i [kW]	1.60	1.60	1.45	1.25	1.06	0.895	0.757	0.648	0.548	0.437	0.370	-	-	-
	T_{out} [N·m]	986	1150	1230	1230	1230	1230	1230	1230	1230	1230	1230	-	-	-
	T_{out} [kgf·m]	100	117	125	125	125	125	125	125	125	125	125	-	-	-
	Pro[N]	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	-	-	-
	Pro[kgf]	1630	1630	1630	1630	1630	1630	1630	1630	1630	1630	1630	-	-	-
69140DC	P_i [kW]	1.99	1.71	1.45	1.25	-	-	-	-	-	-	-	-	-	-
	T_{out} [N·m]	1230	1230	1230	1230	-	-	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	125	125	125	125	-	-	-	-	-	-	-	-	-	-
	Pro[N]	16000	16000	16000	16000	-	-	-	-	-	-	-	-	-	-
	Pro[kgf]	1630	1630	1630	1630	-	-	-	-	-	-	-	-	-	-
6145DA	P_i [kW]	-	-	-	-	-	-	-	-	-	-	0.413	0.356	0.316	0.275
	T_{out} [N·m]	-	-	-	-	-	-	-	-	-	-	1370	1370	1370	1370
	T_{out} [kgf·m]	-	-	-	-	-	-	-	-	-	-	140	140	140	140
	Pro[N]	-	-	-	-	-	-	-	-	-	-	15700	16000	15700	15800
	Pro[kgf]	-	-	-	-	-	-	-	-	-	-	1600	1630	1600	1610
6145DB	P_i [kW]	-	-	1.60	1.39	1.17	0.977	0.827	0.725	0.613	0.489	0.413	0.356	-	0.275
	T_{out} [N·m]	-	-	1360	1360	1360	1340	1340	1370	1370	1370	1370	1370	-	1370
	T_{out} [kgf·m]	-	-	138	138	138	136	136	140	140	140	140	140	-	140
	Pro[N]	-	-	16000	16000	16000	16000	16000	15800	15800	15700	15700	16000	-	15800
	Pro[kgf]	-	-	1630	1630	1630	1630	1630	1610	1610	1600	1600	1630	-	1610
6145DC	P_i [kW]	2.22	1.80	1.62	1.39	-	-	-	-	-	-	-	-	-	-
	T_{out} [N·m]	1370	1290	1370	1360	-	-	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	140	132	140	138	-	-	-	-	-	-	-	-	-	-
	Pro[N]	15900	16000	15900	16000	-	-	-	-	-	-	-	-	-	-
	Pro[kgf]	1620	1630	1620	1630	-	-	-	-	-	-	-	-	-	-
6160DA	P_i [kW]	-	-	-	1.60	1.52	1.28	1.08	0.928	0.785	0.619	0.524	0.456	0.400	0.400
	T_{out} [N·m]	-	-	-	1560	1760	1760	1760	1760	1760	1740	1740	1760	1740	1760
	T_{out} [kgf·m]	-	-	-	159	179	179	179	179	179	177	177	179	177	179
	Pro[N]	-	-	-	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100
	Pro[kgf]	-	-	-	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250
6160DB	P_i [kW]	2.85	2.45	2.07	1.79	1.52	1.28	-	-	-	-	-	-	-	-
	T_{out} [N·m]	1760	1760	1760	1760	1760	1760	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	179	179	179	179	179	179	-	-	-	-	-	-	-	-
	Pro[N]	22100	22100	22100	22100	22100	22100	-	-	-	-	-	-	-	-
	Pro[kgf]	2250	2250	2250	2250	2250	2250	-	-	-	-	-	-	-	-
Frame Size	Ratio[Z]	104	121	143	165	195	231	273	319	377	473	559	649	731	841
	n_2 [r/min]	13.9	12.0	10.1	8.79	7.44	6.28	5.31	4.55	3.85	3.07	2.59	2.23	1.98	1.72

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.

2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables Ratio 104,121 ~ 7569 REDUCERS

Selection Tables 6000 Series Reducer



Input Speed	$n_1 = 1450$ r/min
--------------------	--------------------

												n_2 [r/min]	Dim. Page	Frame Size		
												Ratio[Z]				
1.45	1.16	0.980	0.784	0.702	0.572	0.476	0.417	0.327	0.282	0.235	0.192					
1003	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177	7569					
-	-	-	-	-	-	-	-	-	-	0.200	0.200	P_i [kW]				
-	-	-	-	-	-	-	-	-	-	848	848	T_{OUT} [N•m]	CHH C-74	6130DB		
-	-	-	-	-	-	-	-	-	-	86.5	86.5	T_{OUT} [kgf•m]	CHF C-79			
-	-	-	-	-	-	-	-	-	-	14700	14700	Pro[N]	CVV C-86			
-	-	-	-	-	-	-	-	-	-	1500	1500	Pro[kgf]				
-	-	-	-	-	-	-	-	-	-	-	-	P_i [kW]	CHH C-74	6130DC		
-	-	-	-	-	-	-	-	-	-	-	-	T_{OUT} [N•m]	CHF C-79			
-	-	-	-	-	-	-	-	-	-	-	-	T_{OUT} [kgf•m]	CVV C-86			
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]				
-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]				
0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	-	-	P_i [kW]	CHH C-74	6135DA		
1050	940	979	940	1050	1050	979	1050	979	979	-	-	T_{OUT} [N•m]	CHF C-79			
107	95.8	99.8	95.8	107	107	99.8	107	99.8	99.8	-	-	T_{OUT} [kgf•m]	CVV C-86			
14700	14700	14700	14700	14700	14700	14700	14700	14700	14700	-	-	Pro[N]				
1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	-	Pro[kgf]				
-	-	-	-	-	-	-	-	-	-	0.200	0.200	P_i [kW]	CHH C-74	6135DB		
-	-	-	-	-	-	-	-	-	-	979	979	T_{OUT} [N•m]	CHF C-79			
-	-	-	-	-	-	-	-	-	-	99.8	99.8	T_{OUT} [kgf•m]	CVV C-86			
-	-	-	-	-	-	-	-	-	-	14700	14700	Pro[N]				
-	-	-	-	-	-	-	-	-	-	1500	1500	Pro[kgf]				
-	-	-	-	-	-	-	-	-	-	-	-	P_i [kW]	CHH C-74	6135DC		
-	-	-	-	-	-	-	-	-	-	-	-	T_{OUT} [N•m]	CHF C-79			
-	-	-	-	-	-	-	-	-	-	-	-	T_{OUT} [kgf•m]	CVV C-86			
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]				
-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]				
0.206	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	-	-	P_i [kW]	CHH C-74	6140DA		
1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	-	-	T_{OUT} [N•m]	CHF C-79			
125	125	125	125	125	125	125	125	125	125	-	-	T_{OUT} [kgf•m]	CVV C-86			
16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	-	-	Pro[N]				
1630	1630	1630	1630	1630	1630	1630	1630	1630	1630	-	-	Pro[kgf]				
-	-	-	-	-	-	-	-	-	-	0.200	0.200	P_i [kW]	CHH C-74	6140DB		
-	-	-	-	-	-	-	-	-	-	1230	1230	T_{OUT} [N•m]	CHF C-79			
-	-	-	-	-	-	-	-	-	-	125	125	T_{OUT} [kgf•m]	CVV C-86			
-	-	-	-	-	-	-	-	-	-	16000	16000	Pro[N]				
-	-	-	-	-	-	-	-	-	-	1630	1630	Pro[kgf]				
-	-	-	-	-	-	-	-	-	-	-	-	P_i [kW]	CHH C-74	69140DC		
-	-	-	-	-	-	-	-	-	-	-	-	T_{OUT} [N•m]	CHF C-79			
-	-	-	-	-	-	-	-	-	-	-	-	T_{OUT} [kgf•m]	CVV C-86			
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]				
-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]				
0.230	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	-	-	P_i [kW]	CHH C-74	6145DA		
1370	1370	1250	1370	1370	1370	1250	1370	1250	1250	-	-	T_{OUT} [N•m]	CHF C-79			
140	140	127	140	140	140	127	140	127	127	-	-	T_{OUT} [kgf•m]	CVV C-86			
16000	15700	16000	15700	16000	16000	16000	16000	16000	16000	-	-	Pro[N]				
1630	1600	1630	1600	1630	1630	1630	1630	1630	1630	-	-	Pro[kgf]				
-	-	-	-	-	-	-	-	-	-	0.200	0.200	P_i [kW]	CHH C-74	6145DB		
-	-	-	-	-	-	-	-	-	-	1250	1250	T_{OUT} [N•m]	CHF C-79			
-	-	-	-	-	-	-	-	-	-	127	127	T_{OUT} [kgf•m]	CVV C-86			
-	-	-	-	-	-	-	-	-	-	16000	16000	Pro[N]				
-	-	-	-	-	-	-	-	-	-	1630	1630	Pro[kgf]				
-	-	-	-	-	-	-	-	-	-	-	-	P_i [kW]	CHH C-74	6145DC		
-	-	-	-	-	-	-	-	-	-	-	-	T_{OUT} [N•m]	CHF C-79			
-	-	-	-	-	-	-	-	-	-	-	-	T_{OUT} [kgf•m]	CVV C-86			
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]				
-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]				
0.400	0.400	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	P_i [kW]	CHH C-74	6160DA		
1760	1740	1760	1740	1760	1760	1760	1760	1760	1760	1760	1760	T_{OUT} [N•m]	CHF C-79			
179	177	179	177	179	179	179	179	179	179	179	179	T_{OUT} [kgf•m]	CVV C-86			
22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	Pro[N]				
2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	Pro[kgf]				
-	-	-	-	-	-	-	-	-	-	-	-	P_i [kW]	CHH C-74	6160DB		
-	-	-	-	-	-	-	-	-	-	-	-	T_{OUT} [N•m]	CHF C-79			
-	-	-	-	-	-	-	-	-	-	-	-	T_{OUT} [kgf•m]	CVV C-86			
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]				
-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]				
1003	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177	7569	Ratio[Z]	Dim. Page	Frame Size		
1.45	1.16	0.980	0.784	0.702	0.572	0.476	0.417	0.327	0.282	0.235	0.192	n_2 [r/min]				

Note: 3. Necessary input power for starting is printed in bold face. Do not exceed allowable output torque after startup.

Selection Tables 6000 Series Reducer

Double Reduction Ratio 104,121 ~ 7569 Frame Size: 6160DC ~ 6185DA


Input Speed	$n_1 = 1450$ r/min	n_1 : Input Speed [r/min]	T_{out} : Allowable output torque [N·m, kgf·m]
		n_2 : Output Speed [r/min]	Pro: Allowable output shaft radial load [N, kgf]
		P_1 : Allowable input power [kW]	*Consult us for Pro of CNF and CHF type.

Frame Size	n_2 [r/min]	13.9	12.0	10.1	8.79	7.44	6.28	5.31	4.55	3.85	3.07	2.59	2.23	1.98	1.72
	Ratio[Z]	104	121	143	165	195	231	273	319	377	473	559	649	731	841
6160DC	P_1 [kW]	2.85	2.45	2.07	-	-	-	-	-	-	-	-	-	-	-
	T_{out} [N·m]	1760	1760	1760	-	-	-	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	179	179	179	-	-	-	-	-	-	-	-	-	-	-
	Pro[N]	22100	22100	22100	-	-	-	-	-	-	-	-	-	-	-
	Pro[kgf]	2250	2250	2250	-	-	-	-	-	-	-	-	-	-	-
6165DA	P_1 [kW]	-	-	-	1.60	1.53	1.30	1.11	0.940	0.749	0.634	0.546	0.485	0.421	
	T_{out} [N·m]	-	-	-	1850	2100	2100	2100	2100	2100	2100	2100	2100	2100	
	T_{out} [kgf·m]	-	-	-	188	214	214	214	214	214	214	214	214	214	
	Pro[N]	-	-	-	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	
	Pro[kgf]	-	-	-	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	
6165DB	P_1 [kW]	3.36	2.93	2.48	2.15	1.82	1.53	1.30	-	-	-	-	-	-	-
	T_{out} [N·m]	2070	2100	2100	2100	2100	2100	2100	-	-	-	-	-	-	-
	T_{out} [kgf·m]	211	214	214	214	214	214	214	-	-	-	-	-	-	-
	Pro[N]	22100	22100	22100	22100	22100	22100	22100	-	-	-	-	-	-	-
	Pro[kgf]	2250	2250	2250	2250	2250	2250	2250	-	-	-	-	-	-	-
6165DC	P_1 [kW]	3.41	2.93	2.48	2.15	-	-	-	-	-	-	-	-	-	-
	T_{out} [N·m]	2100	2100	2100	2100	-	-	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	214	214	214	214	-	-	-	-	-	-	-	-	-	-
	Pro[N]	22100	22100	22100	22100	-	-	-	-	-	-	-	-	-	-
	Pro[kgf]	2250	2250	2250	2250	-	-	-	-	-	-	-	-	-	-
6170DA	P_1 [kW]	-	-	-	-	1.60	1.56	1.34	1.13	0.902	0.764	0.658	0.584	0.508	
	T_{out} [N·m]	-	-	-	-	2190	2530	2530	2530	2530	2530	2530	2530	2530	
	T_{out} [kgf·m]	-	-	-	-	223	258	258	258	258	258	258	258	258	
	Pro[N]	-	-	-	-	29500	29500	29500	29500	29500	29500	29500	29500	29500	
	Pro[kgf]	-	-	-	-	3010	3010	3010	3010	3010	3010	3010	3010	3010	
6170DB	P_1 [kW]	-	3.36	2.98	2.59	2.19	1.85	1.56	1.34	-	-	-	-	-	-
	T_{out} [N·m]	-	2410	2530	2530	2530	2530	2530	2530	-	-	-	-	-	-
	T_{out} [kgf·m]	-	245	258	258	258	258	258	258	-	-	-	-	-	-
	Pro[N]	-	29500	29500	29500	29500	29500	29500	29500	-	-	-	-	-	-
	Pro[kgf]	-	3010	3010	3010	3010	3010	3010	3010	-	-	-	-	-	-
6170DC	P_1 [kW]	4.10	3.53	2.98	2.59	2.19	1.85	-	-	-	-	-	-	-	-
	T_{out} [N·m]	2530	2530	2530	2530	2530	2530	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	258	258	258	258	258	258	-	-	-	-	-	-	-	-
	Pro[N]	29500	29500	29500	29500	29500	29500	-	-	-	-	-	-	-	-
	Pro[kgf]	3010	3010	3010	3010	3010	3010	-	-	-	-	-	-	-	-
6175DA	P_1 [kW]	-	-	-	-	-	1.60	1.60	1.41	1.12	0.951	0.819	0.727	0.632	
	T_{out} [N·m]	-	-	-	-	-	2590	3020	3150	3150	3150	3150	3150	3150	
	T_{out} [kgf·m]	-	-	-	-	-	264	308	321	321	321	321	321	321	
	Pro[N]	-	-	-	-	-	29500	29500	29500	29500	29500	29500	29500	29500	
	Pro[kgf]	-	-	-	-	-	3010	3010	3010	3010	3010	3010	3010	3010	
6175DB	P_1 [kW]	-	-	3.36	3.22	2.73	2.30	1.95	1.67	1.41	-	-	-	-	-
	T_{out} [N·m]	-	-	2840	3150	3150	3150	3150	3150	3150	-	-	-	-	-
	T_{out} [kgf·m]	-	-	290	321	321	321	321	321	321	-	-	-	-	-
	Pro[N]	-	-	29500	29500	29500	29500	29500	29500	29500	-	-	-	-	-
	Pro[kgf]	-	-	3010	3010	3010	3010	3010	3010	3010	-	-	-	-	-
6175DC	P_1 [kW]	5.11	4.39	3.72	3.22	2.73	2.30	1.95	-	-	-	-	-	-	-
	T_{out} [N·m]	3150	3150	3150	3150	3150	3150	3150	-	-	-	-	-	-	-
	T_{out} [kgf·m]	321	321	321	321	321	321	321	-	-	-	-	-	-	-
	Pro[N]	29500	29500	29500	29500	29500	29500	29500	-	-	-	-	-	-	-
	Pro[kgf]	3010	3010	3010	3010	3010	3010	3010	-	-	-	-	-	-	-
6180DA	P_1 [kW]	-	-	-	3.36	3.36	2.96	2.50	2.14	1.81	1.45	1.22	1.05	0.937	0.813
	T_{out} [N·m]	-	-	-	3280	3880	4050	4050	4050	4050	4060	4060	4050	4060	4050
	T_{out} [kgf·m]	-	-	-	335	395	413	413	413	413	414	414	413	414	413
	Pro[N]	-	-	-	41700	41700	41700	41700	41700	41700	41700	41700	41700	41700	41700
	Pro[kgf]	-	-	-	4250	4250	4250	4250	4250	4250	4250	4250	4250	4250	4250
6180DB	P_1 [kW]	6.59	5.66	4.79	4.15	3.51	2.96	2.50	2.14	-	-	-	-	-	-
	T_{out} [N·m]	4060	4060	4060	4060	4060	4050	4050	4050	-	-	-	-	-	-
	T_{out} [kgf·m]	414	414	414	414	414	413	413	413	-	-	-	-	-	-
	Pro[N]	40200	41700	41700	41700	41700	41700	41700	41700	-	-	-	-	-	-
	Pro[kgf]	4100	4250	4250	4250	4250	4250	4250	4250	-	-	-	-	-	-
6185DA	P_1 [kW]	-	-	-	-	-	3.36	3.09	2.64	2.24	1.78	1.51	1.30	1.15	1.00
	T_{out} [N·m]	-	-	-	-	-	4600	5000	5000	5000	5000	5000	5000	5000	5000
	T_{out} [kgf·m]	-	-	-	-	-	468	510	510	510	510	510	510	510	510
	Pro[N]	-	-	-	-	-	41700	41700	41700	41700	41700	41700	41600	41700	41700
	Pro[kgf]	-	-	-	-	-	4250	4250	4250	4250	4250	4250	4240	4250	4250
Frame Size	Ratio[Z]	104	121	143	165	195	231	273	319	377	473	559	649	731	841
	n_2 [r/min]	13.9	12.0	10.1	8.79	7.44	6.28	5.31	4.55	3.85	3.07	2.59	2.23	1.98	1.72

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.

2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer



Input Speed	$n_1 = 1450$ r/min
-------------	--------------------

1.45	1.16	0.980	0.784	0.702	0.572	0.476	0.417	0.327	0.282	0.235	0.192	n_2 [r/min]	Dim. Page	Frame Size
1003	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177	7569	Ratio[Z]		
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW]	CHH C-75	6160DC
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [N•m]	CHF C-80	
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf•m]	CVV C-87	
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]		
-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]		
0.400	0.400	0.400	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	P _i [kW]	CHH C-74	6165DA
2100	2100	2050	2100	2100	2100	2050	2100	2050	2050	2050	2050	T _{OUT} [N•m]	CHF C-79	
214	214	209	214	214	214	209	214	209	209	209	209	T _{OUT} [kgf•m]	CVV C-86	
22100	22100	21800	22100	22100	22100	21800	22100	21800	21800	21800	21800	Pro[N]		
2250	2250	2220	2250	2250	2250	2220	2250	2220	2220	2220	2220	Pro[kgf]		
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW]	CHH C-74	6165DB
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [N•m]	CHF C-79	
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf•m]	CVV C-86	
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]		
-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]		
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW]	CHH C-75	6165DC
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [N•m]	CHF C-80	
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf•m]	CVV C-87	
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]		
-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]		
0.426	0.400	0.400	0.400	0.207	0.200	0.200	0.200	0.200	0.200	0.200	0.200	P _i [kW]	CHH C-74	6170DA
2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	T _{OUT} [N•m]	CHF C-79	
258	258	258	258	258	258	258	258	258	258	258	258	T _{OUT} [kgf•m]	CVV C-86	
29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	Pro[N]		
3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	Pro[kgf]		
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW]	CHH C-74	6170DB
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [N•m]	CHF C-79	
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf•m]	CVV C-86	
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]		
-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]		
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW]	CHH C-75	6170DC
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [N•m]	CHF C-80	
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf•m]	CVV C-87	
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]		
-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]		
0.530	0.426	0.400	0.400	0.400	0.209	0.200	0.200	0.200	0.200	0.200	0.200	P _i [kW]	CHH C-74	6175DA
3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	T _{OUT} [N•m]	CHF C-79	
321	321	321	321	321	321	321	321	321	321	321	321	T _{OUT} [kgf•m]	CVV C-86	
29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	Pro[N]		
3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	Pro[kgf]		
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW]	CHH C-74	6175DB
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [N•m]	CHF C-79	
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf•m]	CVV C-86	
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]		
-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]		
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW]	CHH C-75	6175DC
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [N•m]	CHF C-80	
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf•m]	CVV C-87	
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]		
-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]		
0.750	0.750	0.463	0.400	0.400	0.400	0.400	0.400	0.400	0.400	0.400	0.400	P _i [kW]	CHH C-74	6180DA
4050	4060	4060	4060	4050	4050	4060	4050	4060	4060	4060	4060	T _{OUT} [N•m]	CHF C-79	
413	414	414	414	413	413	414	413	414	414	414	414	T _{OUT} [kgf•m]	CVV C-86	
41700	41700	41700	41700	41700	41700	41700	41700	41700	41700	41700	41700	Pro[N]		
4250	4250	4250	4250	4250	4250	4250	4250	4250	4250	4250	4250	Pro[kgf]		
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW]	CHH C-75	6180DB
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [N•m]	CHF C-80	
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf•m]	CVV C-87	
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]		
-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]		
0.841	0.750	0.750	0.750	0.408	0.400	0.400	0.400	0.400	0.400	0.400	0.400	P _i [kW]	CHH C-74	6185DA
5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	T _{OUT} [N•m]	CHF C-79	
510	510	510	510	510	510	510	510	510	510	510	510	T _{OUT} [kgf•m]	CVV C-86	
41600	41700	41700	41700	41600	41600	41700	41600	41700	41700	41700	41700	Pro[N]		
4240	4250	4250	4250	4240	4240	4250	4240	4250	4250	4250	4250	Pro[kgf]		
1003	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177	7569	Ratio[Z]	Dim. Page	Frame Size
1.45	1.16	0.980	0.784	0.702	0.572	0.476	0.417	0.327	0.282	0.235	0.192	n_2 [r/min]		

Note: 3. Necessary input power for starting is printed in bold face. Do not exceed allowable output torque after startup.

REDUCERS
Selection Tables
Ratio 104,121 - 7569

Selection Tables 6000 Series Reducer

Double Reduction Ratio 104,121 ~ 7569 Frame Size: 6185DB ~ 6235DB


Input Speed	$n_1 = 1450$ r/min	n_1 : Input Speed [r/min]	T_{out} : Allowable output torque [N·m, kgf·m]
		n_2 : Output Speed [r/min]	Pro: Allowable output shaft radial load [N, kgf]
		P: Allowable input power [kW]	*Consult us for Pro of CNF and CHF type.

Frame Size	n_2 [r/min]	13.9	12.0	10.1	8.79	7.44	6.28	5.31	4.55	3.85	3.07	2.59	2.23	1.98	1.72
	Ratio[Z]	104	121	143	165	195	231	273	319	377	473	559	649	731	841
6185DB	P_i [kW]	7.95	6.70	5.78	5.03	4.26	3.65	3.09	2.64	2.24	-	-	-	-	-
	T_{out} [N·m]	4900	4810	4900	4920	4920	5000	5000	5000	5000	-	-	-	-	-
	T_{out} [kgf·m]	500	490	500	502	502	510	510	510	510	-	-	-	-	-
	Pro[N]	39900	41700	41700	41700	41700	41700	41700	41700	41700	-	-	-	-	-
	Pro[kgf]	4060	4250	4250	4250	4250	4250	4250	4250	4250	-	-	-	-	-
6190DA	P_i [kW]	-	-	6.25	6.25	5.52	4.66	3.94	3.37	2.85	2.28	1.93	1.66	1.47	1.28
	T_{out} [N·m]	-	-	5300	6110	6380	6380	6380	6380	6380	6380	6380	6380	6380	6380
	T_{out} [kgf·m]	-	-	540	623	650	650	650	650	650	650	650	650	650	650
	Pro[N]	-	-	59000	59000	58900	59000	59000	59000	59000	59000	59000	58600	59000	59000
	Pro[kgf]	-	-	6010	6010	6000	6010	6010	6010	6010	6010	6010	5970	6010	6010
6190DB	P_i [kW]	10.3	8.90	7.53	6.52	5.52	4.66	-	-	-	-	-	-	-	-
	T_{out} [N·m]	6380	6380	6380	6380	6380	6380	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	650	650	650	650	650	650	-	-	-	-	-	-	-	-
	Pro[N]	55800	59000	58700	58900	58900	59000	-	-	-	-	-	-	-	-
	Pro[kgf]	5690	6010	5980	6000	6000	6010	-	-	-	-	-	-	-	-
6195DA	P_i [kW]	-	-	-	-	5.63	5.81	4.92	4.21	3.56	2.84	2.40	2.07	1.84	1.60
	T_{out} [N·m]	-	-	-	-	6500	7960	7960	7960	7960	7960	7960	7960	7960	7960
	T_{out} [kgf·m]	-	-	-	-	663	811	811	811	811	811	811	811	811	811
	Pro[N]	-	-	-	-	58800	59000	59000	59000	59000	59000	59000	58100	59000	59000
	Pro[kgf]	-	-	-	-	6000	6010	6010	6010	6010	6010	6010	5930	6010	6010
6195DB	P_i [kW]	11.9	10.6	9.00	8.09	6.84	5.81	4.92	-	-	-	-	-	-	-
	T_{out} [N·m]	7350	7580	7630	7910	7910	7960	7960	-	-	-	-	-	-	-
	T_{out} [kgf·m]	750	773	778	806	806	811	811	-	-	-	-	-	-	-
	Pro[N]	55400	59000	58200	58300	58300	59000	59000	-	-	-	-	-	-	-
	Pro[kgf]	5650	6010	5940	5940	5940	6010	6010	-	-	-	-	-	-	-
6205DA	P_i [kW]	-	-	-	-	-	-	5.17	4.27	3.83	2.95	2.64	2.20	2.20	2.20
	T_{out} [N·m]	-	-	-	-	-	-	8370	8080	8550	8280	8760	8300	9300	9230
	T_{out} [kgf·m]	-	-	-	-	-	-	853	823	872	844	893	846	948	941
	Pro[N]	-	-	-	-	-	-	84100	84100	84100	84100	84100	84100	84100	84100
	Pro[kgf]	-	-	-	-	-	-	8570	8570	8570	8570	8570	8570	8570	8570
6205DB	P_i [kW]	-	11.9	-	9.48	8.02	6.77	5.73	4.88	4.13	3.32	2.81	2.42	2.20	-
	T_{out} [N·m]	-	8560	-	9270	9270	9270	9270	9230	9230	9300	9300	9300	9300	-
	T_{out} [kgf·m]	-	872	-	945	945	945	945	941	941	948	948	948	948	-
	Pro[N]	-	84100	-	84100	84100	84100	84100	84100	84100	84100	84100	84100	84100	-
	Pro[kgf]	-	8570	-	8570	8570	8570	8570	8570	8570	8570	8570	8570	8570	-
6215DA	P_i [kW]	-	-	-	11.9	10.5	9.13	7.72	6.69	5.66	4.51	3.82	3.29	2.92	2.54
	T_{out} [N·m]	-	-	-	11700	12200	12500	12500	12700	12700	12700	12700	12700	12700	12700
	T_{out} [kgf·m]	-	-	-	1190	1240	1270	1270	1290	1290	1290	1290	1290	1290	1290
	Pro[N]	-	-	-	104000	104000	104000	104000	104000	104000	104000	104000	104000	104000	104000
	Pro[kgf]	-	-	-	10600	10600	10600	10600	10600	10600	10600	10600	10600	10600	10600
6215DB	P_i [kW]	-	15.9	-	12.4	10.5	-	-	-	-	-	-	-	-	-
	T_{out} [N·m]	-	11400	-	12200	12200	-	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	-	1160	-	1240	1240	-	-	-	-	-	-	-	-	-
	Pro[N]	-	104000	-	104000	104000	-	-	-	-	-	-	-	-	-
	Pro[kgf]	-	10600	-	10600	10600	-	-	-	-	-	-	-	-	-
6225DA	P_i [kW]	-	-	-	-	10.8	10.8	9.15	7.95	6.73	5.71	4.83	4.13	3.69	3.02
	T_{out} [N·m]	-	-	-	-	12500	14800	14800	15000	15000	16000	16000	15900	16000	15000
	T_{out} [kgf·m]	-	-	-	-	1270	1510	1510	1530	1530	1630	1630	1620	1630	1530
	Pro[N]	-	-	-	-	129000	137000	145000	145000	145000	145000	145000	145000	145000	145000
	Pro[kgf]	-	-	-	-	13200	14000	14700	14800	14800	14800	14800	14800	14800	14800
6225DB	P_i [kW]	-	18.8	-	14.8	12.5	10.8	-	-	-	-	-	-	-	-
	T_{out} [N·m]	-	13500	-	14500	14500	14800	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	-	1370	-	1480	1480	1510	-	-	-	-	-	-	-	-
	Pro[N]	-	113000	-	122000	129000	137000	-	-	-	-	-	-	-	-
	Pro[kgf]	-	11500	-	12500	13100	14000	-	-	-	-	-	-	-	-
6235DA	P_i [kW]	-	25.4	-	20.0	17.0	13.8	11.7	10.00	8.46	7.31	6.19	5.33	4.73	3.79
	T_{out} [N·m]	-	18200	-	19600	19600	18900	18900	18900	18900	20500	20500	20500	20500	18900
	T_{out} [kgf·m]	-	1860	-	2000	2000	1930	1930	1930	1930	2090	2090	2090	2090	1930
	Pro[N]	-	141000	-	151000	159000	171000	179000	179000	179000	179000	179000	179000	179000	179000
	Pro[kgf]	-	14300	-	15400	16200	17400	18200	18200	18200	18200	18200	18200	18200	18200
6235DB	P_i [kW]	-	26.1	-	20.0	-	-	-	-	-	-	-	-	-	-
	T_{out} [N·m]	-	18700	-	19600	-	-	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	-	1910	-	2000	-	-	-	-	-	-	-	-	-	-
	Pro[N]	-	141000	-	151000	-	-	-	-	-	-	-	-	-	-
	Pro[kgf]	-	14300	-	15400	-	-	-	-	-	-	-	-	-	-
Frame Size	Ratio[Z]	104	121	143	165	195	231	273	319	377	473	559	649	731	841
	n_2 [r/min]	13.9	12.0	10.1	8.79	7.44	6.28	5.31	4.55	3.85	3.07	2.59	2.23	1.98	1.72

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.

2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer



Input Speed	$n_1 = 1450$ r/min
-------------	--------------------

1.45	1.16	0.980	0.784	0.702	0.572	0.476	0.417	0.327	0.282	0.235	0.192	n_2 [r/min]	Dim. Page	Frame Size
1003	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177	7569	Ratio[Z]		
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW]	CHH C-75	6185DB
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [N·m]	CHF C-80	
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf·m]	CVV C-87	
-	-	-	-	-	-	-	-	-	-	-	-	Pro [N]		
-	-	-	-	-	-	-	-	-	-	-	-	Pro [kgf]		
1.07	0.863	0.750	0.750	0.750	0.750	0.750	0.750	0.750	0.750	0.750	0.750	P _i [kW]	CHH C-75	6190DA
6380	6380	6380	6380	6380	6380	6380	6380	6380	6380	6380	6380	T _{OUT} [N·m]	CHF C-80	
650	650	650	650	650	650	650	650	650	650	650	650	T _{OUT} [kgf·m]	CVV C-87	
58600	59000	58900	59000	58600	58600	58900	58600	58900	58900	58900	58900	Pro [N]		
5970	6010	6000	6010	5970	5970	6000	5970	6000	6000	6000	6000	Pro [kgf]		
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW]	CHH C-75	6190DB
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [N·m]	CHF C-80	
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf·m]	CVV C-87	
-	-	-	-	-	-	-	-	-	-	-	-	Pro [N]		
-	-	-	-	-	-	-	-	-	-	-	-	Pro [kgf]		
1.34	1.08	0.908	0.750	0.750	0.750	0.750	0.750	0.750	0.750	0.750	0.750	P _i [kW]	CHH C-75	6195DA
7960	7960	7960	7960	7960	7960	7960	7960	7960	7960	7960	7960	T _{OUT} [N·m]	CHF C-80	
811	811	811	811	811	811	811	811	811	811	811	811	T _{OUT} [kgf·m]	CVV C-87	
58100	59000	58400	59000	58100	58100	58400	58100	58400	58400	58400	58400	Pro [N]		
5930	6010	5950	6010	5930	5930	5950	5930	5950	5950	5950	5950	Pro [kgf]		
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW]	CHH C-75	6195DB
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [N·m]	CHF C-80	
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf·m]	CVV C-87	
-	-	-	-	-	-	-	-	-	-	-	-	Pro [N]		
-	-	-	-	-	-	-	-	-	-	-	-	Pro [kgf]		
2.20	1.50	1.50	1.50	1.50	0.750	0.750	0.750	0.750	0.750	0.750	0.750	P _i [kW]	CHH C-75	6205DA
9300	9300	8760	9300	9300	9300	8760	9300	8760	9300	8760	8760	T _{OUT} [N·m]	CHF C-80	
948	948	893	948	948	948	893	948	893	948	893	893	T _{OUT} [kgf·m]	CVV C-87	
84100	84100	84100	84100	84100	84100	84100	84100	84100	84100	84100	84100	Pro [N]		
8570	8570	8570	8570	8570	8570	8570	8570	8570	8570	8570	8570	Pro [kgf]		
2.20	-	1.50	-	-	-	-	-	-	-	-	-	P _i [kW]	CHH C-75	6205DB
9300	-	8760	-	-	-	-	-	-	-	-	-	T _{OUT} [N·m]	CHF C-80	
948	-	893	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf·m]	CVV C-87	
84100	-	84100	-	-	-	-	-	-	-	-	-	Pro [N]		
8570	-	8570	-	-	-	-	-	-	-	-	-	Pro [kgf]		
2.20	2.20	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	P _i [kW]	CHH C-75	6215DA
12700	12700	11300	12700	12700	12700	11300	12700	11300	12700	11300	11300	T _{OUT} [N·m]	CHF C-80	
1290	1290	1150	1290	1290	1290	1150	1290	1150	1290	1150	1150	T _{OUT} [kgf·m]	CVV C-87	
104000	104000	104000	104000	104000	104000	104000	104000	104000	104000	104000	104000	Pro [N]		
10600	10600	10600	10600	10600	10600	10600	10600	10600	10600	10600	10600	Pro [kgf]		
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW]	CHH C-75	6215DB
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [N·m]	CHF C-80	
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf·m]	CVV C-87	
-	-	-	-	-	-	-	-	-	-	-	-	Pro [N]		
-	-	-	-	-	-	-	-	-	-	-	-	Pro [kgf]		
2.67	2.20	2.20	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	P _i [kW]	CHH C-75	6225DA
15900	16000	15100	16000	15900	15900	15100	15900	15100	15900	15100	15100	T _{OUT} [N·m]	CHF C-80	
1620	1630	1540	1630	1620	1620	1540	1620	1540	1620	1540	1540	T _{OUT} [kgf·m]	CVV C-87	
145000	145000	145000	145000	145000	145000	145000	145000	145000	145000	145000	145000	Pro [N]		
14800	14800	14800	14800	14800	14800	14800	14800	14800	14800	14800	14800	Pro [kgf]		
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW]	CHH C-75	6225DB
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [N·m]	CHF C-80	
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf·m]	CVV C-87	
-	-	-	-	-	-	-	-	-	-	-	-	Pro [N]		
-	-	-	-	-	-	-	-	-	-	-	-	Pro [kgf]		
3.45	2.77	2.20	2.20	2.20	2.20	2.20	2.20	2.20	2.20	2.20	2.20	P _i [kW]	CHH C-75	6235DA
20500	20500	17200	20500	20500	20500	17200	20500	17200	20500	17200	17200	T _{OUT} [N·m]	CHF C-80	
2090	2090	1750	2090	2090	2090	1750	2090	1750	2090	1750	1750	T _{OUT} [kgf·m]	CVV C-87	
179000	179000	179000	179000	179000	179000	179000	179000	179000	179000	179000	179000	Pro [N]		
18200	18200	18200	18200	18200	18200	18200	18200	18200	18200	18200	18200	Pro [kgf]		
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW]	CHH C-75	6235DB
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [N·m]	CHF C-80	
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf·m]	CVV C-87	
-	-	-	-	-	-	-	-	-	-	-	-	Pro [N]		
-	-	-	-	-	-	-	-	-	-	-	-	Pro [kgf]		
1003	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177	7569	Ratio[Z]	Dim. Page	Frame Size
1.45	1.16	0.980	0.784	0.702	0.572	0.476	0.417	0.327	0.282	0.235	0.192	n_2 [r/min]		

Note: 3. Necessary input power for starting is printed in bold face. Do not exceed allowable output torque after startup.

Selection Tables 6000 Series Reducer

Double Reduction Ratio 104,121 ~ 7569 Frame Size: 6245DA ~ 6275DA


Input Speed	$n_1 = 1450$ r/min	n_1 : Input Speed [r/min]	T_{out} : Allowable output torque [N·m, kgf·m]
		n_2 : Output Speed [r/min]	Pro: Allowable output shaft radial load [N, kgf]
		P_i : Allowable input power [kW]	*Consult us for Pro of CNF and CHF type.

Frame Size	n_2 [r/min]	13.9	12.0	10.1	8.79	7.44	6.28	5.31	4.55	3.85	3.07	2.59	2.23	1.98	1.72
		Ratio[Z]	104	121	143	165	195	231	273	319	377	473	559	649	731
6245DA	P_i [kW]	-	-	-	25.4	22.7	18.8	15.9	13.6	11.5	9.20	7.79	6.71	5.95	5.18
	T_{out} [N·m]	-	-	-	24800	26200	25800	25800	25800	25800	25800	25800	25800	25800	25800
	T_{out} [kgf·m]	-	-	-	2530	2680	2630	2630	2630	2630	2630	2630	2630	2630	2630
	Pro[N]	-	-	-	168000	177000	189000	199000	208000	208000	208000	208000	208000	208000	208000
	Pro[kgf]	-	-	-	17100	18000	19300	20300	21200	21200	21200	21200	21200	21200	21200
6245DB	P_i [kW]	-	28.6	-	26.8	22.7	18.8	-	-	-	-	-	-	-	-
	T_{out} [N·m]	-	20500	-	26200	26200	25800	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	-	2090	-	2680	2680	2630	-	-	-	-	-	-	-	-
	Pro[N]	-	156000	-	168000	177000	189000	-	-	-	-	-	-	-	-
	Pro[kgf]	-	15900	-	17100	18000	19300	-	-	-	-	-	-	-	-
6255DA	P_i [kW]	-	31.8	-	31.8	27.0	22.6	19.2	17.2	14.5	12.3	10.4	8.97	7.96	6.51
	T_{out} [N·m]	-	22800	-	31100	31200	31000	31000	32500	32500	34500	34500	34500	34500	32500
	T_{out} [kgf·m]	-	2330	-	3170	3180	3160	3160	3310	3310	3520	3520	3520	3520	3310
	Pro[N]	-	192000	-	206000	216000	231000	243000	255000	258000	258000	258000	258000	258000	258000
	Pro[kgf]	-	19600	-	21000	22100	23500	24700	26000	26300	26300	26300	26300	26300	26300
6255DB	P_i [kW]	-	38.3	-	31.9	27.0	-	-	-	-	-	-	-	-	-
	T_{out} [N·m]	-	27500	-	31200	31200	-	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	-	2800	-	3180	3180	-	-	-	-	-	-	-	-	-
	Pro[N]	-	191000	-	206000	216000	-	-	-	-	-	-	-	-	-
	Pro[kgf]	-	19500	-	21000	22100	-	-	-	-	-	-	-	-	-
6265DA	P_i [kW]	-	43.7	-	44.7	37.8	33.6	28.4	24.3	20.6	16.4	13.9	12.0	10.6	9.23
	T_{out} [N·m]	-	31300	-	43700	43700	46000	46000	46000	46000	46000	46000	46000	46000	46000
	T_{out} [kgf·m]	-	3190	-	4460	4460	4690	4690	4690	4690	4690	4690	4690	4690	4690
	Pro[N]	-	234000	-	250000	263000	276000	276000	276000	276000	276000	276000	276000	276000	276000
	Pro[kgf]	-	23800	-	25500	26800	28100	28100	28100	28100	28100	28100	28100	28100	28100
6275DA	P_i [kW]	-	-	-	-	-	-	-	36.1	30.5	24.3	20.6	17.7	15.7	13.7
	T_{out} [N·m]	-	-	-	-	-	-	-	68200	68200	68200	68200	68200	68200	68200
	T_{out} [kgf·m]	-	-	-	-	-	-	-	6950	6950	6950	6950	6950	6950	6950
	Pro[N]	-	-	-	-	-	-	-	248000	248000	248000	248000	248000	248000	248000
	Pro[kgf]	-	-	-	-	-	-	-	25300	25300	25300	25300	25300	25300	25300
Frame Size	Ratio[Z]	104	121	143	165	195	231	273	319	377	473	559	649	731	841
	n_2 [r/min]	13.9	12.0	10.1	8.79	7.44	6.28	5.31	4.55	3.85	3.07	2.59	2.23	1.98	1.72

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.

2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer



Input Speed	$n_1 = 1450$ r/min
-------------	--------------------

												n_2 [r/min]	Dim. Page	Frame Size												
												Ratio[Z]														
1.45	1.16	0.980	0.784	0.702	0.572	0.476	0.417	0.327	0.282	0.235	0.192	1003	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177	7569	P _i [kW]	CHH C-75 CHF C-80 CVV C-87	6245DA
4.34	3.49	2.58	2.35	2.20	2.20	2.20	2.20	2.20	2.20	2.20	2.20	25800	25800	22600	25800	25800	22600	25800	22600	25800	22600	22600	22600	T _{OUT} [N•m]		
2630	2630	2310	2630	2630	2630	2310	2630	2310	2630	2310	2310	208000	208000	208000	208000	208000	208000	208000	208000	208000	208000	208000	208000	T _{OUT} [kgf•m]		
21200	21200	21200	21200	21200	21200	21200	21200	21200	21200	21200	21200	21200	21200	21200	21200	21200	21200	21200	21200	21200	21200	21200	21200	Pro[N]		
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]	CHH C-75 CHF C-80 CVV C-87	6245DB
5.80	4.67	3.70	3.70	3.70	3.70	3.70	3.70	3.70	3.70	3.70	3.70	34500	34500	31000	34500	34500	31000	34500	31000	34500	31000	31000	P _i [kW]			
3520	3520	3160	3520	3520	3520	3160	3520	3160	3520	3160	3160	258000	258000	258000	258000	258000	258000	258000	258000	258000	258000	258000	258000	T _{OUT} [N•m]		
26300	26300	26300	26300	26300	26300	26300	26300	26300	26300	26300	26300	26300	26300	26300	26300	26300	26300	26300	26300	26300	26300	26300	26300	T _{OUT} [kgf•m]		
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]		
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]	CHH C-75 CHF C-80 CVV C-87	6255DA
7.74	6.22	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50	46000	46000	44000	46000	46000	44000	46000	44000	46000	44000	44000	P _i [kW]			
4690	4690	4490	4690	4690	4690	4490	4690	4490	4690	4490	4490	276000	276000	276000	276000	276000	276000	276000	276000	276000	276000	276000	276000	T _{OUT} [N•m]		
28100	28100	28100	28100	28100	28100	28100	28100	28100	28100	28100	28100	28100	28100	28100	28100	28100	28100	28100	28100	28100	28100	28100	28100	T _{OUT} [kgf•m]		
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]		
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]	CHH C-75 CHF C-80 CVV C-87	6265DA
11.5	9.23	7.78	7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	68200	68200	68200	68200	68200	68200	68200	68200	68200	68200	68200	P _i [kW]			
6950	6950	6950	6950	6950	6950	6950	6950	6950	6950	6950	6950	248000	248000	245000	248000	248000	245000	248000	245000	248000	245000	245000	245000	T _{OUT} [N•m]		
25300	25300	25000	25300	25300	25300	25300	25000	25300	25000	25000	25000	25300	25300	25000	25300	25300	25000	25000	25000	25000	25000	25000	25000	T _{OUT} [kgf•m]		
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]		
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]	CHH C-75 CVV C-87	6275DA
1003	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177	7569	1003	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177	7569	Ratio[Z]		
1.45	1.16	0.980	0.784	0.702	0.572	0.476	0.417	0.327	0.282	0.235	0.192	1.45	1.16	0.980	0.784	0.702	0.572	0.476	0.417	0.327	0.282	0.235	0.192	n_2 [r/min]		

REDUCERS
Selection Tables
Ratio 104,121 - 7569

Note: 3. Necessary input power for starting is printed in bold face. Do not exceed allowable output torque after startup.

Selection Tables 6000 Series Reducer


Double Reduction Ratio 104,121 ~ 7569 Frame Size: 6060DA ~ 6130DA

Input Speed		$n_1 = 1750$ r/min														
		n_1 : Input Speed [r/min]							T_{out} : Allowable output torque [N·m, kgf·m]							
		n_2 : Output Speed [r/min]							Pro: Allowable output shaft radial load [N, kgf]							
		P_i : Allowable input power [kW]							*Consult us for Pro of CNF and CHF type.							
Frame Size	n_2 [r/min]	16.8	14.5	12.2	10.6	8.97	7.58	6.41	5.49	4.64	3.70	3.13	2.70	2.39	2.08	
	Ratio[Z]	104	121	143	165	195	231	273	319	377	473	559	649	731	841	
6060DA	P_i [kW]	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	-	0.100	0.100	
	T_{out} [N·m]	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	-	24.0	24.0	
	T_{out} [kgf·m]	2.45	2.45	2.45	2.45	2.45	2.45	2.45	2.45	2.45	2.45	2.45	-	2.45	2.45	
	Pro[N]	1180	1180	1180	1180	1180	1180	1180	1180	1180	1180	1180	-	1180	1180	
	Pro[kgf]	120	120	120	120	120	120	120	120	120	120	120	-	120	120	
6065DA	P_i [kW]	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	-	0.100	0.100	
	T_{out} [N·m]	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	-	30.0	30.0	
	T_{out} [kgf·m]	3.06	3.06	3.06	3.06	3.06	3.06	3.06	3.06	3.06	3.06	3.06	-	3.06	3.06	
	Pro[N]	1180	1140	1180	1180	1180	1180	1180	1180	1180	1180	1180	-	1180	1180	
	Pro[kgf]	120	116	120	120	120	120	120	120	120	120	120	-	120	120	
6070DA	P_i [kW]	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	
	T_{out} [N·m]	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	
	T_{out} [kgf·m]	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	4.59	
	Pro[N]	1770	1770	1770	1770	1770	1770	1770	1770	1770	1770	1770	1770	1770	1770	
	Pro[kgf]	180	180	180	180	180	180	180	180	180	180	180	180	180	180	
6075DA	P_i [kW]	0.117	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	
	T_{out} [N·m]	60.0	50.8	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	57.4	60.0	60.0	
	T_{out} [kgf·m]	6.12	5.18	6.12	6.12	6.12	6.12	6.12	6.12	6.12	6.12	6.12	5.85	6.12	6.12	
	Pro[N]	1770	1770	1770	1770	1770	1770	1770	1770	1770	1770	1660	1660	1580	1660	1770
	Pro[kgf]	180	180	180	180	180	180	180	180	180	180	169	169	161	169	180
6090DA	P_i [kW]	0.294	0.252	0.214	0.185	0.157	0.132	0.112	0.100	0.100	0.100	0.100	0.100	0.100	0.100	
	T_{out} [N·m]	150	150	150	150	150	150	150	150	150	150	150	146	150	150	
	T_{out} [kgf·m]	15.3	15.3	15.3	15.3	15.3	15.3	15.3	15.3	15.3	15.3	15.3	14.9	15.3	15.3	
	Pro[N]	3340	3340	3340	3340	3340	3340	3340	3290	3290	3310	3310	3300	3310	3290	
	Pro[kgf]	340	340	340	340	340	340	340	336	336	338	338	336	338	336	
6095DA	P_i [kW]	0.354	0.270	0.261	0.247	0.209	0.176	0.149	0.128	0.108	0.100	0.100	-	0.100	0.100	
	T_{out} [N·m]	181	160	183	200	200	200	200	200	200	200	200	-	200	200	
	T_{out} [kgf·m]	18.4	16.4	18.7	20.4	20.4	20.4	20.4	20.4	20.4	20.4	20.4	-	20.4	20.4	
	Pro[N]	3340	3340	3340	3340	3340	3340	3340	3200	3200	3220	3220	-	3220	3200	
	Pro[kgf]	340	340	340	340	340	340	340	326	326	328	328	-	328	326	
6100DA	P_i [kW]	0.429	0.421	0.356	0.308	0.261	0.220	0.186	0.160	0.135	0.108	0.100	0.100	0.100	0.100	
	T_{out} [N·m]	219	250	250	250	250	250	250	250	250	250	250	250	250	250	
	T_{out} [kgf·m]	22.4	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	
	Pro[N]	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	
	Pro[kgf]	550	550	550	550	550	550	550	550	550	550	550	550	550	550	
6105DA	P_i [kW]	0.429	0.429	0.427	0.370	0.313	0.264	0.224	0.191	0.162	0.129	0.109	0.100	0.100	0.100	
	T_{out} [N·m]	219	255	300	300	300	300	300	300	300	300	300	296	300	300	
	T_{out} [kgf·m]	22.4	26.0	30.6	30.6	30.6	30.6	30.6	30.6	30.6	30.6	30.6	30.2	30.6	30.6	
	Pro[N]	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	5090	5400	5400	
	Pro[kgf]	550	550	550	550	550	550	550	550	550	550	550	519	550	550	
6120DA	P_i [kW]	-	-	0.429	0.429	0.429	0.429	0.389	0.332	0.281	0.226	0.191	0.165	0.146	0.126	
	T_{out} [N·m]	-	-	302	348	411	487	522	520	520	525	525	525	525	520	
	T_{out} [kgf·m]	-	-	30.7	35.5	41.9	49.7	53.2	53.0	53.0	53.5	53.5	53.5	53.5	53.0	
	Pro[N]	-	-	9810	9810	9810	9810	9810	9810	9810	9810	9810	9810	9810	9810	
	Pro[kgf]	-	-	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	
6120DB	P_i [kW]	1.03	0.883	0.748	0.648	0.548	0.460	-	-	-	-	-	-	-	-	
	T_{out} [N·m]	525	525	525	525	525	522	-	-	-	-	-	-	-	-	
	T_{out} [kgf·m]	53.5	53.5	53.5	53.5	53.5	53.2	-	-	-	-	-	-	-	-	
	Pro[N]	9810	9810	9810	9810	9810	9810	-	-	-	-	-	-	-	-	
	Pro[kgf]	1000	1000	1000	1000	1000	1000	-	-	-	-	-	-	-	-	
6125DA	P_i [kW]	-	-	-	-	-	0.429	0.429	0.402	0.340	0.271	0.229	0.198	0.175	0.153	
	T_{out} [N·m]	-	-	-	-	-	487	576	630	630	630	630	630	630	630	
	T_{out} [kgf·m]	-	-	-	-	-	49.7	58.7	64.2	64.2	64.2	64.2	64.2	64.2	64.2	
	Pro[N]	-	-	-	-	-	9810	9810	9810	9810	9810	9810	9810	9810	9810	
	Pro[kgf]	-	-	-	-	-	1000	1000	1000	1000	1000	1000	1000	1000	1000	
6125DB	P_i [kW]	1.23	1.05	0.897	0.777	0.658	0.555	0.470	0.402	-	-	-	-	-	-	
	T_{out} [N·m]	630	622	630	630	630	630	630	630	-	-	-	-	-	-	
	T_{out} [kgf·m]	64.2	63.4	64.2	64.2	64.2	64.2	64.2	64.2	-	-	-	-	-	-	
	Pro[N]	9810	9810	9810	9810	9810	9810	9810	9810	-	-	-	-	-	-	
	Pro[kgf]	1000	1000	1000	1000	1000	1000	1000	1000	-	-	-	-	-	-	
6130DA	P_i [kW]	-	-	-	-	-	-	0.429	0.429	0.421	0.336	0.284	0.286	0.217	0.200	
	T_{out} [N·m]	-	-	-	-	-	-	576	673	780	780	780	912	780	780	
	T_{out} [kgf·m]	-	-	-	-	-	-	58.7	68.6	79.5	79.5	79.5	93.0	79.5	79.5	
	Pro[N]	-	-	-	-	-	-	14700	14700	14700	14700	14700	14700	14700	14700	
	Pro[kgf]	-	-	-	-	-	-	1500	1500	1500	1500	1500	1500	1500	1500	
Frame Size	Ratio[Z]	104	121	143	165	195	231	273	319	377	473	559	649	731	841	
	n_2 [r/min]	16.8	14.5	12.2	10.6	8.97	7.58	6.41	5.49	4.64	3.70	3.13	2.70	2.39	2.08	

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.

2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer



Input Speed

 $n_1 = 1750$ r/min

1.74	1.40	1.18	0.946	0.847	0.690	0.575	0.503	0.394	0.341	0.283	0.231	n_2 [r/min]	Dim. Page	Frame Size
1003	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177	7569	Ratio[Z]		
-	0.100	-	0.100	-	-	-	-	-	-	-	-	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6060DA
-	24.0	-	24.0	-	-	-	-	-	-	-	-	T _{OUT} [N•m]		
-	2.45	-	2.45	-	-	-	-	-	-	-	-	T _{OUT} [kgf•m]		
-	1180	-	1180	-	-	-	-	-	-	-	-	Pro[N]		
-	120	-	120	-	-	-	-	-	-	-	-	Pro[kgf]		
-	0.100	-	0.100	-	-	-	-	-	-	-	-	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6065DA
-	30.0	-	30.0	-	-	-	-	-	-	-	-	T _{OUT} [N•m]		
-	3.06	-	3.06	-	-	-	-	-	-	-	-	T _{OUT} [kgf•m]		
-	1180	-	1180	-	-	-	-	-	-	-	-	Pro[N]		
-	120	-	120	-	-	-	-	-	-	-	-	Pro[kgf]		
0.100	0.100	-	0.100	0.100	0.100	-	-	-	-	-	-	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6070DA
45.0	45.0	-	45.0	45.0	45.0	-	-	-	-	-	-	T _{OUT} [N•m]		
4.59	4.59	-	4.59	4.59	4.59	-	-	-	-	-	-	T _{OUT} [kgf•m]		
1770	1770	-	1770	1770	1770	-	-	-	-	-	-	Pro[N]		
180	180	-	180	180	180	-	-	-	-	-	-	Pro[kgf]		
0.100	0.100	-	0.100	0.100	0.100	-	-	-	-	-	-	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6075DA
57.4	60.0	-	60.0	57.4	57.4	-	-	-	-	-	-	T _{OUT} [N•m]		
5.85	6.12	-	6.12	5.85	5.85	-	-	-	-	-	-	T _{OUT} [kgf•m]		
1580	1660	-	1660	1580	1580	-	-	-	-	-	-	Pro[N]		
161	169	-	169	161	161	-	-	-	-	-	-	Pro[kgf]		
0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	-	-	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6090DA
146	150	150	150	146	146	150	146	150	150	-	-	T _{OUT} [N•m]		
14.9	15.3	15.3	15.3	14.9	14.9	15.3	14.9	15.3	15.3	-	-	T _{OUT} [kgf•m]		
3300	3310	3310	3310	3300	3300	3310	3300	3310	3310	-	-	Pro[N]		
336	338	338	338	336	336	338	336	338	338	-	-	Pro[kgf]		
-	0.100	0.100	0.100	-	-	0.100	-	0.100	0.100	-	-	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6095DA
-	200	193	200	-	-	192	-	192	192	-	-	T _{OUT} [N•m]		
-	20.4	19.6	20.4	-	-	19.6	-	19.6	19.6	-	-	T _{OUT} [kgf•m]		
-	3220	3240	3220	-	-	3240	-	3240	3240	-	-	Pro[N]		
-	328	330	328	-	-	330	-	330	330	-	-	Pro[kgf]		
0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	-	-	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6100DA
250	250	250	250	250	250	250	250	250	250	-	-	T _{OUT} [N•m]		
25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	-	-	T _{OUT} [kgf•m]		
5400	5400	5400	5400	5400	5400	5400	5400	5400	5400	-	-	Pro[N]		
550	550	550	550	550	550	550	550	550	550	-	-	Pro[kgf]		
0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	-	-	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6105DA
296	300	300	300	296	296	300	296	300	300	-	-	T _{OUT} [N•m]		
30.2	30.6	30.6	30.6	30.2	30.2	30.6	30.2	30.6	30.6	-	-	T _{OUT} [kgf•m]		
5090	5400	4780	5400	5090	5090	4780	5090	4780	4780	-	-	Pro[N]		
519	550	488	550	519	519	488	519	488	488	-	-	Pro[kgf]		
0.107	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	-	-	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6120DA
525	525	525	525	525	525	525	525	525	525	-	-	T _{OUT} [N•m]		
53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5	-	-	T _{OUT} [kgf•m]		
9810	9810	9780	9810	9810	9810	9780	9810	9780	9780	-	-	Pro[N]		
1000	1000	997	1000	1000	1000	997	1000	997	997	-	-	Pro[kgf]		
-	-	-	-	-	-	-	-	-	-	0.100	0.100	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6120DB
-	-	-	-	-	-	-	-	-	-	525	525	T _{OUT} [N•m]		
-	-	-	-	-	-	-	-	-	-	53.5	53.5	T _{OUT} [kgf•m]		
-	-	-	-	-	-	-	-	-	-	9780	9780	Pro[N]		
-	-	-	-	-	-	-	-	-	-	997	997	Pro[kgf]		
0.128	0.103	0.100	0.100	0.100	0.100	0.100	0.100	0.100	0.100	-	-	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6125DA
630	630	630	630	630	630	630	630	630	630	-	-	T _{OUT} [N•m]		
64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	-	-	T _{OUT} [kgf•m]		
9810	9810	9560	9810	9810	9810	9560	9810	9560	9560	-	-	Pro[N]		
1000	1000	974	1000	1000	1000	974	1000	974	974	-	-	Pro[kgf]		
-	-	-	-	-	-	-	-	-	-	0.100	0.100	P _i [kW]	CNH C-73 CNF C-78 CNV C-85	6125DB
-	-	-	-	-	-	-	-	-	-	630	630	T _{OUT} [N•m]		
-	-	-	-	-	-	-	-	-	-	64.2	64.2	T _{OUT} [kgf•m]		
-	-	-	-	-	-	-	-	-	-	9560	9560	Pro[N]		
-	-	-	-	-	-	-	-	-	-	974	974	Pro[kgf]		
0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	-	-	P _i [kW]	CHH C-74 CHF C-79 CVV C-86	6130DA
912	780	848	780	912	912	848	912	848	848	-	-	T _{OUT} [N•m]		
93.0	79.5	86.5	79.5	93.0	93.0	86.5	93.0	86.5	86.5	-	-	T _{OUT} [kgf•m]		
14700	14700	14700	14700	14700	14700	14700	14700	14700	14700	-	-	Pro[N]		
1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	-	-	Pro[kgf]		
1003	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177	7569	Ratio[Z]	Dim. Page	Frame Size
1.74	1.40	1.18	0.946	0.847	0.690	0.575	0.503	0.394	0.341	0.283	0.231	n_2 [r/min]		

Note: 3. Necessary input power for starting is printed in bold face. Do not exceed allowable output torque after startup.

Selection Tables 6000 Series Reducer

Double Reduction Ratio 104,121 ~ 7569 Frame Size: 6130DB ~ 6160DB


Input Speed	$n_1 = 1750$ r/min	n_1 : Input Speed [r/min]	T_{out} : Allowable output torque [N·m, kgf·m]
		n_2 : Output Speed [r/min]	Pro: Allowable output shaft radial load [N, kgf]
		P_i : Allowable input power [kW]	*Consult us for Pro of CNF and CHF type.

Frame Size	n_2 [r/min]	16.8	14.5	12.2	10.6	8.97	7.58	6.41	5.49	4.64	3.70	3.13	2.70	2.39	2.08
	Ratio[Z]	104	121	143	165	195	231	273	319	377	473	559	649	731	841
6130DB	P_i [kW]	1.53	1.31	1.11	0.963	0.814	0.688	0.582	0.498	0.421	-	-	-	-	-
	T_{out} [N·m]	780	780	780	780	780	780	780	780	780	-	-	-	-	-
	T_{out} [kgf·m]	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	-	-	-	-	-
	Pro[N]	14700	14700	14700	14700	14700	14700	14700	14700	14700	-	-	-	-	-
	Pro[kgf]	1500	1500	1500	1500	1500	1500	1500	1500	1500	-	-	-	-	-
6130DC	P_i [kW]	1.53	-	-	-	-	-	-	-	-	-	-	-	-	-
	T_{out} [N·m]	780	-	-	-	-	-	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	79.5	-	-	-	-	-	-	-	-	-	-	-	-	-
	Pro[N]	14700	-	-	-	-	-	-	-	-	-	-	-	-	-
	Pro[kgf]	1500	-	-	-	-	-	-	-	-	-	-	-	-	-
6135DA	P_i [kW]	-	-	-	-	-	-	-	0.429	0.429	0.405	0.342	0.329	0.262	0.228
	T_{out} [N·m]	-	-	-	-	-	-	-	673	795	940	940	1050	940	940
	T_{out} [kgf·m]	-	-	-	-	-	-	-	68.6	81.1	95.8	95.8	107	95.8	95.8
	Pro[N]	-	-	-	-	-	-	-	14700	14700	14700	14700	14700	14700	14700
	Pro[kgf]	-	-	-	-	-	-	-	1500	1500	1500	1500	1500	1500	1500
6135DB	P_i [kW]	1.60	1.58	1.34	1.16	0.981	0.829	0.701	0.600	0.508	0.405	-	-	-	-
	T_{out} [N·m]	817	940	940	940	940	940	940	940	940	940	-	-	-	-
	T_{out} [kgf·m]	83.3	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	-	-	-	-
	Pro[N]	14700	14700	14700	14700	14700	14700	14700	14700	14700	14700	-	-	-	-
	Pro[kgf]	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	-	-	-	-
6135DC	P_i [kW]	1.84	1.58	-	-	-	-	-	-	-	-	-	-	-	-
	T_{out} [N·m]	940	940	-	-	-	-	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	95.8	95.8	-	-	-	-	-	-	-	-	-	-	-	-
	Pro[N]	14700	14700	-	-	-	-	-	-	-	-	-	-	-	-
	Pro[kgf]	1500	1500	-	-	-	-	-	-	-	-	-	-	-	-
6140DA	P_i [kW]	-	-	-	-	-	-	-	-	0.429	0.429	0.429	0.384	0.341	0.297
	T_{out} [N·m]	-	-	-	-	-	-	-	-	795	998	1180	1230	1230	1230
	T_{out} [kgf·m]	-	-	-	-	-	-	-	-	81.1	102	120	125	125	125
	Pro[N]	-	-	-	-	-	-	-	-	16000	16000	16000	16000	16000	16000
	Pro[kgf]	-	-	-	-	-	-	-	-	1630	1630	1630	1630	1630	1630
6140DB	P_i [kW]	1.60	1.60	1.60	1.51	1.28	1.08	0.914	0.782	0.662	0.527	0.446	-	-	-
	T_{out} [N·m]	817	950	1120	1230	1230	1230	1230	1230	1230	1230	1230	-	-	-
	T_{out} [kgf·m]	83.3	96.9	114	125	125	125	125	125	125	125	125	-	-	-
	Pro[N]	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	-	-	-
	Pro[kgf]	1630	1630	1630	1630	1630	1630	1630	1630	1630	1630	1630	-	-	-
6140DC	P_i [kW]	2.40	2.06	1.74	1.51	-	-	-	-	-	-	-	-	-	-
	T_{out} [N·m]	1230	1230	1230	1230	-	-	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	125	125	125	125	-	-	-	-	-	-	-	-	-	-
	Pro[N]	16000	16000	16000	16000	-	-	-	-	-	-	-	-	-	-
	Pro[kgf]	1630	1630	1630	1630	-	-	-	-	-	-	-	-	-	-
6145DA	P_i [kW]	-	-	-	-	-	-	-	-	-	-	0.429	0.429	0.382	0.302
	T_{out} [N·m]	-	-	-	-	-	-	-	-	-	-	1180	1370	1370	1250
	T_{out} [kgf·m]	-	-	-	-	-	-	-	-	-	-	120	140	140	127
	Pro[N]	-	-	-	-	-	-	-	-	-	-	16000	16000	15700	16000
	Pro[kgf]	-	-	-	-	-	-	-	-	-	-	1630	1630	1600	1630
6145DB	P_i [kW]	-	-	1.60	1.60	1.42	1.18	0.998	0.874	0.740	0.590	0.499	0.430	-	0.332
	T_{out} [N·m]	-	-	1120	1300	1360	1340	1340	1370	1370	1370	1370	1370	-	1370
	T_{out} [kgf·m]	-	-	114	132	138	136	136	140	140	140	140	140	-	140
	Pro[N]	-	-	16000	16000	16000	16000	16000	16000	15800	15800	15700	15700	-	15800
	Pro[kgf]	-	-	1630	1630	1630	1630	1630	1610	1610	1600	1600	1630	-	1610
6145DC	P_i [kW]	2.68	2.17	1.95	1.68	-	-	-	-	-	-	-	-	-	-
	T_{out} [N·m]	1370	1290	1370	1360	-	-	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	140	132	140	138	-	-	-	-	-	-	-	-	-	-
	Pro[N]	15900	16000	15900	16000	-	-	-	-	-	-	-	-	-	-
	Pro[kgf]	1620	1630	1620	1630	-	-	-	-	-	-	-	-	-	-
6160DA	P_i [kW]	-	-	-	1.60	1.60	1.55	1.31	1.12	0.948	0.747	0.632	0.551	0.483	0.425
	T_{out} [N·m]	-	-	-	1300	1530	1760	1760	1760	1760	1740	1740	1760	1740	1760
	T_{out} [kgf·m]	-	-	-	132	156	179	179	179	179	177	177	179	177	179
	Pro[N]	-	-	-	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100
	Pro[kgf]	-	-	-	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250
6160DB	P_i [kW]	3.36	2.95	2.50	2.17	1.83	1.55	-	-	-	-	-	-	-	-
	T_{out} [N·m]	1710	1760	1760	1760	1760	1760	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	175	179	179	179	179	179	-	-	-	-	-	-	-	-
	Pro[N]	22100	22100	22100	22100	22100	22100	-	-	-	-	-	-	-	-
	Pro[kgf]	2250	2250	2250	2250	2250	2250	-	-	-	-	-	-	-	-
Frame Size	Ratio[Z]	104	121	143	165	195	231	273	319	377	473	559	649	731	841
	n_2 [r/min]	16.8	14.5	12.2	10.6	8.97	7.58	6.41	5.49	4.64	3.70	3.13	2.70	2.39	2.08

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.

2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer



Input Speed	$n_1 = 1750$ r/min
--------------------	--------------------

												n_2 [r/min]	Dim. Page	Frame Size		
												Ratio[Z]				
1.74	1.40	1.18	0.946	0.847	0.690	0.575	0.503	0.394	0.341	0.283	0.231					
1003	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177	7569					
-	-	-	-	-	-	-	-	-	-	0.200	0.200	P _i [kW]		CHH C-74 CHF C-79 CVV C-86	6130DB	
-	-	-	-	-	-	-	-	-	-	848	848	T _{OUT} [N•m]				
-	-	-	-	-	-	-	-	-	-	86.5	86.5	T _{OUT} [kgf•m]				
-	-	-	-	-	-	-	-	-	-	14700	14700	Pro[N]				
-	-	-	-	-	-	-	-	-	-	1500	1500	Pro[kgf]				
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW]		CHH C-74 CHF C-79 CVV C-86	6130DC	
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [N•m]				
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf•m]				
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]				
-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]				
0.213	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	-	-	P _i [kW]		CHH C-74 CHF C-79 CVV C-86	6135DA	
1050	940	979	940	1050	1050	979	1050	979	979	-	-	T _{OUT} [N•m]				
107	95.8	99.8	95.8	107	107	99.8	107	99.8	99.8	-	-	T _{OUT} [kgf•m]				
14700	14700	14700	14700	14700	14700	14700	14700	14700	14700	-	-	Pro[N]				
1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	-	-	Pro[kgf]				
-	-	-	-	-	-	-	-	-	-	0.200	0.200	P _i [kW]		CHH C-74 CHF C-79 CVV C-86	6135DB	
-	-	-	-	-	-	-	-	-	-	979	979	T _{OUT} [N•m]				
-	-	-	-	-	-	-	-	-	-	99.8	99.8	T _{OUT} [kgf•m]				
-	-	-	-	-	-	-	-	-	-	14700	14700	Pro[N]				
-	-	-	-	-	-	-	-	-	-	1500	1500	Pro[kgf]				
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW]		CHH C-74 CHF C-79 CVV C-86	6135DC	
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [N•m]				
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf•m]				
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]				
-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]				
0.249	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	-	-	P _i [kW]		CHH C-74 CHF C-79 CVV C-86	6140DA	
1230	1230	1230	1230	1230	1230	1230	1230	1230	1230	-	-	T _{OUT} [N•m]				
125	125	125	125	125	125	125	125	125	125	-	-	T _{OUT} [kgf•m]				
16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	-	-	Pro[N]				
1630	1630	1630	1630	1630	1630	1630	1630	1630	1630	-	-	Pro[kgf]				
-	-	-	-	-	-	-	-	-	-	0.200	0.200	P _i [kW]		CHH C-74 CHF C-79 CVV C-86	6140DB	
-	-	-	-	-	-	-	-	-	-	1230	1230	T _{OUT} [N•m]				
-	-	-	-	-	-	-	-	-	-	125	125	T _{OUT} [kgf•m]				
-	-	-	-	-	-	-	-	-	-	16000	16000	Pro[N]				
-	-	-	-	-	-	-	-	-	-	1630	1630	Pro[kgf]				
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW]		CHH C-74 CHF C-79 CVV C-86	6140DC	
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [N•m]				
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf•m]				
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]				
-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]				
0.278	0.224	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	-	-	P _i [kW]		CHH C-74 CHF C-79 CVV C-86	6145DA	
1370	1370	1250	1370	1370	1370	1250	1370	1250	1250	-	-	T _{OUT} [N•m]				
140	140	127	140	140	140	127	140	127	127	-	-	T _{OUT} [kgf•m]				
16000	15700	16000	15700	16000	16000	16000	16000	16000	16000	-	-	Pro[N]				
1630	1600	1630	1600	1630	1630	1630	1630	1630	1630	-	-	Pro[kgf]				
-	-	-	-	-	-	-	-	-	-	0.200	0.200	P _i [kW]		CHH C-74 CHF C-79 CVV C-86	6145DB	
-	-	-	-	-	-	-	-	-	-	1250	1250	T _{OUT} [N•m]				
-	-	-	-	-	-	-	-	-	-	127	127	T _{OUT} [kgf•m]				
-	-	-	-	-	-	-	-	-	-	16000	16000	Pro[N]				
-	-	-	-	-	-	-	-	-	-	1630	1630	Pro[kgf]				
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW]		CHH C-74 CHF C-79 CVV C-86	6145DC	
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [N•m]				
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf•m]				
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]				
-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]				
0.400	0.400	0.400	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	P _i [kW]		CHH C-74 CHF C-79 CVV C-86	6160DA	
1760	1740	1760	1740	1760	1760	1760	1760	1760	1760	1760	1760	T _{OUT} [N•m]				
179	177	179	177	179	179	179	179	179	179	179	179	T _{OUT} [kgf•m]				
22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	Pro[N]				
2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	Pro[kgf]				
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW]		CHH C-74 CHF C-79 CVV C-86	6160DB	
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [N•m]				
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf•m]				
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]				
-	-	-	-	-	-	-	-	-	-	-	-	Pro[kgf]				
1003	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177	7569	Ratio[Z]	Dim. Page	Frame Size		
1.74	1.40	1.18	0.946	0.847	0.690	0.575	0.503	0.394	0.341	0.283	0.231	n_2 [r/min]				

Note: 3. Necessary input power for starting is printed in bold face. Do not exceed allowable output torque after startup.

Selection Tables 6000 Series Reducer


Double Reduction Ratio 104,121 ~ 7569 Frame Size: 6160DC ~ 6185DA

Input Speed		$n_1 = 1750$ r/min		n_1 : Input Speed [r/min]			T_{out} : Allowable output torque [N·m, kgf·m]			n_2 : Output Speed [r/min]			Pro: Allowable output shaft radial load [N, kgf]		
Frame Size	Ratio[Z]	16.8	14.5	12.2	10.6	8.97	7.58	6.41	5.49	4.64	3.70	3.13	2.70	2.39	2.08
		104	121	143	165	195	231	273	319	377	473	559	649	731	841
6160DC	P_i [kW]	3.44	2.95	2.50	-	-	-	-	-	-	-	-	-	-	-
	T_{out} [N·m]	1760	1760	1760	-	-	-	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	179	179	179	-	-	-	-	-	-	-	-	-	-	-
	Pro[N]	22100	22100	22100	-	-	-	-	-	-	-	-	-	-	-
	Pro[kgf]	2250	2250	2250	-	-	-	-	-	-	-	-	-	-	-
6165DA	P_i [kW]	-	-	-	-	1.60	1.60	1.57	1.34	1.13	0.904	0.765	0.659	0.585	0.508
	T_{out} [N·m]	-	-	-	-	1530	1810	2100	2100	2100	2100	2100	2100	2100	2100
	T_{out} [kgf·m]	-	-	-	-	156	185	214	214	214	214	214	214	214	214
	Pro[N]	-	-	-	-	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100
	Pro[kgf]	-	-	-	-	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250
6165DB	P_i [kW]	3.36	3.36	2.99	2.59	2.19	1.85	1.57	-	-	-	-	-	-	-
	T_{out} [N·m]	1710	1990	2100	2100	2100	2100	2100	-	-	-	-	-	-	-
	T_{out} [kgf·m]	175	203	214	214	214	214	214	-	-	-	-	-	-	-
	Pro[N]	22100	22100	22100	22100	22100	22100	22100	-	-	-	-	-	-	-
	Pro[kgf]	2250	2250	2250	2250	2250	2250	2250	-	-	-	-	-	-	-
6165DC	P_i [kW]	4.11	3.53	2.99	2.59	-	-	-	-	-	-	-	-	-	-
	T_{out} [N·m]	2100	2100	2100	2100	-	-	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	214	214	214	214	-	-	-	-	-	-	-	-	-	-
	Pro[N]	22100	22100	22100	22100	-	-	-	-	-	-	-	-	-	-
	Pro[kgf]	2250	2250	2250	2250	-	-	-	-	-	-	-	-	-	-
6170DA	P_i [kW]	-	-	-	-	-	1.60	1.60	1.60	1.37	1.09	0.922	0.794	0.705	0.613
	T_{out} [N·m]	-	-	-	-	-	1810	2140	2510	2530	2530	2530	2530	2530	2530
	T_{out} [kgf·m]	-	-	-	-	-	185	219	255	258	258	258	258	258	258
	Pro[N]	-	-	-	-	-	29500	29500	29500	29500	29500	29500	29500	29500	29500
	Pro[kgf]	-	-	-	-	-	3010	3010	3010	3010	3010	3010	3010	3010	3010
6170DB	P_i [kW]	-	3.36	3.36	3.12	2.64	2.23	1.89	1.61	-	-	-	-	-	-
	T_{out} [N·m]	-	1990	2360	2530	2530	2530	2530	2530	-	-	-	-	-	-
	T_{out} [kgf·m]	-	203	240	258	258	258	258	258	-	-	-	-	-	-
	Pro[N]	-	29500	29500	29500	29500	29500	29500	29500	-	-	-	-	-	-
	Pro[kgf]	-	3010	3010	3010	3010	3010	3010	3010	-	-	-	-	-	-
6170DC	P_i [kW]	4.95	4.26	3.60	3.12	2.64	2.23	-	-	-	-	-	-	-	-
	T_{out} [N·m]	2530	2530	2530	2530	2530	2530	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	258	258	258	258	258	258	-	-	-	-	-	-	-	-
	Pro[N]	28600	29500	29500	29500	29500	29500	-	-	-	-	-	-	-	-
	Pro[kgf]	2920	3010	3010	3010	3010	3010	-	-	-	-	-	-	-	-
6175DA	P_i [kW]	-	-	-	-	-	-	1.60	1.60	1.60	1.36	1.15	0.988	0.877	0.763
	T_{out} [N·m]	-	-	-	-	-	-	2140	2510	2960	3150	3150	3150	3150	3150
	T_{out} [kgf·m]	-	-	-	-	-	-	219	255	302	321	321	321	321	321
	Pro[N]	-	-	-	-	-	-	29500	29500	29500	29500	29500	29500	29500	29500
	Pro[kgf]	-	-	-	-	-	-	3010	3010	3010	3010	3010	3010	3010	3010
6175DB	P_i [kW]	-	-	3.36	3.36	3.29	2.78	2.35	2.01	1.70	-	-	-	-	-
	T_{out} [N·m]	-	-	2360	2720	3150	3150	3150	3150	3150	-	-	-	-	-
	T_{out} [kgf·m]	-	-	240	277	321	321	321	321	321	-	-	-	-	-
	Pro[N]	-	-	29500	29500	29500	29500	29500	29500	29500	-	-	-	-	-
	Pro[kgf]	-	-	3010	3010	3010	3010	3010	3010	3010	-	-	-	-	-
6175DC	P_i [kW]	6.17	5.30	4.49	3.89	3.29	2.78	2.35	-	-	-	-	-	-	-
	T_{out} [N·m]	3150	3150	3150	3150	3150	3150	3150	-	-	-	-	-	-	-
	T_{out} [kgf·m]	321	321	321	321	321	321	321	-	-	-	-	-	-	-
	Pro[N]	28300	29500	29500	29500	29500	29500	29500	-	-	-	-	-	-	-
	Pro[kgf]	2880	3010	3010	3010	3010	3010	3010	-	-	-	-	-	-	-
6180DA	P_i [kW]	-	-	-	3.36	3.36	3.36	3.02	2.59	2.19	1.75	1.48	1.27	1.13	0.981
	T_{out} [N·m]	-	-	-	2720	3210	3810	4050	4050	4050	4060	4060	4050	4060	4050
	T_{out} [kgf·m]	-	-	-	277	328	388	413	413	413	414	414	413	414	413
	Pro[N]	-	-	-	41700	41700	41700	41700	41700	41700	41700	41700	41700	41700	41700
	Pro[kgf]	-	-	-	4250	4250	4250	4250	4250	4250	4250	4250	4250	4250	4250
6180DB	P_i [kW]	7.95	6.83	5.78	5.01	4.24	3.57	3.02	2.59	-	-	-	-	-	-
	T_{out} [N·m]	4060	4060	4060	4060	4060	4050	4050	4050	-	-	-	-	-	-
	T_{out} [kgf·m]	414	414	414	414	414	413	413	413	-	-	-	-	-	-
	Pro[N]	37700	40300	41700	41700	41700	41700	41700	41700	-	-	-	-	-	-
	Pro[kgf]	3840	4100	4250	4250	4250	4250	4250	4250	-	-	-	-	-	-
6185DA	P_i [kW]	-	-	-	-	-	-	3.36	3.36	3.19	2.70	2.15	1.82	1.57	1.39
	T_{out} [N·m]	-	-	-	-	-	-	3810	4500	5000	5000	5000	5000	5000	5000
	T_{out} [kgf·m]	-	-	-	-	-	-	388	459	510	510	510	510	510	510
	Pro[N]	-	-	-	-	-	-	41700	41700	41700	41700	41700	41700	41600	41700
	Pro[kgf]	-	-	-	-	-	-	4250	4250	4250	4250	4250	4250	4240	4250
Frame Size	Ratio[Z]	104	121	143	165	195	231	273	319	377	473	559	649	731	841
	n_2 [r/min]	16.8	14.5	12.2	10.6	8.97	7.58	6.41	5.49	4.64	3.70	3.13	2.70	2.39	2.08

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.

2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer



Input Speed	$n_1 = 1750$ r/min
--------------------	--------------------

												n_2 [r/min]	Dim. Page	Frame Size
1.74	1.40	1.18	0.946	0.847	0.690	0.575	0.503	0.394	0.341	0.283	0.231	Ratio[Z]		
1003	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177	7569	P _i [kW] T _{OUT} [N·m] T _{OUT} [kgf·m] Pro[N] Pro[kgf]	CHH C-75 CHF C-80 CVV C-87	6160DC
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
0.426	0.400	0.400	0.400	0.207	0.200	0.200	0.200	0.200	0.200	0.200	0.200	P _i [kW] T _{OUT} [N·m] T _{OUT} [kgf·m] Pro[N] Pro[kgf]	CHH C-74 CHF C-79 CVV C-86	6165DA
2100	2100	2050	2100	2100	2100	2050	2100	2050	2050	2050	2050	-	-	
214	214	209	214	214	214	209	214	209	209	209	209	-	-	
22100	22100	21800	22100	22100	22100	21800	22100	21800	21800	21800	21800	-	-	
2250	2250	2220	2250	2250	2250	2220	2250	2220	2220	2220	2220	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW] T _{OUT} [N·m] T _{OUT} [kgf·m] Pro[N] Pro[kgf]	CHH C-74 CHF C-79 CVV C-86	6165DB
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
0.514	0.413	0.400	0.400	0.400	0.203	0.200	0.200	0.200	0.200	0.200	0.200	P _i [kW] T _{OUT} [N·m] T _{OUT} [kgf·m] Pro[N] Pro[kgf]	CHH C-74 CHF C-79 CVV C-86	6170DA
2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	2530	-	-	
258	258	258	258	258	258	258	258	258	258	258	258	-	-	
29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	-	-	
3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW] T _{OUT} [N·m] T _{OUT} [kgf·m] Pro[N] Pro[kgf]	CHH C-74 CHF C-79 CVV C-86	6170DB
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW] T _{OUT} [N·m] T _{OUT} [kgf·m] Pro[N] Pro[kgf]	CHH C-75 CHF C-80 CVV C-87	6170DC
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
0.639	0.514	0.434	0.400	0.400	0.400	0.211	0.200	0.200	0.200	0.200	0.200	P _i [kW] T _{OUT} [N·m] T _{OUT} [kgf·m] Pro[N] Pro[kgf]	CHH C-74 CHF C-79 CVV C-86	6175DA
3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	-	-	
321	321	321	321	321	321	321	321	321	321	321	321	-	-	
29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	-	-	
3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW] T _{OUT} [N·m] T _{OUT} [kgf·m] Pro[N] Pro[kgf]	CHH C-74 CHF C-79 CVV C-86	6175DB
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW] T _{OUT} [N·m] T _{OUT} [kgf·m] Pro[N] Pro[kgf]	CHH C-75 CHF C-80 CVV C-87	6175DC
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
0.822	0.750	0.750	0.447	0.400	0.400	0.400	0.400	0.400	0.400	0.400	0.400	P _i [kW] T _{OUT} [N·m] T _{OUT} [kgf·m] Pro[N] Pro[kgf]	CHH C-74 CHF C-79 CVV C-86	6180DA
4050	4060	4060	4060	4050	4050	4060	4050	4060	4060	4060	4060	-	-	
413	414	414	414	413	413	414	413	414	414	414	414	-	-	
41700	41700	41700	41700	41700	41700	41700	41700	41700	41700	41700	41700	-	-	
4250	4250	4250	4250	4250	4250	4250	4250	4250	4250	4250	4250	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW] T _{OUT} [N·m] T _{OUT} [kgf·m] Pro[N] Pro[kgf]	CHH C-75 CHF C-80 CVV C-87	6180DB
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
1.01	0.816	0.750	0.750	0.750	0.401	0.400	0.400	0.400	0.400	0.400	0.400	P _i [kW] T _{OUT} [N·m] T _{OUT} [kgf·m] Pro[N] Pro[kgf]	CHH C-74 CHF C-79 CVV C-86	6185DA
5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	-	-	
510	510	510	510	510	510	510	510	510	510	510	510	-	-	
41600	41700	41700	41700	41600	41600	41700	41600	41700	41700	41700	41700	-	-	
4240	4250	4250	4250	4240	4240	4250	4240	4250	4250	4250	4250	-	-	

Note: 3. Necessary input power for starting is printed in bold face. Do not exceed allowable output torque after startup.

Selection Tables 6000 Series Reducer


Double Reduction Ratio 104,121 ~ 7569 Frame Size: 6185DB ~ 6235DB

Input Speed		$n_1 = 1750$ r/min		n_1 : Input Speed [r/min]		T_{out} : Allowable output torque [N·m, kgf·m]		n_2 : Output Speed [r/min]		Pro: Allowable output shaft radial load [N, kgf]		P: Allowable input power [kW]		*Consult us for Pro of CNF and CHF type.	
Frame Size	Ratio[Z]	16.8	14.5	12.2	10.6	8.97	7.58	6.41	5.49	4.64	3.70	3.13	2.70	2.39	2.08
6185DB	P_i [kW]	9.60	8.09	6.98	6.07	5.14	4.41	3.73	3.19	2.70	-	-	-	-	-
	T_{out} [N·m]	4900	4810	4900	4920	4920	5000	5000	5000	5000	-	-	-	-	-
	T_{out} [kgf·m]	500	490	500	502	502	510	510	510	510	-	-	-	-	-
	Pro[N]	37300	40000	41700	41700	41700	41700	41700	41700	41700	-	-	-	-	-
	Pro[kgf]	3800	4070	4250	4250	4250	4250	4250	4250	4250	-	-	-	-	-
6190DA	P_i [kW]	-	-	6.25	6.25	6.25	5.62	4.76	4.07	3.45	2.75	2.32	2.00	1.78	1.54
	T_{out} [N·m]	-	-	4390	5060	5980	6380	6380	6380	6380	6380	6380	6380	6380	6380
	T_{out} [kgf·m]	-	-	447	516	610	650	650	650	650	650	650	650	650	650
	Pro[N]	-	-	59000	59000	59000	59000	59000	59000	59000	59000	59000	58600	59000	59000
	Pro[kgf]	-	-	6010	6010	6010	6010	6010	6010	6010	6010	6010	5970	6010	6010
6190DB	P_i [kW]	11.9	10.7	9.08	7.87	6.66	5.62	-	-	-	-	-	-	-	-
	T_{out} [N·m]	6090	6380	6380	6380	6380	6380	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	621	650	650	650	650	650	-	-	-	-	-	-	-	-
	Pro[N]	52400	55900	58400	58900	58900	59000	-	-	-	-	-	-	-	-
	Pro[kgf]	5340	5700	5950	6000	6000	6010	-	-	-	-	-	-	-	-
6195DA	P_i [kW]	-	-	-	-	6.25	6.25	5.94	5.08	4.30	3.43	2.90	2.50	2.22	1.93
	T_{out} [N·m]	-	-	-	-	5980	7090	7960	7960	7960	7960	7960	7960	7960	7960
	T_{out} [kgf·m]	-	-	-	-	610	723	811	811	811	811	811	811	811	811
	Pro[N]	-	-	-	-	59000	59000	59000	59000	59000	59000	59000	58100	59000	59000
	Pro[kgf]	-	-	-	-	6010	6010	6010	6010	6010	6010	6010	5930	6010	6010
6195DB	P_i [kW]	11.9	11.9	10.9	9.76	8.26	7.02	5.94	-	-	-	-	-	-	-
	T_{out} [N·m]	6090	7090	7630	7910	7910	7960	7960	-	-	-	-	-	-	-
	T_{out} [kgf·m]	621	723	778	806	806	811	811	-	-	-	-	-	-	-
	Pro[N]	52400	55700	57900	58300	58300	59000	59000	-	-	-	-	-	-	-
	Pro[kgf]	5340	5680	5900	5940	5940	6010	6010	-	-	-	-	-	-	-
6205DA	P_i [kW]	-	-	-	-	-	-	5.86	4.84	4.34	3.35	3.00	2.44	2.52	2.23
	T_{out} [N·m]	-	-	-	-	-	-	7860	7590	8030	7780	8230	7790	9060	9230
	T_{out} [kgf·m]	-	-	-	-	-	-	801	773	819	793	839	794	923	941
	Pro[N]	-	-	-	-	-	-	84100	84100	84100	84100	84100	84100	84100	84100
	Pro[kgf]	-	-	-	-	-	-	8570	8570	8570	8570	8570	8570	8570	8570
6205DB	P_i [kW]	-	11.9	-	11.4	9.68	8.17	6.92	5.89	4.99	4.00	3.39	2.92	2.59	
	T_{out} [N·m]	-	7090	-	9270	9270	9270	9270	9230	9230	9300	9300	9300	9300	
	T_{out} [kgf·m]	-	723	-	945	945	945	945	941	941	948	948	948	948	
	Pro[N]	-	84100	-	84100	84100	84100	84100	84100	84100	84100	84100	84100	84100	
	Pro[kgf]	-	8570	-	8570	8570	8570	8570	8570	8570	8570	8570	8570	8570	
6215DA	P_i [kW]	-	-	-	11.9	11.9	11.0	9.32	8.07	6.83	5.45	4.61	3.97	3.52	3.06
	T_{out} [N·m]	-	-	-	9670	11400	12500	12500	12700	12700	12700	12700	12700	12700	12700
	T_{out} [kgf·m]	-	-	-	985	1160	1270	1270	1290	1290	1290	1290	1290	1290	1290
	Pro[N]	-	-	-	104000	104000	104000	104000	104000	104000	104000	104000	104000	104000	104000
	Pro[kgf]	-	-	-	10600	10600	10600	10600	10600	10600	10600	10600	10600	10600	10600
6215DB	P_i [kW]	-	19.1	-	15.0	12.7	-	-	-	-	-	-	-	-	-
	T_{out} [N·m]	-	11400	-	12200	12200	-	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	-	1160	-	1240	1240	-	-	-	-	-	-	-	-	-
	Pro[N]	-	101000	-	104000	104000	-	-	-	-	-	-	-	-	-
	Pro[kgf]	-	10300	-	10600	10600	-	-	-	-	-	-	-	-	-
6225DA	P_i [kW]	-	-	-	11.9	11.9	11.0	9.60	8.12	6.89	5.83	4.98	4.46	3.64	
	T_{out} [N·m]	-	-	-	11400	13500	14800	15000	15000	16000	16000	15900	16000	15000	
	T_{out} [kgf·m]	-	-	-	1160	1380	1510	1530	1530	1630	1630	1620	1630	1530	
	Pro[N]	-	-	-	122000	130000	137000	142000	145000	145000	145000	145000	145000	145000	
	Pro[kgf]	-	-	-	12500	13200	13900	14500	14800	14800	14800	14800	14800	14800	
6225DB	P_i [kW]	-	22.6	-	17.9	15.1	13.0	-	-	-	-	-	-	-	-
	T_{out} [N·m]	-	13500	-	14500	14500	14800	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	-	1370	-	1480	1480	1510	-	-	-	-	-	-	-	-
	Pro[N]	-	106000	-	115000	122000	130000	-	-	-	-	-	-	-	-
	Pro[kgf]	-	10800	-	11800	12400	13200	-	-	-	-	-	-	-	-
6235DA	P_i [kW]	-	25.4	-	24.2	20.5	16.7	14.1	12.1	10.2	8.82	7.47	6.43	5.71	4.58
	T_{out} [N·m]	-	15100	-	19600	19600	18900	18900	18900	18900	20500	20500	20500	20500	18900
	T_{out} [kgf·m]	-	1540	-	2000	2000	1930	1930	1930	1930	2090	2090	2090	2090	1930
	Pro[N]	-	133000	-	143000	150000	162000	170000	177000	179000	179000	179000	179000	179000	179000
	Pro[kgf]	-	13600	-	14500	15300	16500	17300	18100	18200	18200	18200	18200	18200	18200
6235DB	P_i [kW]	-	31.5	-	24.2	-	-	-	-	-	-	-	-	-	-
	T_{out} [N·m]	-	18700	-	19600	-	-	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	-	1910	-	2000	-	-	-	-	-	-	-	-	-	-
	Pro[N]	-	133000	-	143000	-	-	-	-	-	-	-	-	-	-
	Pro[kgf]	-	13500	-	14500	-	-	-	-	-	-	-	-	-	-

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.

2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer



Input Speed	$n_1 = 1750$ r/min
-------------	--------------------

1.74	1.40	1.18	0.946	0.847	0.690	0.575	0.503	0.394	0.341	0.283	0.231	n_2 [r/min]	Dim. Page	Frame Size
1003	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177	7569	Ratio[Z]		
-	-	-	-	-	-	-	-	-	-	-	-	P_i [kW]	CHH C-75	6185DB
-	-	-	-	-	-	-	-	-	-	-	-	T_{out} [N·m]	CHF C-80	
-	-	-	-	-	-	-	-	-	-	-	-	T_{out} [kgf·m]	CVV C-87	
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]		
1.30	1.04	0.878	0.750	0.750	0.750	0.750	0.750	0.750	0.750	0.750	0.750	P_i [kW]	CHH C-75	6190DA
6380	6380	6380	6380	6380	6380	6380	6380	6380	6380	6380	6380	T_{out} [N·m]	CHF C-80	
650	650	650	650	650	650	650	650	650	650	650	650	T_{out} [kgf·m]	CVV C-87	
58600	59000	58900	59000	58600	58600	58900	58600	58900	58900	58900	58900	Pro[N]		
5970	6010	6000	6010	5970	5970	6000	5970	6000	6000	6000	6000	Pro[kgf]		
-	-	-	-	-	-	-	-	-	-	-	-	P_i [kW]	CHH C-75	6190DB
-	-	-	-	-	-	-	-	-	-	-	-	T_{out} [N·m]	CHF C-80	
-	-	-	-	-	-	-	-	-	-	-	-	T_{out} [kgf·m]	CVV C-87	
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]		
1.62	1.30	1.10	0.877	0.785	0.750	0.750	0.750	0.750	0.750	0.750	0.750	P_i [kW]	CHH C-75	6195DA
7960	7960	7960	7960	7960	7960	7960	7960	7960	7960	7960	7960	T_{out} [N·m]	CHF C-80	
811	811	811	811	811	811	811	811	811	811	811	811	T_{out} [kgf·m]	CVV C-87	
58100	59000	58400	59000	58100	58100	58400	58100	58400	58400	58400	58400	Pro[N]		
5930	6010	5950	6010	5930	5930	5950	5930	5950	5950	5950	5950	Pro[kgf]		
-	-	-	-	-	-	-	-	-	-	-	-	P_i [kW]	CHH C-75	6195DB
-	-	-	-	-	-	-	-	-	-	-	-	T_{out} [N·m]	CHF C-80	
-	-	-	-	-	-	-	-	-	-	-	-	T_{out} [kgf·m]	CVV C-87	
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]		
2.20	2.20	1.50	1.50	1.50	0.750	0.750	0.750	0.750	0.750	0.750	0.750	P_i [kW]	CHH C-75	6205DA
9060	9300	8360	9300	9300	9300	8760	9300	8760	9300	8760	8760	T_{out} [N·m]	CHF C-80	
923	948	853	948	948	948	893	948	893	948	893	893	T_{out} [kgf·m]	CVV C-87	
84100	84100	84100	84100	84100	84100	84100	84100	84100	84100	84100	84100	Pro[N]		
8570	8570	8570	8570	8570	8570	8570	8570	8570	8570	8570	8570	Pro[kgf]		
2.20	-	1.50	-	-	-	-	-	-	-	-	-	P_i [kW]	CHH C-75	6205DB
9300	-	8760	-	-	-	-	-	-	-	-	-	T_{out} [N·m]	CHF C-80	
948	-	893	-	-	-	-	-	-	-	-	-	T_{out} [kgf·m]	CVV C-87	
84100	-	84100	-	-	-	-	-	-	-	-	-	Pro[N]		
8570	-	8570	-	-	-	-	-	-	-	-	-	Pro[kgf]		
2.57	2.20	1.55	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	P_i [kW]	CHH C-75	6215DA
12700	12700	11300	12700	12700	12700	11300	12700	11300	12700	11300	11300	T_{out} [N·m]	CHF C-80	
1290	1290	1150	1290	1290	1290	1150	1290	1150	1290	1150	1150	T_{out} [kgf·m]	CVV C-87	
104000	104000	104000	104000	104000	104000	104000	104000	104000	104000	104000	104000	Pro[N]		
10600	10600	10600	10600	10600	10600	10600	10600	10600	10600	10600	10600	Pro[kgf]		
-	-	-	-	-	-	-	-	-	-	-	-	P_i [kW]	CHH C-75	6215DB
-	-	-	-	-	-	-	-	-	-	-	-	T_{out} [N·m]	CHF C-80	
-	-	-	-	-	-	-	-	-	-	-	-	T_{out} [kgf·m]	CVV C-87	
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]		
3.22	2.61	2.20	1.76	1.57	1.50	1.50	1.50	1.50	1.50	1.50	1.50	P_i [kW]	CHH C-75	6225DA
15900	16000	15100	16000	15900	15900	15100	15900	15100	15900	15100	15100	T_{out} [N·m]	CHF C-80	
1620	1630	1540	1630	1620	1620	1540	1620	1540	1620	1540	1540	T_{out} [kgf·m]	CVV C-87	
145000	145000	145000	145000	145000	145000	145000	145000	145000	145000	145000	145000	Pro[N]		
14800	14800	14800	14800	14800	14800	14800	14800	14800	14800	14800	14800	Pro[kgf]		
-	-	-	-	-	-	-	-	-	-	-	-	P_i [kW]	CHH C-75	6225DB
-	-	-	-	-	-	-	-	-	-	-	-	T_{out} [N·m]	CHF C-80	
-	-	-	-	-	-	-	-	-	-	-	-	T_{out} [kgf·m]	CVV C-87	
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]		
4.16	3.35	2.36	2.26	2.20	2.20	2.20	2.20	2.20	2.20	2.20	2.20	P_i [kW]	CHH C-75	6235DA
20500	20500	17200	20500	20500	20500	17200	20500	17200	20500	17200	17200	T_{out} [N·m]	CHF C-80	
2090	2090	1750	2090	2090	2090	1750	2090	1750	2090	1750	1750	T_{out} [kgf·m]	CVV C-87	
179000	179000	179000	179000	179000	179000	179000	179000	179000	179000	179000	179000	Pro[N]		
18200	18200	18200	18200	18200	18200	18200	18200	18200	18200	18200	18200	Pro[kgf]		
-	-	-	-	-	-	-	-	-	-	-	-	P_i [kW]	CHH C-75	6235DB
-	-	-	-	-	-	-	-	-	-	-	-	T_{out} [N·m]	CHF C-80	
-	-	-	-	-	-	-	-	-	-	-	-	T_{out} [kgf·m]	CVV C-87	
-	-	-	-	-	-	-	-	-	-	-	-	Pro[N]		
1003	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177	7569	Ratio[Z]	Dim. Page	Frame Size
1.74	1.40	1.18	0.946	0.847	0.690	0.575	0.503	0.394	0.341	0.283	0.231	n_2 [r/min]		

Note: 3. Necessary input power for starting is printed in bold face. Do not exceed allowable output torque after startup.

Selection Tables
 Ratio 104,121 - 7569
 REDUCERS

Selection Tables 6000 Series Reducer


Double Reduction Ratio 104,121 ~ 7569 Frame Size: 6245DA ~ 6275DA

Input Speed		$n_1 = 1750$ r/min		n_1 : Input Speed [r/min]		T_{out} : Allowable output torque [N·m, kgf·m]									
				n_2 : Output Speed [r/min]		Pro: Allowable output shaft radial load [N, kgf]									
				P_i : Allowable input power [kW]		*Consult us for Pro of CNF and CHF type.									
Frame Size	n_2 [r/min]	16.8	14.5	12.2	10.6	8.97	7.58	6.41	5.49	4.64	3.70	3.13	2.70	2.39	2.08
	Ratio[Z]	104	121	143	165	195	231	273	319	377	473	559	649	731	841
6245DA	P_i [kW]	-	-	-	25.4	23.9	22.7	19.2	16.5	13.9	11.1	9.40	8.09	7.19	6.25
	T_{out} [N·m]	-	-	-	20600	22900	25800	25800	25800	25800	25800	25800	25800	25800	25800
	T_{out} [kgf·m]	-	-	-	2100	2330	2630	2630	2630	2630	2630	2630	2630	2630	2630
	Pro[N]	-	-	-	160000	167000	179000	188000	196000	207000	208000	208000	208000	208000	208000
	Pro[kgf]	-	-	-	16300	17100	18200	19200	20000	21100	21200	21200	21200	21200	21200
6245DB	P_i [kW]	-	34.6	-	32.4	27.4	22.7	-	-	-	-	-	-	-	-
	T_{out} [N·m]	-	20500	-	26200	26200	25800	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	-	2090	-	2680	2680	2630	-	-	-	-	-	-	-	-
	Pro[N]	-	148000	-	158000	167000	179000	-	-	-	-	-	-	-	-
	Pro[kgf]	-	15000	-	16100	17000	18200	-	-	-	-	-	-	-	-
6255DA	P_i [kW]	-	31.8	-	31.8	31.8	27.3	23.1	20.7	17.5	14.9	12.6	10.8	9.61	7.86
	T_{out} [N·m]	-	18900	-	25800	30500	31000	31000	32500	32500	34500	34500	34500	34500	32500
	T_{out} [kgf·m]	-	1930	-	2630	3110	3160	3160	3310	3310	3520	3520	3520	3520	3310
	Pro[N]	-	182000	-	195000	204000	218000	229000	241000	254000	258000	258000	258000	258000	258000
	Pro[kgf]	-	18500	-	19900	20800	22200	23400	24600	25900	26300	26300	26300	26300	26300
6255DB	P_i [kW]	-	46.3	-	38.4	32.5	-	-	-	-	-	-	-	-	-
	T_{out} [N·m]	-	27500	-	31200	31200	-	-	-	-	-	-	-	-	-
	T_{out} [kgf·m]	-	2800	-	3180	3180	-	-	-	-	-	-	-	-	-
	Pro[N]	-	180000	-	194000	204000	-	-	-	-	-	-	-	-	-
	Pro[kgf]	-	18400	-	19800	20800	-	-	-	-	-	-	-	-	-
6265DA	P_i [kW]	-	50.8	-	50.8	45.7	40.5	34.3	29.4	24.8	19.8	16.8	14.4	12.8	11.1
	T_{out} [N·m]	-	30200	-	41100	43700	46000	46000	46000	46000	46000	46000	46000	46000	46000
	T_{out} [kgf·m]	-	3080	-	4190	4460	4690	4690	4690	4690	4690	4690	4690	4690	4690
	Pro[N]	-	221000	-	236000	248000	265000	276000	276000	276000	276000	276000	276000	276000	276000
	Pro[kgf]	-	22500	-	24100	25300	27000	28100	28100	28100	28100	28100	28100	28100	28100
6275DA	P_i [kW]	-	-	-	-	-	-	-	43.5	36.8	29.4	24.8	21.4	19.0	16.5
	T_{out} [N·m]	-	-	-	-	-	-	-	68200	68200	68200	68200	68200	68200	68200
	T_{out} [kgf·m]	-	-	-	-	-	-	-	6950	6950	6950	6950	6950	6950	6950
	Pro[N]	-	-	-	-	-	-	-	248000	248000	248000	248000	248000	248000	248000
	Pro[kgf]	-	-	-	-	-	-	-	25300	25300	25300	25300	25300	25300	25300
Frame Size	Ratio[Z]	104	121	143	165	195	231	273	319	377	473	559	649	731	841
	n_2 [r/min]	16.8	14.5	12.2	10.6	8.97	7.58	6.41	5.49	4.64	3.70	3.13	2.70	2.39	2.08

Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft. Refer to pages F-11~12 when radial load is off the midpoint of output shaft and for checking thrust load.

2. Refer to pages F-15~16 for allowable radial load for input shaft.

Selection Tables 6000 Series Reducer



Input Speed	$n_1 = 1750$ r/min
-------------	--------------------

1.74	1.40	1.18	0.946	0.847	0.690	0.575	0.503	0.394	0.341	0.283	0.231	n_2 [r/min]	Dim. Page	Frame Size
1003	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177	7569	Ratio[Z]		
5.24	4.21	3.12	2.84	2.54	2.20	2.20	2.20	2.20	2.20	2.20	2.20	P _i [kW]	CHH C-75	6245DA
25800	25800	22600	25800	25800	25800	22600	25800	22600	25800	22600	22600	T _{OUT} [N•m]	CHF C-80	
2630	2630	2310	2630	2630	2630	2310	2630	2310	2630	2310	2310	T _{OUT} [kgf•m]	CVV C-87	
208000	208000	208000	208000	208000	208000	208000	208000	208000	208000	208000	208000	Pro [N]		
21200	21200	21200	21200	21200	21200	21200	21200	21200	21200	21200	21200	Pro [kgf]		
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW]	CHH C-75	6245DB
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [N•m]	CHF C-80	
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf•m]	CVV C-87	
-	-	-	-	-	-	-	-	-	-	-	-	Pro [N]		
-	-	-	-	-	-	-	-	-	-	-	-	Pro [kgf]		
7.00	5.63	4.27	3.80	3.70	3.70	3.70	3.70	3.70	3.70	3.70	3.70	P _i [kW]	CHH C-75	6255DA
34500	34500	31000	34500	34500	34500	31000	34500	31000	34500	31000	31000	T _{OUT} [N•m]	CHF C-80	
3520	3520	3160	3520	3520	3520	3160	3520	3160	3520	3160	3160	T _{OUT} [kgf•m]	CVV C-87	
258000	258000	258000	258000	258000	258000	258000	258000	258000	258000	258000	258000	Pro [N]		
26300	26300	26300	26300	26300	26300	26300	26300	26300	26300	26300	26300	Pro [kgf]		
-	-	-	-	-	-	-	-	-	-	-	-	P _i [kW]	CHH C-75	6255DB
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [N•m]	CHF C-80	
-	-	-	-	-	-	-	-	-	-	-	-	T _{OUT} [kgf•m]	CVV C-87	
-	-	-	-	-	-	-	-	-	-	-	-	Pro [N]		
-	-	-	-	-	-	-	-	-	-	-	-	Pro [kgf]		
9.34	7.51	6.06	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50	P _i [kW]	CHH C-75	6265DA
46000	46000	44000	46000	46000	46000	44000	46000	44000	46000	44000	44000	T _{OUT} [N•m]	CHF C-80	
4690	4690	4490	4690	4690	4690	4490	4690	4490	4690	4490	4490	T _{OUT} [kgf•m]	CVV C-87	
276000	276000	276000	276000	276000	276000	276000	276000	276000	276000	276000	276000	Pro [N]		
28100	28100	28100	28100	28100	28100	28100	28100	28100	28100	28100	28100	Pro [kgf]		
13.8	11.1	9.39	7.51	7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	P _i [kW]	CHH C-75	6275DA
68200	68200	68200	68200	68200	68200	68200	68200	68200	68200	68200	68200	T _{OUT} [N•m]	CHF C-80	
6950	6950	6950	6950	6950	6950	6950	6950	6950	6950	6950	6950	T _{OUT} [kgf•m]	CVV C-87	
248000	248000	245000	248000	248000	248000	245000	248000	245000	245000	245000	245000	Pro [N]		
25300	25300	25000	25300	25300	25300	25000	25300	25000	25000	25000	25000	Pro [kgf]		
1003	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177	7569	Ratio[Z]	Dim. Page	Frame Size
1.74	1.40	1.18	0.946	0.847	0.690	0.575	0.503	0.394	0.341	0.283	0.231	n_2 [r/min]		

REDUCERS

Selection Tables
Ratio 104,121 - 7569


Note: 3. Necessary input power for starting is printed in bold face. Do not exceed allowable output torque after startup.

C CYCLO® SPEED REDUCERS

3. Dimension Tables

Dimension Tables Speed Reducer (Universal Direction, Foot Mount)

CNH - 606□ to 612□

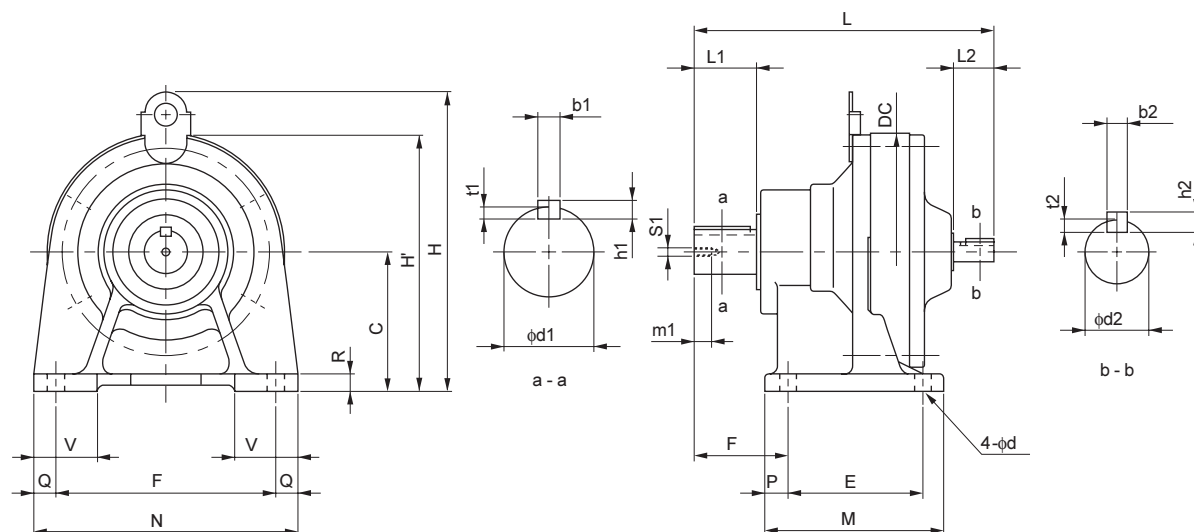

Frame Size Note 1	L	C	DC	E	F	G	H	H'	M	N	P	Q	R	V	d	W(kg)
606□	145	80	110	60	120	41	-	135	84	144	12	12	10	35	9	2.5
607□	151	80	110	60	120	47	-	135	84	144	12	12	10	35	9	2.5
608□	179	90	134	75	120	52	-	157	99	144	12	12	13	37	9	8
609□	202	100	150	90	150	60	-	175	135	180	15	15	12	40	11	11
Note 5 610□	208	100	150	90	150	60	207	-	135	180	15	15	12	40	11	13
611□	218	120	162	90	150	70	236	-	135	180	15	15	12	45	11	15
Note 5 612□	259	120	204	115	190	82	257	-	155	230	20	20	15	55	14	24

Model Note 1	Output Shaft Note 2, 3, 4							Input Shaft Note 2, 3, 4				
	d1	L1	b1	h1	t1	S1	m1	d2	L2	b2	h2	t2
CNH - 606□ - Ratio	14	25	5	5	3	M5	16	12	25	4	4	2.5
CNH - 607□ - Ratio	18	30	6	6	3.5	M6	16	12	25	4	4	2.5
CNH - 608□ - Ratio	22	35	6	6	3.5	M6	16	12	25	4	4	2.5
CNH - 609□ - Ratio	28	35	8	7	4	M8	20	15	25	5	5	3
Note 5 CNH - 610□ - Ratio	28	35	8	7	4	M8	20	15	25	5	5	3
CNH - 611□ - Ratio	32	45	10	8	5	M8	20	15	25	5	5	3
Note 5 CNH - 612□ - Ratio	38	55	10	8	5	M8	20	18	35	6	6	3.5


Note: 4. Refer to pages F-28~30 for details on input and output shaft end dimensions.

5. Refer to page C-88 for center height options available.

6. Dimensions in above drawings are subject to change without notice.

Dimension Tables Speed Reducer (Horizontal Direction, Foot Mount)

CHH - 613□ to 6275

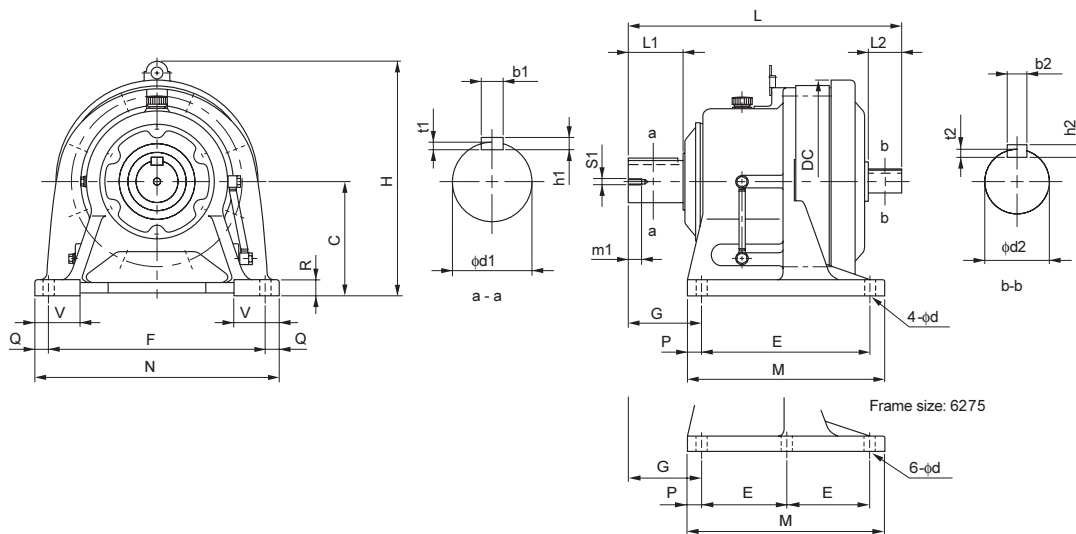


Frame Size	L	C	DC	E	F	G	H	M	N	P	Q	R	V	d	W(kg)
613□ <small>Note 1</small>	321	150	230	145	290	100	300	195	330	25	20	22	65	18	43
614□ <small>Note 5</small>	341	150	230	145	290	120	300	195	330	25	20	22	65	18	44
616□ <small>Note 5</small>	413	160	318	150	370	139	367	238	410	44	20	25	75	18	84
617□	477	200	362	275	380	125	429	335	430	30	25	30	80	22	125
618□	527	220	390	320	420	145	467	380	470	30	25	30	85	22	163
619□	620	250	451	380	480	170	539	440	530	30	25	35	90	26	240
6205	678	250	471	360	440	215	530	440	530	40	45	35	100	26	255
6215	708	265	507	395	480	210	575	475	580	40	50	40	110	26	336
6225	752	280	549	420	540	230	610	520	620	50	40	40	115	33	409
6235	839	300	591	460	580	260	667	560	670	50	45	45	120	33	503
6245	877	335	637	480	630	263	729	580	720	50	45	45	128	39	614
6255	1040	375	703	520	670	320	815	630	780	55	55	50	140	39	957
6265	1150	400	772	590	770	390	874	700	880	55	55	55	160	45	1190
6275	1462	540	986	420	1050	485	1161	1040	1160	100	55	60	200	45	2460

Model	Ratio	Output Shaft							Input Shaft				
		d1	L1	b1	h1	t1	S1	m1	d2	L2	b2	h2	t2
CHH - 613□	-	50	70	14	9	5.5	M10	18	22	40	6	6	3.5
CHH - 614□	-	50	90	14	9	5.5	M10	18	22	40	6	6	3.5
CHH - 616□	-	60	90	18	11	7	M10	18	30	45	8	7	4
CHH - 617□	-	70	90	20	12	7.5	M12	24	35	55	10	8	5
CHH - 618□	-	80	110	22	14	9	M12	24	40	65	12	8	5
CHH - 619□	-	95	135	25	14	9	M20	34	45	70	14	9	5.5
CHH - 6205	-	100	165	28	16	10	M20	34	45	82	14	9	5.5
CHH - 6215	-	110	165	28	16	10	M20	34	50	82	14	9	5.5
CHH - 6225	-	120	165	32	18	11	M20	34	55	82	16	10	6
CHH - 6235	-	130	200	32	18	11	M24	41	60	105	18	11	7
CHH - 6245	-	140	200	36	20	12	M24	41	65	105	18	11	7
CHH - 6255	-	160	240	40	22	13	M30	49	80	130	22	14	9
CHH - 6265	-	170	300	40	22	13	M30	49	80	130	22	14	9
CHH - 6275	-	180	330	45	25	15	M30	52	90	150	25	14	9

Note: 1. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables Speed Reducer (Universal Direction, Foot Mount)

CNH - 606□DA to 612□DB

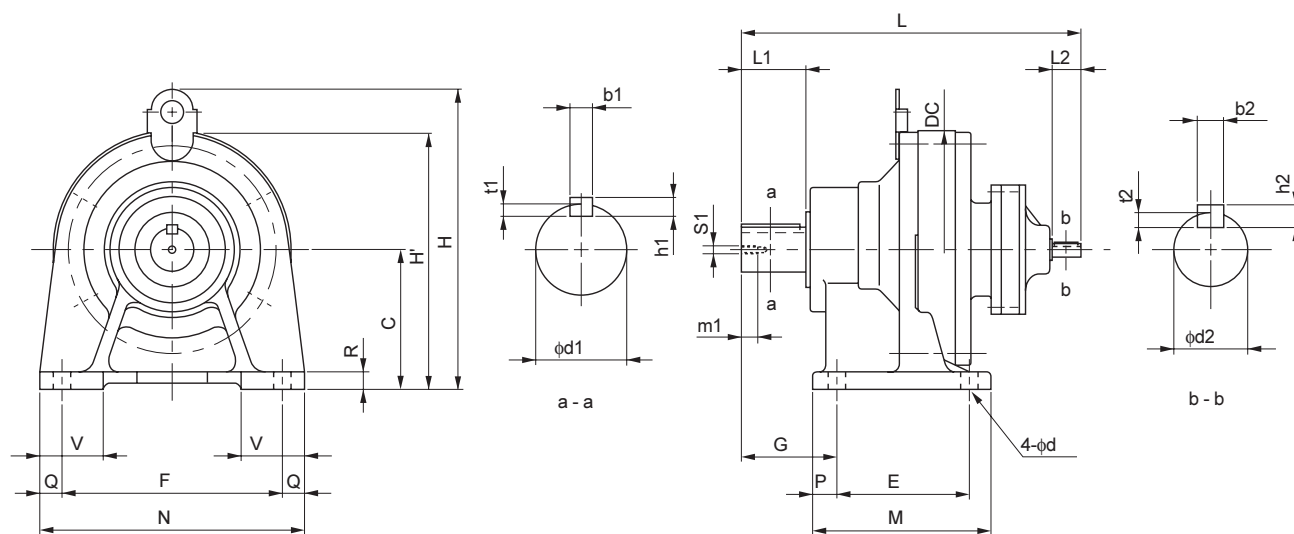

Frame Size Note 1	L	C	DC	E	F	G	H	H'	M	N	P	Q	R	V	d	W(kg)
606□DA	178	80	110	60	120	41	-	135	84	144	12	12	10	35	9	4.0
607□DA	184	80	110	60	120	47	-	135	84	144	12	12	10	35	9	4.5
609□DA	243	100	150	90	150	60	-	175	135	180	15	15	12	40	11	12
610□DA	257	100	150	90	150	60	207	-	135	180	15	15	12	40	11	15
612□DA	293	120	204	115	190	82	257	-	155	230	20	20	15	55	14	26
612□DB	312	120	204	115	190	82	257	-	155	230	20	20	15	55	14	29

Model Note 1	Output Shaft							Input Shaft						
	d1	L1	b1	h1	t1	S1	m1	d2	L2	b2	h2	t2		
CNH - 606□DA - Ratio	14	25	5	5	3	M5	16	12	25	4	4	2.5		
CNH - 607□DA - Ratio	18	30	6	6	3.5	M6	16	12	25	4	4	2.5		
CNH - 609□DA - Ratio	28	35	8	7	4	M8	20	12	25	4	4	2.5		
CNH - 610□DA - Ratio	28	35	8	7	4	M8	20	12	25	4	4	2.5		
CNH - 612□DA - Ratio	38	55	10	8	5	M8	20	12	25	4	4	2.5		
CNH - 612□DB - Ratio	38	55	10	8	5	M8	20	15	25	5	5	3		


Note: 4. Refer to pages F-28~30 for details on input and output shaft end dimensions.

5. Refer to page C-88 for center height options available.

6. Dimensions in above drawings are subject to change without notice.

Dimension Tables Speed Reducer (Horizontal Direction, Foot Mount)

CHH - 613□DA to 618□DA

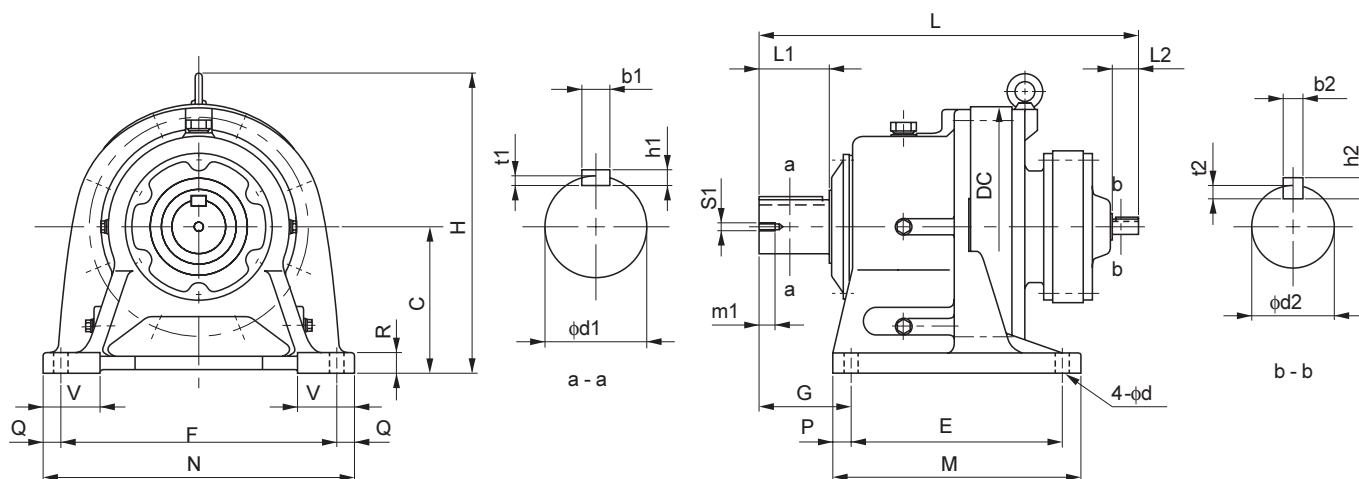


Frame Size	L	C	DC	E	F	G	H	M	N	P	Q	R	V	d	W(kg)
613□DA	347	150	230	145	290	100	300	195	330	25	20	22	65	18	41
613□DB	363	150	230	145	290	100	300	195	330	25	20	22	65	18	45
613□DC	369	150	230	145	290	100	300	195	330	25	20	22	65	18	46
614□DA	367	150	230	145	290	120	300	195	330	25	20	22	65	18	41
614□DB	383	150	230	145	290	120	300	195	330	25	20	22	65	18	45
614□DC	389	150	230	145	290	120	300	195	330	25	20	22	65	18	46
616□DA	433	160	300	150	370	139	349	238	410	44	20	25	75	18	85
616□DB	439	160	300	150	370	139	349	238	410	44	20	25	75	18	87
617□DA	478	200	340	275	380	125	416	335	430	30	25	30	80	22	121
617□DB	484	200	340	275	380	125	416	335	430	30	25	30	80	22	123
618□DA	526	220	370	320	420	145	451	380	470	30	25	30	85	22	165

Model	Output Shaft								Input Shaft				
	d1	L1	b1	h1	t1	S1	m1	d2	L2	b2	h2	t2	
CHH - 613□DA - Ratio	50	70	14	9	5.5	M10	18	12	25	4	4	2.5	
CHH - 613□DB - Ratio	50	70	14	9	5.5	M10	18	15	25	5	5	3	
CHH - 613□DC - Ratio	50	70	14	9	5.5	M10	18	15	25	5	5	3	
CHH - 614□DA - Ratio	50	90	14	9	5.5	M10	18	12	25	4	4	2.5	
CHH - 614□DB - Ratio	50	90	14	9	5.5	M10	18	15	25	5	5	3	
CHH - 614□DC - Ratio	50	90	14	9	5.5	M10	18	15	25	5	5	3	
CHH - 616□DA - Ratio	60	90	18	11	7	M10	18	15	25	5	5	3	
CHH - 616□DB - Ratio	60	90	18	11	7	M10	18	15	25	5	5	3	
CHH - 617□DA - Ratio	70	90	20	12	7.5	M12	24	15	25	5	5	3	
CHH - 617□DB - Ratio	70	90	20	12	7.5	M12	24	15	25	5	5	3	
CHH - 618□DA - Ratio	80	110	22	14	9	M12	24	15	25	5	5	3	

Note: 1. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables Speed Reducer (Horizontal Direction, Foot Mount)

CHH - 616□DC to 6275DA

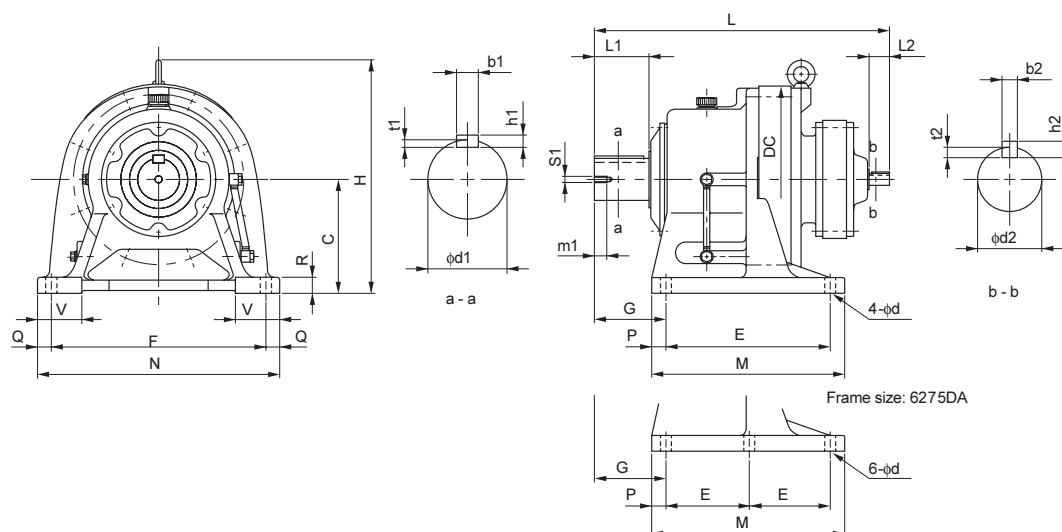

Frame Size Note 1	L	C	DC	E	F	G	H	M	N	P	Q	R	V	d	W(kg)
616□DC	462	160	300	150	370	139	349	238	410	44	20	25	75	18	94
617□DC	509	200	340	275	380	125	416	335	430	30	25	30	80	22	128
618□DB	577	220	370	320	420	145	451	380	470	30	25	30	85	22	183
619□DA	629	250	430	380	480	170	531	440	530	30	25	35	90	26	241
619□DB	653	250	430	380	480	170	531	440	530	30	25	35	90	26	250
6205DA	670	250	448	360	440	215	530	440	530	40	45	35	100	26	260
6205DB	705	250	448	360	440	215	530	440	530	40	45	35	100	26	273
6215DA	731	265	485	395	480	210	575	475	580	40	50	40	110	26	354
6215DB	780	265	485	395	480	210	575	475	580	40	50	40	110	26	376
6225DA	773	280	526	420	540	230	610	520	620	50	40	40	115	33	429
6225DB	860	280	526	420	540	230	610	520	620	50	40	40	115	33	476
6235DA	883	300	562	460	580	260	667	560	670	50	45	45	120	33	548
6235DB	938	300	562	460	580	260	667	560	670	50	45	45	120	33	582
6245DA	921	335	614	480	630	263	729	580	720	50	45	45	128	39	656
6245DB	975	335	614	480	630	263	729	580	720	50	45	45	128	39	686
6255DA	1081	375	670	520	670	320	815	630	780	55	55	50	140	39	1010
6255DB	1133	375	670	520	670	320	815	630	780	55	55	50	140	39	1085
6265DA	1243	400	736	590	770	390	874	700	880	55	55	55	160	45	1340
6275DA	1504	540	950	420	1050	485	1161	1040	1160	100	55	60	200	45	2480


Model Note 1	Output Shaft Note 2, 3, 4								Input Shaft Note 2, 3, 4				
	d1	L1	b1	h1	t1	S1	m1	d2	L2	b2	h2	t2	
CHH - 616□DC - Ratio	60	90	18	11	7	M10	18	18	35	6	6	3.5	
CHH - 617□DC - Ratio	70	90	20	12	7.5	M12	24	18	35	6	6	3.5	
CHH - 618□DB - Ratio	80	110	22	14	9	M12	24	22	40	6	6	3.5	
CHH - 619□DA - Ratio	95	135	25	14	9	M20	34	18	35	6	6	3.5	
CHH - 619□DB - Ratio	95	135	25	14	9	M20	34	22	40	6	6	3.5	
CHH - 6205DA - Ratio	100	165	28	16	10	M20	34	18	35	6	6	3.5	
CHH - 6205DB - Ratio	100	165	28	16	10	M20	34	22	40	6	6	3.5	
CHH - 6215DA - Ratio	110	165	28	16	10	M20	34	22	40	6	6	3.5	
CHH - 6215DB - Ratio	110	165	28	16	10	M20	34	30	45	8	7	4	
CHH - 6225DA - Ratio	120	165	32	18	11	M20	34	22	40	6	6	3.5	
CHH - 6225DB - Ratio	120	165	32	18	11	M20	34	35	55	10	8	5	
CHH - 6235DA - Ratio	130	200	32	18	11	M24	41	30	45	8	7	4	
CHH - 6235DB - Ratio	130	200	32	18	11	M24	41	40	65	12	8	5	
CHH - 6245DA - Ratio	140	200	36	20	12	M24	41	30	45	8	7	4	
CHH - 6245DB - Ratio	140	200	36	20	12	M24	41	40	65	12	8	5	
CHH - 6255DA - Ratio	160	240	40	22	13	M30	49	35	55	10	8	5	
CHH - 6255DB - Ratio	160	240	40	22	13	M30	49	45	70	14	9	5.5	
CHH - 6265DA - Ratio	170	300	40	22	13	M30	49	45	70	14	9	5.5	
CHH - 6275DA - Ratio	180	330	45	25	15	M30	52	45	70	14	9	5.5	

Note: 4. Refer to pages F-28~30 for details on input and output shaft end dimensions.

5. Dimensions in above drawings are subject to change without notice.

Dimension Tables Speed Reducer (Universal Direction, V-Flange Mount)

CNV - 606□ to 612□

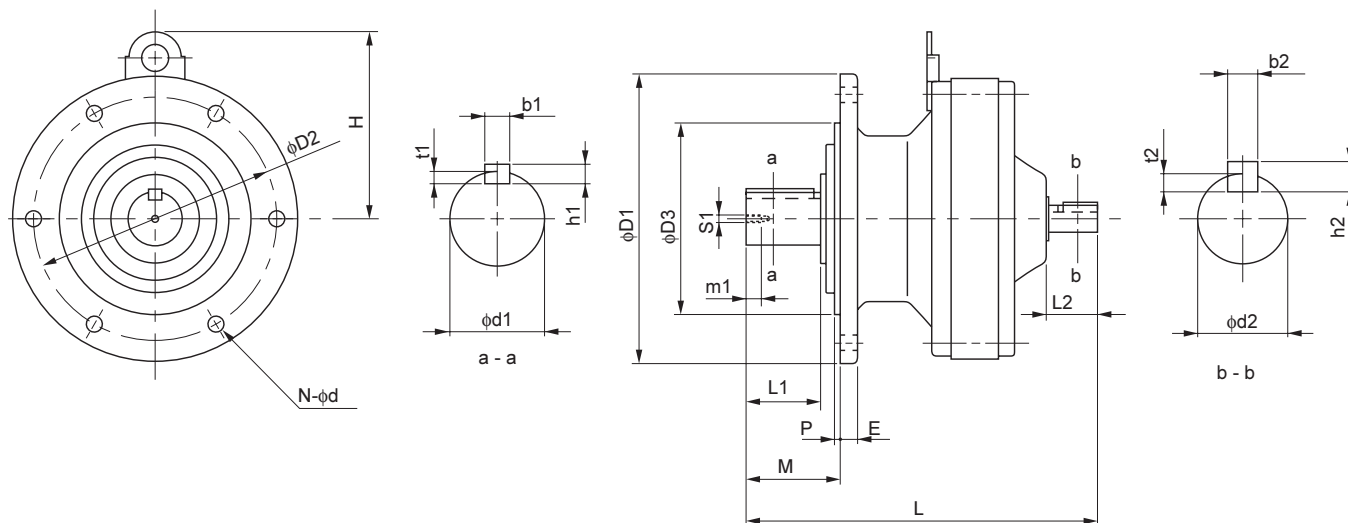


Frame Size <small>Note 1</small>	L	D1	D2	D3 <small>Note 4</small>	H	M	E	P	N	d	W(kg)
606□	145	120	102	80	-	34	8	3	6	9	3.5
607□	151	160	134	110	-	42	9	3	4	11	4.5
608□	179	160	134	110	-	48	9	3	4	11	8
609□	202	160	134	110	107	48	9	3	4	11	9
610□	208	160	134	110	107	48	9	3	4	11	11
611□	218	210	180	140	116	58	11	4	6	11	13
612□	259	210	180	140	137	69	13	4	6	11	23

Model <small>Note 1</small>	Output Shaft <small>Note 2, 3</small>						Input Shaft <small>Note 2, 3</small>					
	d1	L1	b1	h1	t1	S1	m1	d2	L2	b2	h2	t2
CNV - 606□ - Ratio	14	25	5	5	3	M5	16	12	25	4	4	2.5
CNV - 607□ - Ratio	18	30	6	6	3.5	M6	16	12	25	4	4	2.5
CNV - 608□ - Ratio	22	35	6	6	3.5	M6	16	12	25	4	4	2.5
CNV - 609□ - Ratio	28	35	8	7	4	M8	20	15	25	5	5	3
CNV - 610□ - Ratio	28	35	8	7	4	M8	20	15	25	5	5	3
CNV - 611□ - Ratio	32	45	10	8	5	M8	20	15	25	5	5	3
CNV - 612□ - Ratio	38	55	10	8	5	M8	20	18	35	6	6	3.5

Note: 1. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables Speed Reducer (Vertical, Slow Speed Shaft Down, V-Flange Mount)

CVV - 613□ to 614□

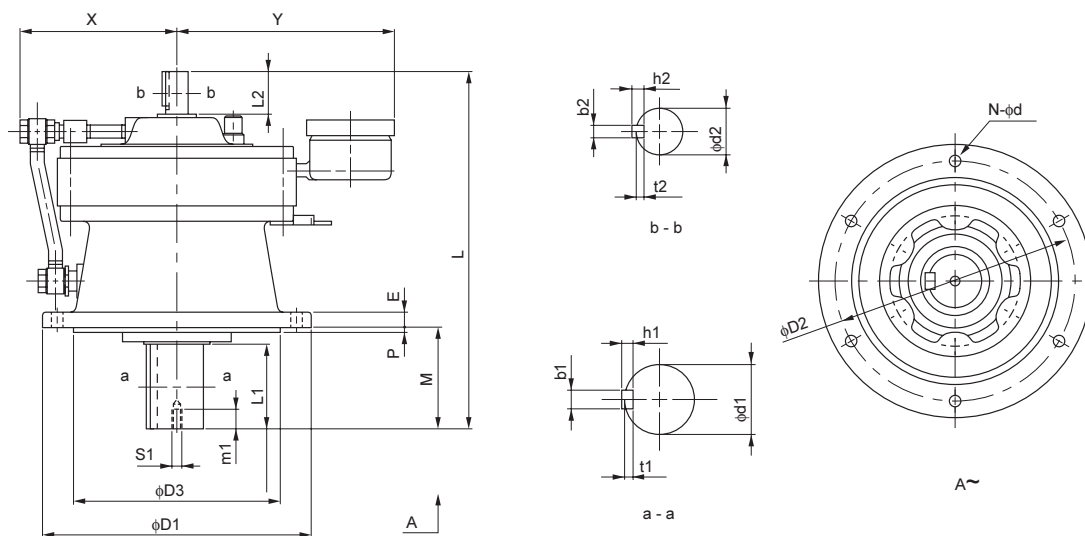


Frame Size Note 1	L	D1	D2	D3 Note 4	M	E	P	N	d	X	Y	W(kg)
613□	321	260	230	200	76	15	4	6	11	152	233	42
614□	341	260	230	200	96	15	4	6	11	152	233	43

Model Note 1	Ratio	Output Shaft Note 2, 3						Input Shaft Note 2, 3					
		d1	L1	b1	h1	t1	S1	m1	d2	L2	b2	h2	t2
CVV - 613□	-	50	61	14	9	5.5	M10	18	22	40	6	6	3.5
CVV - 614□	-	50	81	14	9	5.5	M10	18	22	40	6	6	3.5

Note: 4. Pilot diameter ($\phi D3$): Dimension tolerance conforms to JIS B 0401-1976 "f8."
5. Dimensions in above drawings are subject to change without notice.

Dimension Tables Speed Reducer (Vertical, Slow Speed Shaft Down, V-Flange Mount)

CVV - 616□ to 6275

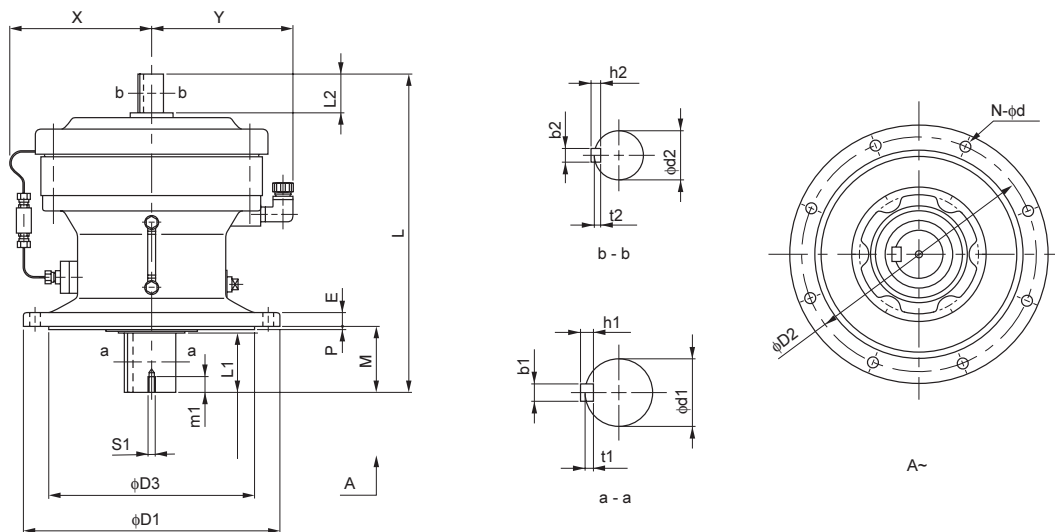


Frame Size	L	D1	D2	D3	M	E	P	N	d	X	Y	W(kg)
616□	413	340	310	270	89	20	4	6	11	217	200	79
617□	477	400	360	316	94	22	5	8	14	222	225	125
618□	527	430	390	345	110	22	5	8	18	237	240	150
619□	620	490	450	400	145	30	6	12	18	265	270	225
6205	678	455	405	355	204	30	5	8	22	341	287	243
6215	708	490	440	390	203	35	7	8	24	348	306	314
6225	752	535	475	415	210	35	10	8	27	352	326	396
6235	839	570	510	450	250	40	10	8	27	359	344	474
6245	877	635	560	485	250	40	10	8	33	370	371	568
6255	1040	685	610	535	295	45	10	8	33	426	399	865
6265	1150	750	660	570	360	50	10	8	39	460	431	1125
6275	1462	1160	1020	900	355	60	10	8	39	610	613	2610

Model	Ratio	Output Shaft						Input Shaft					
		d1	L1	b1	h1	t1	S1	m1	d2	L2	b2	h2	t2
CVV - 616□	-	60	80	18	11	7	M10	18	30	45	8	7	4
CVV - 617□	-	70	84	20	12	7.5	M12	24	35	55	10	8	5
CVV - 618□	-	80	100	22	14	9	M12	24	40	65	12	8	5
CVV - 619□	-	95	125	25	14	9	M20	34	45	70	14	9	5.5
CVV - 6205	-	100	165	28	16	10	M20	34	45	82	14	9	5.5
CVV - 6215	-	110	165	28	16	10	M20	34	50	82	14	9	5.5
CVV - 6225	-	120	165	32	18	11	M20	34	55	82	16	10	6
CVV - 6235	-	130	200	32	18	11	M24	41	60	105	18	11	7
CVV - 6245	-	140	200	36	20	12	M24	41	65	105	18	11	7
CVV - 6255	-	160	240	40	22	13	M30	49	80	130	22	14	9
CVV - 6265	-	170	300	40	22	13	M30	49	80	130	22	14	9
CVV - 6275	-	180	320	45	25	15	M30	52	90	150	25	14	9

Note: 1. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables Speed Reducer (Vertical, Slow Speed Shaft Down, V-Flange Mount)

CNV - 606□DA to 612□DB

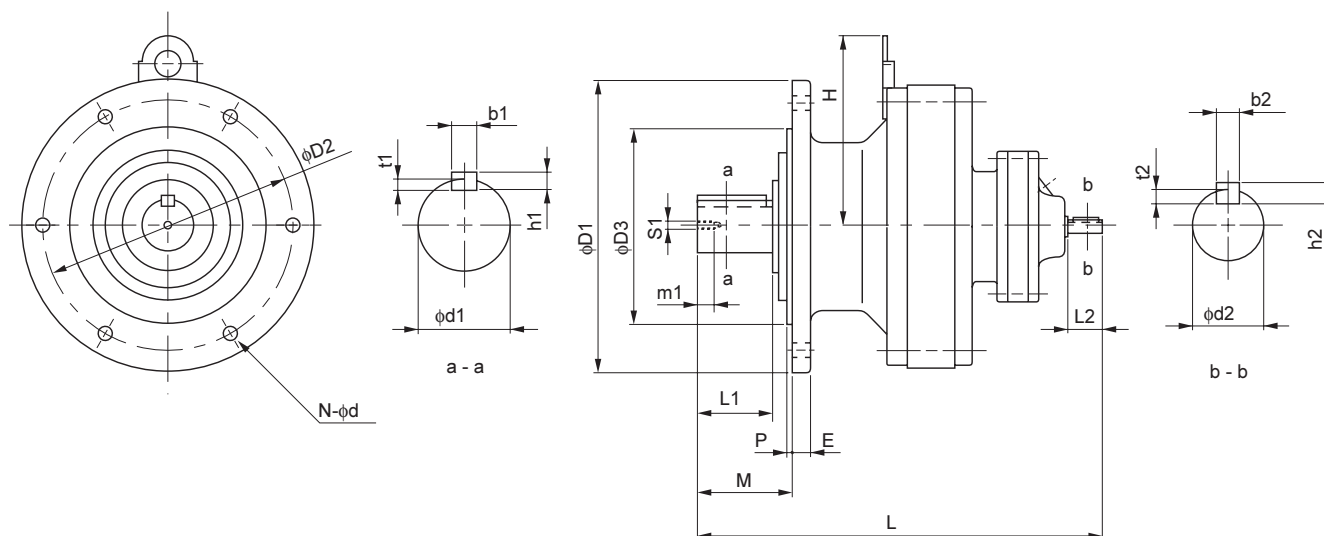


Frame Size Note 1	L	D1	D2	D3 Note 4	H	M	E	P	N	d	W(kg)
606□DA	178	120	102	80	-	34	8	3	6	9	5.0
607□DA	184	160	134	110	-	42	9	3	4	11	6.7
609□DA	243	160	134	110	107	48	9	3	4	11	11
610□DA	257	160	134	110	107	48	9	3	4	11	13
612□DA	293	210	180	140	137	69	13	4	6	11	25
612□DB	312	210	180	140	137	69	13	4	6	11	29

Model Note 1	Output Shaft Note 2, 3							Input Shaft Note 2, 3				
	d1	L1	b1	h1	t1	S1	m1	d2	L2	b2	h2	t2
CNV - 606□DA - Ratio	14	25	5	5	3	M5	16	12	25	4	4	2.5
CNV - 607□DA - Ratio	18	30	6	6	3.5	M6	16	12	25	4	4	2.5
CNV - 609□DA - Ratio	28	35	8	7	4	M8	20	12	25	4	4	2.5
CNV - 610□DA - Ratio	28	35	8	7	4	M8	20	12	25	4	4	2.5
CNV - 612□DA - Ratio	38	55	10	8	5	M8	20	12	25	4	4	2.5
CNV - 612□DB - Ratio	38	55	10	8	5	M8	20	15	25	5	5	3

Note: 4. Pilot diameter ($\phi D3$): Dimension tolerance conforms to JIS B 0401-1976 "f8."
5. Dimensions in above drawings are subject to change without notice.

Dimension Tables Speed Reducer (Vertical, Slow Speed Shaft Down, V-Flange Mount)

CVV - 613□DA to 618□DA

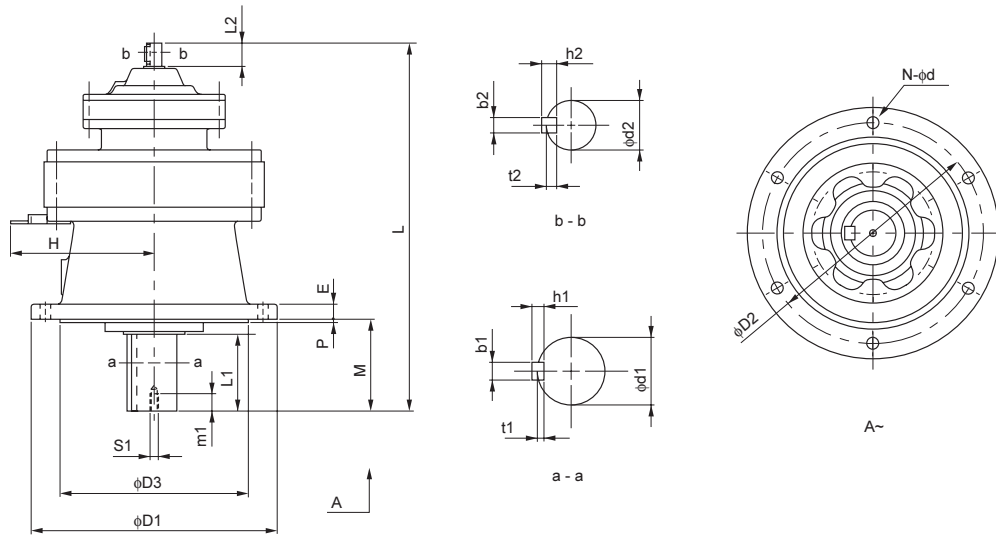

REDUCERS
Dimension Tables
CVV


Frame Size	L	D1	D2	D3	M	E	P	N	d	H	W(kg)
613□DA	347	260	230	200	76	15	4	6	11	150	40
613□DB	363	260	230	200	76	15	4	6	11	150	43
613□DC	369	260	230	200	76	15	4	6	11	-	44
614□DA	367	260	230	200	96	15	4	6	11	150	40
614□DB	383	260	230	200	96	15	4	6	11	150	43
614□DC	389	260	230	200	96	15	4	6	11	-	44
616□DA	433	340	310	270	89	20	4	6	11	-	80
616□DB	439	340	310	270	89	20	4	6	11	-	82
617□DA	478	400	360	316	94	22	5	8	14	-	115
617□DB	484	400	360	316	94	22	5	8	14	-	117
618□DA	526	430	390	345	110	22	5	8	18	-	149

Model	Ratio	Output Shaft						Input Shaft					
		d1	L1	b1	h1	t1	S1	m1	d2	L2	b2	h2	t2
CVV - 613□DA	Ratio	50	61	14	9	5.5	M10	18	12	25	4	4	2.5
CVV - 613□DB	Ratio	50	61	14	9	5.5	M10	18	15	25	5	5	3
CVV - 613□DC	Ratio	50	61	14	9	5.5	M10	18	15	25	5	5	3
CVV - 614□DA	Ratio	50	81	14	9	5.5	M10	18	12	25	4	4	2.5
CVV - 614□DB	Ratio	50	81	14	9	5.5	M10	18	15	25	5	5	3
CVV - 614□DC	Ratio	50	81	14	9	5.5	M10	18	15	25	5	5	3
CVV - 616□DA	Ratio	60	80	18	11	7	M10	18	15	25	5	5	3
CVV - 616□DB	Ratio	60	80	18	11	7	M10	18	15	25	5	5	3
CVV - 617□DA	Ratio	70	84	20	12	7.5	M12	24	15	25	5	5	3
CVV - 617□DB	Ratio	70	84	20	12	7.5	M12	24	15	25	5	5	3
CVV - 618□DA	Ratio	80	100	22	14	9	M12	24	15	25	5	5	3

Note: 1. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables Speed Reducer (Vertical, Slow Speed Shaft Down, V-Flange Mount)

CVV - 616□DC to 6275DA

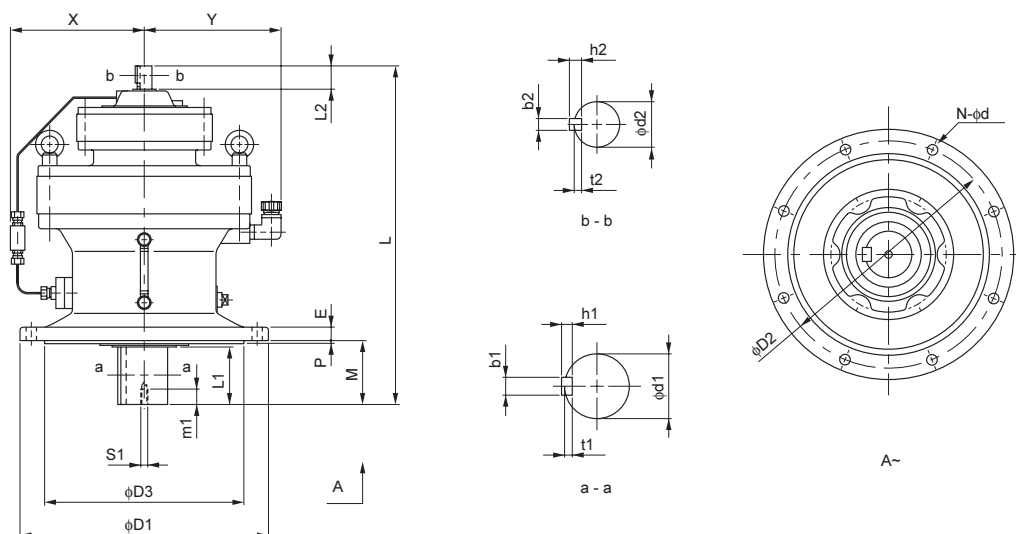

Frame Size Note 1	L	D1	D2	D3 Note 4	M	E	P	N	d	X	Y	W(kg)
616□DC	462	340	310	270	89	20	4	6	11	196	200	90
617□DC	509	400	360	316	94	22	5	8	14	218	225	125
618□DB	577	430	390	345	110	22	5	8	18	233	240	171
619□DA	629	490	450	400	145	30	6	12	18	255	270	229
619□DB	653	490	450	400	145	30	6	12	18	255	270	240
6205DA	670	455	405	355	204	30	5	8	22	341	287	246
6205DB	705	455	405	355	204	30	5	8	22	341	287	258
6215DA	731	490	440	390	203	35	7	8	24	348	306	333
6215DB	780	490	440	390	203	35	7	8	24	348	306	355
6225DA	773	535	475	415	210	35	10	8	27	352	326	408
6225DB	860	535	475	415	210	35	10	8	27	352	326	455
6235DA	883	570	510	450	250	40	10	8	27	359	344	510
6235DB	938	570	510	450	250	40	10	8	27	359	344	544
6245DA	921	635	560	485	250	40	10	8	33	370	371	604
6245DB	975	635	560	485	250	40	10	8	33	370	371	633
6255DA	1081	685	610	535	295	45	10	8	33	395	399	925
6255DB	1133	685	610	535	295	45	10	8	33	395	399	993
6265DA	1243	750	660	570	360	50	10	8	39	427	431	1265
6275DA	1504	1160	1020	900	355	60	10	8	39	610	613	2660


Model Note 1	Output Shaft Note 2, 3								Input Shaft Note 2, 3				
	d1	L1	b1	h1	t1	S1	m1	d2	L2	b2	h2	t2	
CVV - 616□DC - Ratio	60	80	18	11	7	M10	18	18	35	6	6	3.5	
CVV - 617□DC - Ratio	70	84	20	12	7.5	M12	24	18	35	6	6	3.5	
CVV - 618□DB - Ratio	80	100	22	14	9	M12	24	22	40	6	6	3.5	
CVV - 619□DA - Ratio	95	125	25	14	9	M20	34	18	35	6	6	3.5	
CVV - 619□DB - Ratio	95	125	25	14	9	M20	34	22	40	6	6	3.5	
CVV - 6205DA - Ratio	100	165	28	16	10	M20	34	18	35	6	6	3.5	
CVV - 6205DB - Ratio	100	165	28	16	10	M20	34	22	40	6	6	3.5	
CVV - 6215DA - Ratio	110	165	28	16	10	M20	34	22	40	6	6	3.5	
CVV - 6215DB - Ratio	110	165	28	16	10	M20	34	30	45	8	7	4	
CVV - 6225DA - Ratio	120	165	32	18	11	M20	34	22	40	6	6	3.5	
CVV - 6225DB - Ratio	120	165	32	18	11	M20	34	35	55	10	8	5	
CVV - 6235DA - Ratio	130	200	32	18	11	M24	41	30	45	8	7	4	
CVV - 6235DB - Ratio	130	200	32	18	11	M24	41	40	65	12	8	5	
CVV - 6245DA - Ratio	140	200	36	20	12	M24	41	30	45	8	7	4	
CVV - 6245DB - Ratio	140	200	36	20	12	M24	41	40	65	12	8	5	
CVV - 6255DA - Ratio	160	240	40	22	13	M30	49	35	55	10	8	5	
CVV - 6255DB - Ratio	160	240	40	22	13	M30	49	45	70	14	9	5.5	
CVV - 6265DA - Ratio	170	300	40	22	13	M30	49	45	70	14	9	5.5	
CVV - 6275DA - Ratio	180	320	45	25	15	M30	52	45	70	14	9	5.5	

Note: 4. Pilot diameter ($\phi D3$): Dimension tolerance conforms to JIS B 0401-1976 "f8."

5. Dimensions in above drawings are subject to change without notice.

Dimension Tables Speed Reducer (Foot Mount, Center Height Option)


CNH - 610H, 612H

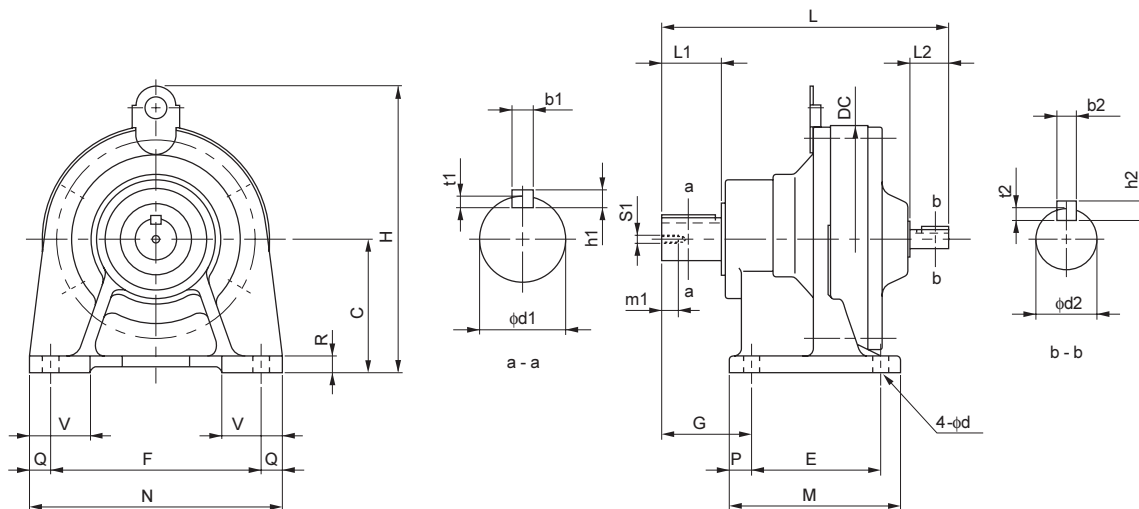

Frame Size	L	C	DC	E	F	G	H	M	N	P	Q	R	V	d	W(kg)
610H	208	120	150	90	150	60	227	135	180	15	15	12	45	11	14
612H	259	140	204	115	190	82	277	155	230	20	20	15	60	14	25

Model	Output Shaft								Input Shaft				
	d1	L1	b1	h1	t1	S1	m1	d2	L2	b2	h2	t2	
CHH - 610H - Ratio	28	35	8	7	4	M8	20	15	25	5	5	3	
CHH - 612H - Ratio	38	55	10	8	5	M8	20	18	35	6	6	3.5	

CNH - 614H, 616H

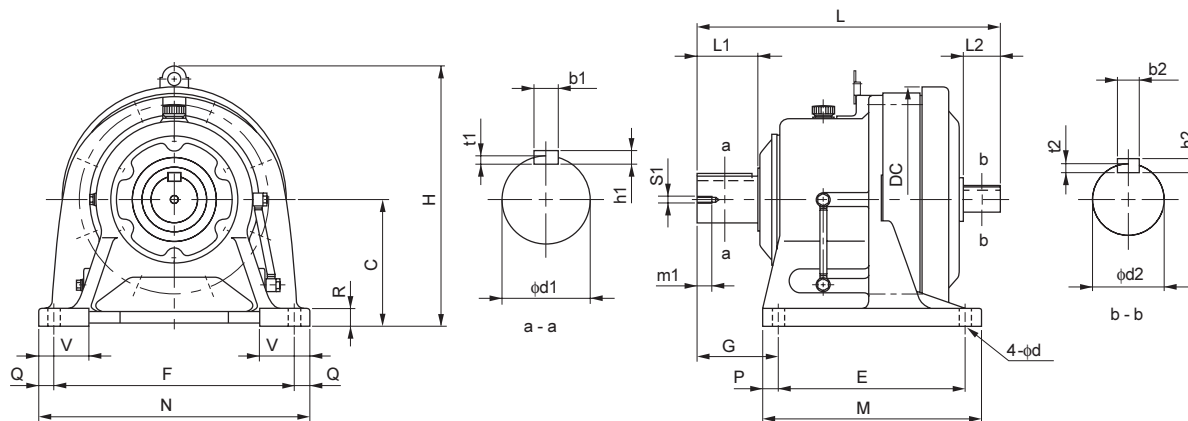

Frame size	L	C	DC	E	F	G	H	M	N	P	Q	R	V	d	W(kg)
614H	341	160	230	145	290	120	310	195	330	25	20	22	70	18	46
616H	413	200	318	150	370	139	407	238	410	44	20	25	80	18	89

Model	Output Shaft								Input Shaft				
	d1	L1	b1	h1	t1	S1	m1	d2	L2	b2	h2	t2	
CHH - 614H - Ratio	50	90	14	9	5.5	M10	18	22	40	6	6	3.5	
CHH - 616H - Ratio	60	90	18	11	7	M10	18	30	45	8	7	4	

- Note: 1. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 2. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."
 3. Refer to pages F-28~30 for details on input and output shaft end dimensions.
 4. Dimensions in above drawings are subject to change without notice.

D

GEARMOTOR
FOR INVERTERS

CYCLO® GEARMOTORS with AF Motor for Inverters

	Page
1. How to Select	
Standard Specifications	D-3
Model Selection	D-4
Reminders for Selection	D-6
Nomenclature	D-7
Precautions for Inverter Driving	D-9
2. Selection Tables	D-11
3. Dimension Tables	D-23

D CYCLO® GEARMOTORS with AF Motor for Inverters

1. How to Select

Standard Specifications of Gearmotor for Inverters

Mortor

Items	Standard Specification ^{Note 1}		Standard Specification with Built-in Brake			
Capacity Range	0.1 ~ 55kW × 4P		0.1 ~ 7.5kW × 4P FB Brake (Non-Asbestors) 11kW × 4P CMB Brake 15 ~22kW × 4P ESB Brake			
Enclosure	Totally enclosed fan cooled type (30kW and over: Totally enclosed air over)		Totally enclosed fan cooled type			
Power Source	380V 60Hz, 400V 60Hz, 415V 60Hz		380V 60Hz, 400V 60Hz, 415V 60Hz			
Insulation	F		F			
Time Rating	Continuous rating (6 ~ 60Hz Torque constant)		Continuous rating (6 ~ 60Hz Torque constant)			
Terminal Box Position & Lead Wire Direction	On the left side viewed from the load side. Regarding the draw out hole direction, refer to table below.		On the left side viewed from the load side. Regarding the draw out hole direction, refer to table below.			
Lead wiring (Lug type)		4P	6P		4P	6P
	6 Wires	0.1~5.5kW	-	8 Wires	0.1~5.5kW	-
	6 Wires	7.5~22kW ^{Note: 2}	-	8 Wires	7.5~22kW ^{Note: 2}	-
	6 for motor 2 for thermostat 3 for axial fan	30~55kW ^{Note: 2}	-	-	-	-
Standards	According to IEC					

Reducer

Items	Specifications	
Model	CYCLO 6000 Series	CYCLO 6000SK Series
Lubrication Method	Grease lubricated and oil lubricated models available	
Speed Reduction Method	Internal planetary gear mechanism with trochoidal curved tooth profile	
Direction of output shaft rotation	Single reduction	Clockwise rotation
	Double reduction	Counter-clockwise rotation
	*Note that it is different from CYCLO 6000 series single reduction type	
As observed from the load side when connected to R-U, S-V, T-W motors.		

Common to Motor and Reducer

Items	Specifications	
Ambient Conditions	Installation location	Indoor or outdoor (Minimal dust and humidity)
	Ambient temperature	-10°C ~ 40°C
	Ambient humidity	Under 85%
	Elevation	Under 1,000 meters
	Atmosphere	Well ventilated location, free of corrosive gases, explosive gases, vapors and dust.
Method of Mounting ^{Note: 3}	CHHM type-with slow speed shaft in horizontal direction and with legs. CVVM type-with slow speed shaft down in vertical direction and with mount. (No restrictions in mounting position of maintenance-free grease lubricated models, and the 2nd digit of type symbol provides "N")	
Method of coupling with driven machine	Coupling, gears, chain sprocket or belt.	
Painting	Type : Acrylic modified phtalic Colour : Equivalent to Muncell 6.5PB 3.6/8.2.	

- Note: 1. Refer to the technical section (Page F-31~57) for motor specification other than standard one.
 2. λ - Δ start is also available. Please consult us.
 3. Models for universal mounting (types with N for the second digit of nomenclature) can be manufactured for following frame sizes only. Other frame sizes require indication for mounting direction.

[Frame sizes for universal mounting direction] *□ of the frame size indicates 0, 5, or H.
 606□, 607□, 608□, 609□, 610□, 611□, 612□,
 606□DA, 607□DA, 608□DA, 609□DA, 610□DA, 612□DA, 612□DB

Direction of Withdrawing Lead Wire

Main frame mounting direction	Standard
Horizontal Type (Slow speed shaft in horizontal direction)	
Vertical Type (Slow speed shaft in vertical direction)	

Note: Whenever not specified, the above direction shall be used. When the direction of withdrawal from the terminal box is other than specified above, refer to Page F-34.

Model Selection

Description of Our Selection Table

This is a brief description of our tables on page D-11 and after.

Motor capacity (kW)

Input speed (r/min) (Indicated for each number of poles at 60Hz.)

Selection Tables Gearmotors (AF Motor for Inverters)

Output Speed n_2 r/min		Allowable MAX Speed (Horizontal)	Output Torque (60Hz) T_{out}		Allowable Radial Load (60Hz) Pro		Model			
6Hz	60Hz		N·m	kgf·m	N	kgf	Input Capacity Symbol	Frame Size	Suffix	Reduction Ratio
29.2	292	584 (120Hz)	171	17.4	5710	582	8	6130	AV	6
21.9	219	438 (120Hz)	228	23.3	6360	648	8	6130	AV	8
15.9	159	318 (120Hz)	314	32.0	7240	739	8	6130	AV	11
13.5	135	270 (120Hz)	371	37.8	7530	768	8	6130	AV	13
11.7	117	234 (120Hz)	428	43.6	7680	783	8	6130	AV	15
10.3	103	206 (120Hz)	485	49.4	8230	839	8	6135	AV	17
8.33	83.3	167 (120Hz)	599	61.0	8760	893	8	6135	AV	21
7.00	70.0	140 (120Hz)	713	72.7	9070	925	8	6135	AV	25
6.03	60.3	121 (120Hz)	827	84.3	14100	1430	8	6140	AV	29
5.00	50.0	100 (120Hz)	998	102	15000	1530	8	6145	AV	35
4.07	40.7	56.3 (83Hz)	1230	125	18900	1930	8	6160	AV	43
3.43	34.3	47.4 (83Hz)	1450	148	19600	2000	8	6165	AV	51
2.97	29.7	41.1 (83Hz)	1680	171	21700	2220	8	6165	AV	59
2.46	24.6	34.0 (83Hz)	2020	206	24700	2520	8	6175	AV	71
2.01	20.1	27.8 (83Hz)	2480	253	26400	2690	8	6175	AV	87
1.68	16.8	33.7 (120Hz)	2810	286	37700	3840	8	6180DB	AV	104
1.45	14.5	28.9 (120Hz)	3270	333	40000	4070	8	6185DB	AV	121

AF Motor for Inverter	
P	4
Motor Speed n_1 r/min	1750(60Hz)

5.5 kW

Output speed (r/min)

Allowable maximum output speed (r/min) and motor frequency (Hz) at that time

[Input capacity symbol] - [Frame size] - [Suffix (AV)] - [Reduction ratio]

* Note that "reduction ratio = normal ratio" for models with "SK" at the end of frame size (6000 SK Series with "1" on the side of reduction ratio). (Indicated reduction ratio is the same as actual reduction ratios for other models.)

GEARMOTOR FOR INVERTERS

How to Select

Nomenclature

Slow Speed Shaft Direction	
Horizontal, slow speed shaft level	H
Vertical, slow speed shaft down	V
Vertical, slow speed shaft up	W
Universal mounting	N

Mounting style	
Foot	H
Vflange	V
Flange	F

Type of Input	
Gearmotor	M
With adaptor	JM

Special Specifications	
Standard specification	-
Special specification	S

Motor Capacity Symbol					
4P	Capacity symbol	01	02	05	1
	kW (HP)	0.1 (1/8)	0.2 (1/4)	0.4 (1/2)	0.75 (1)
	Capacity symbol	2	3	5	8
	kW (HP)	1.5 (2)	2.2 (3)	3.7 (5)	5.5 (7.5)
6P	Capacity symbol	10	15	20	25
	kW (HP)	7.5 (10)	11 (15)	15 (20)	18.5 (25)
	Capacity symbol	30	40	50	100
	kW (HP)	22 (30)	30 (40)	37 (50)	75 (100)
6P	Capacity symbol	406	506		
	kW (HP)	30 (40)	37 (50)		


Shaft specification	
Metric JIS (Standard)	-
Inch size	Y
AGMA I	YA
AGMA II	YB
AGMA III	YC
Metric DIN	G

Frame size
(Refer to Selection Tables starting from page D-11.)

Suffix	
With AF (inverter) motor	AV

With or Without Brake	
Without brake	-
With brake	B

Nominal ratio

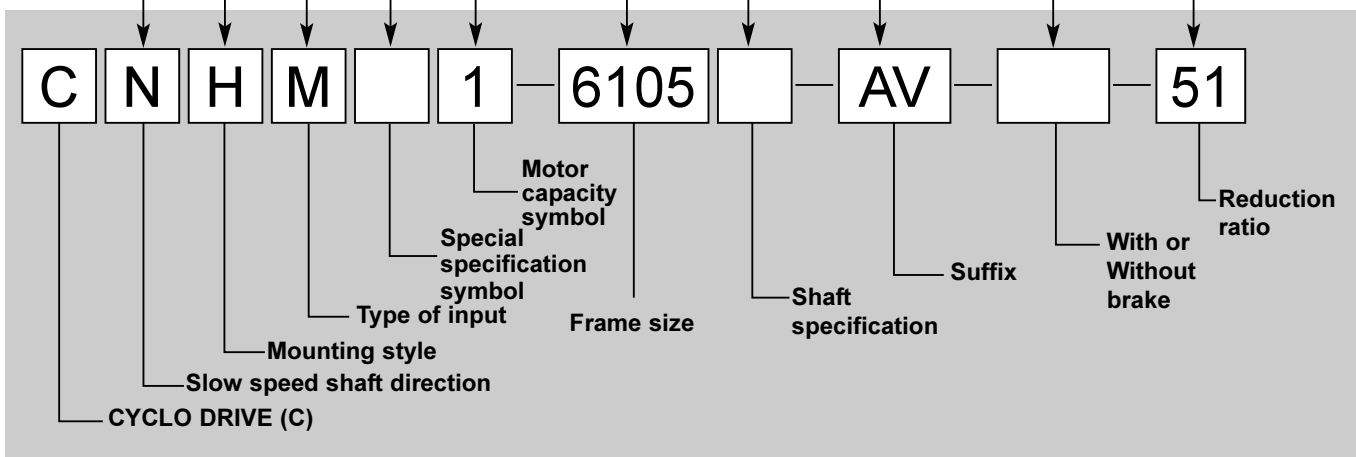

GEARMOTOR FOR INVERTERS
How to Select

Nomenclature and Product Examples

Nomenclature Examples (Gearmotor)

Example 1.

CNHM2 - 6105 - AV - 29

C:	Model	- CYCLO® DRIVE
N:	Slow speed shaft direction	- Universal direction
H:	Mounting style	- Foot
M:	Type of input	- Gearmotor type
2:	Motor capacity	- 1.5kW
6115:	Frame size	- 6105
AV:	With motor for inverter	- AV
29:	Reduction ratio	- 29

Example 2.

CHHM5 - 6175DC - AV - B - 143

C:	Model	- CYCLO® DRIVE
H:	Slow speed shaft direction	- Horizontal, level
H:	Mounting style	- Foot mount
M:	Type of input	- Gearmotor type
5:	Motor capacity	- 3.7kW
6175DC:	Frame size	- 6175DC
AV:	With motor for inverter	
B:	Brake	- With brake
143:	Reduction ratio	- 143

Application Products

Consult us for application products for CYCLO® GEARMOTORS with inverter motors. Application products are available, which are comparable to gearmotors with general motors.

Constant Torque Operation of General-Purpose Motors


Operation with the following characteristics is possible when our inverters HF-320 α and HF-430 series are used for sensorless control in combination with our general-purpose motors (22 kW or less).

A combination with a motor of standard frame size can be used for constant torque operation where an AF motor with a reducer of a larger frame size has conventionally been used.

- Note:
1. To select the combination with CYCLO, examine the lubrication method and torque during slow speed operation and rated output operation. Specify that inverter operation is desired when placing an order (Refer to page C-6).
 2. Contact us for 400V class model because insulation selection is necessary for inverter operation.
 3. When a motor with brakes is to be operated for a long time at slow speed, the cooling effect of the fan will decrease and the brake temperature will rise substantially. Contact us for details.
 4. Contact us for details when a general-purpose motor is to be operated under V/F control. (Contact us also when SF-320 α series is to be used.)

kW	Motor frame size	Thermal class	Applicable frequency range	Constant torque range	Constant output range	Applicable inverter	
0.1	F63S	E	6~120Hz	6~60Hz (1:10)	60~120Hz	HF-320 α Sensorless control	
0.2	F63M						
0.4	F71M						
0.75	F80M						
1.5	F90L	B		20~60Hz (1:3)		60~120Hz	HF-430 Sensorless control
2.2	F100L						
3.7	F112M						
5.5	F132S						
7.5	F132M						
11	F160M						
15	G160L						
22	F180MG		6~110Hz	60~110Hz			

HF-320 α and HF-430 Output Torque Characteristics During Sensorless Mode Operation

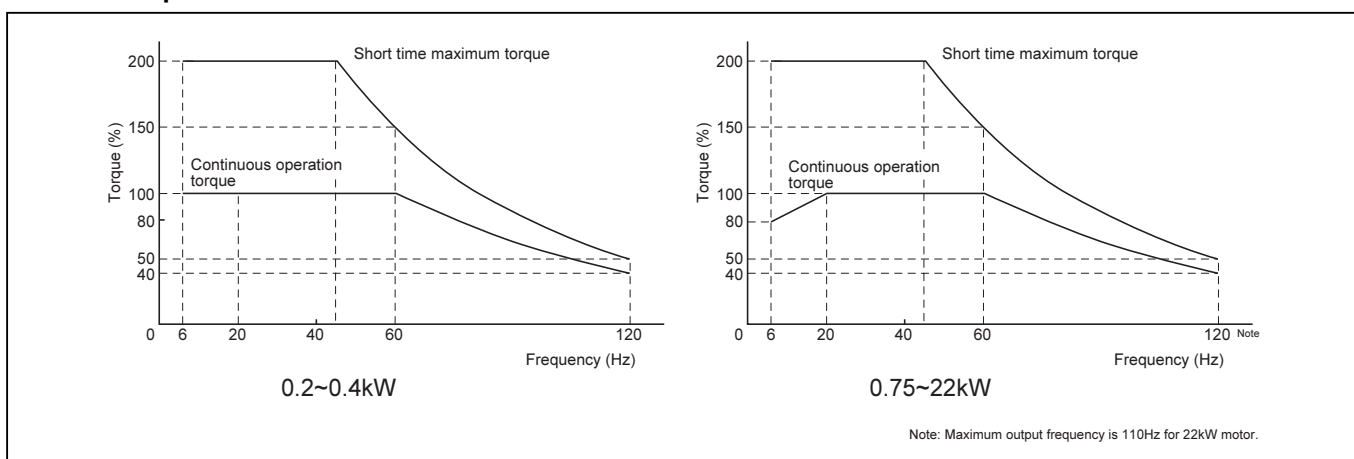

Output torque 100% is the motor rating at 60Hz.

Continuous operation torque: Allowable torque value enabling continuous operation with motor temperature rise, fulfilling standards.

Short-time operation torque: Maximum torque emitted by motor when driven with inverter. Motor can be operated for 1 minute at this torque value.

Use AF motor when constant torque is required for capacity 30kW and above.


D CYCLO® GEARMOTORS With AF Motor for Inverters

2. Selection Tables

GEARMOTOR
FOR INVERTERS

Selection
Tables

Selection Tables Gearmotors (AF Motor for Inverters)




CNHM

0.1 kW	AF Motor for Inverters	
	P	4
	Motor Speed n ₁ r/min	1750(60Hz)

Output Speed n ₂ r/min			Output Torque (60Hz) Tout		Allowable Radial Load (60Hz) Pro		Model				Dim. Page	
6Hz	60Hz	Allowable MAX Speed (Horizontal)	N·m	kgf·m	N	kgf	Input Capacity Symbol	Frame Size	Suffix	Reduction Ratio	CNHM	
29.2	292	584 (120Hz)	3.11	0.317	756	77.1	01	-	6060	- AV	6	D-29
21.9	219	438 (120Hz)	4.15	0.423	866	88.3	01	-	6060	- AV	8	D-29
15.9	159	318 (120Hz)	5.70	0.581	1180	120	01	-	6060	- AV	11	D-29
13.5	135	270 (120Hz)	6.74	0.687	1180	120	01	-	6060	- AV	13	D-29
11.7	117	234 (120Hz)	7.78	0.793	1180	120	01	-	6060	- AV	15	D-29
10.3	103	206 (120Hz)	8.81	0.898	1180	120	01	-	6060	- AV	17	D-29
8.33	83.3	167 (120Hz)	10.9	1.11	1180	120	01	-	6060	- AV	21	D-29
7.00	70.0	140 (120Hz)	13.0	1.32	1180	120	01	-	6060	- AV	25	D-29
6.03	60.3	121 (120Hz)	15.0	1.53	1180	120	01	-	6060	- AV	29	D-29
5.00	50.0	100 (120Hz)	18.1	1.85	1180	120	01	-	6060	- AV	35	D-29
4.07	40.7	81.4 (120Hz)	22.3	2.27	1180	120	01	-	6065	- AV	43	D-29
3.43	34.3	68.6 (120Hz)	26.4	2.70	1770	180	01	-	6070	- AV	51	D-29
2.97	29.7	59.4 (120Hz)	30.6	3.12	1770	180	01	-	6070	- AV	59	D-29
2.46	24.6	49.2 (120Hz)	36.8	3.75	2560	261	01	-	6080	- AV	71	D-29
2.01	20.1	40.2 (120Hz)	45.1	4.60	2560	261	01	-	6085	- AV	87	D-29
1.68	16.8	33.7 (120Hz)	51.1	5.21	1770	180	01	-	6075DA	- AV	104	D-33
1.45	14.5	28.9 (120Hz)	59.4	6.06	3340	340	01	-	6090DA	- AV	121	D-33
1.22	12.2	24.5 (120Hz)	70.2	7.16	3340	340	01	-	6090DA	- AV	143	D-33
1.06	10.6	21.2 (120Hz)	81.0	8.26	3340	340	01	-	6090DA	- AV	165	D-33
0.897	8.97	17.9 (120Hz)	95.8	9.76	3340	340	01	-	6090DA	- AV	195	D-33
0.758	7.58	15.2 (120Hz)	113	11.6	3340	340	01	-	6090DA	- AV	231	D-33
0.641	6.41	12.8 (120Hz)	134	13.7	3340	340	01	-	6095DA	- AV	273	D-33
0.549	5.49	11.0 (120Hz)	157	16.0	3280	334	01	-	6095DA	- AV	319	D-33
0.464	4.64	9.3 (120Hz)	185	18.9	3230	329	01	-	6095DA	- AV	377	D-33
0.370	3.70	7.4 (120Hz)	232	23.7	5400	550	01	-	6105DA	- AV	473	D-33
0.313	3.13	6.3 (120Hz)	275	28.0	5400	550	01	-	6105DA	- AV	559	D-33
0.270	2.70	5.4 (120Hz)	319	32.5	9810	1000	01	-	6120DA	- AV	649	D-33
0.239	2.39	4.8 (120Hz)	359	36.6	9810	1000	01	-	6120DA	- AV	731	D-33
0.208	2.08	4.2 (120Hz)	413	42.1	9810	1000	01	-	6125DA	- AV	841	D-33
0.174	1.74	3.5 (120Hz)	493	50.2	9810	1000	01	-	6125DA	- AV	1003	D-33
0.140	1.40	2.8 (120Hz)	612	62.4	9810	1000	01	-	6125DA	- AV	1247	D-33

- Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft.
 2. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
 3. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.
 4. Refer to page D-9 "Precautions for Inverter Driving" when operating beyond 6~60 Hz.

Selection Tables 600SK Series•Reducer




CHHM/CNHM

0.2 kW	AF Motor for Inverters	
	P	4
	Motor Speed n ₁	r/min 1750(60Hz)

Output Speed n ₂ r/min			Output Torque (60Hz) Tout	Allowable Radial Load (60Hz) Pro		Model				Dim. Page		
6Hz	60Hz	Allowable MAX Speed (Horizontal)		N·m	kgf·m	N	kgf	Input Capacity Symbol	Frame Size	Suffix	Reduction Ratio	CNHM
29.2	292	584 (120Hz)	6.22	0.634	751	76.6	02	-	6060	- AV	- 6	D-29
21.9	219	438 (120Hz)	8.29	0.846	859	87.5	02	-	6060	- AV	- 8	D-29
15.9	159	318 (120Hz)	11.4	1.16	1170	119	02	-	6060	- AV	- 11	D-29
13.5	135	270 (120Hz)	13.5	1.37	1180	120	02	-	6060	- AV	- 13	D-29
11.7	117	234 (120Hz)	15.6	1.59	1180	120	02	-	6060	- AV	- 15	D-29
10.3	103	206 (120Hz)	17.6	1.80	1180	120	02	-	6060	- AV	- 17	D-29
8.33	83.3	167 (120Hz)	21.8	2.22	1180	120	02	-	6065	- AV	- 21	D-29
7.00	70.0	140 (120Hz)	25.9	2.64	1770	180	02	-	6070	- AV	- 25	D-29
6.03	60.3	121 (120Hz)	30.1	3.07	1770	180	02	-	6070	- AV	- 29	D-29
5.00	50.0	100 (120Hz)	36.3	3.70	1770	180	02	-	6070	- AV	- 35	D-29
4.07	40.7	81.4 (120Hz)	44.6	4.54	1770	180	02	-	6075	- AV	- 43	D-29
3.43	34.3	68.6 (120Hz)	52.9	5.39	2560	261	02	-	6085	- AV	- 51	D-29
2.97	29.7	59.4 (120Hz)	61.2	6.24	2560	261	02	-	6085	- AV	- 59	D-29
2.46	24.6	49.2 (120Hz)	73.6	7.50	3290	335	02	-	6090	- AV	- 71	D-29
2.01	20.1	40.2 (120Hz)	90.2	9.20	3340	340	02	-	6090	- AV	- 87	D-29
1.68	16.8	33.7 (120Hz)	102	10.4	3340	340	02	-	6090DA	- AV	- 104	D-33
1.47	14.7	29.4 (120Hz)	123	12.6	5400	550	02	-	6100	- AV	- 119	D-29
1.45	14.5	28.9 (120Hz)	119	12.1	3340	340	02	-	6095DA	- AV	- 121	D-33
1.22	12.2	24.5 (120Hz)	140	14.3	3340	340	02	-	6095DA	- AV	- 143	D-33
1.06	10.6	21.2 (120Hz)	162	16.5	3340	340	02	-	6095DA	- AV	- 165	D-33
0.897	8.97	17.9 (120Hz)	192	19.5	3340	340	02	-	6095DA	- AV	- 195	D-33
0.758	7.58	15.2 (120Hz)	227	23.1	5400	550	02	-	6105DA	- AV	- 231	D-33
0.641	6.41	12.8 (120Hz)	268	27.3	5400	550	02	-	6105DA	- AV	- 273	D-33
0.549	5.49	11.0 (120Hz)	313	31.9	9810	1000	02	-	6120DA	- AV	- 319	D-33
0.464	4.64	9.3 (120Hz)	370	37.7	9810	1000	02	-	6120DA	- AV	- 377	D-33
0.370	3.70	7.4 (120Hz)	465	47.4	9810	1000	02	-	6125DA	- AV	- 473	D-33
0.313	3.13	6.3 (120Hz)	549	56.0	9810	1000	02	-	6125DA	- AV	- 559	D-33
0.270	2.70	5.4 (120Hz)	638	65.0	14700	1500	02	-	6130DA	- AV	- 649	D-34
0.239	2.39	4.8 (120Hz)	718	73.2	14700	1500	02	-	6135DA	- AV	- 731	D-34
0.208	2.08	4.2 (120Hz)	826	84.2	14700	1500	02	-	6135DA	- AV	- 841	D-34
0.174	1.74	3.5 (120Hz)	985	100	14700	1500	02	-	6135DA	- AV	- 1003	D-34
0.140	1.40	2.8 (120Hz)	1220	125	16000	1630	02	-	6145DA	- AV	- 1247	D-34
0.085	0.85	1.7 (120Hz)	2030	207	22100	2250	02	-	6165DA	- AV	- 2065	D-34
0.058	0.58	1.2 (120Hz)	2990	305	29500	3010	02	-	6175DA	- AV	- 3045	D-34

- "*1" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000 SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- "*2" indicate models requiring increased capacity for inverters, for certain operation conditions (ambient temperature, load condition, etc.).
- Consult us for vertical types. Lubrication oil and system requires contemplation.

Selection Tables Gearmotors (AF Motor for Inverters)




CHHM/CNHM

0.4 kW	AF Motor for Inverters	
	P	4
	Motor Speed n ₁ r/min	1750(60Hz)

Output Speed n ₂ r/min			Output Torque (60Hz) Tout		Allowable Radial Load (60Hz) Pro		Model				Dim. Page			
							Input Capacity Symbol	Frame Size	Suffix	Reduction Ratio	CNHM CHHM			
6Hz	60Hz	Allowable MAX Speed (Horizontal)	N·m	kgf·m	N	kgf								
70.0	700	1400 (120Hz)	5.18	0.528	1120	114	05	-	6070SK	-	AV	-	2.5 *1	D-28
58.3	583	1167 (120Hz)	6.22	0.634	1180	120	05	-	6070SK	-	AV	-	3 *1	D-28
43.8	438	875 (120Hz)	8.29	0.846	1290	131	05	-	6070SK	-	AV	-	4 *1	D-28
35.0	350	700 (120Hz)	10.4	1.06	1290	132	05	-	6070SK	-	AV	-	5 *1	D-28
29.2	292	584 (120Hz)	12.4	1.27	1290	132	05	-	6070SK	-	AV	-	6 *1	D-28
29.2	292	584 (120Hz)	12.4	1.27	1810	184	05	-	6080	-	AV	-	6	D-29
21.9	219	438 (120Hz)	16.6	1.69	1430	145	05	-	6070SK	-	AV	-	8 *1	D-28
21.9	219	438 (120Hz)	16.6	1.69	1960	200	05	-	6080	-	AV	-	8	D-29
17.5	175	350 (120Hz)	20.7	2.11	1590	162	05	-	6070SK	-	AV	-	10 *1	D-28
15.9	159	318 (120Hz)	22.8	2.33	2160	220	05	-	6080	-	AV	-	11	D-29
13.5	135	270 (120Hz)	27.0	2.75	2320	237	05	-	6080	-	AV	-	13	D-29
11.7	117	234 (120Hz)	31.1	3.17	2400	245	05	-	6080	-	AV	-	15	D-29
10.3	103	206 (120Hz)	35.3	3.59	2510	256	05	-	6080	-	AV	-	17	D-29
8.33	83.3	167 (120Hz)	43.5	4.44	2450	250	05	-	6085	-	AV	-	21	D-29
7.00	70.0	140 (120Hz)	51.8	5.28	2520	256	05	-	6085	-	AV	-	25	D-29
6.03	60.3	121 (120Hz)	60.1	6.13	2560	261	05	-	6085	-	AV	-	29	D-29
5.00	50.0	100 (120Hz)	72.6	7.40	3340	340	05	-	6090	-	AV	-	35	D-29
4.07	40.7	81.4 (120Hz)	89.2	9.09	3340	340	05	-	6090	-	AV	-	43	D-29
3.43	34.3	68.6 (120Hz)	106	10.8	3340	340	05	-	6095	-	AV	-	51	D-29
2.97	29.7	59.4 (120Hz)	122	12.5	5400	550	05	-	6100	-	AV	-	59	D-29
2.46	24.6	49.2 (120Hz)	147	15.0	5400	550	05	-	6105	-	AV	-	71	D-29
2.01	20.1	40.2 (120Hz)	180	18.4	5400	550	05	-	6105	-	AV	-	87	D-29
1.68	16.8	33.7 (120Hz)	204	20.8	9810	1000	05	-	6120DB	-	AV	-	104	D-33
1.45	14.5	28.9 (120Hz)	238	24.2	9810	1000	05	-	6120DB	-	AV	-	121	D-33
1.22	12.2	24.5 (120Hz)	281	28.6	9810	1000	05	-	6120DB	-	AV	-	143	D-33
1.06	10.6	21.2 (120Hz)	324	33.0	9810	1000	05	-	6120DB	-	AV	-	165	D-33
0.897	8.97	17.9 (120Hz)	383	39.1	9810	1000	05	-	6120DB	-	AV	-	195	D-33
0.758	7.58	15.2 (120Hz)	454	46.3	9810	1000	05	-	6125DB	-	AV	-	231	D-33
0.641	6.41	12.8 (120Hz)	536	54.7	9810	1000	05	-	6125DB	-	AV	-	273	D-33
0.549	5.49	11.0 (120Hz)	627	63.9	9810	1000	05	-	6125DB	-	AV	-	319	D-33
0.464	4.64	9.3 (120Hz)	741	75.5	14700	1500	05	-	6135DB	-	AV	-	377	D-34
0.370	3.70	7.4 (120Hz)	929	94.7	14700	1500	05	-	6135DB	-	AV	-	473	D-34
0.313	3.13	6.3 (120Hz)	1100	112	16000	1630	05	-	6145DB	-	AV	-	559	D-34
0.270	2.70	5.4 (120Hz)	1280	130	16000	1630	05	-	6145DB	-	AV	-	649	D-34
0.239	2.39	4.8 (120Hz)	1440	146	22100	2250	05	-	6165DA	-	AV	-	731	D-34
0.208	2.08	4.2 (120Hz)	1650	168	22100	2250	05	-	6165DA	-	AV	-	841	D-34
0.174	1.74	3.5 (120Hz)	1970	201	22100	2250	05	-	6165DA	-	AV	-	1003	D-34
0.140	1.40	2.8 (120Hz)	2450	250	29500	3010	05	-	6175DA	-	AV	-	1247	D-34
0.118	1.18	2.4 (120Hz)	2910	296	29500	3010	05	-	6175DA	-	AV	-	1479	D-34
0.069	0.69	1.4 (120Hz)	4980	508	41600	4240	05	-	6185DA	-	AV	-	2537	D-34

- Notes: 1. Allowable radial load Pro is the value at the midpoint of the output shaft.
 2. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
 3. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.
 4. Refer to page D-9 "Precautions for Inverter Driving" when operating beyond 6~60 Hz.

Selection Tables Gearmotors (AF Motor for Inverters)



CHHM/CNHM


0.75 kW	AF Motor for Inverters	
	P	4
	Motor Speed n ₁	r/min 1750(60Hz)

Output Speed n ₂ r/min			Output Torque (60Hz) Tout		Allowable Radial Load (60Hz) Pro		Model				Dim. Page			
6Hz	60Hz	Allowable MAX Speed (Horizontal)	N·m	kgf·m	N	kgf	Input Capacity Symbol	Frame Size	Suffix	Reduction Ratio	CNHM	CHHM		
70.0	700	1400 (120Hz)	9.72	0.991	1190	121	1	-	6080SK	-	AV	-	2.5 *1	D-28
58.3	583	1167 (120Hz)	11.7	1.19	1250	127	1	-	6080SK	-	AV	-	3 *1	D-28
43.8	438	875 (120Hz)	15.6	1.59	1350	138	1	-	6080SK	-	AV	-	4 *1	D-28
35.0	350	700 (120Hz)	19.4	1.98	1460	149	1	-	6080SK	-	AV	-	5 *1	D-28
29.2	292	584 (120Hz)	23.3	2.38	1520	155	1	-	6080SK	-	AV	-	6 *1	D-28
29.2	292	584 (120Hz)	23.3	2.38	2670	273	1	-	6090	-	AV	-	6	D-29
21.9	219	438 (120Hz)	31.1	3.17	1590	162	1	-	6080SK	-	AV	-	8 *1	D-28
21.9	219	438 (120Hz)	31.1	3.17	2980	304	1	-	6090	-	AV	-	8	D-29
17.5	175	350 (120Hz)	38.9	3.96	1680	171	1	-	6080SK	-	AV	-	10 *1	D-28
15.9	159	318 (120Hz)	42.8	4.36	3340	340	1	-	6090	-	AV	-	11	D-29
13.5	135	270 (120Hz)	50.5	5.15	3340	340	1	-	6090	-	AV	-	13	D-29
11.7	117	234 (120Hz)	58.3	5.95	3340	340	1	-	6090	-	AV	-	15	D-29
10.3	103	206 (120Hz)	66.1	6.74	3340	340	1	-	6090	-	AV	-	17	D-29
8.33	83.3	167 (120Hz)	81.7	8.32	3340	340	1	-	6090	-	AV	-	21	D-29
7.00	70.0	140 (120Hz)	97.2	9.91	3340	340	1	-	6095	-	AV	-	25	D-29
6.03	60.3	121 (120Hz)	113	11.5	3340	340	1	-	6095	-	AV	-	29	D-29
5.00	50.0	100 (120Hz)	136	13.9	3330	339	1	-	6095	-	AV	-	35	D-29
4.07	40.7	81.4 (120Hz)	167	17.0	5400	550	1	-	6100	-	AV	-	43	D-29
3.43	34.3	68.6 (120Hz)	198	20.2	5390	549	1	-	6105	-	AV	-	51	D-29
2.97	29.7	59.4 (120Hz)	229	23.4	7610	776	1	-	6110	-	AV	-	59	D-29
2.46	24.6	49.2 (120Hz)	276	28.1	7610	776	1	-	6115	-	AV	-	71	D-29
2.01	20.1	40.2 (120Hz)	338	34.5	7610	776	1	-	6115	-	AV	-	87	D-29
1.68	16.8	33.7 (120Hz)	383	39.1	9810	1000	1	-	6120DB	-	AV	-	104	D-33
1.45	14.5	28.9 (120Hz)	446	45.4	9810	1000	1	-	6125DB	-	AV	-	121	D-33
1.22	12.2	24.5 (120Hz)	527	53.7	9810	1000	1	-	6125DB	-	AV	-	143	D-33
1.06	10.6	21.2 (120Hz)	608	62.0	9810	1000	1	-	6125DB	-	AV	-	165	D-33
0.897	8.97	17.9 (120Hz)	718	73.2	14700	1500	1	-	6135DB	-	AV	-	195	D-34
0.758	7.58	15.2 (120Hz)	851	86.7	14700	1500	1	-	6135DB	-	AV	-	231	D-34
0.641	6.41	12.8 (120Hz)	1010	103	16000	1630	1	-	6145DB	-	AV	-	273	D-34
0.549	5.49	11.0 (120Hz)	1180	120	16000	1630	1	-	6145DB	-	AV	-	319	D-34
0.464	4.64	9.3 (120Hz)	1390	142	22100	2250	1	-	6165DA	-	AV	-	377	D-34
0.370	3.70	7.4 (120Hz)	1740	178	22100	2250	1	-	6165DA	-	AV	-	473	D-34
0.313	3.13	6.3 (120Hz)	2060	210	22100	2250	1	-	6165DA	-	AV	-	559	D-34
0.270	2.70	5.4 (120Hz)	2390	244	29500	3010	1	-	6175DA	-	AV	-	649	D-34
0.239	2.39	4.8 (120Hz)	2690	274	29500	3010	1	-	6175DA	-	AV	-	731	D-34
0.208	2.08	4.2 (120Hz)	3100	316	29500	3010	1	-	6175DA	-	AV	-	841	D-34
0.174	1.74	3.5 (120Hz)	3690	377	41700	4250	1	-	6185DA	-	AV	-	1003	D-34
0.140	1.40	2.8 (120Hz)	4590	468	41700	4250	1	-	6185DA	-	AV	-	1247	D-34
0.118	1.18	2.4 (120Hz)	5450	555	59000	6010	1	-	6195DA	-	AV	-	1479	D-35
0.095	0.95	1.9 (120Hz)	6810	694	59000	6010	1	-	6195DA	-	AV	-	1849	D-35
0.085	0.85	1.7 (120Hz)	7610	775	58200	5940	1	-	6195DA	-	AV	-	2065	D-35
0.069	0.69	1.4 (120Hz)	9350	953	84100	8570	1	-	6205DA	-	AV	-	2537 *2	D-36

Selection Tables
 0.75 kW
 GEARMOTOR
 FOR INVERTERS

- "*1" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000 SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- "*2" indicate models requiring increased capacity for inverters, for certain operation conditions (ambient temperature, load condition, etc.).
- Consult us for vertical types. Lubrication oil and system requires contemplation.

Selection Tables Gearmotors (AF Motor for Inverters)




CHHM/CNHM

1.5 kW	AF Motor for Inverters	
	P	4
	Motor Speed n ₁ r/min	1750(60Hz)

Output Speed n ₂ r/min			Output Torque (60Hz) Tout		Allowable Radial Load (60Hz) Pro		Model				Dim. Page			
							Input Capacity Symbol	Frame Size	Suffix	Reduction Ratio	CNHM CHHM			
6Hz	60Hz	Allowable MAX Speed (Horizontal)	N·m	kgf·m	N	kgf	-	-	-	-				
70.0	700	1400 (120Hz)	19.4	1.98	2050	209	2	-	6090SK	-	AV	-	2.5 *1	D-28
58.3	583	1167 (120Hz)	23.3	2.38	2120	216	2	-	6090SK	-	AV	-	3 *1	D-28
43.8	438	875 (120Hz)	31.1	3.17	2370	242	2	-	6090SK	-	AV	-	4 *1	D-28
35.0	350	700 (120Hz)	38.9	3.96	2490	254	2	-	6090SK	-	AV	-	5 *1	D-28
29.2	292	584 (120Hz)	46.7	4.76	2530	258	2	-	6090SK	-	AV	-	6 *1	D-28
29.2	292	584 (120Hz)	46.7	4.76	3880	396	2	-	6100	-	AV	-	6	D-29
21.9	219	438 (120Hz)	62.2	6.34	2780	283	2	-	6090SK	-	AV	-	8 *1	D-28
21.9	219	438 (120Hz)	62.2	6.34	4330	441	2	-	6100	-	AV	-	8	D-29
17.5	175	350 (120Hz)	77.8	7.93	2900	296	2	-	6095SK	-	AV	-	10 *1	D-28
15.9	159	318 (120Hz)	85.5	8.72	4920	501	2	-	6100	-	AV	-	11	D-29
13.5	135	270 (120Hz)	101	10.3	5110	521	2	-	6100	-	AV	-	13	D-29
11.7	117	234 (120Hz)	117	11.9	5400	550	2	-	6100	-	AV	-	15	D-29
10.3	103	206 (120Hz)	132	13.5	5400	550	2	-	6100	-	AV	-	17	D-29
8.33	83.3	167 (120Hz)	163	16.6	5400	550	2	-	6105	-	AV	-	21	D-29
7.00	70.0	140 (120Hz)	194	19.8	5400	550	2	-	6105	-	AV	-	25	D-29
6.03	60.3	121 (120Hz)	226	23.0	5400	550	2	-	6105	-	AV	-	29	D-29
5.00	50.0	100 (120Hz)	272	27.7	7360	751	2	-	6115	-	AV	-	35	D-29
4.07	40.7	81.4 (120Hz)	334	34.1	7610	776	2	-	6115	-	AV	-	43	D-29
3.43	34.3	68.6 (120Hz)	397	40.4	9810	1000	2	-	6120	-	AV	-	51	D-29
2.97	29.7	59.4 (120Hz)	459	46.8	9810	1000	2	-	6125	-	AV	-	59	D-29
2.46	24.6	49.2 (120Hz)	552	56.3	12900	1320	2	-	6130	-	AV	-	71	D-30
2.01	20.1	40.2 (120Hz)	677	69.0	13900	1420	2	-	6135	-	AV	-	87	D-30
1.68	16.8	33.7 (120Hz)	766	78.1	14700	1500	2	-	6135DC	-	AV	-	104	D-34
1.45	14.5	28.9 (120Hz)	891	90.9	14700	1500	2	-	6135DC	-	AV	-	121	D-34
1.22	12.2	24.5 (120Hz)	1050	107	15900	1620	2	-	6145DC	-	AV	-	143	D-34
1.06	10.6	21.2 (120Hz)	1220	124	16000	1630	2	-	6145DC	-	AV	-	165	D-34
0.897	8.97	17.9 (120Hz)	1440	146	22100	2250	2	-	6165DB	-	AV	-	195	D-34
0.758	7.58	15.2 (120Hz)	1700	173	22100	2250	2	-	6165DB	-	AV	-	231	D-34
0.641	6.41	12.8 (120Hz)	2010	205	22100	2250	2	-	6165DB	-	AV	-	273	D-34
0.549	5.49	11.0 (120Hz)	2350	240	29500	3010	2	-	6175DB	-	AV	-	319	D-34
0.464	4.64	9.3 (120Hz)	2780	283	29500	3010	2	-	6175DB	-	AV	-	377	D-34
0.370	3.70	7.4 (120Hz)	3480	355	41700	4250	2	-	6185DA	-	AV	-	473	D-34
0.313	3.13	6.3 (120Hz)	4120	420	41700	4250	2	-	6185DA	-	AV	-	559	D-34
0.270	2.70	5.4 (120Hz)	4780	487	41700	4250	2	-	6185DA	-	AV	-	649	D-34
0.239	2.39	4.8 (120Hz)	5390	549	59000	6010	2	-	6195DA	-	AV	-	731	D-35
0.208	2.08	4.2 (120Hz)	6200	632	59000	6010	2	-	6195DA	-	AV	-	841	D-35
0.174	1.74	3.5 (120Hz)	7390	753	58300	5940	2	-	6195DA	-	AV	-	1003	D-35
0.118	1.18	2.4 (120Hz)	10900	1110	104000	10600	2	-	6215DA	-	AV	-	1479	D-36
0.095	0.95	1.9 (120Hz)	13600	1390	145000	14800	2	-	6225DA	-	AV	-	1849	D-36
0.085	0.85	1.7 (120Hz)	15200	1550	145000	14800	2	-	6225DA	-	AV	-	2065	D-36

- Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft.
 2. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
 3. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.
 4. Refer to page D-9 "Precautions for Inverter Driving" when operating beyond 6~60 Hz.

Selection Tables Gearmotors (AF Motor for Inverters)




CHHM/CNHM

2.2 kW	AF Motor for Inverters	
	P	4
	Motor Speed n ₁	r/min 1750(60Hz)

Output Speed n ₂ r/min			Output Torque (60Hz) Tout		Allowable Radial Load (60Hz) Pro		Model				Dim. Page			
6Hz	60Hz	Allowable MAX Speed (Horizontal)	N·m	kgf·m	N	kgf	Input Capacity Symbol	Frame Size	Suffix	Reduction Ratio	CNHM	CHHM		
													6Hz	60Hz
70.0	700	1400 (120Hz)	28.5	2.91	1970	201	3	-	6100SK	-	AV	-	2.5 *1	D-28
58.3	583	1167 (120Hz)	34.2	3.49	2040	208	3	-	6100SK	-	AV	-	3 *1	D-28
43.8	438	875 (120Hz)	45.6	4.65	2240	228	3	-	6100SK	-	AV	-	4 *1	D-28
35.0	350	700 (120Hz)	57.0	5.81	2330	238	3	-	6100SK	-	AV	-	5 *1	D-28
29.2	292	584 (120Hz)	68.4	6.98	2370	242	3	-	6100SK	-	AV	-	6 *1	D-28
29.2	292	584 (120Hz)	68.4	6.98	4370	445	3	-	6110	-	AV	-	6	D-29
21.9	219	438 (120Hz)	91.2	9.30	2500	255	3	-	6105SK	-	AV	-	8 *1	D-28
21.9	219	438 (120Hz)	91.2	9.30	4870	496	3	-	6110	-	AV	-	8	D-29
17.5	175	350 (120Hz)	114	11.6	2500	263	3	-	6105SK	-	AV	-	10 *1	D-28
15.9	159	318 (120Hz)	125	12.8	5560	567	3	-	6110	-	AV	-	11	D-29
13.5	135	270 (120Hz)	148	15.1	5740	586	3	-	6110	-	AV	-	13	D-29
11.7	117	234 (120Hz)	171	17.4	6120	624	3	-	6110	-	AV	-	15	D-29
10.3	103	206 (120Hz)	194	19.8	6180	630	3	-	6110	-	AV	-	17	D-29
8.33	83.3	167 (120Hz)	240	24.4	6540	667	3	-	6115	-	AV	-	21	D-29
7.00	70.0	140 (120Hz)	285	29.1	6620	675	3	-	6115	-	AV	-	25	D-29
6.03	60.3	121 (120Hz)	331	33.7	6800	693	3	-	6115	-	AV	-	29	D-29
5.00	50.0	100 (120Hz)	399	40.7	8830	900	3	-	6120	-	AV	-	35	D-29
4.07	40.7	81.4 (120Hz)	490	50.0	9380	956	3	-	6125	-	AV	-	43	D-29
3.43	34.3	68.6 (120Hz)	582	59.3	11500	1180	3	-	6135	-	AV	-	51	D-30
2.97	29.7	59.4 (120Hz)	673	68.6	12100	1230	3	-	6135	-	AV	-	59	D-30
2.46	24.6	49.2 (120Hz)	810	82.5	16000	1630	3	-	6145	-	AV	-	71	D-30
2.01	20.1	40.2 (120Hz)	992	101	22100	2250	3	-	6160	-	AV	-	87	D-30
1.68	16.8	33.7 (120Hz)	1120	115	22100	2250	3	-	6160DC	-	AV	-	104	D-35
1.45	14.5	28.9 (120Hz)	1310	133	22100	2250	3	-	6160DC	-	AV	-	121	D-35
1.22	12.2	24.5 (120Hz)	1550	158	22100	2250	3	-	6165DC	-	AV	-	143	D-35
1.06	10.6	21.2 (120Hz)	1780	182	22100	2250	3	-	6165DC	-	AV	-	165	D-35
0.897	8.97	17.9 (120Hz)	2100	214	22100	2250	3	-	6165DC	-	AV	-	195	D-35
0.758	7.58	15.2 (120Hz)	2500	254	29500	3010	3	-	6175DC	-	AV	-	231	D-35
0.641	6.41	12.8 (120Hz)	2950	301	29500	3010	3	-	6175DC	-	AV	-	273	D-35
0.549	5.49	11.0 (120Hz)	3450	351	41700	4250	3	-	6185DB	-	AV	-	319	D-35
0.464	4.64	9.3 (120Hz)	4070	415	41700	4250	3	-	6185DB	-	AV	-	377	D-35
0.370	3.70	7.4 (120Hz)	5110	521	59000	6010	3	-	6195DA	-	AV	-	473	D-35
0.313	3.13	6.3 (120Hz)	6040	616	59000	6010	3	-	6195DA	-	AV	-	559	D-35
0.270	2.70	5.4 (120Hz)	7010	715	58400	5950	3	-	6195DA	-	AV	-	649	D-35
0.239	2.39	4.8 (120Hz)	7900	805	59000	6010	3	-	6195DA	-	AV	-	731	D-35
0.208	2.08	4.2 (120Hz)	9090	926	84100	8570	3	-	6205DA	-	AV	-	841	D-36
0.174	1.74	3.5 (120Hz)	10800	1100	104000	10600	3	-	6215DA	-	AV	-	1003	D-36
0.140	1.40	2.8 (120Hz)	13500	1370	145000	14800	3	-	6225DA	-	AV	-	1247	D-36
0.118	1.18	2.4 (120Hz)	16000	1630	179000	18200	3	-	6235DA	-	AV	-	1479	D-37
0.095	0.95	1.9 (120Hz)	20000	2040	179000	18200	3	-	6235DA	-	AV	-	1849	D-37
0.085	0.85	1.7 (120Hz)	22300	2270	208000	21200	3	-	6245DA	-	AV	-	2065	D-37

- "*1" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000 SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- "*2" indicate models requiring increased capacity for inverters, for certain operation conditions (ambient temperature, load condition, etc.).
- Consult us for vertical types. Lubrication oil and system requires contemplation.

Selection Tables Gearmotors (AF Motor for Inverters)




CHHM/CNHM

3.7 kW	AF Motor for Inverters	
	P	4
	Motor Speed n ₁ r/min	1750(60Hz)

Output Speed n ₂ r/min			Output Torque (60Hz) Tout		Allowable Radial Load (60Hz) Pro		Model				Dim. Page
6Hz	60Hz	Allowable MAX Speed (Horizontal)	N·m	kgf·m	N	kgf	Input Capacity Symbol	Frame Size	Suffix	Reduction Ratio	CNHM CHHM
70.0	700	1400 (120Hz)	48.0	4.89	2500	255	5 -	6110SK	- AV	- 2.5 *1	D-28
58.3	583	1167 (120Hz)	57.5	5.87	2650	275	5 -	6110SK	- AV	- 3 *1	D-28
43.8	438	875 (120Hz)	76.7	7.82	2820	287	5 -	6110SK	- AV	- 4 *1	D-28
35.0	350	700 (120Hz)	95.9	9.78	2930	299	5 -	6110SK	- AV	- 5 *1	D-28
29.2	292	584 (120Hz)	115	11.7	3060	312	5 -	6110SK	- AV	- 6 *1	D-28
29.2	292	389 (80Hz)	115	11.7	4910	500	5 -	6120	- AV	- 6	D-29
21.9	219	438 (120Hz)	153	15.6	3190	325	5 -	6110SK	- AV	- 8 *1	D-28
21.9	219	438 (120Hz)	153	15.6	5470	557	5 -	6120	- AV	- 8	D-29
17.5	175	350 (120Hz)	192	19.6	3330	339	5 -	6115SK	- AV	- 10 *1	D-28
15.9	159	318 (120Hz)	211	21.5	6200	632	5 -	6120	- AV	- 11	D-29
13.5	135	270 (120Hz)	249	25.4	6400	652	5 -	6120	- AV	- 13	D-29
11.7	117	234 (120Hz)	288	29.3	6860	699	5 -	6120	- AV	- 15	D-29
10.3	103	206 (120Hz)	326	33.2	6920	705	5 -	6125	- AV	- 17	D-29
8.33	83.3	167 (120Hz)	403	41.1	7570	772	5 -	6125	- AV	- 21	D-29
7.00	70.0	140 (120Hz)	480	48.9	7900	806	5 -	6125	- AV	- 25	D-29
6.03	60.3	121 (120Hz)	556	56.7	9700	989	5 -	6130	- AV	- 29	D-30
5.00	50.0	100 (120Hz)	671	68.4	10200	1040	5 -	6135	- AV	- 35	D-30
4.07	40.7	81.4 (120Hz)	825	84.1	15800	1610	5 -	6145	- AV	- 43	D-30
3.43	34.3	68.6 (120Hz)	978	99.7	16000	1630	5 -	6145	- AV	- 51	D-30
2.97	29.7	59.4 (120Hz)	1130	115	22100	2250	5 -	6160	- AV	- 59	D-30
2.46	24.6	34.0 (83Hz)	1360	139	21900	2240	5 -	6165	- AV	- 71	D-30
2.01	20.1	27.8 (83Hz)	1670	170	21800	2220	5 -	6165	- AV	- 87	D-30
1.68	16.8	33.7 (120Hz)	1890	193	22100	2250	5 -	6165DC	- AV	- 104	D-35
1.45	14.5	28.9 (120Hz)	2200	224	29500	3010	5 -	6175DC	- AV	- 121	D-35
1.22	12.2	24.5 (120Hz)	2600	265	29500	3010	5 -	6175DC	- AV	- 143	D-35
1.06	10.6	21.2 (120Hz)	3000	306	29500	3010	5 -	6175DC	- AV	- 165	D-35
0.897	8.97	17.9 (120Hz)	3540	361	41700	4250	5 -	6185DB	- AV	- 195	D-35
0.758	7.58	15.2 (120Hz)	4200	428	41700	4250	5 -	6185DB	- AV	- 231	D-35
0.641	6.41	12.8 (120Hz)	4960	506	41700	4250	5 -	6185DB	- AV	- 273	D-35
0.549	5.49	11.0 (120Hz)	5800	591	59000	6010	5 -	6195DA	- AV	- 319	D-35
0.464	4.64	9.3 (120Hz)	6850	698	59000	6010	5 -	6195DA	- AV	- 377	D-35
0.370	3.70	7.4 (120Hz)	8600	876	104000	10600	5 -	6215DA	- AV	- 473	D-36
0.313	3.13	6.3 (120Hz)	10200	1040	104000	10600	5 -	6215DA	- AV	- 559	D-36
0.270	2.70	5.4 (120Hz)	11800	1200	104000	10600	5 -	6215DA	- AV	- 649	D-36
0.239	2.39	4.8 (120Hz)	13300	1350	145000	14800	5 -	6225DA	- AV	- 731	D-36
0.208	2.08	4.2 (120Hz)	15300	1560	179000	18200	5 -	6235DA	- AV	- 841	D-37
0.174	1.74	3.5 (120Hz)	18200	1860	179000	18200	5 -	6235DA	- AV	- 1003	D-37
0.140	1.40	2.8 (120Hz)	22700	2310	208000	21200	5 -	6245DA	- AV	- 1247	D-37
0.118	1.18	1.6 (83Hz)	26900	2740	258000	26300	5 -	6255DA	- AV	- 1479 *2	D-37
0.095	0.95	1.3 (83Hz)	33600	3430	258000	26300	5 -	6255DA	- AV	- 1849 *2	D-37

- Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft.
 2. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
 3. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.
 4. Refer to page D-9 "Precautions for Inverter Driving" when operating beyond 6~60 Hz.

Selection Tables Gearmotors (AF Motor for Inverters)




CHHM

5.5 kW	AF Motor for Inverters	
	P	4
	Motor Speed n ₁	r/min 1750(60Hz)

Output Speed n ₂ r/min			Output Torque (60Hz) Tout	Allowable Radial Load (60Hz) Pro		Model				Dim. Page	
6Hz	60Hz	Allowable MAX Speed (Horizontal)		N·m	kgf·m	N	kgf	Input Capacity Symbol	Frame Size	Suffix	Reduction Ratio
29.2	292	584 (120Hz)	171	17.4	5710	582	8 -	6130	- AV	- 6	D-30
21.9	219	438 (120Hz)	228	23.3	6360	648	8 -	6130	- AV	- 8	D-30
15.9	159	318 (120Hz)	314	32.0	7240	739	8 -	6130	- AV	- 11	D-30
13.5	135	270 (120Hz)	371	37.8	7530	768	8 -	6130	- AV	- 13	D-30
11.7	117	234 (120Hz)	428	43.6	7680	783	8 -	6130	- AV	- 15	D-30
10.3	103	206 (120Hz)	485	49.4	8230	839	8 -	6135	- AV	- 17	D-30
8.33	83.3	167 (120Hz)	599	61.0	8760	893	8 -	6135	- AV	- 21	D-30
7.00	70.0	140 (120Hz)	713	72.7	9070	925	8 -	6135	- AV	- 25	D-30
6.03	60.3	121 (120Hz)	827	84.3	14100	1430	8 -	6140	- AV	- 29	D-30
5.00	50.0	100 (120Hz)	998	102	15000	1530	8 -	6145	- AV	- 35	D-30
4.07	40.7	56.3 (83Hz)	1230	125	18900	1930	8 -	6160	- AV	- 43	D-30
3.43	34.3	47.4 (83Hz)	1450	148	19600	2000	8 -	6165	- AV	- 51	D-30
2.97	29.7	41.1 (83Hz)	1680	171	21700	2220	8 -	6165	- AV	- 59	D-30
2.46	24.6	34.0 (83Hz)	2020	206	24700	2520	8 -	6175	- AV	- 71	D-31
2.01	20.1	27.8 (83Hz)	2480	253	26400	2690	8 -	6175	- AV	- 87	D-31
1.68	16.8	33.7 (120Hz)	2810	286	37700	3840	8 -	6180DB	- AV	- 104	D-35
1.45	14.5	28.9 (120Hz)	3270	333	40000	4070	8 -	6185DB	- AV	- 121	D-35
1.22	12.2	24.5 (120Hz)	3860	394	41700	4250	8 -	6185DB	- AV	- 143	D-35
1.06	10.6	21.2 (120Hz)	4460	454	41700	4250	8 -	6185DB	- AV	- 165	D-35
0.897	8.97	17.9 (120Hz)	5270	537	58300	5940	8 -	6195DB	- AV	- 195	D-35
0.758	7.58	15.2 (120Hz)	6240	636	59000	6010	8 -	6195DB	- AV	- 231	D-35
0.641	6.41	12.8 (120Hz)	7370	752	59000	6010	8 -	6195DB	- AV	- 273	D-35
0.549	5.49	11.0 (120Hz)	8620	878	84100	8570	8 -	6205DB	- AV	- 319	D-36
0.464	4.64	9.3 (120Hz)	10200	1040	104000	10600	8 -	6215DA	- AV	- 377	D-36
0.370	3.70	7.4 (120Hz)	12800	1300	145000	14800	8 -	6225DA	- AV	- 473	D-36
0.313	3.13	6.3 (120Hz)	15100	1540	145000	14800	8 -	6225DA	- AV	- 559	D-36
0.270	2.70	5.4 (120Hz)	17500	1790	179000	18200	8 -	6235DA	- AV	- 649	D-37
0.239	2.39	4.8 (120Hz)	19700	2010	179000	18200	8 -	6235DA	- AV	- 731	D-37
0.208	2.08	4.2 (120Hz)	22700	2320	208000	21200	8 -	6245DA	- AV	- 841	D-37
0.174	1.74	2.4 (83Hz)	27100	2760	258000	26300	8 -	6255DA	- AV	- 1003 *2	D-37
0.140	1.40	1.9 (83Hz)	33700	3430	258000	26300	8 -	6255DA	- AV	- 1247	D-37
0.118	1.18	1.4 (73Hz)	40000	4070	276000	28100	8 -	6265DA	- AV	- 1479 *2	D-37

- "*1" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000 SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- "*2" indicate models requiring increased capacity for inverters, for certain operation conditions (ambient temperature, load condition, etc.).
- Consult us for vertical types. Lubrication oil and system requires contemplation.

Selection Tables Gearmotors (AF Motor for Inverters)




CHHM

7.5 kW	AF Motor for Inverters	
	P	4
	Motor Speed n ₁ r/min	1750(60Hz)

Output Speed n ₂ r/min			Output Torque (60Hz) Tout		Allowable Radial Load (60Hz) Pro		Model				Dim. Page	
6Hz	60Hz	Allowable MAX Speed (Horizontal)	N·m	kgf·m	N	kgf	Input Capacity Symbol	Frame Size	Suffix	Reduction Ratio	CHHM	
29.2	292	584 (120Hz)	233	23.8	5650	576	10	-	6130	- AV	6	D-30
21.9	219	438 (120Hz)	311	31.7	6290	641	10	-	6130	- AV	8	D-30
15.9	159	318 (120Hz)	428	43.6	7150	729	10	-	6130	- AV	11	D-30
13.5	135	270 (120Hz)	505	51.5	7430	758	10	-	6130	- AV	13	D-30
11.7	117	234 (120Hz)	583	59.5	7570	771	10	-	6135	- AV	15	D-30
10.3	103	206 (120Hz)	661	67.4	8100	826	10	-	6135	- AV	17	D-30
8.33	83.3	167 (120Hz)	817	83.2	13100	1330	10	-	6145	- AV	21	D-30
7.00	70.0	140 (120Hz)	972	99.1	13700	1390	10	-	6145	- AV	25	D-30
6.03	60.3	121 (120Hz)	1130	115	14000	1420	10	-	6145	- AV	29	D-30
5.00	50.0	100 (120Hz)	1360	139	17500	1790	10	-	6165	- AV	35	D-30
4.07	40.7	56.3 (83Hz)	1670	170	18600	1900	10	-	6165	- AV	43	D-30
3.43	34.3	47.4 (83Hz)	1980	202	22100	2250	10	-	6170	- AV	51	D-31
2.97	29.7	41.1 (83Hz)	2290	234	23100	2360	10	-	6175	- AV	59	D-31
2.46	24.6	34.0 (83Hz)	2760	281	33100	3380	10	-	6180	- AV	71	D-31
2.01	20.1	27.8 (83Hz)	3380	345	35600	3620	10	-	6185	- AV	87	D-31
1.68	16.8	33.7 (120Hz)	3830	391	37300	3800	10	-	6185DB	- AV	104	D-35
1.45	14.5	28.9 (120Hz)	4460	454	40000	4070	10	-	6185DB	- AV	121	D-35
1.22	12.2	24.5 (120Hz)	5270	537	57900	5900	10	-	6195DB	- AV	143	D-35
1.06	10.6	21.2 (120Hz)	6080	620	58300	5940	10	-	6195DB	- AV	165	D-35
0.897	8.97	17.9 (120Hz)	7180	732	58300	5940	10	-	6195DB	- AV	195	D-35
0.758	7.58	15.2 (120Hz)	8510	867	84100	8570	10	-	6205DB	- AV	231	D-36
0.641	6.41	12.8 (120Hz)	10100	1030	104000	10600	10	-	6215DA	- AV	273	D-36
0.549	5.49	11.0 (120Hz)	11800	1200	104000	10600	10	-	6215DA	- AV	319	D-36
0.464	4.64	9.3 (120Hz)	13900	1420	145000	14800	10	-	6225DA	- AV	377	D-36
0.370	3.70	7.4 (120Hz)	17400	1780	179000	18200	10	-	6235DA	- AV	473	D-37
0.313	3.13	6.3 (120Hz)	20600	2100	179000	18200	10	-	6235DA	- AV	559	D-37
0.270	2.70	5.4 (120Hz)	23900	2440	208000	21200	10	-	6245DA	- AV	649	D-37
0.239	2.39	3.3 (83Hz)	26900	2740	258000	26300	10	-	6255DA	- AV	731 *2	D-37
0.208	2.08	2.9 (83Hz)	31000	3160	258000	26300	10	-	6255DA	- AV	841	D-37
0.174	1.74	2.1 (73Hz)	36900	3770	276000	28100	10	-	6265DA	- AV	1003	D-37
0.140	1.40	1.7 (73Hz)	45900	4680	276000	28100	10	-	6265DA	- AV	1247 *2	D-37
0.118	1.18	1.4 (73Hz)	54500	5550	248000	25300	10	-	6275DA	- AV	1479	D-37
0.095	0.95	1.2 (73Hz)	68100	6940	248000	25300	10	-	6275DA	- AV	1849	D-37

- Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft.
 2. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
 3. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.
 4. Refer to page D-9 "Precautions for Inverter Driving" when operating beyond 6~60 Hz.

Selection Tables Gearmotors (AF Motor for Inverters)




CHHM

11 kW	AF Motor for Inverters	
	P	4
	Motor Speed n ₁ r/min	1750(60Hz)

Output Speed n ₂ r/min			Output Torque (60Hz) T _{out} N·m kgf·m	Allowable Radial Load (60Hz) Pro		Model				Dim. Page	
6Hz	60Hz	Allowable MAX Speed (Horizontal)		N	kgf	Input Capacity Symbol	Frame Size	Suffix	Reduction Ratio	CNHM	
29.2	292	584 (120Hz)	342	34.9	5540	564	15 -	6135	- AV -	6	D-30
21.9	219	438 (120Hz)	456	46.5	6150	627	15 -	6135	- AV -	8	D-30
15.9	159	318 (120Hz)	627	63.9	6980	712	15 -	6135	- AV -	11	D-30
13.5	135	270 (120Hz)	741	75.6	11100	1140	15 -	6140	- AV -	13	D-30
11.7	117	234 (120Hz)	855	87.2	11600	1190	15 -	6140	- AV -	15	D-30
10.3	103	206 (120Hz)	969	98.8	12100	1240	15 -	6145	- AV -	17	D-30
8.33	83.3	115 (83Hz)	1200	122	15000	1530	15 -	6160	- AV -	21	D-30
7.00	70.0	96.8 (83Hz)	1430	145	15700	1600	15 -	6165	- AV -	25	D-30
6.03	60.3	83.4 (83Hz)	1650	169	16300	1660	15 -	6165	- AV -	29	D-30
5.00	50.0	69.2 (83Hz)	2000	203	19700	2010	15 -	6170	- AV -	35	D-31
4.07	40.7	56.3 (83Hz)	2450	250	20900	2130	15 -	6175	- AV -	43	D-31
3.43	34.3	47.4 (83Hz)	2910	296	29600	3010	15 -	6180	- AV -	51	D-31
2.97	29.7	41.1 (83Hz)	3360	343	30900	3150	15 -	6185	- AV -	59	D-31
2.46	24.6	29.9 (73Hz)	4050	413	46300	4720	15 -	6190	- AV -	71	D-31
2.01	20.1	24.5 (73Hz)	4960	506	49700	5070	15 -	6195	- AV -	87	D-31
1.68	16.8	33.7 (120Hz)	5620	573	51800	5280	15 -	6195DB	- AV -	104	D-35
1.45	14.5	28.9 (120Hz)	6540	666	55500	5660	15 -	6195DB	- AV -	121	D-35
1.06	10.6	21.2 (120Hz)	8910	909	84100	8570	15 -	6205DB	- AV -	165	D-36
0.897	8.97	17.9 (120Hz)	10500	1070	104000	10600	15 -	6215DA	- AV -	195	D-36
0.758	7.58	15.2 (120Hz)	12500	1270	104000	10600	15 -	6215DA	- AV -	231	D-36
0.641	6.41	12.8 (120Hz)	14800	1510	137000	13900	15 -	6225DA	- AV -	273	D-36
0.549	5.49	11.0 (120Hz)	17200	1760	177000	18100	15 -	6235DA	- AV -	319	D-37
0.464	4.64	9.3 (120Hz)	20400	2080	208000	21200	15 -	6245DA	- AV -	377 *2	D-37
0.370	3.70	7.4 (120Hz)	25600	2600	208000	21200	15 -	6245DA	- AV -	473	D-37
0.313	3.13	3.8 (73Hz)	30200	3080	258000	26300	15 -	6255DA	- AV -	559 *2	D-37
0.270	2.70	3.3 (73Hz)	35100	3570	276000	28100	15 -	6265DA	- AV -	649 *2	D-37
0.239	2.39	2.9 (73Hz)	39500	4030	276000	28100	15 -	6265DA	- AV -	731 *2	D-37
0.208	2.08	2.5 (73Hz)	45400	4630	276000	28100	15 -	6265DA	- AV -	841 *2	D-37
0.174	1.74	2.1 (73Hz)	54200	5520	248000	25300	15 -	6275DA	- AV -	1003 *2	D-37
0.140	1.40	1.7 (73Hz)	67400	6870	248000	25300	15 -	6275DA	- AV -	1247 *2	D-37

5. "**1" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000 SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
6. "**2" indicate models requiring increased capacity for inverters, for certain operation conditions (ambient temperature, load condition, etc.).
7. Consult us for vertical types. Lubrication oil and system requires contemplation.

Selection Tables Gearmotors (AF Motor for Inverters)




CHHM

15 kW	AF Motor for Inverters	
	P	4
	Motor Speed n_1 r/min	1750(60Hz)

Output Speed n_2 /min			Output Torque (60Hz) Tout		Allowable Radial Load (60Hz) Pro		Model				Dim. Page	
6Hz	60Hz	Allowable MAX Speed (Horizontal)	N·m	kgf·m	N	kgf	Input Capacity Symbol	Frame Size	Suffix	Reduction Ratio	CNHM	
29.2	292	355 (73Hz)	467	47.6	9670	986	20	-	6160	- AV	6	D-30
21.9	219	518 (120Hz)	622	63.4	10800	1100	20	-	6160	- AV	8	D-30
15.9	159	318 (120Hz)	855	87.2	12200	1240	20	-	6160	- AV	11	D-30
13.5	135	270 (120Hz)	1010	103	12700	1300	20	-	6165	- AV	13	D-30
11.7	117	142 (73Hz)	1170	119	13500	1370	20	-	6165	- AV	15	D-30
10.3	103	142 (83Hz)	1320	135	13900	1410	20	-	6165	- AV	17	D-30
8.33	83.3	115 (83Hz)	1630	166	14800	1510	20	-	6165	- AV	21	D-30
7.00	70.0	85.2 (73Hz)	1940	198	17500	1780	20	-	6170	- AV	25	D-31
6.03	60.3	73.4 (73Hz)	2260	230	18400	1870	20	-	6175	- AV	29	D-31
5.00	50.0	69.2 (83Hz)	2720	277	26500	2700	20	-	6180	- AV	35	D-31
4.07	40.7	56.3 (83Hz)	3340	341	28300	2880	20	-	6185	- AV	43	D-31
3.43	34.3	41.7 (73Hz)	3970	404	29200	2980	20	-	6185	- AV	51	D-31
2.97	29.7	36.1 (73Hz)	4590	468	43400	4430	20	-	6195	- AV	59	D-31
2.46	24.6	29.9 (73Hz)	5520	563	45900	4680	20	-	6195	- AV	71	D-31
2.01	20.1	24.5 (73Hz)	6770	690	84100	8570	20	-	6205	- AV	87 *2	D-32
1.45	14.5	28.9 (120Hz)	8910	909	101000	10300	20	-	6215DB	- AV	121	D-36
1.06	10.6	21.2 (120Hz)	12200	1240	104000	10600	20	-	6215DB	- AV	165	D-36
0.897	8.97	17.9 (120Hz)	14400	1460	122000	12400	20	-	6225DB	- AV	195	D-36
0.758	7.58	15.2 (120Hz)	17000	1730	162000	16500	20	-	6235DA	- AV	231	D-37
0.641	6.41	12.8 (120Hz)	20100	2050	188000	19200	20	-	6245DA	- AV	273	D-37
0.549	5.49	10.1 (110Hz)	23500	2400	197000	20100	20	-	6245DA	- AV	319	D-37
0.464	4.64	5.7 (73Hz)	27800	2830	255000	26000	20	-	6255DA	- AV	377	D-37
0.370	3.70	4.5 (73Hz)	34800	3550	276000	28100	20	-	6265DA	- AV	473 *2	D-37
0.313	3.13	3.8 (73Hz)	41200	4200	276000	28100	20	-	6265DA	- AV	559 *2	D-37
0.270	2.70	3.3 (73Hz)	47800	4870	248000	25300	20	-	6275DA	- AV	649 *2	D-37
0.239	2.39	2.9 (73Hz)	53900	5490	248000	25300	20	-	6275DA	- AV	731 *2	D-37
0.208	2.08	2.5 (73Hz)	62000	6320	248000	25300	20	-	6275DA	- AV	841	D-37

- Notes: 1. Allowable radial load Pro is the value at the midpoint of the output shaft.
 2. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
 3. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.
 4. Refer to page D-9 "Precautions for Inverter Driving" when operating beyond 6~60 Hz.

Selection Tables 600SK Series•Reducer



CHHM

18.5 kW	AF Motor for Inverters	
	P	4
	Motor Speed n ₁	r/min 1750(60Hz)

Output Speed n ₂ r/min			Output Torque (60Hz) Tout		Allowable Radial Load (60Hz) Pro		Model				Dim. Page
6Hz	60Hz	Allowable MAX Speed (Horizontal)	N·m	kgf·m	N	kgf	Input Capacity Symbol	Frame Size	Suffix	Reduction Ratio	CNHM
29.2	292	292 (60Hz)	575	58.7	10900	1110	25 -	6175	- AV	- 6	D-31
21.9	219	219 (60Hz)	767	78.2	12000	1220	25 -	6175	- AV	- 8	D-31
15.9	159	193 (73Hz)	1060	108	13800	1410	25 -	6175	- AV	- 11	D-31
13.5	135	164 (73Hz)	1250	127	14300	1460	25 -	6175	- AV	- 13	D-31
11.7	117	142 (73Hz)	1440	147	15000	1530	25 -	6175	- AV	- 15	D-31
10.3	103	125 (73Hz)	1630	166	15600	1590	25 -	6175	- AV	- 17	D-31
8.33	83.3	101 (73Hz)	2010	205	16800	1710	25 -	6175	- AV	- 21	D-31
7.00	70.0	85.1 (73Hz)	2400	244	17300	1760	25 -	6175	- AV	- 25	D-31
6.03	60.3	73.4 (73Hz)	2780	284	24700	2520	25 -	6180	- AV	- 29	D-31
5.00	50.0	60.8 (73Hz)	3360	342	26300	2680	25 -	6185	- AV	- 35	D-31
4.07	40.7	40.7 (60Hz)	4120	420	28000	2850	25 -	6185	- AV	- 43	D-31
3.43	34.3	41.7 (73Hz)	4890	499	41300	4210	25 -	6195	- AV	- 51	D-31
2.97	29.7	36.1 (73Hz)	5660	577	43100	4400	25 -	6195	- AV	- 59	D-31
2.01	20.1	20.1 (60Hz)	8340	851	90600	9240	25 -	6215	- AV	- 87 *2	D-32
1.45	14.5	17.6 (73Hz)	11000	1120	106000	10800	25 -	6225DB	- AV	- 121	D-36
1.06	10.6	12.9 (73Hz)	15000	1530	143000	14500	25 -	6235DB	- AV	- 165 *2	D-37
0.897	8.97	10.9 (73Hz)	17700	1810	150000	15300	25 -	6235DB	- AV	- 195 *2	D-37
0.758	7.58	9.22 (73Hz)	21000	2140	179000	18200	25 -	6245DB	- AV	- 231 *2	D-37
0.641	6.41	7.80 (73Hz)	24800	2530	188000	19200	25 -	6245DB	- AV	- 273	D-37
0.549	5.49	6.7 (73Hz)	29000	2950	242000	24600	25 -	6255DA	- AV	- 319	D-37
0.464	4.64	5.7 (73Hz)	34300	3490	276000	28100	25 -	6265DA	- AV	- 377 *2	D-37
0.370	3.70	4.5 (73Hz)	43000	4380	276000	28100	25 -	6265DA	- AV	- 473 *2	D-37
0.313	3.13	3.8 (73Hz)	50800	5180	248000	25300	25 -	6275DA	- AV	- 559 *2	D-37
0.270	2.70	3.3 (73Hz)	59000	6010	248000	25300	25 -	6275DA	- AV	- 649 *2	D-37
0.239	2.39	2.9 (73Hz)	66400	6770	248000	25300	25 -	6275DA	- AV	- 731 *2	D-37


 Selection Tables
 18.5 kW
 GEARMOTOR
 FOR INVERTERS

5. "*"1" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000 SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.

6. "*"2" indicate models requiring increased capacity for inverters, for certain operation conditions (ambient temperature, load condition, etc.).

7. Consult us for vertical types. Lubrication oil and system requires contemplation.

Selection Tables Gearmotors (AF Motor for Inverters)



CHHM


22 kW	AF Motor for Inverters	
	P	4
	Motor Speed n ₁ r/min	1750(60Hz)

Output Speed n ₂ r/min			Output Torque (60Hz) Tout		Allowable Radial Load (60Hz) Pro		Model				Dim. Page
6Hz	60Hz	Allowable MAX Speed (Horizontal)	N·m	kgf·m	N	kgf	Input Capacity Symbol	Frame Size	Suffix	Reduction Ratio	CNHM
29.2	292	292 (60Hz)	684	69.8	10800	1100	30 -	6175	- AV	- 6	D-31
21.9	219	219 (60Hz)	912	93.0	11900	1220	30 -	6175	- AV	- 8	D-31
15.9	159	193 (73Hz)	1250	128	13700	1390	30 -	6175	- AV	- 11	D-31
13.5	135	164 (73Hz)	1480	151	14200	1450	30 -	6175	- AV	- 13	D-31
11.7	117	142 (73Hz)	1710	174	14800	1510	30 -	6175	- AV	- 15	D-31
10.3	103	125 (73Hz)	1940	198	15400	1570	30 -	6175	- AV	- 17	D-31
8.33	83.3	101 (73Hz)	2400	244	16600	1690	30 -	6175	- AV	- 21	D-31
7.00	70.0	85.2 (73Hz)	2850	291	23500	2400	30 -	6180	- AV	- 25	D-31
6.03	60.3	73.4 (73Hz)	3310	337	24500	2500	30 -	6185	- AV	- 29	D-31
5.00	50.0	60.8 (73Hz)	3990	407	26000	2650	30 -	6185	- AV	- 35	D-31
4.07	40.7	40.7 (60Hz)	4900	500	39400	4020	30 -	6195	- AV	- 43	D-31
2.97	29.7	29.7 (60Hz)	6730	686	79200	8070	30 -	6205	- AV	- 59 *2	D-32
2.01	20.1	20.1 (60Hz)	9920	1010	95700	9760	30 -	6225	- AV	- 87 *2	D-32
1.45	14.5	17.6 (73Hz)	13100	1330	106000	10800	30 -	6225DB	- AV	- 121	D-36
1.06	10.6	12.9 (73Hz)	17800	1820	143000	14500	30 -	6235DB	- AV	- 165 *2	D-37
0.897	8.97	10.9 (73Hz)	21100	2150	167000	17000	30 -	6245DB	- AV	- 195 *2	D-37
0.758	7.58	9.22 (73Hz)	25000	2540	179000	18200	30 -	6245DB	- AV	- 231 *2	D-37
0.641	6.41	7.80 (73Hz)	29500	3010	229000	23400	30 -	6255DA	- AV	- 273	D-37
0.549	5.49	6.7 (73Hz)	34500	3510	276000	28100	30 -	6265DA	- AV	- 319 *2	D-37
0.464	4.64	5.7 (73Hz)	40700	4150	276000	28100	30 -	6265DA	- AV	- 377 *2	D-37
0.370	3.70	4.5 (73Hz)	51100	5210	248000	25300	30 -	6275DA	- AV	- 473 *2	D-37
0.313	3.13	3.8 (73Hz)	60400	6160	248000	25300	30 -	6275DA	- AV	- 559 *2	D-37

- Note: 1. Allowable radial load Pro is the value at the midpoint of the output shaft.
 2. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
 3. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.
 4. Refer to page D-9 "Precautions for Inverter Driving" when operating beyond 6~60 Hz.

Selection Tables Gearmotors (AF Motor for Inverters)

30 kW	AF Motor for Inverters		
	P	4	6
	Motor Speed n ₁ r/min	1750(60Hz)	1165(60Hz)




CHHM

Output Speed n ₂ r/min			Output Torque (60Hz) Tout		Allowable Radial Load (60Hz) Pro		Model				Dim. Page
6Hz	60Hz	Allowable MAX Speed (Horizontal)	N·m	kgf·m	N	kgf	Input Capacity Symbol	Frame Size	Suffix	Reduction Ratio	CHHM
15.9	159	193 (73Hz)	1710	174	18200	1850	40 -	6185	- AV	- 11	D-31
13.5	135	164 (73Hz)	2020	206	18800	1920	40 -	6185	- AV	- 13	D-31
11.7	117	142 (73Hz)	2330	238	19800	2020	40 -	6185	- AV	- 15	D-31
10.3	103	125 (73Hz)	2640	270	20800	2120	40 -	6185	- AV	- 17	D-31
8.33	83.3	83.3 (60Hz)	3270	333	22400	2280	40 -	6185	- AV	- 21	D-31
7.00	70.0	70.0 (60Hz)	3890	396	23100	2360	40 -	6185	- AV	- 25	D-31
6.03	60.3	60.3 (60Hz)	4510	460	34500	3520	40 -	6195	- AV	- 29	D-31
5.55	55.5	55.5 (60Hz)	4910	500	35800	3650	406 -	6190	- AV	- 21	D-31
5.00	50.0	50.0 (60Hz)	5440	555	36300	3700	40 -	6195	- AV	- 35	D-31
4.07	40.7	40.7 (60Hz)	6690	682	72600	7400	40 -	6205	- AV	- 43 *2	D-32
2.97	29.7	29.7 (60Hz)	9180	935	80300	8180	40 -	6215	- AV	- 59 *2	D-32
2.71	27.1	27.1 (60Hz)	10000	1020	83100	8480	406 -	6215	- AV	- 43 *2	D-32
1.97	19.7	19.7 (60Hz)	13800	1410	119000	12200	406 -	6235	- AV	- 59 *2	D-32
1.45	14.5	17.6 (73Hz)	17800	1820	133000	13500	40 -	6235DB	- AV	- 121	D-37
1.06	10.6	12.9 (73Hz)	24300	2480	158000	16100	40 -	6245DB	- AV	- 165	D-37
0.897	8.97	10.9 (73Hz)	28700	2930	204000	20800	40 -	6255DB	- AV	- 195 *2	D-37
0.758	7.58	9.22 (73Hz)	34000	3470	265000	27000	40 -	6265DA	- AV	- 231	D-37
0.641	6.41	7.80 (73Hz)	40200	4100	276000	28100	40 -	6265DA	- AV	- 273	D-37
0.549	5.49	6.7 (73Hz)	47000	4790	248000	25300	40 -	6275DA	- AV	- 319	D-37
0.464	4.64	5.7 (73Hz)	55500	5660	248000	25300	40 -	6275DA	- AV	- 377 *2	D-37

- "*1" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000 SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
- "*2" indicate models requiring increased capacity for inverters, for certain operation conditions (ambient temperature, load condition, etc.).
- Consult us for vertical types. Lubrication oil and system requires contemplation.

Selection Tables Gearmotors (AF Motor for Inverters)



CHHM

37 kW	AF Motor for Inverters		
	P	4	6
	Motor Speed n ₁ r/min	1750(60Hz)	1165(60Hz)

Output Speed n ₂ r/min			Output Torque (60Hz) Tout N·m kgf·m	Allowable Radial Load (60Hz) Pro N kgf		Model				Dim. Page				
6Hz	60Hz	Allowable MAX Speed (Horizontal)				Input Capacity Symbol	Frame Size	Suffix	Reduction Ratio	CHHM				
15.9	159	193 (73Hz)	2110	215	25400	2590	50	-	6195	-	AV	-	11	D-31
13.5	135	164 (73Hz)	2490	254	26400	2690	50	-	6195	-	AV	-	13	D-31
11.7	117	142 (73Hz)	2880	293	27700	2820	50	-	6195	-	AV	-	15	D-31
10.3	103	125 (73Hz)	3260	332	29100	2970	50	-	6195	-	AV	-	17	D-31
8.33	83.3	83.3 (60Hz)	4030	411	31300	3190	50	-	6195	-	AV	-	21	D-31
7.77	77.7	77.7 (60Hz)	4320	441	31300	3190	506	-	6190	-	AV	-	15	D-31
7.00	70.0	70.0 (60Hz)	4800	489	32700	3330	50	-	6195	-	AV	-	25	D-31
6.03	60.3	60.3 (60Hz)	5560	567	34200	3490	50	-	6195	-	AV	-	29	D-31
5.55	55.5	55.5 (60Hz)	6050	617	35500	3610	506	-	6195	-	AV	-	21	D-31
4.07	40.7	40.7 (60Hz)	8250	841	73800	7520	50	-	6215	-	AV	-	43	D-32
2.97	29.7	29.7 (60Hz)	11300	1150	84700	8630	50	-	6225	-	AV	-	59	D-32
2.71	27.1	27.1 (60Hz)	12400	1260	87700	8940	506	-	6225	-	AV	-	43 *2	D-32
1.97	19.7	19.7 (60Hz)	17000	1730	133000	13500	506	-	6245	-	AV	-	59 *2	D-32
1.45	14.5	17.6 (73Hz)	22000	2240	180000	18400	50	-	6255DB	-	AV	-	121	D-37
1.06	10.6	12.9 (73Hz)	30000	3060	194000	19800	50	-	6255DB	-	AV	-	165	D-37
0.897	8.97	10.9 (73Hz)	35400	3610	248000	25300	50	-	6265DA	-	AV	-	195	D-37
0.758	7.58	9.22 (73Hz)	42000	4280	265000	27000	50	-	6265DA	-	AV	-	231	D-37
0.549	5.49	6.7 (73Hz)	58000	5910	248000	25300	50	-	6275DA	-	AV	-	319	D-37
0.464	4.64	5.7 (73Hz)	68500	6980	248000	25300	50	-	6275DA	-	AV	-	377 *2	D-37

- Notes: 1. Allowable radial load Pro is the value at the midpoint of the output shaft.
2. Lubrication method is different for each model. Refer to "Lubrication" section in page F-4~F-5 for details.
3. "6" at the end of "input capacity symbol" indicates models with 6P motor. Other models come with 4P motor.
4. Refer to page D-9 "Precautions for Inverter Driving" when operating beyond 6~60 Hz.
5. "*"1" indicate models with reduction ratios equal to nominal ratio. Refer to Table A-3 "6000 SK Series (Actual Reduction Ratio)" on page A-4 for actual reduction ratio. Indicated reduction ratio is the same as actual reduction ratio for other models.
6. "*"2" indicate models requiring increased capacity for inverters, for certain operation conditions (ambient temperature, load condition, etc.).
7. Consult us for vertical types. Lubrication oil and system requires contemplation.


D CYCLO® GEARMOTORS With AF Motor for Inverters

3. Dimension Tables

GEARMOTOR
FOR INVERTERS

Dimension
Tables

Dimension Tables (Universal Direction, Foot Mount)

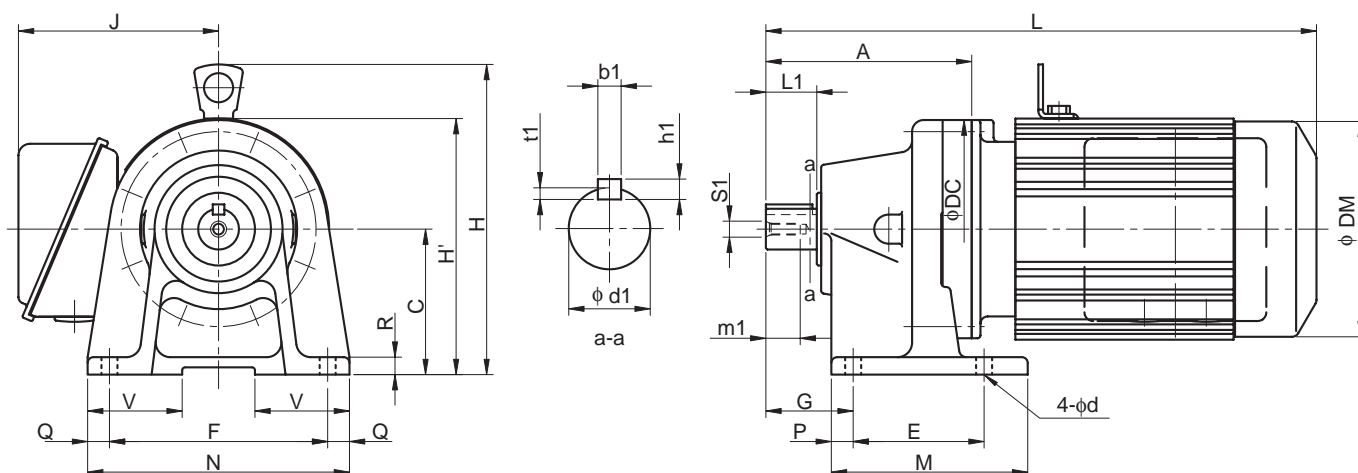CNHM^{Note 1} - 606□ to 612□ - AV

Frame size <small>Note 3</small>	A	C	DC	E	F	G	M	N	O	P	R	V	d	Output Shaft <small>Note 2, 3, 6</small>						
														d1	L1	b1	h1	t1	S1	m1
606□	92	80	110	60	120	41	84	144	12	12	10	35	9	14	25	5	5	3	M5	16
607□	98	80	110	60	120	47	84	144	12	12	10	35	9	18	30	6	6	3.5	M6	16
608□	129	90	134	75	120	52	99	144	12	12	13	37	9	22	35	6	6	3.5	M6	16
609□	142	100	150	90	150	60	135	180	15	15	12	40	11	28	35	8	7	4	M8	20
610□	156	100	150	90	150	60	135	180	15	15	12	40	11	28	35	8	7	4	M8	20
611□	170	120	162	90	150	70	135	180	15	15	12	45	11	32	45	10	8	5	M8	20
612□	186	120	204	115	190	82	155	230	20	20	15	55	14	38	55	10	8	5	M8	20

Model <small>Note 4, 5</small>	Motor		Standard						With Brake					
	kW	P	L	H	H'	J	DM	W(kg)	L	H	H'	J	DM	W(kg)
CNHM01 - 606□ - AV - (B) - Ratio	0.1	4	272	-	138	130	124	8	300	-	138	130	124	9
CNHM02 - 606□ - AV - (B) - Ratio	0.2	4	288	-	138	130	124	9	320	-	138	130	124	10
CNHM01 - 607□ - AV - (B) - Ratio	0.1	4	278	-	138	130	124	8	306	-	138	130	124	9
CNHM02 - 607□ - AV - (B) - Ratio	0.2	4	294	-	138	130	124	9	326	-	138	130	124	10
CNHM01 - 608□ - AV - (B) - Ratio	0.1	4	304	-	157	130	124	11	332	-	157	130	124	12
CNHM02 - 608□ - AV - (B) - Ratio	0.2	4	320	-	157	130	124	13	352	-	157	130	124	14
CNHM05 - 608□ - AV - (B) - Ratio	0.4	4	361	203	-	140	148	17	404	203	-	140	148	18
CNHM02 - 609□ - AV - (B) - Ratio	0.2	4	338	-	175	130	124	14	370	-	175	130	124	16
CNHM05 - 609□ - AV - (B) - Ratio	0.4	4	379	213	-	140	148	18	422	213	-	140	148	21
CNHM1 - 609□ - AV - (B) - Ratio	0.75	4	412	220	-	145	160	21	474	220	-	145	160	26
CNHM02 - 610□ - AV - (B) - Ratio	0.2	4	352	207	-	130	124	19	384	207	-	130	124	21
CNHM05 - 610□ - AV - (B) - Ratio	0.4	4	393	213	-	140	148	23	436	213	-	140	148	26
CNHM1 - 610□ - AV - (B) - Ratio	0.75	4	426	220	-	145	160	27	488	220	-	145	160	32
CNHM2 - 610□ - AV - (B) - Ratio	1.5	4	446	226	-	152	173	31	509	226	-	152	173	37
CNHM1 - 611□ - AV - (B) - Ratio	0.75	4	436	240	-	145	160	26	493	240	-	145	160	31
CNHM2 - 611□ - AV - (B) - Ratio	1.5	4	456	246	-	152	173	30	519	246	-	152	173	36
CNHM3 - 611□ - AV - (B) - Ratio	2.2	4	491	266	-	168	212	40	563	266	-	168	212	50
CNHM2 - 612□ - AV - (B) - Ratio	1.5	4	476	246	-	152	173	40	539	246	-	152	173	47
CNHM3 - 612□ - AV - (B) - Ratio	2.2	4	499	266	-	168	212	50	571	266	-	168	212	60
CNHM5 - 612□ - AV - (B) - Ratio	3.7	4	543	266	-	168	212	57	615	266	-	168	212	67

Note: 4. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.

5. "B" after the suffix "AV" indicates models equipped with brake.


6. Dimensions of shaft end: Refer to pages F-28 to F-29 for details.

7. 30kW or over motors are air over type.

8. Dimensions in above drawings are subject to change without notice.

Dimension Tables (Horizontal Direction, Foot Mount)

CHHM^{Note 1} - 613□ to 616□ - AV

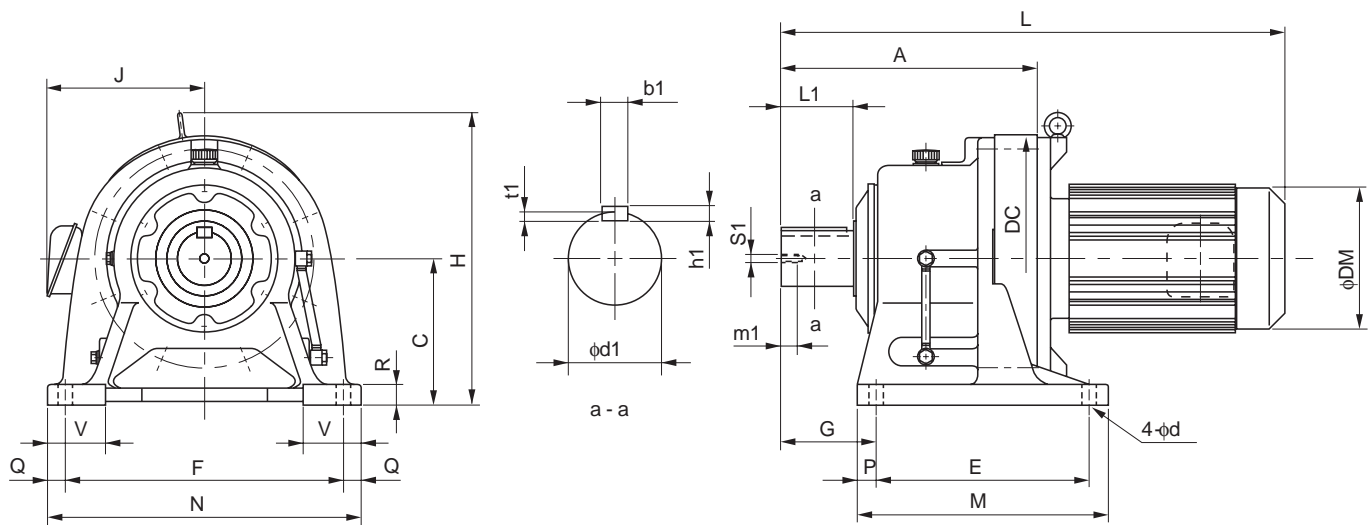


Frame size <small>Note 4</small>	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft <small>Note 2, 3, 6</small>						
														d1	L1	b1	h1	t1	S1	m1
613□	240	150	230	145	290	100	195	330	25	20	22	65	18	50	70	14	9	5.5	M10	18
<small>Note 8</small> 614□	260	150	230	145	290	120	195	330	25	20	22	65	18	50	90	14	9	5.5	M10	18
<small>Note 8</small> 616□	308	160	300	150	370	139	238	410	44	20	25	75	18	60	90	18	11	7	M10	18

Model <small>Note 4, 5</small>	Motor		Standard					With Brake				
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM2 - 613□ - AV - (B) - Ratio	1.5	4	530	274	152	173	58	593	274	152	173	65
CHHM3 - 613□ - AV - (B) - Ratio	2.2	4	553	296	168	212	68	625	296	168	212	78
CHHM5 - 613□ - AV - (B) - Ratio	3.7	4	597	296	168	212	75	669	296	168	212	85
CHHM8 - 613□ - AV - (B) - Ratio	5.5	4	620	323	213	251	90	715	323	213	251	108
CHHM10 - 613□ - AV - (B) - Ratio	7.5	4	680	323	213	251	103	775	323	213	251	121
*CHHM15 - 613□ - AV - (B) - Ratio	11	4	770	358	261	324	155	875	321	261	324	189
CHHM3 - 614□ - AV - (B) - Ratio	2.2	4	573	296	168	212	69	645	296	168	212	79
CHHM5 - 614□ - AV - (B) - Ratio	3.7	4	617	296	168	212	76	689	296	168	212	86
CHHM8 - 614□ - AV - (B) - Ratio	5.5	4	640	323	213	251	91	735	323	213	251	109
CHHM10 - 614□ - AV - (B) - Ratio	7.5	4	700	323	213	251	104	795	323	213	251	122
*CHHM15 - 614□ - AV - (B) - Ratio	11	4	790	358	261	324	156	895	321	261	324	190
CHHM3 - 616□ - AV - (B) - Ratio	2.2	4	621	310	168	212	106	693	310	168	212	116
CHHM5 - 616□ - AV - (B) - Ratio	3.7	4	665	310	168	212	113	737	310	168	212	123
CHHM8 - 616□ - AV - (B) - Ratio	5.5	4	693	333	213	251	129	788	333	213	251	146
CHHM10 - 616□ - AV - (B) - Ratio	7.5	4	753	333	213	251	143	848	333	213	251	160
*CHHM15 - 616□ - AV - (B) - Ratio	11	4	838	368	261	324	196	943	368	261	324	230
*CHHM20 - 616□ - AV - (B) - Ratio	15	4	933	368	328	394	272	1098	368	328	394	323

** indicates models with bottom level of the motor lower than the reducer base.
Refer to pages D-33 and D-34 for center height options.

- Note: 1. □ indicates motor capacity.
2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables (Horizontal Direction, Foot-Mount)

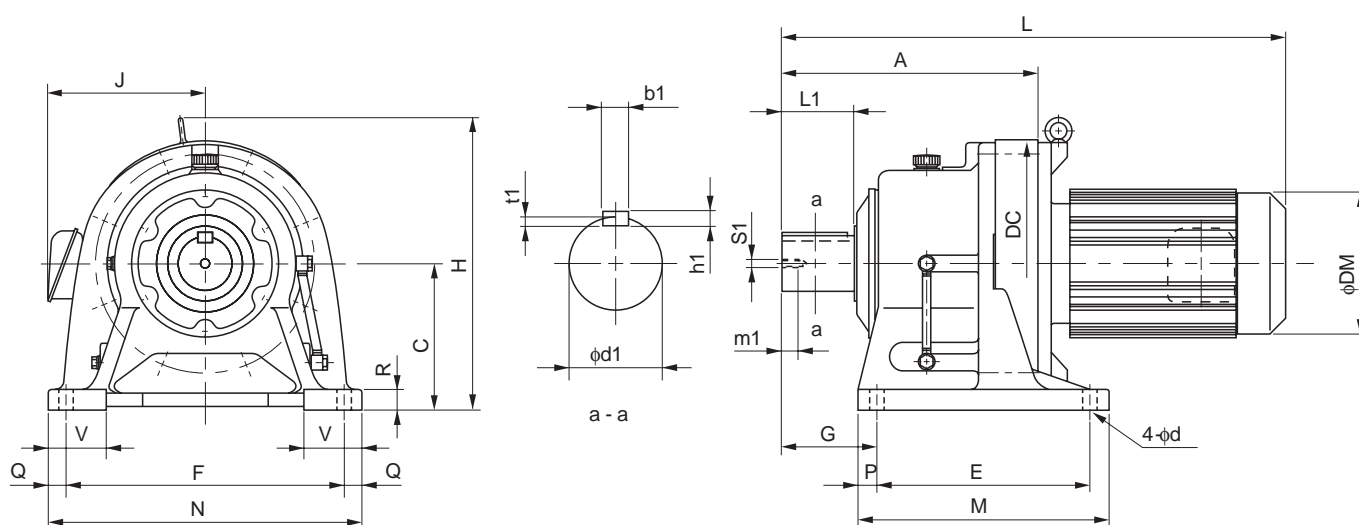CHHM^{Note 1} - 617□ to 619□ - AV

Frame size <small>Note 4</small>	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft <small>Note 2, 3, 6</small>						
														d1	L1	b1	h1	t1	S1	m1
617□	352	200	340	275	380	125	335	430	30	25	30	80	22	70	90	20	12	7.5	M12	24
618□	389	220	370	320	420	145	380	470	30	25	30	85	22	80	110	22	14	9	M12	24
619□	465	250	430	380	480	170	440	530	30	25	35	90	26	95	135	25	14	9	M20	34

Model <small>Note 4, 5</small>	Motor		Standard					With Brake				
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM8 - 617□ - AV - (B) - Ratio	5.5	4	742	403	213	251	169	837	403	213	251	187
CHHM10 - 617□ - AV - (B) - Ratio	7.5	4	802	403	213	251	183	897	403	213	251	201
CHHM15 - 617□ - AV - (B) - Ratio	11	4	882	413	261	324	237	987	413	261	324	271
CHHM20 - 617□ - AV - (B) - Ratio	15	4	977	428	328	394	309	1142	428	328	394	360
CHHM25 - 617□ - AV - (B) - Ratio	18.5	4	977	428	328	394	309	1142	428	328	394	360
CHHM30 - 617□ - AV - (B) - Ratio	22	4	977	428	328	394	326	1142	428	328	394	369
CHHM10 - 618□ - AV - (B) - Ratio	7.5	4	839	438	213	251	221	934	438	213	251	239
CHHM15 - 618□ - AV - (B) - Ratio	11	4	919	438	261	324	281	1024	438	261	324	310
CHHM20 - 618□ - AV - (B) - Ratio	15	4	1014	448	328	394	347	1179	448	328	394	398
CHHM25 - 618□ - AV - (B) - Ratio	18.5	4	1014	448	328	394	347	1179	448	328	394	398
CHHM30 - 618□ - AV - (B) - Ratio	22	4	1014	448	328	394	364	1179	448	328	394	407
CHHM40 - 618□ - AV - (B) - Ratio	30 <small>Note 7</small>	4	1159	481	328	394	314	1411	481	328	394	510
CHHM15 - 619□ - AV - (B) - Ratio	11	4	995	467	261	324	346	1100	467	261	324	381
CHHM20 - 619□ - AV - (B) - Ratio	15	4	1090	511	328	394	422	1255	511	328	394	467
CHHM25 - 619□ - AV - (B) - Ratio	18.5	4	1090	511	328	394	422	1255	511	328	394	467
CHHM30 - 619□ - AV - (B) - Ratio	22	4	1090	511	328	394	437	1255	511	328	394	480
CHHM40 - 619□ - AV - (B) - Ratio	30 <small>Note 7</small>	4	1235	511	328	394	477	1487	511	328	394	573
CHHM406 - 619□ - AV - (B) - Ratio	30 <small>Note 7</small>	6	1235	511	328	394	477	1487	511	328	394	573
CHHM50 - 619□ - AV - (B) - Ratio	37 <small>Note 7</small>	4	1235	511	328	394	478	1487	511	328	394	573
CHHM506 - 619□ - AV - (B) - Ratio	37 <small>Note 7</small>	6	1290	511	378	484	569	-	-	-	-	-

Note: 4. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.

5. "B" after the suffix "AV" indicates models equipped with brake.


6. Dimensions of shaft end: Refer to pages F-28 to F-29 for details.

7. 30kW or over motors are air over type.

8. Dimensions in above drawings are subject to change without notice.

Dimension Tables (Horizontal Direction, Foot Mount)

CHHM^{Note 1} - 6205 to 6255 - AV

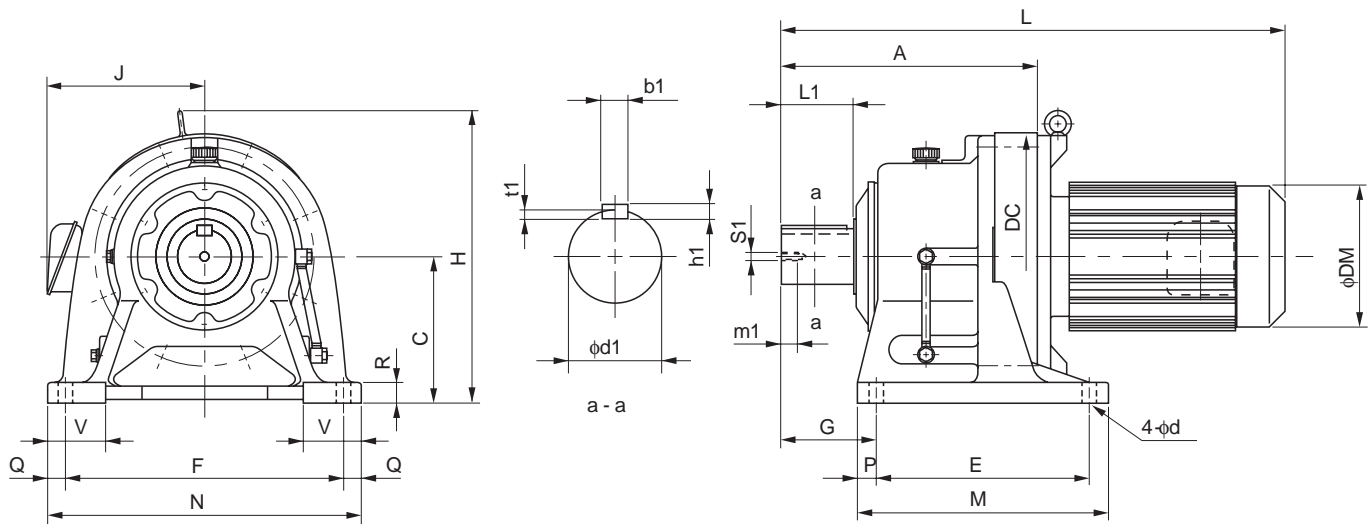


GEARMOTOR FOR INVERTERS
Dimension Tables
CHHM

Frame size	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft <small>Note 2, 3, 6</small>						
														d1	L1	b1	h1	t1	S1	m1
6205	502	250	448	360	440	215	440	530	40	45	35	100	26	100	165	28	16	10	M20	34
6215	526	265	485	395	480	210	475	580	40	50	40	110	26	110	165	28	16	10	M20	34
6225	566	280	526	420	540	230	520	620	50	40	40	115	33	120	165	32	18	11	M20	34
6235	628	300	562	460	580	260	560	670	50	45	45	120	33	130	200	32	18	11	M24	41
6245	657	335	614	480	630	263	580	720	50	45	45	128	39	140	200	36	20	12	M24	41
6255	775	375	670	520	670	320	630	780	55	55	50	140	39	160	240	40	22	13	M30	49

Model	Motor <small>Note 5</small>	Standard							With Brake				
		kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM20 - 6205 - AV - (B) - Ratio	15 4	1127	530	328	394	443	1292	530	328	394	488		
CHHM30 - 6205 - AV - (B) - Ratio	22 4	1127	530	328	394	456	1292	530	328	394	501		
CHHM40 - 6205 - AV - (B) - Ratio	30 <small>Note 7</small> 4	1272	530	328	394	496	1524	530	328	394	589		
CHHM25 - 6215 - AV - (B) - Ratio	18.5 4	1151	575	328	394	520	1316	575	328	394	565		
CHHM40 - 6215 - AV - (B) - Ratio	30 <small>Note 7</small> 4	1296	575	328	394	573	1548	575	328	394	667		
CHHM406 - 6215 - AV - (B) - Ratio	30 <small>Note 7</small> 6	1296	575	328	394	573	1548	575	328	394	667		
CHHM50 - 6215 - AV - (B) - Ratio	37 <small>Note 7</small> 4	1296	575	328	394	573	1548	575	328	394	667		
CHHM30 - 6225 - AV - (B) - Ratio	22 4	1191	610	328	394	618	1401	610	328	394	663		
CHHM50 - 6225 - AV - (B) - Ratio	37 <small>Note 7</small> 4	1336	610	328	394	658	1588	610	328	394	752		
CHHM406 - 6235 - AV - (B) - Ratio	30 <small>Note 7</small> 6	1398	667	328	394	751	1650	667	297	394	838		
CHHM506 - 6245 - AV - (B) - Ratio	37 <small>Note 7</small> 6	1482	729	378	484	967	-	-	-	-	-		
CHHM506 - 6255 - AV - (B) - Ratio	37 <small>Note 7</small> 6	1600	815	378	484	1286	-	-	-	-	-		

Note: 1. □ indicates motor capacity.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables (Universal Direction, Foot Mount)

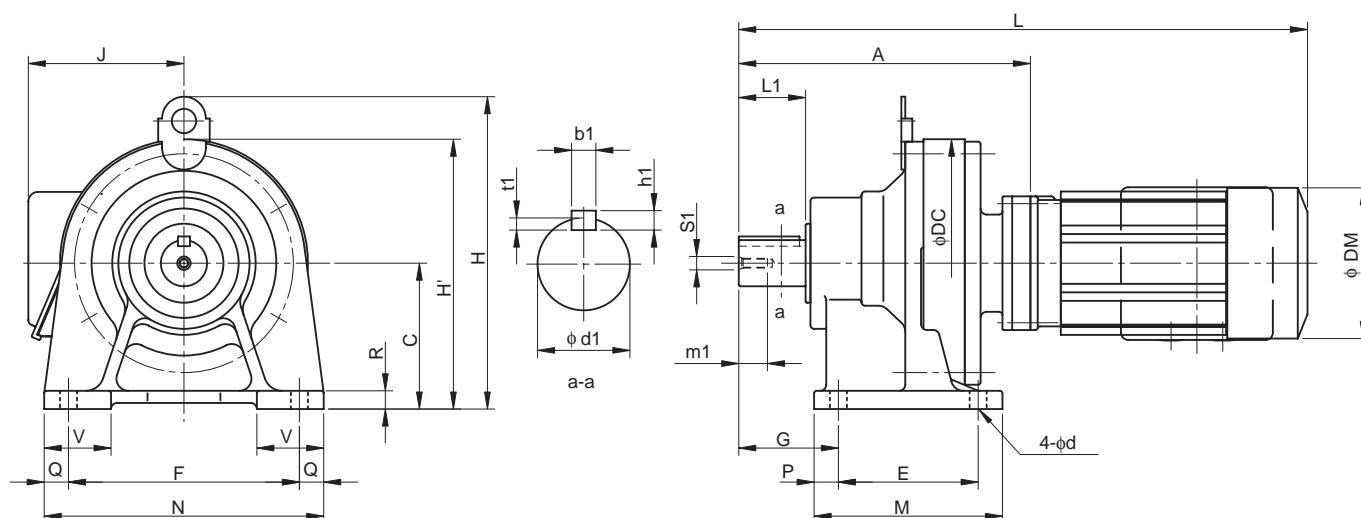CNHM^{Note 1} - 607□DA to 612□DB - AV

Frame size <small>Note 4</small>	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft <small>Note 2, 3, 6</small>						
														d1	L1	b1	h1	t1	S1	m1
607□DA	131	80	110	60	120	47	84	144	12	12	10	35	9	18	30	6	6	3.5	M6	16
609□DA	190	100	150	90	150	60	135	180	15	15	12	40	11	28	35	8	7	4	M8	20
610□DA	204	100	150	90	150	60	135	180	15	15	12	40	11	28	35	8	7	4	M8	20
612□DA	240	120	204	115	190	82	155	230	20	20	15	55	14	38	55	10	8	5	M8	20
612□DB	252	120	204	115	190	82	155	230	20	20	15	55	14	38	55	10	8	5	M8	20

Model <small>Note 4, 5</small>	Motor		Standard							With Brake					
	kW	P	L	H	H'	J	DM	W(kg)	L	H	H'	J	DM	W(kg)	
CNHM01 - 607□DA - AV - (B) - Ratio	0.1	4	311	-	140	130	124	10	339	-	138	130	124	11	
CNHM01 - 609□DA - AV - (B) - Ratio	0.1	4	370	207	-	130	124	18	398	207	-	130	124	19	
CNHM02 - 609□DA - AV - (B) - Ratio	0.2	4	386	207	-	130	124	19	418	207	-	130	124	20	
CNHM01 - 610□DA - AV - (B) - Ratio	0.1	4	384	207	-	130	124	20	412	207	-	130	124	21	
CNHM02 - 610□DA - AV - (B) - Ratio	0.2	4	400	207	-	130	124	21	432	207	-	130	124	22	
CNHM01 - 612□DA - AV - (B) - Ratio	0.1	4	420	257	-	130	124	31	448	257	-	130	124	32	
CNHM02 - 612□DA - AV - (B) - Ratio	0.2	4	436	257	-	130	124	32	468	257	-	130	124	33	
CNHM05 - 612□DB - AV - (B) - Ratio	0.4	4	489	257	-	140	148	39	532	257	-	140	148	42	
CNHM1 - 612□DB - AV - (B) - Ratio	0.75	4	516	257	-	145	160	42	578	257	-	145	160	47	

Note: 4. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.

5. "B" after the suffix "AV" indicates models equipped with brake.


6. Dimensions of shaft end: Refer to pages F-28 to F-29 for details.

7. 30kW or over motors are air over type.

8. Dimensions in above drawings are subject to change without notice.

Dimension Tables (Horizontal Direction, Foot Mount)

CHHM^{Note 1} - 613□DA to 618□DA - AV

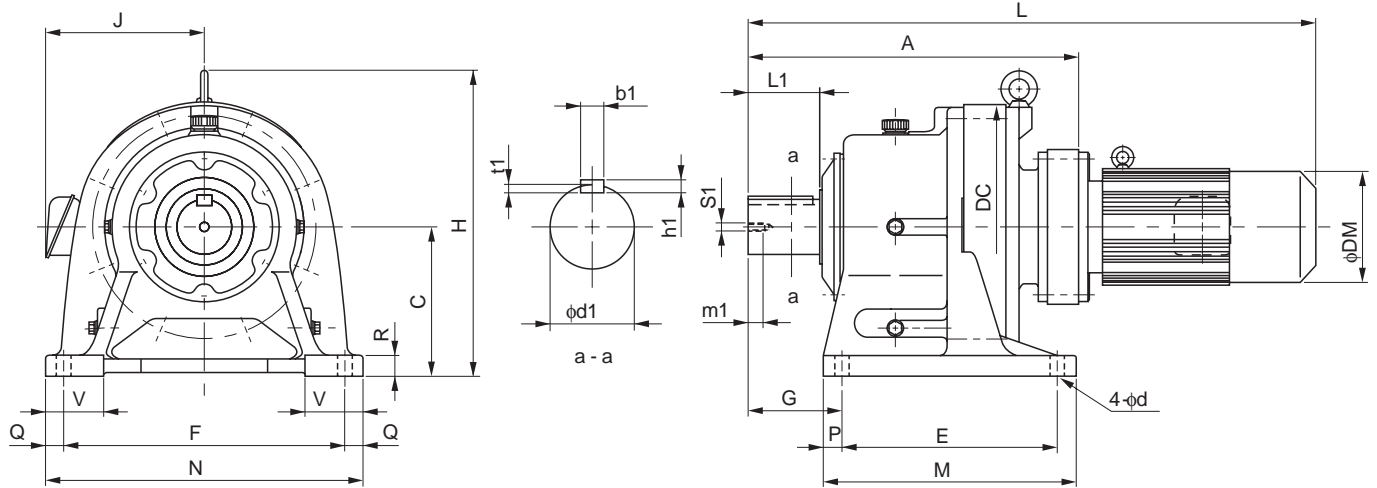


GEARMOTOR FOR INVERTERS
Dimension Tables
CHHM

Frame size <small>Note 4</small>	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft <small>Note 2, 3, 6</small>						
														d1	L1	b1	h1	t1	S1	m1
613□DA	294	150	230	145	290	100	195	330	25	20	22	65	18	50	70	14	9	5.5	M10	18
613□DB	303	150	230	145	290	100	195	330	25	20	22	65	18	50	70	14	9	5.5	M10	18
613□DC	317	150	230	145	290	100	195	330	25	20	22	65	18	50	70	14	9	5.5	M10	18
614□DA	314	150	230	145	290	120	195	330	25	20	22	65	18	50	90	14	9	5.5	M10	18
614□DB	323	150	230	145	290	120	195	330	25	20	22	65	18	50	90	14	9	5.5	M10	18
614□DC	337	150	230	145	290	120	195	330	25	20	22	65	18	50	90	14	9	5.5	M10	18
616□DA	373	160	300	150	370	139	238	410	44	20	25	75	18	60	90	18	11	7	M10	18
616□DB	387	160	300	150	370	139	238	410	44	20	25	75	18	60	90	18	11	7	M10	18
617□DA	418	200	340	275	380	125	335	430	30	25	30	80	22	70	90	20	12	7.5	M12	24
617□DB	432	200	340	275	380	125	335	430	30	25	30	80	22	70	90	20	12	7.5	M12	24
618□DA	474	220	370	320	420	145	380	470	30	25	30	85	22	80	110	22	14	9	M12	24

Model <small>Note 4, 5</small>	Motor		Standard					With Brake				
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM02 - 613□DA - AV - (B) - Ratio	0.2	4	490	300	130	124	47	522	300	130	124	48
CHHM05 - 613□DB - AV - (B) - Ratio	0.4	4	540	265	140	148	54	583	265	140	148	57
CHHM1 - 613□DB - AV - (B) - Ratio	0.75	4	573	270	145	160	57	635	270	145	160	62
CHHM2 - 613□DC - AV - (B) - Ratio	1.5	4	607	276	152	173	64	670	276	152	173	70
CHHM02 - 614□DA - AV - (B) - Ratio	0.2	4	510	300	130	124	48	542	300	130	124	49
CHHM05 - 614□DB - AV - (B) - Ratio	0.4	4	560	265	140	148	54	603	265	140	148	57
CHHM1 - 614□DB - AV - (B) - Ratio	0.75	4	593	270	145	160	57	655	270	145	160	62
CHHM2 - 614□DC - AV - (B) - Ratio	1.5	4	627	276	152	173	61	690	276	152	173	70
CHHM02 - 616□DA - AV - (B) - Ratio	0.2	4	569	349	130	124	91	601	349	130	124	93
CHHM05 - 616□DA - AV - (B) - Ratio	0.4	4	610	349	140	148	95	653	349	140	148	98
CHHM1 - 616□DA - AV - (B) - Ratio	0.75	4	643	349	145	160	99	705	349	145	160	104
CHHM2 - 616□DB - AV - (B) - Ratio	1.5	4	677	349	152	173	105	740	349	152	173	111
CHHM02 - 617□DA - AV - (B) - Ratio	0.2	4	614	416	130	124	126	646	416	130	124	128
CHHM05 - 617□DA - AV - (B) - Ratio	0.4	4	655	416	140	148	130	698	416	140	148	133
CHHM1 - 617□DA - AV - (B) - Ratio	0.75	4	688	416	145	160	134	750	416	145	160	139
CHHM2 - 617□DB - AV - (B) - Ratio	1.5	4	722	416	152	173	140	785	416	152	173	146
CHHM05 - 618□DA - AV - (B) - Ratio	0.4	4	711	451	140	148	176	754	451	140	148	178
CHHM1 - 618□DA - AV - (B) - Ratio	0.75	4	744	451	145	160	179	806	451	145	160	184
CHHM2 - 618□DA - AV - (B) - Ratio	1.5	4	764	451	152	173	183	827	451	152	173	189

Note: 1. □ indicates motor capacity.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables (Horizontal Direction, Foot-Mount)

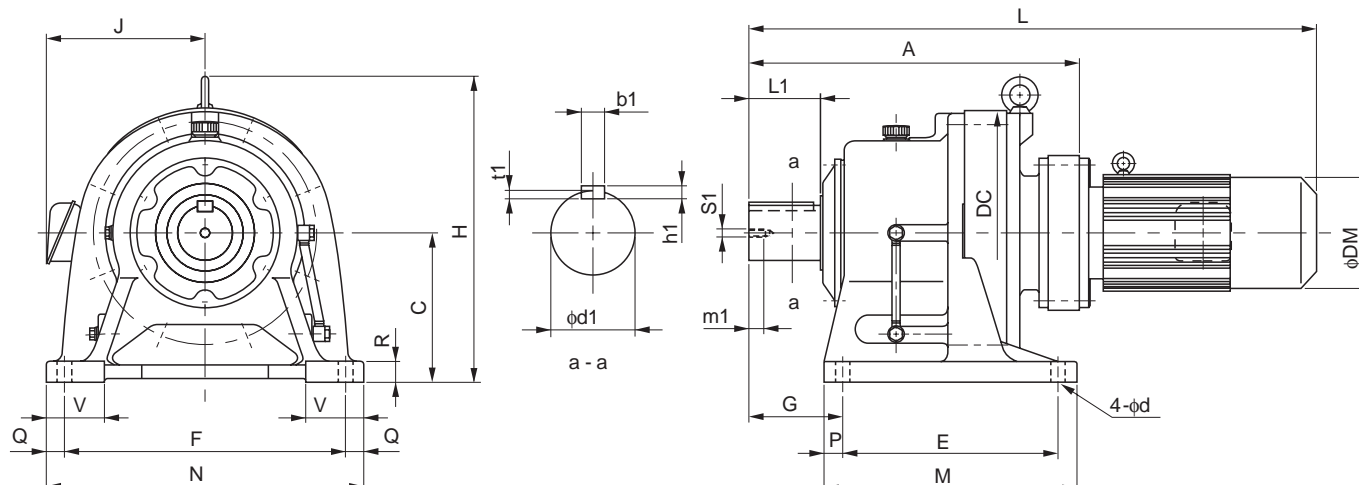CHHM^{Note 1} - 616□DC to 619□DB - AV

Frame size <small>Note 4</small>	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft <small>Note 2, 3, 6</small>						
														d1	L1	b1	h1	t1	S1	m1
616□DC	389	160	300	150	370	139	238	410	44	20	25	75	18	60	90	18	11	7	M10	18
617□DC	436	200	340	275	380	125	335	430	30	25	30	80	22	70	90	20	12	7.5	M12	24
618□DB	496	220	370	320	420	145	380	470	30	25	30	85	22	80	110	22	14	9	M12	24
619□DA	556	250	430	380	480	170	440	530	30	25	35	90	26	95	135	25	14	9	M20	34
619□DB	572	250	430	380	480	170	440	530	30	25	35	90	26	95	135	25	14	9	M20	34

Model <small>Note 4, 5</small>	Motor		Standard					With Brake				
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM3 - 616□DC - AV - (B) - Ratio	2.2	4	702	349	168	212	121	774	349	147	212	131
CHHM5 - 616□DC - AV - (B) - Ratio	3.7	4	746	349	168	212	128	818	349	147	212	138
CHHM3 - 617□DC - AV - (B) - Ratio	2.2	4	749	416	168	212	155	821	416	147	212	165
CHHM5 - 617□DC - AV - (B) - Ratio	3.7	4	793	416	168	212	162	865	416	147	212	172
CHHM3 - 618□DB - AV - (B) - Ratio	2.2	4	809	451	168	212	207	881	451	147	212	217
CHHM5 - 618□DB - AV - (B) - Ratio	3.7	4	853	451	168	212	214	925	451	147	212	224
CHHM8 - 618□DB - AV - (B) - Ratio	5.5	4	876	451	213	251	229	971	451	188	251	247
CHHM10 - 618□DB - AV - (B) - Ratio	7.5	4	936	451	213	251	243	1031	451	188	251	261
CHHM1 - 619□DA - AV - (B) - Ratio	0.75	4	826	531	145	160	254	888	531	119	160	259
CHHM2 - 619□DA - AV - (B) - Ratio	1.5	4	846	531	152	173	258	909	531	126	173	265
CHHM3 - 619□DA - AV - (B) - Ratio	2.2	4	869	531	168	212	268	941	531	147	212	278
CHHM5 - 619□DA - AV - (B) - Ratio	3.7	4	913	531	168	212	275	985	531	147	212	285
CHHM8 - 619□DB - AV - (B) - Ratio	5.5	4	952	531	213	251	297	1047	531	188	251	315
CHHM10 - 619□DB - AV - (B) - Ratio	7.5	4	1012	531	213	251	311	1107	531	188	251	329
CHHM15 - 619□DB - AV - (B) - Ratio	11	4	1102	531	232	324	363	1207	531	259	324	397

Note: 4. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.

5. "B" after the suffix "AV" indicates models equipped with brake.


6. Dimensions of shaft end: Refer to pages F-28 to F-29 for details.

7. 30kW or over motors are air over type.

8. Dimensions in above drawings are subject to change without notice.

Dimension Tables (Horizontal Direction, Foot Mount)

CHHM^{Note 1} - 6205DA to 6225DB - AV

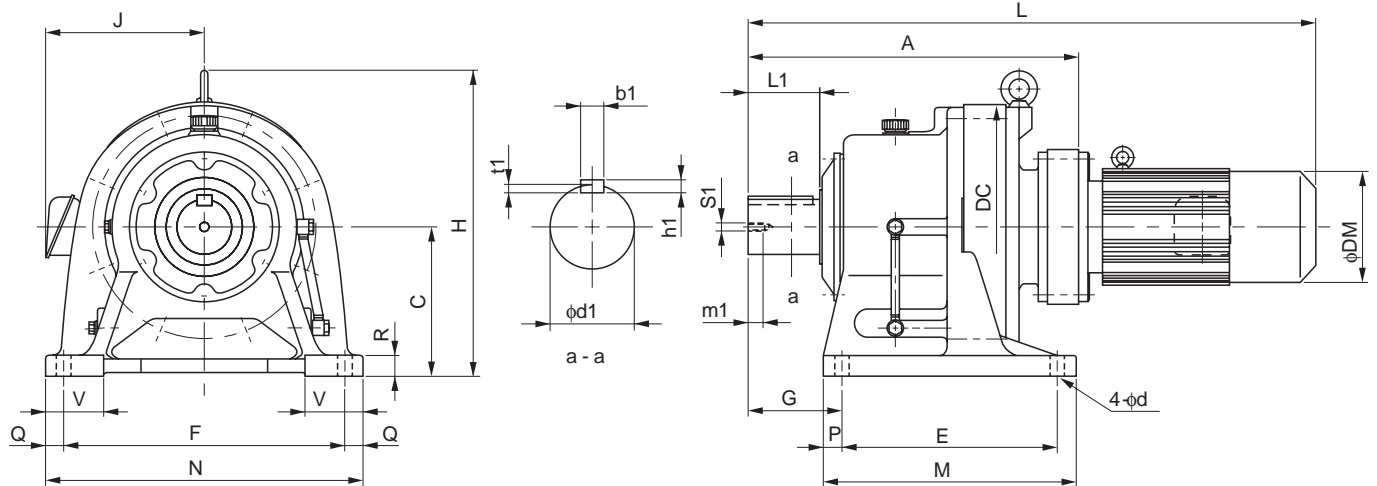


GEARMOTOR FOR INVERTERS
Dimension Tables CHHM

Frame size <small>Note 4</small>	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft <small>Note 2, 3, 6</small>						
														d1	L1	b1	h1	t1	S1	m1
6205DA	597	250	448	360	440	215	440	530	40	45	35	100	26	100	165	28	16	10	M20	34
6205DB	624	250	448	360	440	215	440	530	40	45	35	100	26	100	165	28	16	10	M20	34
6215DA	650	265	485	395	480	210	475	580	40	50	40	110	26	110	165	28	16	10	M20	34
6215DB	675	265	485	395	480	210	475	580	40	50	40	110	26	110	165	28	16	10	M20	34
6225DA	692	280	526	420	540	230	520	620	50	40	40	115	33	120	165	32	18	11	M20	34
6225DB	735	280	526	420	540	230	520	620	50	40	40	115	33	120	165	32	18	11	M20	34

Model <small>Note 4, 5</small>	Motor		Standard					With Brake				
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM1 - 6205DA - AV - (B) - Ratio	0.75	4	867	530	145	160	273	929	530	145	160	278
CHHM3 - 6205DA - AV - (B) - Ratio	2.2	4	910	530	168	212	287	982	530	168	212	297
CHHM8 - 6205DB - AV - (B) - Ratio	5.5	4	1004	530	213	251	321	1099	530	213	251	339
CHHM10 - 6205DB - AV - (B) - Ratio	7.5	4	1064	530	188	251	334	1159	530	188	251	352
CHHM15 - 6205DB - AV - (B) - Ratio	11	4	1154	530	232	324	386	1249	530	259	324	419
CHHM2 - 6215DA - AV - (B) - Ratio	1.5	4	940	575	152	173	370	1003	575	152	173	377
CHHM3 - 6215DA - AV - (B) - Ratio	2.2	4	963	575	168	212	380	1035	575	168	212	390
CHHM5 - 6215DA - AV - (B) - Ratio	3.7	4	1007	575	168	212	387	1079	575	168	212	397
CHHM8 - 6215DA - AV - (B) - Ratio	5.5	4	1030	575	213	251	402	1125	575	213	251	420
CHHM10 - 6215DA - AV - (B) - Ratio	7.5	4	1090	575	188	251	415	1185	575	188	251	433
CHHM15 - 6215DA - AV - (B) - Ratio	11	4	1180	575	232	324	467	1285	575	259	324	501
CHHM20 - 6215DB - AV - (B) - Ratio	15	4	1300	575	297	394	564	1465	575	297	394	615
CHHM2 - 6225DA - AV - (B) - Ratio	1.5	4	982	610	152	173	444	1045	640	152	173	451
CHHM3 - 6225DA - AV - (B) - Ratio	2.2	4	1005	610	168	212	454	1077	610	168	212	464
CHHM5 - 6225DA - AV - (B) - Ratio	3.7	4	1049	610	168	212	461	1121	610	168	212	471
CHHM8 - 6225DA - AV - (B) - Ratio	5.5	4	1072	610	213	251	476	1167	610	213	251	494
CHHM10 - 6225DA - AV - (B) - Ratio	7.5	4	1132	610	213	251	490	1227	610	213	251	508
CHHM15 - 6225DA - AV - (B) - Ratio	11	4	1222	610	232	324	542	1327	610	259	324	576
CHHM20 - 6225DB - AV - (B) - Ratio	15	4	1360	610	297	394	661	1525	610	297	394	712
CHHM25 - 6225DB - AV - (B) - Ratio	18.5	4	1360	610	297	394	661	1525	610	297	394	712
CHHM30 - 6225DB - AV - (B) - Ratio	22	4	1360	610	297	394	678	1525	610	297	394	729

- Note: 1. □ indicates motor capacity.
 2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables (Horizontal Direction, Foot Mount)

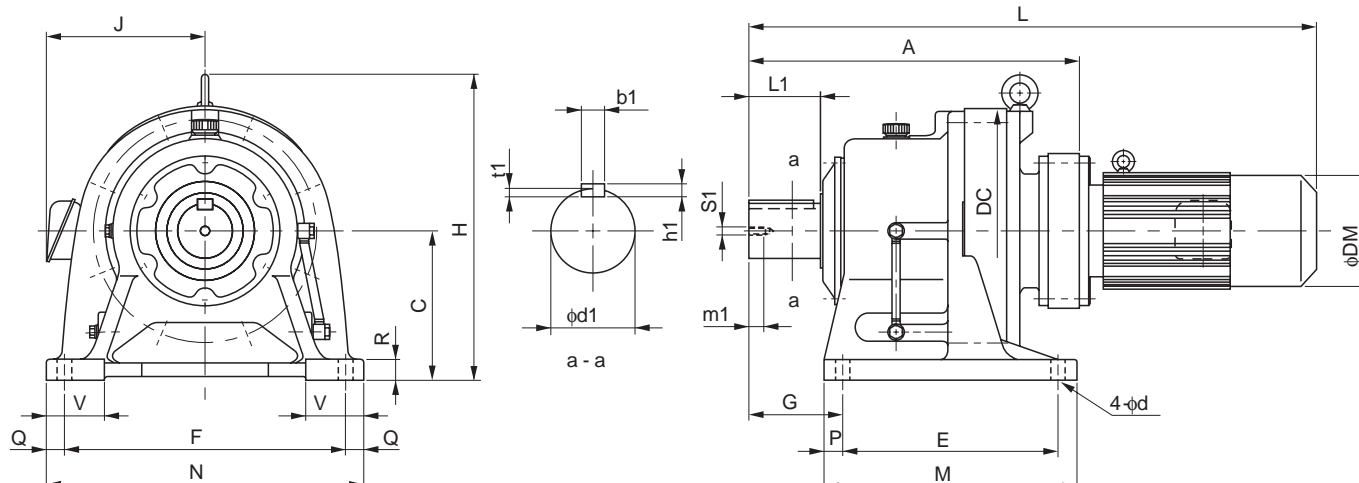CHHM^{Note 1} - 6235DA to 6255DB - AV

Frame size	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft ^{Note 2, 3, 6}						
														d1	L1	b1	h1	t1	S1	m1
6235DA	778	300	562	460	580	260	560	670	50	45	45	120	33	130	200	32	18	11	M24	41
6235DB	800	300	562	460	580	260	560	670	50	45	45	120	33	130	200	32	18	11	M24	41
6245DA	816	335	614	480	630	263	580	720	50	45	45	128	39	140	200	36	20	12	M24	41
6245DB	837	335	614	480	630	263	580	720	50	45	45	128	39	140	200	36	20	12	M24	41
6255DA	956	375	670	520	670	320	630	780	55	55	50	140	39	160	240	40	22	13	M30	49
6255DB	978	375	670	520	670	320	630	780	55	55	50	140	39	160	240	40	22	13	M30	49

Model	Note 5	Motor		Standard					With Brake				
		kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM3 - 6235DA - AV - (B) - Ratio		2.2	4	1091	667	168	212	570	1163	667	168	212	580
CHHM5 - 6235DA - AV - (B) - Ratio		3.7	4	1135	667	168	212	577	1207	667	168	212	587
CHHM8 - 6235DA - AV - (B) - Ratio		5.5	4	1163	667	213	251	593	1258	667	213	251	610
CHHM10 - 6235DA - AV - (B) - Ratio		7.5	4	1223	667	213	251	607	1318	667	213	251	624
CHHM15 - 6235DA - AV - (B) - Ratio		11	4	1308	667	261	324	660	1413	667	261	324	694
CHHM20 - 6235DA - AV - (B) - Ratio		15	4	1403	667	297	394	737	1568	667	297	394	788
CHHM25 - 6235DB - AV - (B) - Ratio		18.5	4	1425	667	297	394	782	1590	667	297	394	825
CHHM30 - 6235DB - AV - (B) - Ratio		22	4	1425	667	297	394	782	1590	667	297	394	825
CHHM40 - 6235DB - AV - (B) - Ratio		30 ^{Note 7}	4	1570	667	297	394	822	1822	667	297	394	918
CHHM3 - 6245DA - AV - (B) - Ratio		2.2	4	1129	729	168	212	679	1201	729	168	212	689
CHHM5 - 6245DA - AV - (B) - Ratio		3.7	4	1173	729	168	212	686	1245	729	168	212	696
CHHM8 - 6245DA - AV - (B) - Ratio		5.5	4	1201	729	213	251	702	1296	729	213	251	719
CHHM10 - 6245DA - AV - (B) - Ratio		7.5	4	1261	729	213	251	716	1356	729	213	251	733
CHHM15 - 6245DA - AV - (B) - Ratio		11	4	1346	729	261	324	769	1451	729	261	324	803
CHHM20 - 6245DA - AV - (B) - Ratio		15	4	1441	729	328	394	840	1606	729	328	394	891
CHHM25 - 6245DB - AV - (B) - Ratio		18.5	4	1462	729	297	394	866	1627	729	297	394	917
CHHM30 - 6245DB - AV - (B) - Ratio		22	4	1462	729	297	394	883	1627	729	297	394	926
CHHM40 - 6245DB - AV - (B) - Ratio		30 ^{Note 7}	4	1607	729	297	394	937	1859	729	297	394	1033
CHHM5 - 6255DA - AV - (B) - Ratio		3.7	4	1328	815	168	212	1041	1400	815	168	212	1049
CHHM8 - 6255DA - AV - (B) - Ratio		5.5	4	1346	815	213	251	1056	1441	815	213	251	1071
CHHM10 - 6255DA - AV - (B) - Ratio		7.5	4	1406	815	213	251	1071	1501	815	213	251	1086
CHHM15 - 6255DA - AV - (B) - Ratio		11	4	1486	815	261	324	1103	1591	815	261	324	1157
CHHM20 - 6255DA - AV - (B) - Ratio		15	4	1581	815	328	394	1195	1746	815	328	394	1246
CHHM25 - 6255DA - AV - (B) - Ratio		18.5	4	1581	815	328	394	1195	1746	815	328	394	1246
CHHM30 - 6255DA - AV - (B) - Ratio		22	4	1581	815	297	394	1215	1746	815	297	394	1258
CHHM40 - 6255DB - AV - (B) - Ratio		30 ^{Note 7}	4	1748	815	297	394	1325	2000	815	297	394	1421
CHHM50 - 6255DB - AV - (B) - Ratio		37 ^{Note 7}	4	1748	815	297	394	1325	2000	815	297	394	1421

Note: 4. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.

5. "B" after the suffix "AV" indicates models equipped with brake.


6. Dimensions of shaft end: Refer to pages F-28 to F-29 for details.

7. 30kW or over motors are air over type.

8. Dimensions in above drawings are subject to change without notice.

Dimension Tables (Horizontal Direction, Foot Mount)

CHHM - 6265DA to 6275DA - AV

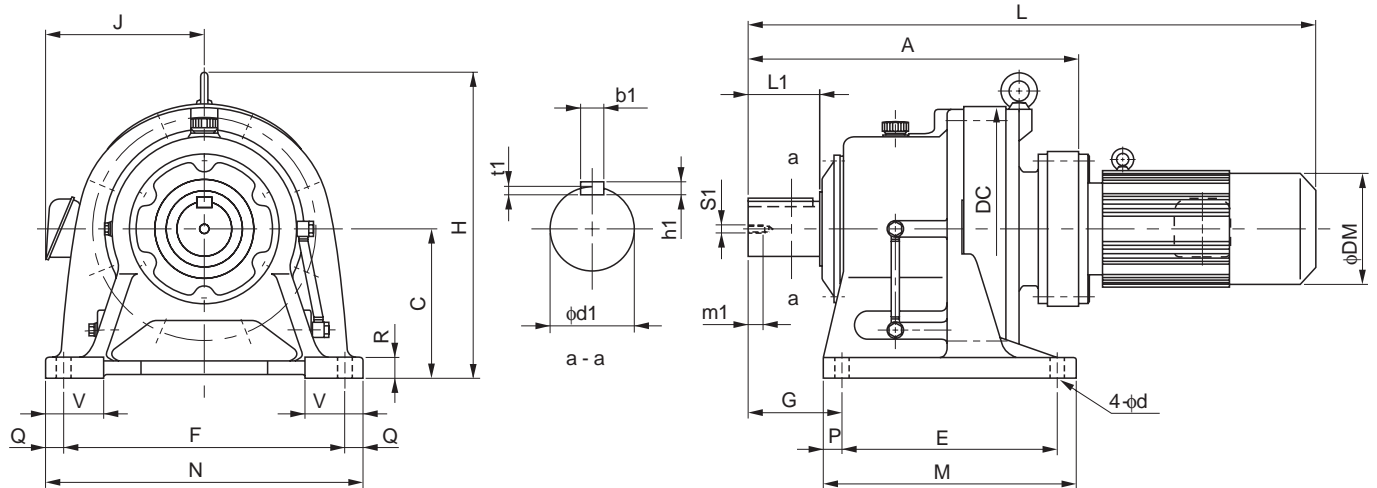


Frame size	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft <small>Note 2, 3, 6</small>						
														d1	L1	b1	h1	t1	S1	m1
6265DA	1088	400	736	590	770	390	700	880	55	55	55	160	45	170	300	40	22	13	M30	49
6275DA	1349	540	950	420	1050	485	1040	1160	100	55	60	200	45	180	330	45	25	15	M30	52

Model	Motor <small>Note 5</small>	Standard						With Brake				
		kW	P	L	H	J	DM	W(kg)	L	H	J	DM
CHHM8 - 6265DA - AV - (B) - Ratio	5.5 4	1493	874	213	251	1381	1588	874	213	251	1401	
CHHM10 - 6265DA - AV - (B) - Ratio	7.5 4	1553	874	213	251	1396	1648	874	213	251	1411	
CHHM15 - 6265DA - AV - (B) - Ratio	11 4	1618	874	261	324	1446	1723	874	261	324	1482	
CHHM20 - 6265DA - AV - (B) - Ratio	15 4	1713	874	328	394	1525	1878	874	328	394	1570	
CHHM25 - 6265DA - AV - (B) - Ratio	18.5 4	1713	874	328	394	1525	1878	874	328	394	1570	
CHHM30 - 6265DA - AV - (B) - Ratio	22 4	1713	874	328	394	1540	1878	874	328	394	1583	
CHHM40 - 6265DA - AV - (B) - Ratio	30 <small>Note 7</small> 4	1858	874	328	394	1577	2110	874	328	394	1673	
CHHM50 - 6265DA - AV - (B) - Ratio	37 <small>Note 7</small> 4	1858	874	328	394	1577	2110	874	328	394	1673	
CHHM10 - 6275DA - AV - (B) - Ratio	7.5 4	1814	1161	213	251	2531	1909	1161	213	251	2546	
CHHM15 - 6275DA - AV - (B) - Ratio	11 4	1879	1161	261	324	2581	1984	1161	261	324	2617	
CHHM20 - 6275DA - AV - (B) - Ratio	15 4	1974	1161	328	394	2660	2139	1161	328	394	2705	
CHHM25 - 6275DA - AV - (B) - Ratio	18.5 4	1974	1161	328	394	2660	2139	1161	328	394	2705	
CHHM30 - 6275DA - AV - (B) - Ratio	22 4	1974	1161	328	394	2675	2139	1161	328	394	2718	
CHHM40 - 6275DA - AV - (B) - Ratio	30 <small>Note 7</small> 4	2089	1161	328	394	2713	2304	1161	328	394	2810	
CHHM50 - 6275DA - AV - (B) - Ratio	37 <small>Note 7</small> 4	2089	1161	328	394	2713	2304	1161	328	394	2810	

Notes: 1 indicates motor capacity.
 2 Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 3 Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key".

GEARMOTOR FOR INVERTERS
Dimension Tables CHHM

Dimension Tables (Universal Direction, Foot Mount)

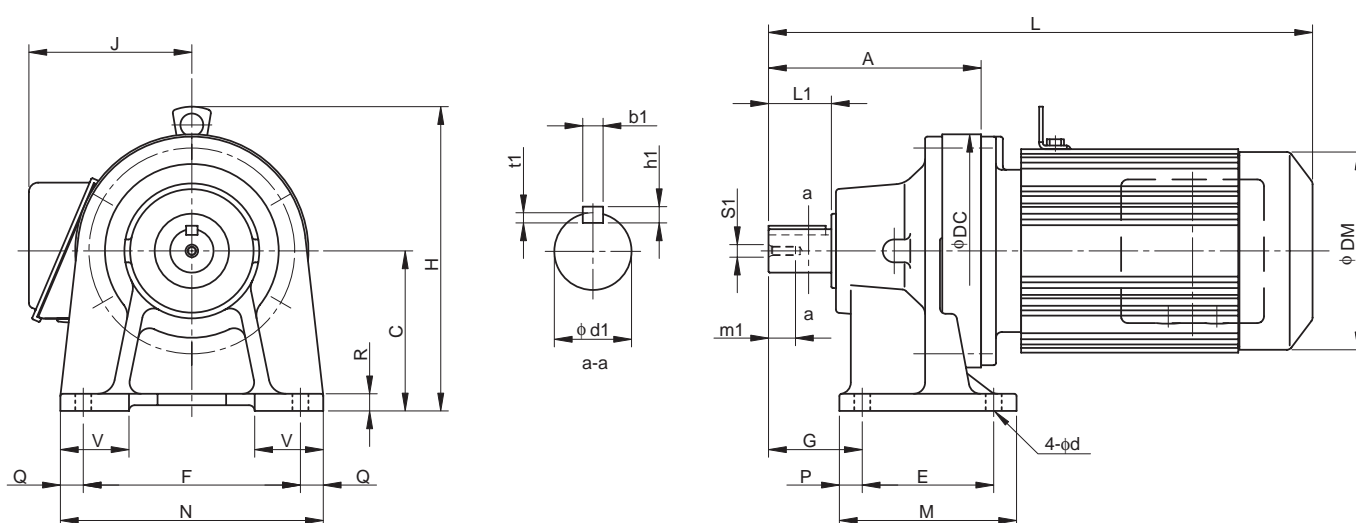CNHM^{Note 2} - 610H, 612H - AV (Center Height Option)


Frame size	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft <small>Note 2, 3, 6</small>						
														d1	L1	b1	h1	t1	S1	m1
610H	156	120	150	90	150	60	135	180	15	15	12	40	11	28	35	8	7	4	M8	20
612H	186	140	204	115	190	82	155	230	20	20	15	60	14	38	55	10	8	5	M8	20

Model	Motor <small>Note 4</small>	Motor		Standard						With Brake					
		kW	P	L	H	H'	J	DM	W(kg)	L	H	H'	J	DM	W(kg)
CNHM02 - 610H - AV - (B) - Ratio	0.2	4	352	227	-	130	124	20	384	227	-	130	124	22	
CNHM05 - 610H - AV - (B) - Ratio	0.4	4	393	233	-	140	148	24	436	233	-	140	148	27	
CNHM1 - 610H - AV - (B) - Ratio	0.75	4	426	240	-	145	160	28	488	240	-	145	160	33	
CNHM2 - 610H - AV - (B) - Ratio	1.5	4	446	246	-	152	173	32	509	246	-	152	173	38	
CNHM2 - 612H - AV - (B) - Ratio	1.5	4	476	266	-	152	173	41	539	266	-	152	173	48	
CNHM3 - 612H - AV - (B) - Ratio	2.2	4	499	286	-	168	212	51	571	286	-	168	212	61	
CNHM5 - 612H - AV - (B) - Ratio	3.7	4	543	286	-	168	212	58	615	286	-	168	212	68	

- Note: 4. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.
5. "B" after the suffix "AV" indicates models equipped with brake.
6. Dimensions of shaft end: Refer to pages F-28 to F-29 for details.
7. 30kW or over motors are air over type.
8. Dimensions in above drawings are subject to change without notice.

Dimension Tables (Horizontal Direction, Foot-Mount)

CHHM^{Note 2} - 614H, 616H - AV (Center Height Option)

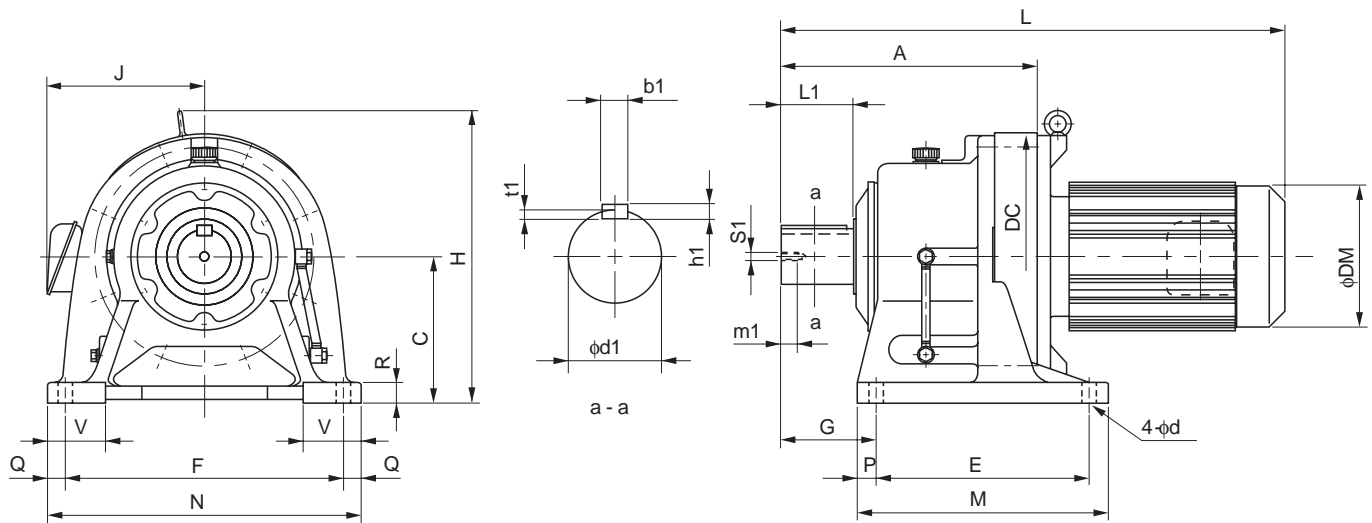

Frame size	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft <small>Note 2, 3, 6</small>						
														d1	L1	b1	h1	t1	S1	m1
614H	260	160	230	145	290	120	195	330	25	20	22	70	18	50	90	14	9	5.5	M10	18
616H	308	200	300	150	370	139	238	410	44	20	25	80	18	60	90	18	11	7	M10	18

Model <small>Note 4</small>	Motor		Standard					With Brake				
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM3 - 614H - AV - (B) - Ratio	2.2	4	573	306	168	212	71	645	306	168	212	81
CHHM5 - 614H - AV - (B) - Ratio	3.7	4	617	306	168	212	78	689	306	168	212	88
CHHM8 - 614H - AV - (B) - Ratio	5.5	4	640	333	213	251	93	735	333	213	251	111
CHHM10 - 614H - AV - (B) - Ratio	7.5	4	700	333	213	251	107	795	333	213	251	125
*CHHM15 - 614H - AV - (B) - Ratio	11	4	790	368	261	324	159	895	368	261	324	193
CHHM3 - 616H - AV - (B) - Ratio	2.2	4	621	350	168	212	111	693	350	168	212	121
CHHM5 - 616H - AV - (B) - Ratio	3.7	4	665	350	168	212	118	737	350	168	212	128
CHHM8 - 616H - AV - (B) - Ratio	5.5	4	693	373	213	251	134	788	373	213	251	151
CHHM10 - 616H - AV - (B) - Ratio	7.5	4	753	373	213	251	148	848	373	213	251	165
CHHM15 - 616H - AV - (B) - Ratio	11	4	838	408	261	324	201	943	408	261	324	235
CHHM20 - 616H - AV - (B) - Ratio	15	4	933	408	328	394	273	1098	408	328	394	324

*** indicates models with bottom level of the motor lower than the reducer base.

- Note:
- indicates motor capacity.
 - Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."
 - Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."
 - "B" after the suffix "AV" indicates models equipped with brake.
 - Dimensions of shaft end: Refer to pages F-28 to F-29 for details.
 - Dimensions in above drawings are subject to change without notice.

E

CYCLO® GEARMOTORS with High Efficiency Motor

	Page
Product Introduction	E-2
High Efficiency Regulation and Standard	E-4
Basic Gearmotor with High Efficiency	
Motor Specification	E-5

*This section contains a brief description on CYCLO® GEARMOTORS with high efficiency motor.

CYCLO® GEARMOTORS with High Efficiency Motor

High-Efficiency Regulations and Standards

1. High Efficiency Regulations

US: According to the Energy Policy Act of 1992 (EPAAct), motors and other products with built-in motors sold in the US later than October 24, 1997 are subject to this energy-efficiency regulation. Motors which fail to conform to the standards are penalized. (Subject capacity: 1-200HP; voltage: 230 & 460V; for commercial power supply). Although gearmotors are not included at this point, they may also become subject, observing the movement in Canada,

Canada: Natural Resources Canada (NRCan) enacted the Energy Efficiency Act (EEAct) in 1992 and the Energy Efficiency Regulation (EER) in 1995. These regulations are applied to standard motors imported to Canada starting February 3, 1995. Additional regulations were applied to gearmotors and explosion-proof motors imported after November 27, 1999. Motors and gearmotors which do not conform to the efficiency standard are prohibited for import. This requires all gearmotors to be high efficiency. (Subject capacity: 1-200HP; frame: IEC 90 or larger; voltage: 600V or less; for constant-speed motors).

Japan: Law concerning the Rational Use of Energy (comprehensive law promoting efficient energy use and energy waste elimination) was enacted in 1997 and "Reduction of annual energy consumption at factories by 1% on average" was announced. Furthermore, "Promotion on systematic energy-saving investment" and "Expansion of object factories and offices" were revised in April 1999. Use of high efficiency motor is recommended for the factory owners.

2. Standards

UL Standards: (US) Safety standards required primarily in the US. In the US, this standard is most generally applied to motored machines and is frequently quoted during negotiations for import. UL standards assure safety of equipment, appliances, and materials in order to protect human life and assets from fire and other accidents. UL conformity products are recommended also for observing the Product Liability (PL) Law.

CSA Standards: (Canada) Safety standards required in Canada. This is an arbitrary standards developed voluntarily by the members of association. However, most of the standards have been adopted officially as Canadian national standards and are quoted in laws and ordinances by the federal and state government and other local authorities. The CSA standards adopted as the Canadian national standards prefix with "CAN," followed with the number, for differentiation (Ex. CAN/CSA C22.1).

JIS: (Japan) Technical reference organized by Japan Electrical Manufacturers' Association (JEMA) has been applied previously. In July 2000, standard for high efficiency motors, "Low-voltage three-phase squirrel-cage high efficiency induction motors, JIS C 4212" was added in Japanese Industrial Standards (JIS).

GEARMOTORS WITH HIGH EFFICIENCY MOTORS

Table of Models

Combinations with 4P Motor **Reduction Ratio 6~273**

Reduction Ratio	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	104 (13×8)	121 (11×11)	143 (13×11)	165 (15×11)	195 (15×13)	231 (21×11)	273 (21×13)	
Output Speed r/min	50Hz	242	181	132	112	96.7	85.3	69.0	58.0	50.0	41.4	33.7	28.4	24.6	20.4	16.7	12.2	13.9	12.0	10.1	8.79	7.44	6.28	5.31
	60Hz	292	219	159	135	117	103	83.3	70.0	60.3	50.0	40.7	34.3	29.7	24.6	20.1	14.7	16.8	14.5	12.2	10.6	8.97	7.58	6.41
Motor (kW × P)	0.2 × 4	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	0.4 × 4	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	0.75 × 4	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	1.5 × 4	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	2.2 × 4	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	3.7 × 4	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	5.5 × 4	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	7.5 × 4	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	11 × 4	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	15 × 4	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
18.5 × 4	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
22 × 4	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
30 × 4	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	

*Consult us for 6000SK Series (Reduction Ratio 2.5~10).

CYCLO® GEARMOTORS with High Efficiency Motor

High Efficiency Motor

Table E-1 3-Phase Induction Motor without Built-in Brakes

⊙: Standard Type ○: Produced on order

Specification		Indoor type (IP44)	Outdoor type (IP44)	Insulation class		
Output (kW)	Poles			E	B	F
		4	4	4	4	4
0.2		⊙	○	⊙	○	○
0.4		⊙	○	⊙	○	○
0.75		⊙	○		⊙	○
1.5		⊙	○		⊙	○
2.2		⊙	○		⊙	○
3.7		⊙	○		⊙	○
5.5		⊙	○		⊙	○
7.5		⊙	○		⊙	○
11		⊙	○		⊙	○
15		⊙	○		⊙	○
18.5		⊙	○		⊙	○
22		⊙	○		⊙	○
30		⊙	○		⊙	○
Remarks		Continuous rating, power source specification 200V 50/60Hz, 220V 60Hz (400V 50/60Hz, 440V 60Hz)				

Table E-2 3-Phase Induction Motor with Built-in Brakes

⊙: Standard Type ○: Produced on order

Specification		Indoor type (IP44)	Outdoor type (IP44)	Insulation class		
Output (kW)	Poles			E	B	F
		4	4	4	4	4
0.2		⊙	○	⊙	○	○
0.4		⊙	○	⊙	○	○
0.75		⊙	○		⊙	○
1.5		⊙	○		⊙	○
2.2		⊙	○		⊙	○
3.7		⊙	○		⊙	○
5.5		⊙	○		⊙	○
7.5		⊙	○		⊙	○
11		⊙	○		⊙	○
15		⊙	○		⊙	○
18.5		⊙	○		⊙	○
22		⊙	○		⊙	○
30		⊙	○		⊙	○
Remarks		Continuous rating, power source specification 200V 50/60Hz, 220V 60Hz (400V 50/60Hz, 440V 60Hz)				

- Note:
1. Consult us for specifications not indicated in above tables. They may be produced on order. Characteristics, dimension, and CYCLO® DRIVE combinations may be changed depending on the specification. Example: 6P, special voltage, dust-proof type, humidity-proof, tropical treatment, high-temperature use, double shaft extension (round or square shaft), EPAAct conformity, NRCan conformity, etc.
 2. Consult us with information on operation condition (ambient temperature, input speed, mounting style, load condition, etc.) when driving our high-efficiency motor with inverter. CYCLO® DRIVE combination selection requires contemplation on startup, lubrication, thermal rating, etc.
 3. Consult us when driving our high-efficiency motor with high carrier frequency type (IGBT, etc.) at high input voltage (400V and above) or with long wiring distance. Motor insulation may be necessary.
 4. Protection nomenclature for outdoor type is IP44. Consult us for operation in locations with exposure to elements or with frequent water splash.

F

TECHNICAL DATA

	Page
1. Reducer	
Mechanism	F-3
Lubrication	F-4
Nameplate	F-8
Allowable Radial and Axial Load	F-10
Moment of Inertia (GD ²)	F-17
Construction Drawing	F-25
Detailed Dimension of Slow Speed Shaft	F-28
2. Motor	
Terminal Box Specifications	F-32
Table of Motor Characteristics	F-36
Specifications and Constructions of Built-in Brake	F-40
Structure of Brake Terminal Box	F-49
Protection and Cooling	F-51
International Standards and Compliance of Sumitomo Products	F-52
EC Directives and CE Marking	F-55
Power Source Voltage and Conditions Worldwide	F-57
3. Common	
Paint and Rustproof Coating	F-59
Drive System Formulas	F-61

F TECHNICAL DATA

1. Reducer

TECHNICAL
DATA

Reducer

Lubrication

Lubrication Method

1. □ indicates 0, 5, or H (for certain frame size)

(1) Standard Type

Table F-1 Horizontal

a) 6000SK Series Horizontal

Nominal Reduction Ratio		2.5		3		4		5		6		8		10			
		Frame Size		607□SK, 609□SK, 611□SK		608□SK, 610□SK		Maintenance-Free Type Grease (MF) *Indication necessary for mounting direction.									

b) 6000 Series Single Reduction Horizontal

Ratio	Frame Size																
	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119	
606□	Maintenance-Free Type Grease (MF)											43					
607□	Maintenance-Free Type Grease (MF)											59					
608□	Maintenance-Free Type Grease (MF)											87					
609□, 610□	Maintenance-Free Type Grease (MF)																
611□, 612□	Maintenance-Free Type Grease (MF)																
613□, 614□	Oil Bath (PB)																
616□, 617□	Oil Bath (PB)																
618□, 619□	Oil Bath (PB)																
6205, 6215	Oil Bath (PB)																
6225, 6235	Oil Bath (PB)																
6245, 6255	Oil Bath (PB)																
6265	Oil Bath (PB)																
6275	Oil Bath (PB)																

c) 6000 Series Double Reduction Horizontal

Ratio	Frame Size																									
	104	121	143	165	195	231	273	319	377	473	599	649	731	841	1003	1015	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177
606□DA	Maintenance-Free Type Grease (MF)																									
607□DA	Maintenance-Free Type Grease (MF)																									
609□DA, 610□DA	Maintenance-Free Type Grease (MF)																									
612□DA, 612□DB	Maintenance-Free Type Grease (MF)																									
613□DA, 613□DB	Grease (G)																									
613□DC	Grease (G)																									
614□DA, 614□DB	Grease (G)																									
614□DC	Grease (G)																									
616□DA, 616□DB	Grease (G)																									
617□DA, 617□DB	Grease (G)																									
618□DA	Grease (G)																									
616□DC	Grease (G)																									
617□DC	Grease (G)																									
618□DB	Grease (G)																									
619□DA, 619□DB	Grease (G)																									
6205DA, 6205DB	Oil Bath (PB)																									
6215DA, 6215DB	Oil Bath (PB)																									
6225DA, 6225DB	Oil Bath (PB)																									
6235DA, 6235DB	Oil Bath (PB)																									
6245DA, 6245DB	Oil Bath (PB)																									
6255DA, 6255DB	Oil Bath (PB)																									
6265DA	Oil Bath (PB)																									
6275DA	Oil Bath (PB)																									

Note: 1. This table shows the standard lubrication method when the CYCLO® DRIVE is driven at the standard input speed.
 2. Grease lubrication is possible for some models with oil lubrication as standards. Consult us in those cases, for performance may vary.
 3. □ indicates 0 or 5, expressing the combination with reduction ratio.

TECHNICAL DATA Reducer

Table F-2 Vertical

a) 6000SK Series Vertical

Nominal Reduction Ratio	2.5	3	4	5	6	8	10
Frame Size							
607□SK, 608□SK	Maintenance-Free Type Grease (MF) *Indication necessary for mounting direction.						
609□SK, 610□SK							
611□SK							

b) 6000 Series Single Reduction Vertical

Ratio	6	8	11	13	15	17	21	25	29	35	43	51	59	71	87	119
Frame Size																
606□	Maintenance-Free Type Grease (MF)															
607□																
608□																
609□, 610□	Oil Bath (PB)															
611□, 612□																
613□, 614□	Forced Oil Lubrication (P)															
616□, 617□																
618□, 619□	Positive Displacement Pump Lubrication (TP)															
6205, 6215																
6225, 6235																
6245, 6255																
6265																
6275																

TP: Positive Displacement Pump Lubrication (See Table F-3)

c) 6000 Series Double Reduction Vertical

Ratio	104	121	143	165	195	231	273	319	377	473	599	649	731	841	1003	1015	1247	1479	1849	2065	2537	3045	3481	4437	5133	6177	7569		
Frame Size																													
606□DA	Maintenance-Free Type Grease (MF)																												
607□DA																													
609□DA, 610□DA																													
612□DA, 612□DB	Grease (G)																												
613□DA, 613□DB																													
613□DC	Forced Oil Lubrication (P)																												
614□DA, 614□DB																													
614□DC																													
616□DA, 616□DB																													
617□DA, 617□DB																													
618□DA	Positive Displacement Pump Lubrication (TP) (See Table F-3)																												
616□DC																													
617□DC																													
618□DB																													
619□DA, 619□DB																													
6205DA, 6205DB																													
6215DA, 6215DB																													
6225DA, 6225DB																													
6235DA, 6235DB																													
6245DA, 6245DB																													
6255DA, 6255DB																													
6265DA																													
6275DA																													

TECHNICAL DATA
Reducer

Note: 1. This table shows the standard lubrication method when the CYCLO® DRIVE is driven at the standard input speed.
2. Grease lubrication is possible for some models with oil lubrication as standards. Consult us in those cases, for performance may vary.
3. □ indicates 0 or 5, expressing the combination with reduction ratio.

Lubrication

(2) Electric Pump (Electric Pump Type Forced Oil Lubrication Specification)

Table F-3 Electric Pump Specification

Trochoid pump type	TOP216HA-VB3 with release valve (3-phase induction motor: 0.75kW × 4P Type E)	TOP204HB-VB3 with release valve (3-phase induction motor: 0.4kW × 4P Type E)
Frame size/ reduction ratio	6275/29, 43, 59, 87	6275DA

Note: Although the CYCLO® SPEED REDUCER is capable for most uses with lubrication method in Table F-1 and 2, consult us when using in severe conditions, such as with harsh ambient temperature, input speed, or load condition.

2. Lubricant

(1) Grease Lubrication Models

Grease lubrication models in Table F-4 are packed with grease prior to shipment. They may be used without replenishment.

(i) Maintenance-Free Series

· 6000SK Series

Models in Table F-1 a) and F-2 a) are sealed with long-life grease (ALVANIA GREASE EPR000).

Although replenishment is hardly necessary, replacement every 20,000 hours or 4~5 years will provide longer lifetime.

*Only designated mounting direction possible.

· 6000 Series

Models in section (MF) in Table F-1 b & c and F-2 b & c are sealed with long-life grease (ALVANIA GREASE RA). Although replenishment is hardly necessary, replacement every 20,000 hours or 4~5 years will provide longer lifetime.

*Any mounting direction possible.

(ii) Grease Lubrication Models Other than Indicated in Section (i)

Replenish or replace grease following the Instruction Manual.

Table F-4 Standard Grease

Model	Ambient Temperature °C	Model/Part	Company	Brand	
CYCLO® 6000SK Series	-10 ~ 40	(i) Maintenance-Free Type Grease Lubrication	Shell Oil	SHELL ALVANIA GREASE EPR000	
CYCLO® 6000 Series	-10 ~ 50	(i) Maintenance-Free Type Grease Lubrication	Shell Oil	SHELL ALVANIA GREASE RA	
		(ii) Models other than (i)	Shell Oil	SHELL ALVANIA GREASE 2	
			Cosmo Oil	COSMO GREASE DYNAMAX SH No.2	
Sumitomo Motor	-10 ~ 50	Sealed Bearings		Kyodo Yushi	MULTEMP SRL
		Open Bearings	Thermal Class: E, B	Shell Oil	SHELL ALVANIA GREASE 2
			Thermal Class: F	Shell Oil	DARINA GREASE 2

(iii) Consult us when the unit is stored for more than three years. Grease replacement may be necessary.

Note: 1. Do not use grease other than the ones indicated above.
2. Models (ii) in the Table F-4 are packed with COSMO GREASE DYNAMAX SH No.2 prior to shipment.
3. Grease for models (ii) in Table F-4 may be combined with no problem.
4. Consult us when the unit will be operated in temperatures exceeding 0~40°C.

(2) Oil Lubrication Models

Oil lubrication models are shipped without oil. Always fill with lubrication oil to the top red line on the oil gauge before operation.

Table F-5 Recommended Lubrication Oil (SP Type Industrial Extreme-Pressure Gear Oil)
[Equivalent to Type 2 Industrial Oil in JIS K2219.]

Ambient temperature °C	Gulf Oil	Esso Oil	Mobil Oil	Shell Oil	Caltex Oil	BP Oil
-10~5	EP Lubricant HD 68	Spartan EP 68	Mobil gear 626 (ISO VG 68)	Omala Oil 68		Energol GR-XP 68
0 ~ 35	EP Lubricant HD 100 HD 150	Spartan EP 100 EP 150	Mobil gear 627, 629 (ISO VG 100, 150)	Omala Oil 100, 150	Meropa 100, 150	Energol GR-XP 100 GR-XP 150
30 ~ 50	EP Lubricant HD 220 HD 320 HD 460	Spartan EP 220 EP 320 EP 460	Mobil gear 630, 632 633, 634 (ISO VG 220~460)	Omala Oil 220, 320 460	Meropa 220, 320 460	Energol GR-XP 220 GR-XP 320 GR-XP 460

Note: 1. Use oil with lower viscosity for operation in winter or relatively low ambient temperature, specified in the parenthesis.
2. Consult us for operation in ambient temperatures exceeding 0~40°C.

2. Volume of Oil

Table F-6 Volume of Lubrication Oil, Litres ℓ (Approximate)

[Single Reduction]

Frame Size	613□	614□	616□	617□	618□	619□	6205	6215	6225	6235	6245	6255	6265	6275
Horizontal	0.7	0.7	1.4	1.9	2.5	4.0	5.5	8.5	10	15	16	21	29	56
Vertical	1.1	1.1	1	1.9	2	2.7	5.7	7.5	10	12	15	42	51	(60)

[Double Reduction]

Frame Size	616□ DC	617□ DC	618□ DB	619□ DA	619□ DB	6205 DA	6205 DB	6215 DA	6215 DB	6225 DA	6225 DB	6235 DA	6235 DB	6245 DA	6245 DB	6255 DA	6255 DB	6265 DA	6275 DA
Horizontal	1.5	2.4	3.5	5.8	6.0	6.0	6	10	10	11	11	17	17	18	18	23	23	32	60
Vertical	1.0	1.9	2.0	2.7	2.7	11	11	14	14	18	18	23	23	29	29	42	42	51	(60)

Note: 1. □ indicates 0, 5, or H (for certain frame size).
2. () with trochoid pump.

3. Cautions on Oil Seals

Oil seal has limited lifetime. Sealing effect may lower by natural degradation or abrasion by prolonged use. Seal life may vary depending on operation condition and ambient condition of the reducer. Oil seal change every 1~3 years is recommended for normal operation (uniform load, 10 hours/day, at normal temperature).

Nameplate

There are two types of nameplates, Type I and Type II. Refer to the relevant example of the typical plates shown below.

1. For Gearmotors

(1) Nameplate Type I: Gearmotor

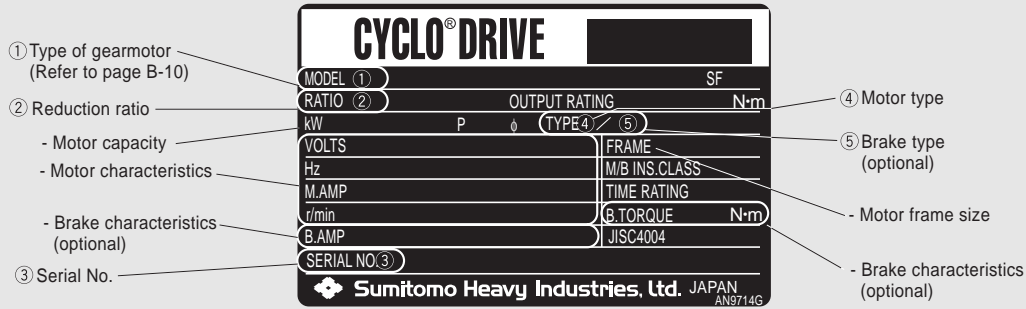


Fig. F-5 Nameplate of Gearmotor (Type I)

(2) Nameplate Type II: Reducer with Motor

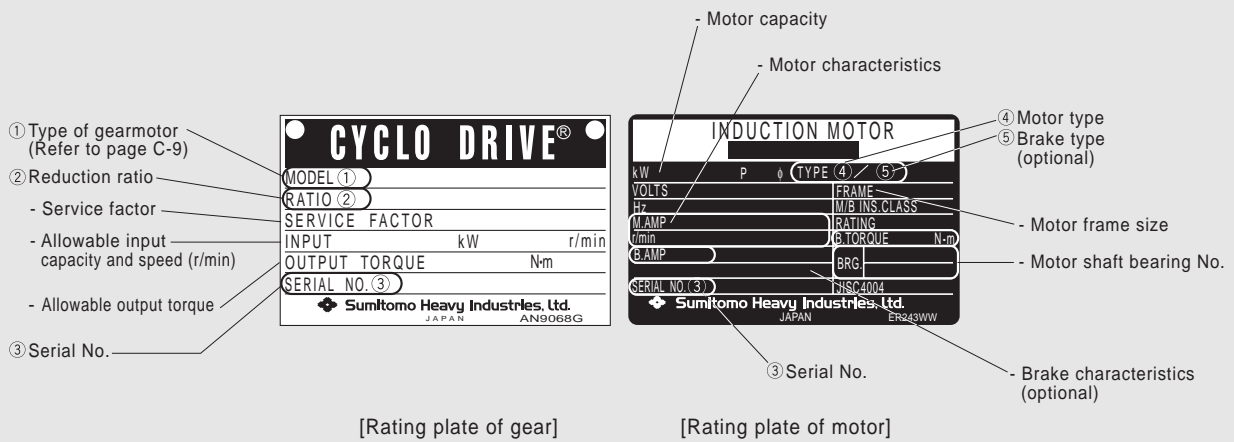


Fig. F-6 Namplates of Reducer with Motor (Type II)

2. For Reducers

(1) Nameplate Type I

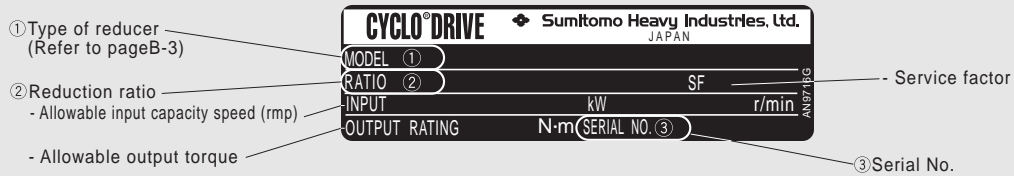


Fig. F-7 Nameplate of Reducer (Type I)

(2) Nameplate Type II


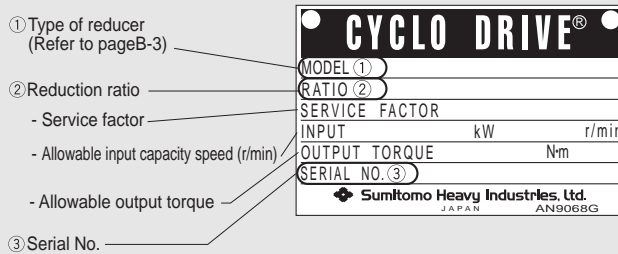


Fig. F-8 Nameplate of Reducer (Type II)

Allowable Radial and Axial Load

Table F-9 Load Location Factor (Slow Speed Shaft) Lf

Frame Size		Load Location L mm																											
Single Reduction	Double Reduction	~5	10	15	20	25	30	35	40	45	50	60	70	80	90	100	120	140	160	180	200	225	250	275	300				
607□SK	-	0.83	0.92	1.00	1.08	1.17	1.25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
608□SK	-	0.83	0.90	0.97	1.03	1.10	1.17	1.24	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
609□SK	-	0.87	0.92	0.97	1.03	1.08	1.13	1.19	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
610□SK	-	0.87	0.92	0.97	1.03	1.08	1.13	1.19	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
611□SK	-	0.83	0.88	0.93	0.98	1.02	1.07	1.12	1.17	1.22	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
606□	606□DA	0.83	0.94	1.19	1.56	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
607□	607□DA	0.82	0.91	1.00	1.29	1.59	1.88	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
608□	-	0.81	0.87	0.94	1.03	1.28	1.54	1.80	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
609□	609□DA	0.86	0.92	0.97	1.13	1.38	1.64	1.90	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
610□	610□DA	0.86	0.92	0.97	1.13	1.38	1.64	1.90	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
611□	-	0.78	0.84	0.90	0.96	1.02	1.08	1.19	1.36	1.53	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
612□	612□DA 612□DB	-	0.82	0.87	0.92	0.97	1.08	1.25	1.42	1.59	1.76	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
613□	613□DA 613□DB 613□DC	-	-	0.83	0.87	0.92	0.96	1.00	1.13	1.25	1.38	1.63	1.88	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
614□	614□DA 614□DB 614□DC	-	-	-	0.66	0.73	0.80	0.87	0.93	1.00	1.10	1.30	1.50	1.70	1.90	-	-	-	-	-	-	-	-	-	-	-	-		
616□	616□DA 616□DB 616□DC	-	-	-	0.83	0.87	0.90	0.93	0.97	1.00	1.11	1.32	1.53	1.75	1.96	-	-	-	-	-	-	-	-	-	-	-	-		
617□	617□DA 617□DB 617□DC	-	-	-	0.86	0.89	0.92	0.94	0.97	1.00	1.11	1.32	1.53	1.75	1.96	-	-	-	-	-	-	-	-	-	-	-	-		
618□	618□DA 618□DB	-	-	-	-	0.85	0.87	0.90	0.93	0.95	0.98	1.09	1.26	1.43	1.60	1.78	-	-	-	-	-	-	-	-	-	-	-		
619□	619□DA 619□DB	-	-	-	-	-	0.85	0.87	0.89	0.91	0.93	0.97	1.04	1.18	1.32	1.46	1.75	-	-	-	-	-	-	-	-	-	-		
6205	6205DA 6205DB	-	-	-	-	-	-	-	0.70	0.74	0.77	0.84	0.91	0.98	1.05	1.12	1.26	1.40	1.54	-	-	-	-	-	-	-	-		
6215	6215DA 6215DB	-	-	-	-	-	-	-	0.70	0.73	0.77	0.84	0.91	0.98	1.05	1.13	1.27	1.41	1.56	-	-	-	-	-	-	-	-		
6225	6225DA 6225DB	-	-	-	-	-	-	-	0.86	0.88	0.90	0.93	0.96	0.99	1.02	1.06	1.12	1.19	1.25	-	-	-	-	-	-	-	-		
6235	6235DA 6235DB	-	-	-	-	-	-	-	0.82	0.84	0.85	0.88	0.91	0.94	0.97	1.00	1.06	1.12	1.18	1.24	1.30	-	-	-	-	-	-		
6245	6245DA 6245DB	-	-	-	-	-	-	-	0.83	0.84	0.86	0.89	0.92	0.94	0.97	1.00	1.06	1.11	1.17	1.23	1.29	-	-	-	-	-	-		
6255	6255DA 6255DB	-	-	-	-	-	-	-	-	0.83	0.85	0.88	0.90	0.93	0.95	1.00	1.05	1.10	1.22	1.36	1.52	1.69	-	-	-	-	-		
6265	6265DA	-	-	-	-	-	-	-	-	-	-	-	0.83	0.85	0.88	0.90	0.94	0.98	1.04	1.17	1.29	1.45	1.61	1.77	1.93	-	-		
6275	6275DA	-	-	-	-	-	-	-	-	-	-	-	-	0.67	0.71	0.75	0.82	0.90	0.98	1.09	1.21	1.35	1.50	1.65	1.79	-	-		
Single Reduction	Double Reduction	~5	10	15	20	25	30	35	40	45	50	60	70	80	90	100	120	140	160	180	200	225	250	275	300	-			
Frame Size		Load Location L mm																											



Note: □ indicates 0 or 5, expressing combination with reduction ratio.

Allowable Radial and Axial Load

Table F-10 Axial Load Capacity (Slow Speed Shaft) Pao (Upper Row: N, Lower Row: kgf)

(When Cf, Lf, Fs=1)

Frame Size		Output Speed r/min																
Single Reduction	Double Reduction	~10	15	20	25	30	35	40	50	60	80	100	125	150	200	250	300	~700
607□SK	-	785 80	785 80	785 80	785 80	785 80	785 80	785 80	785 80	785 80	785 80	785 80	785 80	785 80	785 80	785 80	785 80	785 80
608□SK	-	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100
609□SK	-	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100
610□SK	-	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150
611□SK	-	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150
606□	606□DA	294 30	294 30	294 30	294 30	294 30	294 30	294 30	294 30	294 30	294 30	294 30	294 30	294 30	294 30	294 30	-	-
607□	607□DA	785 80	785 80	785 80	785 80	785 80	785 80	785 80	785 80	785 80	785 80	785 80	785 80	785 80	785 80	785 80	785 80	785 80
608□	-	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100
609□	609□DA	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100	981 100
610□	610□DA	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150
611□	-	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150	1470 150
612□	612□DA 612□DB	2940 300	2940 300	2940 300	2940 300	2940 300	2940 300	2940 300	2940 300	2940 300	2940 300	2940 300	2940 300	2940 300	2940 300	2770 282	2500 255	2390 244
613□	613□DA 613□DB 613□DC	3920 400	3920 400	3920 400	3920 400	3920 400	3920 400	3920 400	3920 400	3920 400	3920 400	3920 400	3920 400	3920 400	3920 400	3920 400	3920 400	3920 400
614□	614□DA 614□DB 614□DC	5400 550	5400 550	5400 550	5400 550	5400 550	5400 550	5400 550	5400 550	5400 550	5400 550	5230 533	4860 495	4560 465	4370 445	3850 392	3670 374	3450 352
616□	616□DA 616□DB 616□DC	6870 700	6870 700	6870 700	6870 700	6870 700	6870 700	6870 700	6870 700	6870 700	6870 700	6870 700	6870 700	6870 700	6870 700	6300 642	5700 581	-
617□	617□DA 617□DB 617□DC	9810 1000	9810 1000	9810 1000	9810 1000	9810 1000	9810 1000	9810 1000	9810 1000	9810 1000	9810 1000	9810 1000	9810 1000	9680 987	9020 919	8090 825	7330 747	6880 701
618□	618□DA 618□DB	13700 1400	13700 1400	13700 1400	13700 1400	13700 1400	13700 1400	13700 1400	13700 1400	13700 1400	13700 1400	13700 1400	13100 1340	12500 1270	11000 1120	-	-	-
619□	619□DA 619□DB	19600 2000	19600 2000	19600 2000	19600 2000	19600 2000	19600 2000	19600 2000	19600 2000	19600 2000	19600 2000	19600 2000	18500 1890	17500 1780	15400 1570	-	-	-
6205	6205DA 6205DB	26500 2700	23500 2400	21100 2150	19600 2000	18600 1900	18100 1850	17700 1800	16700 1700	15700 1600	14200 1450	13200 1350	12800 1300	12300 1250	11300 1150	-	-	-
6215	6215DA 6215DB	27500 2800	24500 2500	22100 2250	20600 2100	19600 2000	18600 1900	18100 1850	17200 1750	16200 1650	14700 1500	13700 1400	13200 1350	12800 1300	11800 1200	-	-	-
6225	6225DA 6225DB	29400 3000	25600 2610	23200 2360	21700 2210	20600 2100	19600 2000	18700 1910	17600 1790	16700 1700	15300 1560	14400 1470	13600 1390	13100 1340	12100 1230	-	-	-
6235	6235DA 6235DB	35300 3600	31400 3200	28400 2900	26500 2700	25000 2550	23500 2400	22600 2300	21100 2150	20100 2050	18600 1900	17700 1800	16700 1700	-	-	-	-	-
6245	6245DA 6245DB	37300 3800	33800 3450	30900 3150	28800 2940	27300 2780	26100 2660	25100 2560	23500 2400	22300 2270	21000 2140	19900 2030	19100 1950	-	-	-	-	-
6255	6255DA 6255DB	48100 4900	43100 4390	39400 4020	36900 3760	35100 3580	33600 3430	32300 3290	30400 3100	28500 2910	26800 2730	25500 2600	24200 2470	-	-	-	-	-
6265	6265DA	52000 5300	52000 5300	51000 5200	47500 4840	44800 4570	42800 4360	41600 4240	38900 3970	37300 3800	34800 3550	33000 3360	31100 3170	-	-	-	-	-
6275	6275DA	58900 6000	58900 6000	58900 6000	58900 6000	58900 6000	58900 6000	58900 6000	58900 6000	58900 6000	-	-	-	-	-	-	-	-
Single Reduction	Double Reduction	~10	15	20	25	30	35	40	50	60	80	100	125	150	200	250	300	
Frame Size		Output Speed r/min																

Note: □ indicates 0 or 5, expressing combination with reduction ratio.

Allowable Radial and Axial Load

2. Heavy Radial Load Type, Light Heavy Radial Load Type (Optional Items)

When the radial load of the slow speed shaft exceeds the allowable value of the standard CYCLO® reducer, a larger frame size may be selected, but depending upon the degree of the load, this may be avoided by using the heavy radial load type. Refer to Table F-9~10 for allowable radial load on the slow speed shaft of the heavy radial load type.

Precautions for Selection and Use

1. Heavy radial load type is indicated with the suffix "R1" or "R2" after the frame size.
Example: CHHM5-6135-R2-B-29
2. □ indicates 0, 5, or H.
3. Consult us for the following conditions, which require special considerations:
 - When the shaft direction is vertical (Vertical type).
 - When thrust load is simultaneously exerted on the slow speed shaft.
4. Use JIS B1051 erection bolts, with strength in exceeding 8.8.

Table F-11 Allowable Radial Load Pro (Upper: N, Lower: kgf, Max) on the Slow Speed Shaft of the Light Heavy Radial Load Type.

(When Cf, Lf, Fs=1)

Frame Size		Output Speed r/min											
Single Reduction	Double Reduction	~1	2	3	4	5	6	8	10	15	20	25	30
613□	613□DA	14700	14700	14700	14700	14700	14700	14700	14700	14700	14700	14700	14700
	613□DB	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500
	613□DC												
616□	616□DA	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100	22100
	616□DB	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250	2250
	616□DC												
617□	617□DA	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500	29500
	617□DB	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010	3010
	617□DC												
618□	618□DA	41700	41700	41700	41700	41700	41700	41700	41700	41700	41700	41700	41700
	618□DB	4250	4250	4250	4250	4250	4250	4250	4250	4250	4250	4250	4250
619□	619□DA	59000	59000	59000	59000	59000	59000	59000	59000	59000	59000	59000	59000
	619□DB	6010	6010	6010	6010	6010	6010	6010	6010	6010	6010	6010	6010

Frame Size		Output Speed r/min										
Single Reduction	Double Reduction	35	40	50	60	80	100	125	150	200	250	300
613□	613□DA	14700	14700	14700	14700	14100	13500	12600	11900	10900	10200	9660
	613□DB	1500	1500	1500	1500	1440	1380	1280	1210	1110	1040	985
	613□DC											
616□	616□DA	22100	22100	22100	22100	22100	21600	20100	19000	17500	16300	15400
	616□DB	2250	2250	2250	2250	2250	2200	2050	1940	1780	1660	1570
	616□DC											
617□	617□DA	29500	29500	29500	29500	29500	29300	27400	25900	23800	22200	21100
	617□DB	3010	3010	3010	3010	3010	2990	2790	2640	2430	2260	2150
	617□DC											
618□	618□DA	41700	41700	41700	41700	41300	38600	36200	34200	31400	-	-
	618□DB	4250	4250	4250	4250	4210	3930	3690	3490	3200	-	-
619□	619□DA	59000	59000	55200	53000	47200	44000	41000	38300	34700	-	-
	619□DB	6010	6010	5630	5400	4810	4490	4180	3900	3540	-	-

Note: □ indicates 0 or 5, expressing combination with reduction ratio.

TECHNICAL DATA

Reducer

Allowable Radial and Axial Load

Table F-12 Allowable Radial Load Pro (Upper: N, Lower: kgf, Max) on the Slow Speed Shaft of the Heavy Radial Load Type. (Cf, Lf, Fs=1)

Frame Size		Output Speed r/min											
Single Reduction	Double Reduction	~1	2	3	4	5	6	8	10	15	20	25	30
613□	613□DA	24000	24000	24000	24000	24000	24000	24000	24000	23800	21800	20400	19300
	613□DB	2450	2450	2450	2450	2450	2450	2450	2450	2430	2220	2080	1970
	613□DC												
616□	616□DA	33600	33600	33600	33600	33600	33600	33600	33600	33600	33600	33300	31500
	616□DB	3430	3430	3430	3430	3430	3430	3430	3430	3430	3430	3390	3210
	616□DC												
617□	617□DA	45900	45900	45900	45900	45900	45900	45900	45900	45900	45900	45300	42900
	617□DB	4680	4680	4680	4680	4680	4680	4680	4680	4680	4680	4620	4370
	617□DC												
618□	618□DA	55700	55700	55700	55700	55700	55700	55700	55700	55700	55700	55700	55700
	618□DB	5680	5680	5680	5680	5680	5680	5680	5680	5680	5680	5680	5680
619□	619□DA	71800	71800	71800	71800	71800	71800	71800	71800	71800	71800	71800	69300
	619□DB	7320	7320	7320	7320	7320	7320	7320	7320	7320	7320	7320	7060
6205	6205DA	97800	97800	97800	97800	97800	97800	97800	97800	89100	81800	76500	72400
	6205DB	9970	9970	9970	9970	9970	9970	9970	9970	9080	8340	7800	7380
6215	6215DA	132000	132000	132000	132000	126000	119000	109000	102000	90500	83000	77600	73500
	6215DB	13500	13500	13500	13500	12800	12100	11100	10400	9230	8460	7910	7490
6225	6225DA	161000	161000	161000	161000	156000	148000	135000	126000	112000	103000	96300	91100
	6225DB	16400	16400	16400	16400	15900	15100	13800	12800	11400	10500	9820	9290
6235	6235DA	183000	183000	183000	183000	183000	183000	170000	159000	141000	129000	121000	114000
	6235DB	18700	18700	18700	18700	18700	18700	17300	16200	14400	13100	12300	11600
6245	6245DA	223000	223000	223000	223000	209000	198000	181000	169000	150000	138000	129000	122000
	6245DB	22700	22700	22700	22700	21300	20200	18500	17200	15300	14100	13100	12400
6255	6255DA	274000	274000	274000	274000	258000	244000	224000	210000	185000	170000	159000	151000
	6255DB	27900	27900	27900	27900	26300	24900	22800	21400	18900	17300	16200	15400
6265	6265DA	283000	283000	283000	283000	283000	283000	270000	253000	224000	205000	191000	181000
		28800	28800	28800	28800	28800	28800	27500	25800	22800	20900	19500	18500
6275	6275DA	272000	272000	272000	272000	272000	272000	272000	272000	272000	272000	272000	272000
		27700	27700	27700	27700	27700	27700	27700	27700	27700	27700	27700	27700

TECHNICAL DATA Reducer

Frame Size		Output Speed r/min										
Single Reduction	Double Reduction	35	40	50	60	80	100	125	150	200	250	300
613□	613□DA	18400	17800	16500	15600	14400	13500	12600	11900	10900	10200	9660
	613□DB	1880	1810	1680	1590	1470	1380	1280	1210	1110	1040	985
	613□DC											
616□	616□DA	30100	28900	27000	25600	23500	22000	20500	19400	17900	16600	15400
	616□DB	3070	2950	2750	2610	2400	2240	2090	1980	1820	1690	1570
	616□DC											
617□	617□DA	40900	39300	36800	34800	31900	29900	27900	26400	24300	22200	21100
	617□DB	4170	4010	3750	3550	3250	3050	2840	2690	2480	2260	2150
	617□DC											
618□	618□DA	54000	51900	48500	45900	42100	39400	36900	34900	32000	-	-
	618□DB	5500	5290	4940	4680	4290	4020	3760	3560	3260	-	-
619□	619□DA	66100	63500	59400	56300	51600	48300	45100	42800	39300	-	-
	619□DB	6740	6470	6060	5740	5260	4920	4600	4360	4010	-	-
6205	6205DA	69100	66400	62100	58800	54000	50500	47100	44600	41000	-	-
	6205DB	7040	6770	6330	5990	5500	5150	4800	4550	4180	-	-
6215	6215DA	70100	67400	63000	59600	54800	51300	47900	45400	41600	-	-
	6215DB	7150	6870	6420	6080	5590	5230	4880	4630	4240	-	-
6225	6225DA	87000	83500	78100	74000	67900	63500	59400	56300	51500	-	-
	6225DB	8870	8510	7960	7540	6920	6470	6060	5740	5250	-	-
6235	6235DA	109000	105000	98100	92900	85300	79800	74500	-	-	-	-
	6235DB	11100	10700	10000	9470	8700	8130	7590	-	-	-	-
6245	6245DA	116000	112000	105000	98900	90800	84900	79400	-	-	-	-
	6245DB	11800	11400	10700	10100	9260	8650	8090	-	-	-	-
6255	6255DA	144000	139000	129000	123000	112000	105000	98300	-	-	-	-
	6255DB	14700	14200	13100	12500	11400	10700	10000	-	-	-	-
6265	6265DA	174000	166000	156000	148000	135000	126000	118000	-	-	-	-
		17700	16900	15900	15100	13800	12800	12000	-	-	-	-
6275	6275DA	-	-	-	-	-	-	-	-	-	-	-
		-	-	-	-	-	-	-	-	-	-	-

Note: □ indicates 0 or 5, expressing combination with reduction ratio.

Allowable Radial and Axial Load


Confirm the radial load on the high speed shaft, following the formula below:

$$Pr \leq \frac{Pro}{Lf \cdot Cf \cdot Fs} \text{ [N, kgf]}$$

Pr: Actual radial load [N, kgf]
 Pro: Allowable radial load [N, kgf]
 Lf: Load location factor (Table F-11)
 Cf: Coupling factor (Table F-5)
 Fs: Shock factor (Table F-6)

Table F-13 Radial Load Location Factor (High Speed Shaft) Lf

Frame Size		Load Location L mm																			
Single Reduction	Double Reduction	5	10	15	20	25	30	35	40	45	50	60	70	80	90	100	120	140	160	180	200
607□SK	-	0.72	0.91	1.09	1.28	1.46	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
608□SK	-	0.90	0.97	1.03	1.10	1.16	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
609□SK	-	0.90	0.97	1.03	1.10	1.16	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
610□SK	-	0.75	0.92	1.08	1.25	1.42	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
611□SK	-	0.87	0.92	0.97	1.03	1.08	1.13	1.18	-	-	-	-	-	-	-	-	-	-	-	-	-
606□	606□DA, 607□DA	0.73	0.91	1.20	1.60	2.00	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
607□	609□DA, 610□DA, 612□DA, 613□DA, 614□DA	0.73	0.91	1.20	1.60	2.00	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
608□	-	0.73	0.91	1.20	1.60	2.00	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
609□	612□DB, 613□DB, 614□DB, 616□DA, 617□DA	0.88	0.96	1.20	1.59	2.00	2.38	-	-	-	-	-	-	-	-	-	-	-	-	-	-
610□	613□DC, 614□DC, 616□DB, 617□DB, 618□DA	0.91	0.97	1.20	1.59	2.00	2.38	-	-	-	-	-	-	-	-	-	-	-	-	-	-
611□	-	0.91	0.97	1.20	1.59	2.00	2.38	-	-	-	-	-	-	-	-	-	-	-	-	-	-
612□	616□DC, 617□DC, 619□DA, 6205DA	-	0.81	0.93	1.14	1.41	1.67	1.96	2.22	-	-	-	-	-	-	-	-	-	-	-	-
613□	618□DB, 619□DB, 6205DB, 6215DA, 6225DA	-	0.78	0.89	1.00	1.23	1.45	1.69	1.92	2.13	-	-	-	-	-	-	-	-	-	-	-
614□	-	-	0.78	0.89	1.00	1.23	1.45	1.69	1.92	2.13	-	-	-	-	-	-	-	-	-	-	-
616□	6215DB, 6235DA, 6245DA	-	0.92	0.95	0.98	1.05	1.18	1.28	1.41	1.52	1.64	1.85	-	-	-	-	-	-	-	-	-
617□	6225DA, 6255DB	-	-	0.93	0.96	0.99	1.05	1.16	1.28	1.39	1.49	1.72	1.92	2.17	-	-	-	-	-	-	-
618□	6235DB, 6245DB	-	-	-	0.93	0.96	0.99	1.05	1.15	1.25	1.35	1.56	1.75	1.96	2.17	-	-	-	-	-	-
619□	6255DB, 6265DA, 6275DA	-	-	-	0.93	0.95	0.98	1.00	1.09	1.16	1.25	1.41	1.59	1.75	1.92	2.08	-	-	-	-	-
6205	-	-	-	-	-	0.93	0.95	0.97	1.00	1.04	1.10	1.22	1.33	1.45	1.56	1.68	1.91	-	-	-	-
6215	-	-	-	-	-	0.93	0.95	0.98	1.00	1.03	1.08	1.19	1.29	1.40	1.51	1.61	1.82	-	-	-	-
6225	-	-	-	-	-	0.94	0.96	0.98	1.00	1.02	1.04	1.08	1.14	1.24	1.33	1.42	1.60	-	-	-	-
6235	-	-	-	-	-	0.84	0.86	0.87	0.89	0.93	0.98	1.07	1.16	1.25	1.34	1.44	1.62	-	-	-	-
6245	-	-	-	-	-	0.91	0.92	0.94	0.96	0.98	0.99	1.07	1.15	1.24	1.33	1.42	1.59	-	-	-	-
6255	-	-	-	-	-	-	-	0.92	0.93	0.94	0.96	0.99	1.03	1.09	1.16	1.22	1.34	1.47	1.60	1.72	-
6265	-	-	-	-	-	-	-	0.92	0.93	0.94	0.96	0.99	1.03	1.09	1.16	1.22	1.34	1.47	1.60	1.72	-
6275	-	-	-	-	-	-	-	-	-	0.93	0.94	0.97	0.99	1.04	1.14	1.22	1.39	1.56	1.72	1.92	2.08
Single Reduction	Double Reduction	5	10	15	20	25	30	35	40	45	50	60	70	80	90	100	120	140	160	180	200
Frame Size		Load Location L mm																			



Lf=1
when "L=Lo/2"

Note: □ indicates 0 or 5, expressing combination with reduction ratio.

TECHNICAL
DATA

Reducer

Allowable Radial and Axial Load

Table F-14 Radial Load Capacity (High Speed Shaft) Pro (Upper row: N, Lower row: kgf)

(When Cf, Lf, Fs=1)

Frame Size		Reduction Ratio (Double Reduction: Input side)	Input Speed r/min						
Single Reduction	Double Reduction		1750	1450	1165	980	870	720	580
607□SK	-	2.5 - 10	196 20	147 15	147 15	196 20	196 20	196 20	196 20
608□SK	-	2.5 - 10	196 20	147 15	147 15	196 20	196 20	196 20	196 20
609□SK	-	2.5 - 10	294 30	294 30	294 30	294 30	294 30	294 30	294 30
610□SK	-	2.5 - 10	441 45	441 45	491 50	540 55	589 60	589 60	589 60
611□SK	-	2.5 - 10	441 45	343 35	441 45	491 50	491 50	540 55	589 60
606□	606□DA, 607□DA	6 - 17, 25 - 35	196 20	147 15	147 15	196 20	196 20	196 20	196 20
		21, 43	196 8	147 3	147 5	196 5	196 5	196 5	196 5
607□	609□DA, 610□DA, 612□DA 613□DA, 614□DA	6 - 17, 25 - 35, 51, 59	196 20	147 15	147 15	196 20	196 20	196 20	196 20
		21, 43	49.1 5	49.1 5	49.1 5	49.1 5	49.1 5	147 15	196 20
608□	-	6 - 15, 21 - 29, 43 - 59, 87	196 20	147 15	147 15	196 20	196 20	196 20	196 20
		17, 35, 71	49.1 5	49.1 5	49.1 5	49.1 5	49.1 5	147 15	196 20
609□	612□DB, 613□DB, 614□DB 616□DA, 617□DA	6 - 17, 25 - 71, 119	294 30	294 30	294 30	294 30	294 30	294 30	294 30
		21, 87	196 20	196 20	196 20	196 20	245 25	245 25	294 30
610□	613□DC, 614□DC, 616□DB 617□DB, 618VDA	6 - 11, 17 - 119	441 45	441 45	491 50	540 55	589 60	589 60	589 60
		13, 15	441 45	343 35	441 45	491 50	491 50	540 55	589 60
611□	-	6, 8, 21 - 87	441 45	343 35	441 45	491 50	491 50	540 55	589 60
		11 - 17	196 20	196 20	196 20	196 20	245 25	245 25	294 30
612□	616□DC, 617□DC 619□DA, 6205DA	6 - 17	590 60	690 70	740 75	780 80	880 90	880 90	880 90
		21 - 87	540 55	440 45	490 50	540 55	590 60	880 90	880 90
613□	618□DB, 619□DB, 6205DB 6215DA, 6225DA	6 - 17, 21	1370 140	1370 140	1370 140	1520 155	1620 165	1720 175	1860 190
		25 - 87	1280 130	1280 130	1280 130	1370 140	1470 150	1570 160	1770 180
614□	-	6, 8	1370 140	1370 140	1370 140	1520 155	1620 165	1720 175	1860 190
		11 - 21	1230 125	980 100	1080 110	1180 120	1230 125	1320 135	1470 150
		25	1080 110	1130 115	1180 120	1280 130	1320 135	1370 140	1470 150
		29 - 87	540 55	590 60	590 60	690 70	690 70	690 70	1080 110
616□	6215DB, 6235DA, 6245DA	8 - 25, 51, 59	1770 180	1770 180	1960 200	2060 210	2160 220	2160 220	2160 220
		29 - 43, 71, 87	1080 110	1180 120	1280 130	1370 140	1370 140	1570 160	1770 180
617□	6225DA, 6255DB	11 - 87	2060 210	2060 210	2260 230	2260 230	2350 240	2450 250	2650 270
618□	6235DB, 6245DB	11 - 87	2750 280	2550 260	2750 280	2940 300	3040 310	3340 340	3430 350
619□	6255DB, 6265DA, 6275DA	11 - 25	3040 310	3040 310	3240 330	3530 360	3630 370	3920 400	3920 400
		29 - 87	2650 270	2550 260	2840 290	2940 300	3140 320	3340 340	3630 370
6205	-	11 - 87	5400 550	4910 501	5400 550	5890 600	6080 620	6230 635	6180 630
6215	-	11 - 87	5740 585	5100 520	5440 555	6130 625	6330 645	6820 695	7260 740
6225	-	11 - 87	6620 675	5790 590	5980 610	6130 625	6620 675	6970 710	7500 765
6235	-	11 - 87	-	-	10000 1020	9520 970	9170 935	8980 915	8730 890
6245	-	11 - 87	-	-	11100 1130	10100 1030	10100 1030	10600 1080	11200 1140
6255	-	11 - 87	-	-	11800 1200	10800 1100	11300 1150	12300 1250	13100 1340
6265	-	11 - 87	-	-	11800 1200	10800 1100	11300 1150	12300 1250	13100 1340
6275	-	29 - 87	-	-	14700 1500	14700 1500	14700 1500	14700 1500	14700 1500
Single Reduction	Double Reduction	Reduction Ratio (Double Reduction: Input side)	1750	1450	1165	980	870	720	580
Frame Size			Input Speed r/min						

Note: □ indicates 0 or 5, expressing combination with reduction ratio.

TECHNICAL DATA
Reducer

Introduction to Moment of Inertia - GD²

2. Calculation of Moment of Inertia

(1) Moment of Inertia of Rotating Motion

Rotating motion on the center of gravity		Rotating motion off the center of gravity	
	$J = \frac{1}{8} MD^2 \text{ [kg}\cdot\text{m}^2]$		$J = \frac{M}{4} \left(\frac{1}{2} D^2 + 4R^2 \right) \text{ [kg}\cdot\text{m}^2]$
	$J = \frac{1}{8} M (D^2 + d^2) \text{ [kg}\cdot\text{m}^2]$		$J = \frac{M}{4} \left(\frac{a^2 + b^2}{3} + 4R^2 \right) \text{ [kg}\cdot\text{m}^2]$
	$J = \frac{1}{12} M (a^2 + b^2) \text{ [kg}\cdot\text{m}^2]$		$J = \frac{1}{12} M (4L^2 + C^2) \text{ [kg}\cdot\text{m}^2]$

(2) Moment of Inertia of Rectilinear Motion (Loaded Shaft Side)

General application		$J = \frac{M}{4} \left(\frac{V}{\pi N_s} \right)^2 = \frac{M}{4} D^2 \text{ [kg}\cdot\text{m}^2]$
Horizontal motion by conveyor		$J = \frac{1}{4} \left(\frac{M_1 + M_2 + M_3 + M_4}{2} \right) \times D^2 \text{ [kg}\cdot\text{m}^2]$
Horizontal motion by lead screw		$J = \frac{M}{4} \left(\frac{V}{\pi N_s} \right)^2 = \frac{M}{4} \left(\frac{P}{\pi} \right)^2 \text{ [kg}\cdot\text{m}^2]$
Vertical motion by hoist		$J = \frac{M_1 D^2}{4} + \frac{1}{8} M_2 D^2 \text{ [kg}\cdot\text{m}^2]$

(3) Calculation of Moment of Inertia at Different Rotating Speeds

	$J_L = \left(\frac{N_{s2}}{N_{s1}} \right)^2 J_R = \left(\frac{1}{Z} \right)^2 J_R$
	Z: Total ratio

TECHNICAL DATA

Reducer

Introduction to Moment of Inertia - GD^2 3. Calculation of GD^2 (1) GD^2 of Rotating Motion

Rotating motion on the center of gravity		Rotating motion off the center of gravity	
	$GD^2 = \frac{1}{2} WD^2$ [kgf·m ²]		$GD^2 = W \left(\frac{1}{2} D^2 + 4R^2 \right)$ [kgf·m ²]
	$GD^2 = \frac{1}{2} W (D^2 + d^2)$ [kgf·m ²]		$GD^2 = W \left(\frac{a^2 + b^2}{3} + 4R^2 \right)$ [kgf·m ²]
	$GD^2 = \frac{1}{3} W (a^2 + b^2)$ [kgf·m ²]		$GD^2 = \frac{1}{3} W (4L^2 + C^2)$ [kgf·m ²]

(2) GD^2 of Rectilinear Motion (Loaded Shaft Side GD^2)

General application		$GD^2 = W \left(\frac{V}{\pi \cdot N} \right)^2 = WD^2$	[kgf·m ²]
Horizontal motion by conveyor		$GD^2 = \left(\frac{W_1 + W_2}{2} + W_3 + W_4 \right) \times D^2$	[kgf·m ²]
Horizontal motion by lead screw		$GD^2 = W \left(\frac{V}{\pi \cdot N} \right)^2 = W \left(\frac{P}{\pi} \right)^2$	[kgf·m ²]
Vertical motion by hoist		$GD^2 = W_1 D^2 + \frac{1}{2} W_2 D^2$	[kgf·m ²]

(3) Calculation of Moment of Inertia at Different Rotating Speeds

	$GD_i^2 = \left(\frac{N_2}{N_1} \right)^2 GD^2 = \left(\frac{1}{Z} \right)^2 GD^2$	Z: Total ratio
--	--	----------------

Introduction to Moment of Inertia - GD²

Moment of Inertia - GD²

Table F-15 Moment of Inertia-GD²on Motor Shaft of CYCLO® Gearmotor (Single Stage Reduction, CYCLO Part Only)

Unit: GD_c² (× 10⁻⁴kgf·m²) J_c (Moment of inertia) (× 10⁻⁴kg·m²)

Frame Size	Reduction Ratio															
	6		8		11		13		15		17		21		25	
	GD _c ²	J _c	GD _c ²	J _c	GD _c ²	J _c	GD _c ²	J _c	GD _c ²	J _c	GD _c ²	J _c	GD _c ²	J _c	GD _c ²	J _c
6060 6065	0.666	0.167	0.532	0.133	0.449	0.112	0.423	0.106	0.407	0.102	0.396	0.099	0.378	0.095	0.366	0.092
6070 6075	0.682	0.171	0.541	0.135	0.454	0.114	0.426	0.107	0.409	0.102	0.398	0.100	0.379	0.095	0.367	0.092
6080 6085	1.61	0.403	1.32	0.330	1.12	0.280	1.07	0.268	1.02	0.255	0.997	0.249	0.688	0.172	0.665	0.166
6090 6095	3.82	0.955	2.96	0.740	2.37	0.593	2.49	0.623	2.42	0.605	2.12	0.530	1.61	0.403	1.56	0.390
6100 6105	3.07	0.768	2.22	0.555	1.36	0.340	1.40	0.350	1.28	0.320	0.897	0.224	1.03	0.258	0.942	0.236
6110 6115	5.99	1.50	4.44	1.11	3.38	0.845	3.07	0.768	2.88	0.720	2.75	0.688	2.44	0.610	2.38	0.595
6120 6125	12.4	3.10	10.1	2.53	6.24	1.56	6.82	1.71	6.46	1.62	4.82	1.21	5.56	1.39	5.17	1.29
6130 6135	34.3	8.58	23.5	5.88	17.3	4.33	14.7	3.68	13.2	3.30	12.1	3.03	10.0	2.51	9.39	2.35
6140 6145	37.7	9.43	25.6	6.40	18.2	4.55	14.7	3.68	13.3	3.33	11.8	2.95	10.1	2.52	9.41	2.35
6160 6165	98.7	24.7	68.9	17.2	45.4	12.4	41.5	11.0	37.7	9.90	32.2	8.35	29.9	7.65	28.2	71.5
6170 6175	264	66.0	197	49.3	153	37.5	140	35.3	124	31.3	119	30.0	111	28.0	107	27.0
6180 6185	-	-	-	-	231	58.5	209	52.8	186	46.8	177	44.5	167	42.3	156	39.3
6190 6195	-	-	-	-	545	136	503	126	478	120	460	115	428	107	415	104
6205	-	-	-	-	646	162	-	-	565	141	-	-	517	129	-	-
6215	-	-	-	-	990	248	-	-	864	216	-	-	789	197	-	-
6225	-	-	-	-	1220	305	-	-	1030	258	-	-	927	232	-	-
6235	-	-	-	-	1990	498	-	-	1710	428	-	-	1530	383	-	-
6245	-	-	-	-	3610	903	-	-	3170	793	-	-	2890	723	-	-
6255	-	-	-	-	5870	1470	-	-	5120	1280	-	-	4630	1160	-	-
6265	-	-	-	-	8590	2150	-	-	7460	1870	-	-	6800	1700	-	-
6275	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Frame Size	Reduction Ratio															
	29		35		43		51		59		71		87		119	
	GD _c ²	J _c	GD _c ²	J _c	GD _c ²	J _c	GD _c ²	J _c	GD _c ²	J _c	GD _c ²	J _c	GD _c ²	J _c	GD _c ²	J _c
6060 6065	0.361	0.090	0.356	0.089	0.351	0.088	-	-	-	-	-	-	-	-	-	-
6070 6075	0.362	0.091	0.356	0.089	0.351	0.088	0.348	0.087	0.346	0.087	-	-	-	-	-	-
6080 6085	0.650	0.163	0.633	0.158	0.380	0.095	0.373	0.093	0.370	0.093	0.365	0.091	0.363	0.091	-	-
6090 6095	1.30	0.325	1.01	0.253	0.993	0.248	0.968	0.242	0.723	0.181	0.954	0.239	0.712	0.178	0.944	0.236
6100 6105	0.651	0.163	0.607	0.152	0.573	0.143	0.790	0.198	0.528	0.132	0.767	0.192	0.511	0.128	0.750	0.188
6110 6115	2.32	0.580	2.23	0.558	2.19	0.548	2.13	0.533	2.12	0.530	2.10	0.525	2.09	0.523	-	-
6120 6125	3.63	0.908	3.46	0.865	3.30	0.825	4.58	1.15	3.15	0.788	4.48	1.12	3.04	0.760	-	-
6130 6135	8.63	2.16	8.33	2.08	7.84	1.96	7.71	1.93	7.64	1.91	7.45	1.86	7.40	1.85	-	-
6140 6145	8.63	2.16	8.34	2.09	7.84	1.96	7.65	1.91	7.64	1.91	7.45	1.86	7.40	1.85	-	-
6160 6165	25.2	6.35	24.3	6.10	23.3	5.85	23.0	5.75	23.1	5.78	22.1	5.53	21.8	5.45	-	-
6170 6175	102	25.5	100	25.3	97.7	24.5	96.7	24.2	95.6	23.9	95.2	23.8	94.7	23.7	-	-
6180 6185	149	37.5	147	37.0	144	36.0	140	35.0	139	34.8	138	34.5	137	34.3	-	-
6190 6195	402	101	393	98.3	387	96.8	383	95.8	380	95.0	378	94.5	376	94.0	-	-
6205	482	121	-	-	460	115	-	-	451	113	-	-	446	117	-	-
6215	735	184	-	-	700	175	-	-	686	172	-	-	678	170	-	-
6225	840	210	-	-	788	197	-	-	766	192	-	-	753	188	-	-
6235	1410	353	-	-	1340	335	-	-	1300	325	-	-	1290	323	-	-
6245	2720	680	-	-	2600	650	-	-	2550	638	-	-	2530	633	-	-
6255	4320	1080	-	-	4140	1040	-	-	4060	1020	-	-	4010	1000	-	-
6265	6330	1580	-	-	6030	1510	-	-	5900	1480	-	-	5820	1460	-	-
6275	19600	4900	-	-	18900	4730	-	-	18600	4650	-	-	18400	4600	-	-

Note: 1. Table F-15 does not include GD² of motor. Obtain the GD² of the single stage reduction gearmotor by adding the GD² of the motor Tables F-19, 20.

2. Calculate the GD² of the 2-Stage reduction model from the following formula:

$$GD^2 \text{ of the 2-stage reduction model} = GD^2 \text{ of 1st stage} + \frac{GD^2 \text{ (2nd stage)}}{(\text{Reduction ratio of 1st stage})^2}$$

Calculate the GD² of the 1st stage (input side) in the same manner as calculating the GD² of single stage reduction model.

For the GD² of the 2nd stage (output side), the values shown in Table F-15 may be used.

*The values in Table F-15 are subject to change without notice.

TECHNICAL DATA Reducer

Introduction to Moment of Inertia · GD²Table F-16 Moment of Inertia · GD² on High Speed Shaft of CYCLO® Reducer (Single Stage Reducer)Unit: GD² (× 10⁻⁴kgf·m²) J_c (Moment of inertia) (× 10⁻⁴kg·m²)

Frame Size	Reduction Ratio															
	6		8		11		13		15		17		21		25	
	GD ²	J _c	GD ²	J _c	GD ²	J _c	GD ²	J _c	GD ²	J _c	GD ²	J _c	GD ²	J _c	GD ²	J _c
6060 6065	0.764	0.191	0.630	0.158	0.547	0.137	0.521	0.130	0.505	0.126	0.494	0.124	0.476	0.119	0.464	0.116
6070 6075	0.780	0.195	0.639	0.160	0.552	0.138	0.524	0.131	0.507	0.127	0.496	0.124	0.477	0.119	0.465	0.116
6080 6085	1.70	0.425	1.41	0.353	1.22	0.305	1.16	0.290	1.11	0.278	1.09	0.273	0.782	0.196	0.759	0.190
6090 6095	4.06	1.015	2.73	0.683	2.60	0.650	2.25	0.563	2.18	0.545	2.36	0.590	1.380	0.345	1.330	0.333
6100 6105	3.32	0.830	1.98	0.495	1.60	0.400	1.15	0.288	1.03	0.259	1.18	0.295	0.783	0.196	0.695	0.174
6110 6115	6.23	1.56	4.68	1.17	3.62	0.905	3.31	0.828	3.12	0.780	2.99	0.748	2.68	0.670	2.62	0.655
6120 6125	13.8	3.45	8.68	2.17	7.64	1.91	5.42	1.36	5.06	1.27	6.22	1.56	4.17	1.04	3.77	0.943
6130 6135	36.8	9.20	26.0	6.50	19.8	4.95	17.2	4.30	15.8	3.95	14.6	3.65	12.6	3.15	18.9	4.73
6140 6145	41.7	10.4	28.9	7.23	21.2	5.30	17.3	4.33	15.8	3.95	14.5	3.63	12.6	3.15	12.0	3.00
6160 6165	146	36.5	116	29.0	92.6	23.2	88.7	22.2	84.9	21.2	79.4	19.9	77.1	19.3	75.4	18.9
6170 6175	315	78.8	248	62.0	204	51.0	191	47.8	175	43.8	170	42.5	161	40.3	158	39.5
6180 6185	-	-	-	-	292	73.0	271	67.8	247	61.8	239	59.8	228	57.0	217	54.3
6190 6195	-	-	-	-	678	169	636	159	611	152	594	148	561	140	548	137
6205	-	-	-	-	946	237	-	-	864	216	-	-	817	204	-	-
6215	-	-	-	-	1490	373	-	-	1360	340	-	-	1290	323	-	-
6225	-	-	-	-	1930	483	-	-	1750	438	-	-	1640	410	-	-
6235	-	-	-	-	3240	810	-	-	2960	740	-	-	2780	695	-	-
6245	-	-	-	-	4940	1240	-	-	4500	1130	-	-	4220	1060	-	-
6255	-	-	-	-	8910	2230	-	-	8160	2040	-	-	7670	1920	-	-
6265	-	-	-	-	11700	2930	-	-	10600	2650	-	-	9960	2490	-	-
6275	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Frame Size	Reduction Ratio																GD ² of fan Moment of Inertia	
	29		35		43		51		59		71		87		119		GD ²	J _c
	GD ²	J _c	GD ²	J _c	GD ²	J _c	GD ²	J _c	GD ²	J _c	GD ²	J _c	GD ²	J _c	GD ²	J _c	GD ²	J _c
6060 6065	0.460	0.115	0.454	0.114	0.449	0.112	-	-	-	-	-	-	-	-	-	-	-	-
6070 6075	0.460	0.115	0.454	0.114	0.450	0.113	0.446	0.112	0.445	0.111	-	-	-	-	-	-	-	-
6080 6085	0.744	0.186	0.727	0.182	0.474	0.119	0.467	0.117	0.463	0.116	0.459	0.115	0.456	0.114	-	-	-	-
6090 6095	1.54	0.385	1.25	0.313	1.23	0.308	0.731	0.183	0.960	0.240	0.717	0.179	0.949	0.237	0.707	0.177	-	-
6100 6105	0.899	0.225	0.854	0.214	0.820	0.205	0.543	0.136	0.776	0.194	0.520	0.130	0.758	0.190	0.503	0.126	-	-
6110 6115	2.56	0.64	2.47	0.618	2.43	0.608	2.37	0.593	2.36	0.590	2.34	0.585	2.33	0.583	-	-	-	-
6120 6125	5.03	1.26	4.86	1.22	4.70	1.18	3.19	0.798	4.55	1.14	3.08	0.770	4.44	1.11	-	-	-	-
6130 6135	11.2	2.80	10.9	2.73	10.3	2.58	10.2	2.55	10.2	2.55	9.97	2.49	9.93	2.48	-	-	-	-
6140 6145	11.2	2.80	10.9	2.73	10.3	2.58	10.2	2.55	10.2	2.55	9.99	2.50	9.93	2.48	-	-	-	-
6160 6165	72.4	18.1	71.5	17.9	70.5	17.6	70.2	17.6	70.3	17.6	69.3	17.3	69.0	17.3	-	-	35.4	8.85
6170 6175	153	38.3	151	37.8	148	37.0	147	36.8	146	36.5	146	36.5	145	36.3	-	-	33.3	8.33
6180 6185	211	52.8	209	52.3	206	51.5	202	50.5	200	50.0	199	49.8	198	49.5	-	-	32.7	8.18
6190 6195	535	133	527	131	520	130	516	129	513	128	511	127	509	127	-	-	83.6	20.9
6205	782	196	-	-	760	190	-	-	750	188	-	-	745	186	-	-	248	62.0
6215	1240	310	-	-	1200	300	-	-	1190	298	-	-	1180	295	-	-	419	105
6225	1550	388	-	-	1500	375	-	-	1480	370	-	-	1470	368	-	-	599	150
6235	2660	665	-	-	2580	645	-	-	2550	638	-	-	2530	633	-	-	1040	260
6245	4040	1010	-	-	3930	983	-	-	3880	970	-	-	3850	963	-	-	1040	260
6255	7360	1840	-	-	7180	1800	-	-	7100	1780	-	-	7060	1770	-	-	2370	593
6265	9480	2370	-	-	9180	2300	-	-	9050	2260	-	-	8980	2250	-	-	2370	593
6275	-	-	-	-	29900	7480	-	-	29600	7400	-	-	29400	7350	-	-	9540	2390

Note: 1. The value of the fan has been to the GD² of the Frame sizes of 6160~6275.
2. The GD² of the 2-stage reduction model is calculated by the following formula:

$$\text{GD}^2 \text{ of the 2-stage reduction model} = \text{GD}^2 \text{ of 1st stage} + \frac{\text{GD}^2 \text{ (2nd stage)}}{(\text{Reduction ratio of 1st stage})^2}$$
Use value in Table F-16 for GD² of 1st stage.
For the GD² of the 2nd stage, deduct the GD² of the fan from the value in Table F-16.

*The values in Table F-16 are subject to change without notice.

TECHNICAL
DATA

Reducer

Moment of Inertia-GD²Table F-19 Moment of Inertia · GD² of Three Phase Motor

[4P Motor]

Unit: GD_M²(kgf·m²) J_M (Moment of inertia) (kg·m²)

kW × P	0.1kW × 4P		0.2kW × 4P		0.25kW × 4P		0.4kW × 4P		0.55kW × 4P		0.75kW × 4P	
	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M
Standard	0.0013	0.000325	0.0020	0.000500	0.0020	0.000500	0.0026	0.000650	0.0041	0.00101	0.0048	0.00120
With Brake	0.0014	0.000350	0.0022	0.000550	0.0022	0.000550	0.0027	0.000675	0.0045	0.00111	0.0052	0.00130
kW × P	1.1kW × 4P		1.5kW × 4P		2.2kW × 4P		3.0kW × 4P		3.7kW × 4P		5.5kW × 4P	
	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M
Standard	0.0074	0.00185	0.0085	0.00213	0.0133	0.00333	0.0281	0.00700	0.0339	0.00848	0.0457	0.0114
With Brake	0.0083	0.00208	0.0094	0.00235	0.0149	0.00373	0.0325	0.00810	0.0383	0.00958	0.0501	0.0125
kW × P	7.5kW × 4P		11kW × 4P		15kW × 4P		18.5kW × 4P		22kW × 4P		30W × 4P	
	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M
Standard	0.107	0.0268	0.150	0.0375	0.359	0.0898	0.900	0.225	0.900	0.225	1.00	0.250
With Brake	0.121	0.0303	0.164	0.0410	0.428	0.107	0.972	0.243	0.972	0.243	1.05	0.262
kW × P	37kW × 4P		45kW × 4P		55kW × 4P							
	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M						
Standard	1.23	0.308	1.37	0.343	2.70	0.675						
With Brake	1.28	0.321	-	-	-	-						

[6P Motor]

kW × P	0.1kW × 6P		0.2kW × 6P		0.25kW × 6P		0.4kW × 6P		0.55kW × 6P		0.75kW × 6P	
	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M
Standard	0.0023	0.000575	0.0031	0.000775	0.0031	0.000775	0.0067	0.00168	0.0077	0.00193	0.0120	0.00300
With Brake	0.0025	0.000625	0.0032	0.000800	0.0032	0.000800	0.0071	0.00178	0.0081	0.00203	0.0129	0.00323
kW × P	1.1kW × 6P		1.5kW × 6P		2.2kW × 6P		3.0kW × 6P		3.7kW × 6P		5.5kW × 6P	
	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M
Standard	0.0145	0.00363	0.0212	0.00530	0.0527	0.0132	0.0657	0.0164	0.0740	0.0185	0.140	0.0350
With Brake	0.0154	0.00385	0.0228	0.00570	0.0571	0.0143	0.0701	0.0175	0.0784	0.0196	0.154	0.0385
kW × P	7.5kW × 6P		11kW × 6P		15kW × 6P		18.5kW × 6P		22kW × 6P		30W × 6P	
	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M
Standard	0.286	0.0715	0.359	0.0898	1.27	0.318	1.45	0.363	1.45	0.363	1.90	0.475
With Brake	0.355	0.0888	0.428	0.1070	-	-	-	-	-	-	-	-
kW × P	37kW × 6P		45kW × 6P		55kW × 6P							
	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M						
Standard	2.40	0.600	4.00	1.00	4.70	1.18						
With Brake	-	-	-	-	-	-						

Table F-20 Moment of Inertia · GD² of Motor for InverterUnit: GD_M²(kgf·m²) J_M (Moment of inertia) (kg·m²)

kW × P	0.1kW × 4P		0.2kW × 4P		0.4kW × 4P		0.75kW × 4P		1.5kW × 4P		2.2kW × 4P	
	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M
Standard	0.0020	0.000500	0.0026	0.000650	0.0048	0.00120	0.0085	0.00213	0.0133	0.00333	0.0339	0.00848
With Brake	0.0022	0.000550	0.0027	0.000675	0.0052	0.00130	0.0094	0.00235	0.0149	0.00373	0.0383	0.00958
kW × P	3.7kW × 4P		5.5kW × 4P		7.5kW × 4P		11kW × 4P		15kW × 4P		18.5W × 4P	
	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M
Standard	0.0457	0.0114	0.107	0.0268	0.150	0.0375	0.359	0.0898	0.900	0.225	1.00	0.250
With Brake	0.0501	0.0125	0.121	0.0303	0.164	0.0410	0.428	0.1070	0.972	0.243	1.05	0.262
kW × P	22kW × 4P		30kW × 4P		37kW × 4P							
	GD _M ²	J _M	GD _M ²	J _M	GD _M ²	J _M						
Standard	1.00	0.250	1.23	0.308	1.37	0.343						
With Brake	1.05	0.262	1.28	0.321	-	-						

TECHNICAL
DATA

Reducer

Construction Drawing

1. Construction of 6000 Series

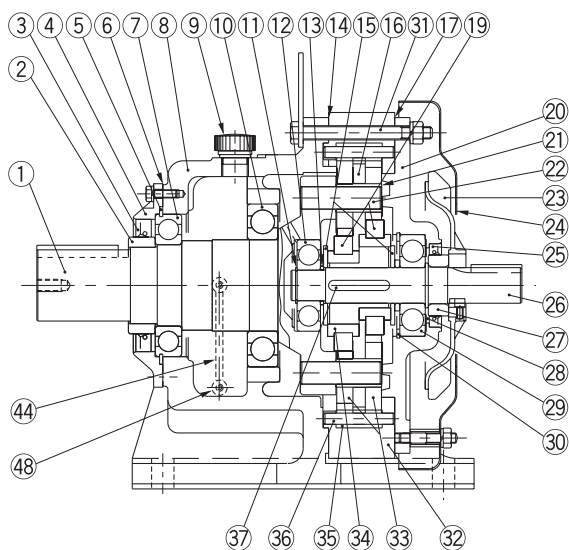


Fig F-10 Type CHH (Horizontal, Reducer) Single reduction
(Example: Frame size 6175)

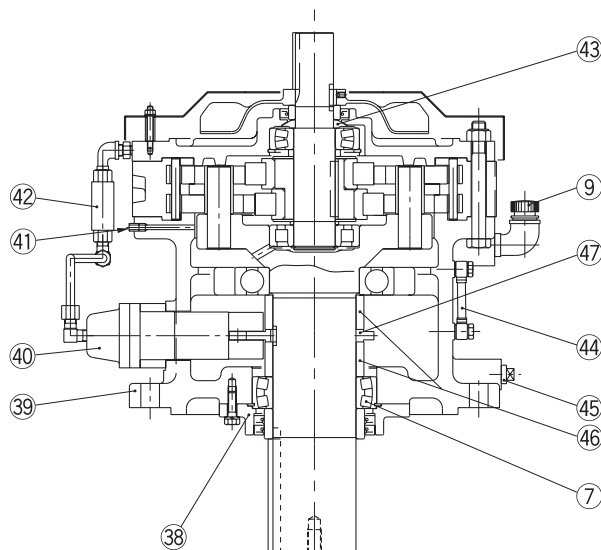


Fig F-11 Type CVV (Vertical, Reducer) Single reduction
(Example: Frame size 6225)

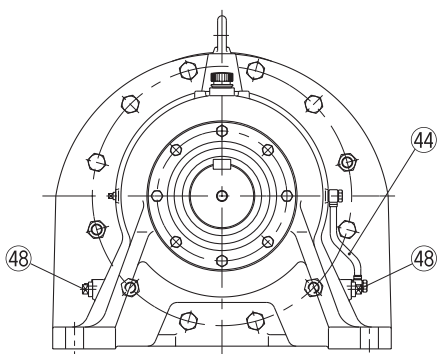


Fig F-12 Type CHHM (Horizontal, Gearmotor) Single reduction
(Example: Frame size 6225)

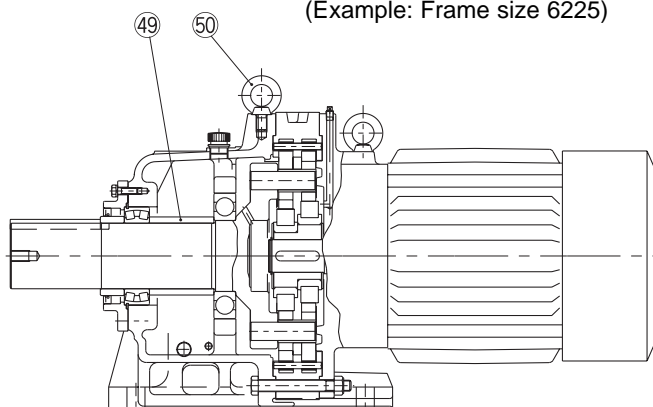


Fig F-13 Type CNHM (Horizontal, Gearmotor) Single reduction
(Example: Frame size 6095)


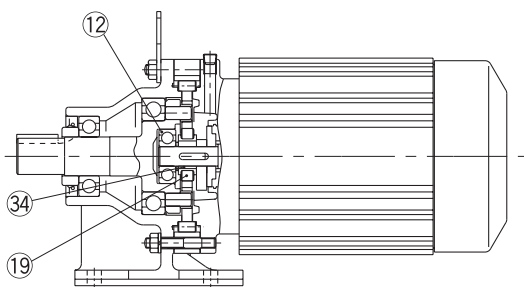


Fig F-14 Type CNH (Horizontal, Reducer) Single reduction
(Example: Frame size 6105)

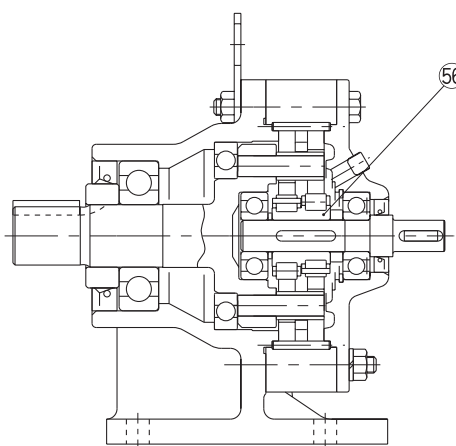

TECHNICAL
DATA

Reducer

Construction Drawing

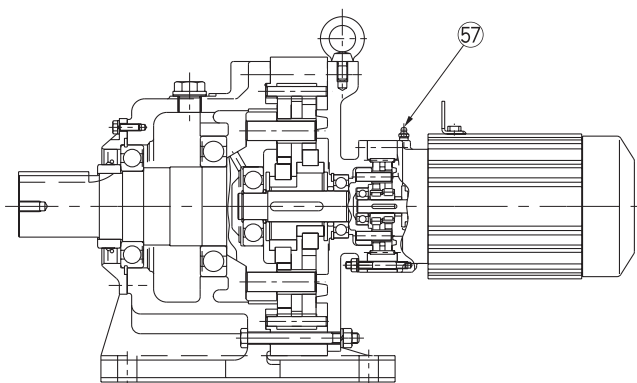


Fig F-15 Type CHHM (Horizontal, Gearmotor)
Double reduction
(Example: Frame size grease lubricated 6185DB)

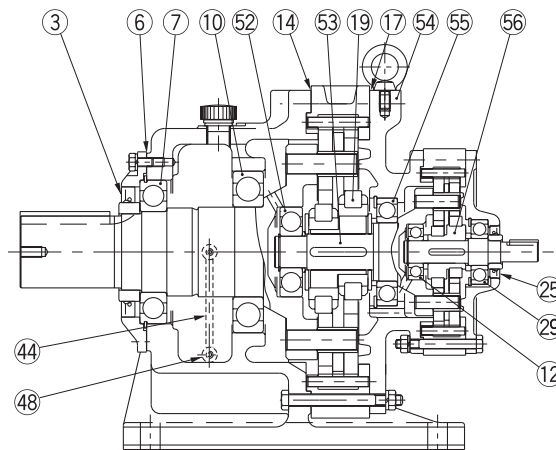


Fig F-16 Type CHH (Horizontal, Reducer)
Double reduction
(Example: Frame size 6185DB)

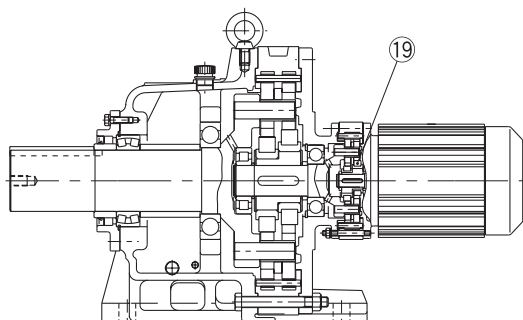


Fig F-17 Type CHHM (Horizontal, Gearmotor)
Double reduction
(Example: Frame size 6225DB)

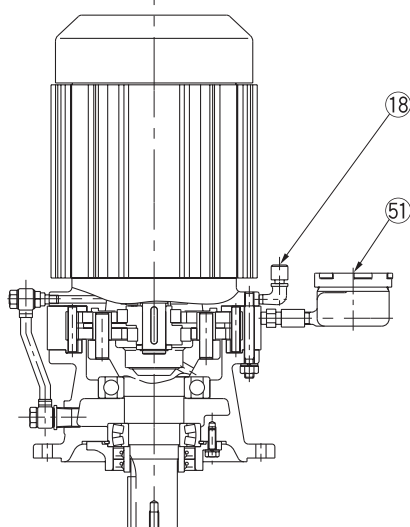


Fig F-18 Type CVVM
(Vertical, Gearmotor)
Single reduction
(Example: Frame size 6145)

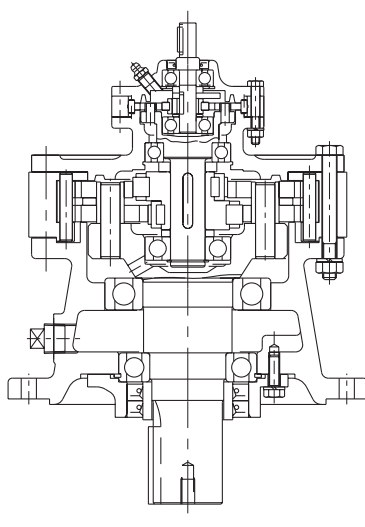


Fig F-19 Type CVV
(Vertical, Reducer)
Double reduction
(Example: Frame size 6135DA)

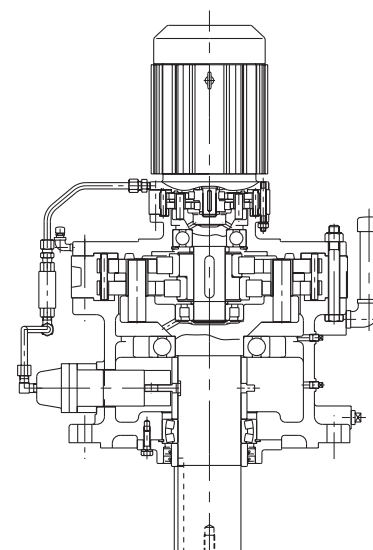


Fig F-20 Type CVVM
(Vertical, Gearmotor)
Double reduction
(Example: Frame size 6225DA)

TECHNICAL
DATA

Reducer

Principal parts

No.	Part Name	No.	Part Name	No.	Part Name	No.	Part Name	No.	Part Name
1	Slow speed shaft	13	Spacer	25	Oil seal	37	Key	49	Spacer
2	Collar (Slow speed shaft)	14	Gasket B	26	High speed shaft	38	Gland	50	Eye bolt
3	Oil seal	15	End plate	27	Collar (High Speed Shaft)	39	Flanged casing	51	Oil filler
4	Slow speed end cap	16	Spacer ring	28	Spacer	40	Plunger pump	52	Intermediate shaft, bearing A
5	Retaining ring	17	Gasket C	29	High speed shaft, bearing B	41	Air vent plug	53	Intermediate shaft
6	Gasket A	18	Air vent plug	30	Retaining ring	42	Oil signal	54	Intermediate cover
7	Slow speed shaft, bearing A	19	Bearing for eccentric (High speed shaft section)	31	Bolt for ring gear housing	43	Oil slinger	55	Intermediate shaft, bearing B
8	Horizontal casing	20	High speed end shield	32	Ring gear housing	44	Oil level gauge	56	Eccentric bearing (Double)
9	Oil filler plug	21	Slow speed shaft roller	33	Cycloid disc	45	Plug (Oil drain)	57	Grease nipple
10	Slow speed shaft, bearing B	22	Slow speed shaft pin	34	Eccentric	46	Spacer		
11	Retaining ring	23	Cooling fan	35	Ring gear roller	47	Cam		
12	High speed shaft, bearing A	24	Fan cover	36	Ring gear pin	48	Plug (Oil drain)		

2. Construction of 6000SK Series

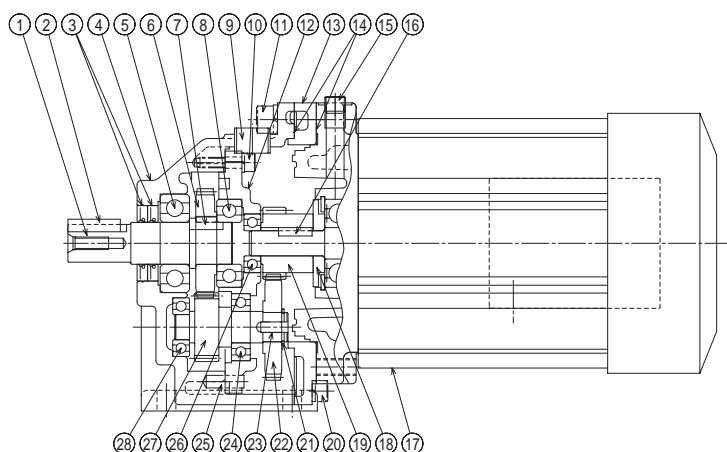


Fig F-21 Type CHHM
(6000SK Series Horizontal, Gearmotor)
(Example: Frame size 6075SK)

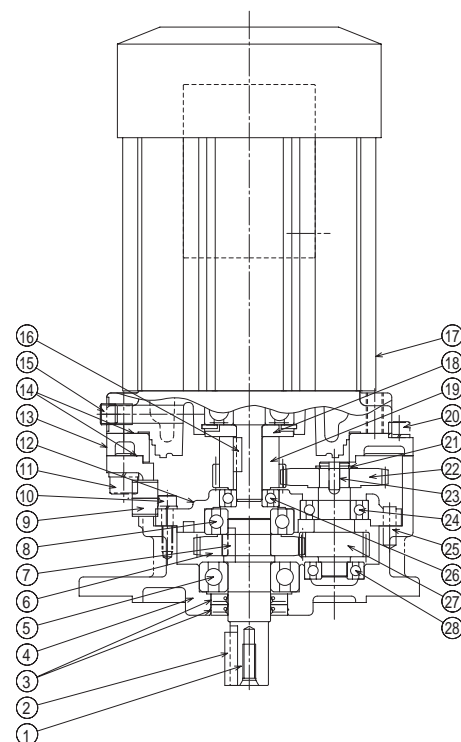


Fig F-22 Type CVVM
(6000SK Series Vertical, Gearmotor)
(Example: Frame size 6075SK)


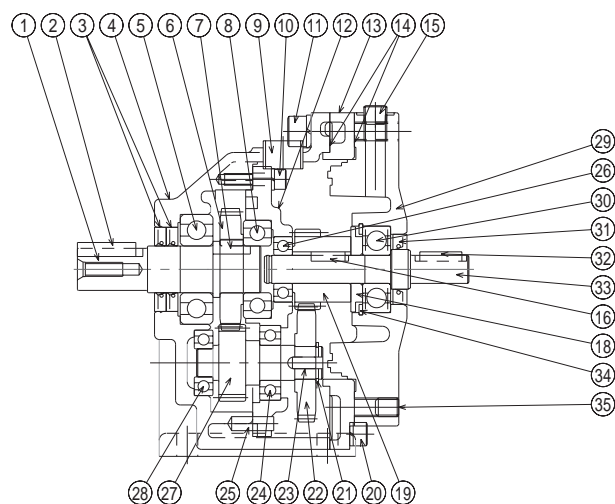


Fig F-23 Type CHH
(6000SK Series Horizontal, Reducer)
(Example: Frame size 6075SK)


Principal parts

No.	Part Name	No.	Part Name	No.	Part Name	No.	Part Name
1	Slow speed shaft (Output shaft)	11	Hexagon socket head cap screw	21	Snap ring	31	Oil seal
2	Key	12	Bearing plate	22	First gear	32	Key
3	Oil seal	13	Adapter plate	23	Key	33	High speed shaft
4	Horizontal casing	14	Liquid gasket	24	Bearing (B) for mid speed shaft	34	Snap ring
5	Bearing (A) for slow speed shaft	15	Plug	25	Pin	35	Hexagon socket head cap screw
6	Second gear	16	Key	26	Bearing (A) for high speed shaft		
7	Key	17	Motor	27	Second pinion (middle speed shaft)		
8	Bearing (B) for slow speed shaft	18	Oil slinger	28	Bearing (A) for middle speed shaft		
9	Plug	19	First pinion	29	High speed end shield		
10	Hexagon socket head cap screw	20	Hexagon socket head cap screw	30	Bearing (B) for high speed shaft		


Detailed Dimension of Slow Speed Shaft



View from A

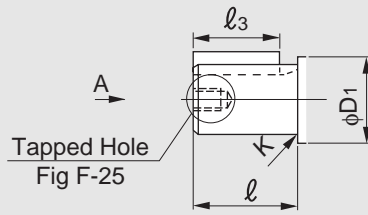

[Fig F-24a]



[Fig F-24b]

- Dimension of slow speed shaft end; Dimension tolerance in accordance with JIS B 0401-1976 "h6".
- Dimension of shaft end key; Parallel key in accordance with JIS B 1301-1996.

Table F-23 Dimension of Slow Speed Shaft


Frame Size			Slow Speed Shaft													
6000SK Series	6000Series		Fig	D (h6)	Tolerance	D1	l	K (Roundness)	t	Tolerance	b(key) (h9)		h(key)		l_3 (key)	l_4
	Single	Double									Tolerance	Tolerance	Tolerance	Tolerance		
-	6060	6060DA	F-24b	14	0	30	25	-	3	+0.1	5	0	5	0	20	22.5
-	6065	6065DA	F-24b	18		-0.011	30	-	-		6		6		25	-
-	6070	6070DA	F-24b	18	-0.011	30	0.6	3.5	+0.1	0	6	0	6	-0.030	25	28
-	6075	6075DA														
6070SK	-	-	F-24b	22	0	45	-	3.5	+0.1	0	6	0	6	-0.030	30	33
6080SK	6080	-														
6085SK	6085	-	F-24a	28	0	45	-	4	+0.2	0	8	0	7	-	32	-
-	6090	6090DA														
6090SK	6090	6090DA	F-24b	28	-0.013	30	35	0.5	+0.2	0	8	0	7	-0.090	27	32
6095SK	6095	6095DA														
-	6100	6100DA	F-24a	28	0	50	-	4	+0.2	0	8	0	7	-	32	-
-	6105	6105DA														
6100SK	6100	-	F-24b	28	0	30	35	0.5	+0.2	0	8	0	7	-0.090	27	32
6105SK	6105	-														
-	6110	-	F-24b	32	0	55	-	5	+0.2	0	10	0	8	-	37	42
-	6115	-														
6110SK	6110	-	F-24b	32	0	35	45	1	+0.2	0	10	0	8	-	37	40
6115SK	6115	-														
-	6120	6120DA 6120DB	F-24a	38	-0.016	65	55	-	5	+0.2	10	0	8	-	50	-
-	6125	6125DA 6125DB														
-	612H	-	F-24a	38	-0.016	65	55	-	5	+0.2	10	0	8	-	50	-

TECHNICAL DATA

Reducer

Table F-24 Dimension of Tapped Hole

Frame Size			Tap	Depth	Center hole		
6000SK Series	6000 Series				M	A	$\phi D1$
-	6060	6060DA	M5	16	7	5.2	2.6
-	6065	6065DA	M5	16	7	5.2	2.6
6070SK	6070	6070DA	M6	16	9	6.2	3.4
6075SK	6075	6075DA	M6	16	9	6.2	3.4
6080SK	6080	-	M6	16	9	6.2	3.4
6085SK	6085	-	M6	16	9	6.2	3.4
6090SK	6090	6090DA	M8	20	11	8.2	3.6
6095SK	6095	6095DA	M8	20	11	8.2	3.6
6100SK	6100	6100DA	M8	20	11	8.2	3.6
6105SK	6105	6105DA	M8	20	11	8.2	3.6
-	610H	-	M8	20	11	8.2	3.6
6110SK	6110	-	M8	20	11	8.2	3.6
6115SK	6115	-	M8	20	11	8.2	3.6
-	6120	6120DA 6120DB	M8	20	11	8.2	3.6
-	6125	6125DA 6125DB	M8	20	11	8.2	3.6
-	612H	-	M8	20	11	8.2	3.6

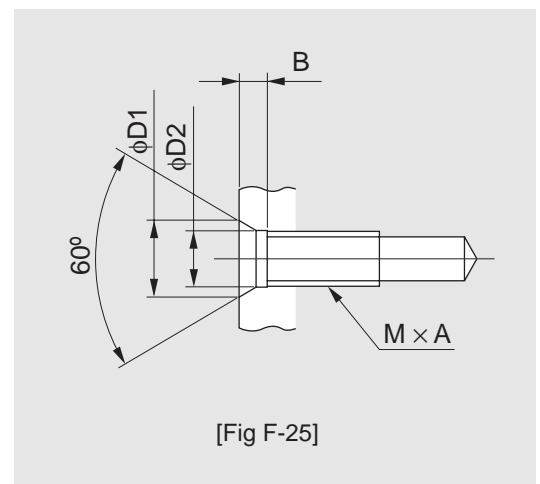

[Fig F-25]

Detailed Dimension of Slow Speed Shaft







Table F-25 Dimension of Slow Speed Shaft


Frame Size			Slow Speed Shaft																	
Single	Double		Fig	D (h6)	Tolerance	D ₁	ℓ	K (Roundness)	s	ℓ ₂	t	Tolerance	b (key) (h9)	Tolerance	h (key)	Tolerance	ℓ ₃ (key)	ℓ ₄		
6130	6130DA	6130DB	6130DC	F-26	50	0 -0.016	65	70 (61)	-	M10	18	5.5	+0.2 0	14	0 -0.043	9	0	56	-	
6135	6135DA	6135DB	6135DC	F-26	50		65	90 (81)	-	M10	18	5.5		14		9	-0.090	80	-	-
6140	6140DA	6140DB	6140DC	F-26	50		65	90 (81)	-	M10	18	5.5		14		9	-0.090	80	-	-
6145	6145DA	6145DB	6145DC	F-26	50	0 -0.019	65	90 (81)	-	M10	18	5.5	+0.2 0	14	0 -0.043	9	0	56	-	
6145	6145DA	6145DB	6145DC	F-26	50		65	90 (81)	-	M10	18	5.5		14		9	-0.090	80	-	-
614H	-	-	-	F-26	50		65	90 (81)	-	M10	18	5.5		14		9	-0.090	80	-	-
6160	6160DA	6160DB	6160DC	F-26	60	0 -0.019	85	90 (80)	-	M10	18	7	+0.2 0	18	0 -0.052	11	0	80	-	
6165	6165DA	6165DB	6165DC	F-26	60		85	90 (80)	-	M10	18	7		18		11	-0.110	80	-	-
616H	-	-	-	F-26	60		85	90 (80)	-	M10	18	7		18		11	-0.110	80	-	-
6170	6170DA	6170DB	6170DC	F-26	70	0 -0.022	95	90 (84)	-	M12	24	7.5	+0.2 0	20	0 -0.052	12	0	80	-	
6175	6175DA	6175DB	6175DC	F-26	70		95	90 (84)	-	M12	24	7.5		20		12	-0.110	80	-	-
6180	6180DA	6180DB	6180DC	F-26	70		95	90 (84)	-	M12	24	7.5		20		12	-0.110	80	-	-
6185	6185DA	6185DB	6185DC	F-26	80	0 -0.025	110	110 (100)	-	M12	24	9	+0.3 0	22	0 -0.063	14	0	100	-	
6185	6185DA	6185DB	6185DC	F-26	80		110	110 (100)	-	M12	24	9		22		14	-0.110	100	-	-
6190	6190DA	6190DB	6190DC	F-28	80		110	110 (100)	-	M12	24	9		22		14	-0.110	100	-	-
6195	6195DA	6195DB	6195DC	F-28	95	0 -0.022	120	135 (125)	-	M20	34	9	+0.3 0	25	0 -0.063	14	0	125	137.5	
6195	6195DA	6195DB	6195DC	F-28	95		120	135 (125)	-	M20	34	9		25		14	-0.110	125	137.5	-
6205	6205DA	6205DB	6205DC	F-27	100		120	135 (125)	-	M20	34	9		25		14	-0.110	125	137.5	-
6205	6205DA	6205DB	6205DC	F-27	100	0 -0.022	120	165	-	M20	34	10	+0.3 0	28	0 -0.063	16	0	165	-	
6215	6215DA	6215DB	6215DC	F-27	110		120	165	-	M20	34	10		28		16	-0.130	165	-	-
6215	6215DA	6215DB	6215DC	F-27	110		120	165	-	M20	34	10		28		16	-0.130	165	-	-
6225	6225DA	6225DB	6225DC	F-27	120	0 -0.025	145	165	-	M20	34	11	+0.3 0	32	0 -0.063	18	0	165	-	
6225	6225DA	6225DB	6225DC	F-27	120		145	165	-	M20	34	11		32		18	-0.130	165	-	-
6235	6235DA	6235DB	6235DC	F-27	130		145	165	-	M20	34	11		32		18	-0.130	165	-	-
6235	6235DA	6235DB	6235DC	F-27	130	0 -0.025	160	200	-	M24	41	11	+0.3 0	32	0 -0.063	18	0	200	-	
6245	6245DA	6245DB	6245DC	F-27	140		160	200	-	M24	41	11		32		18	-0.130	200	-	-
6245	6245DA	6245DB	6245DC	F-27	140		160	200	-	M24	41	11		32		18	-0.130	200	-	-
6255	6255DA	6255DB	6255DC	F-27	160	0 -0.025	190	240	-	M30	49	13	+0.3 0	40	0 -0.063	22	0	240	-	
6255	6255DA	6255DB	6255DC	F-27	160		190	240	-	M30	49	13		40		22	-0.130	240	-	-
6265	6265DA	6265DB	6265DC	F-27	170		190	240	-	M30	49	13		40		22	-0.130	240	-	-
6265	6265DA	6265DB	6265DC	F-27	170	0 -0.025	200	300	-	M30	49	13	+0.3 0	40	0 -0.063	22	0	300	-	
6275	6275DA	6275DB	6275DC	F-27	180		200	300	-	M30	49	13		40		22	-0.130	300	-	-
6275	6275DA	6275DB	6275DC	F-27	180		200	300	-	M30	49	13		40		22	-0.130	300	-	-
6275	6275DA	6275DB	6275DC	F-27	180	230	330 (320)	-	M30	52	15	45	25	-0.130	330 (320)	-	-	-		

Note: Dimensions in parentheses for ℓ and ℓ₃ are models with vertical output shaft.

TECHNICAL
DATA

Reducer

Detailed Dimension of High Speed Shaft

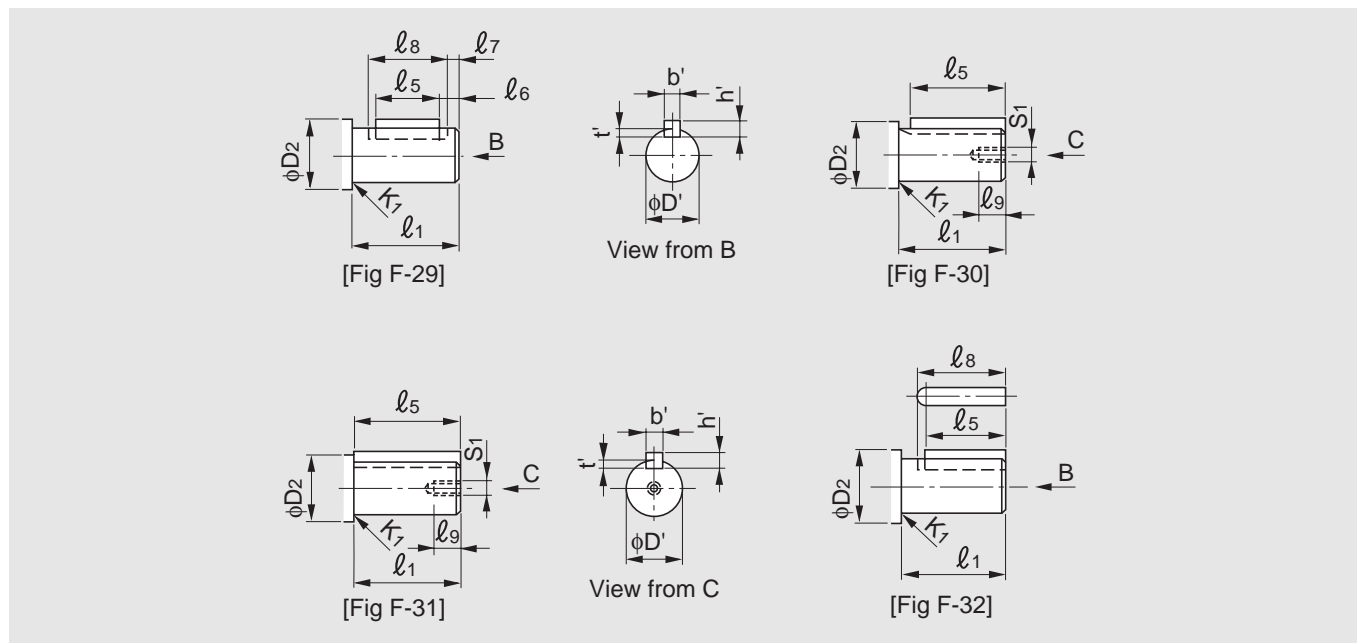

- Dimension of high speed shaft end; Dimension tolerance in accordance with JIS B 0401-1976 "h6".
- Dimension of shaft end key; Parallel key in accordance with JIS B 1301-1996.
- *S1 & 9 Dimension Tap Hole is only for vertical (Type CVV, CVF) Single stage only

Table F-26 Dimension of High Speed Shaft

Frame Size			High Speed Shaft																	
6000SK Series	6000 Series		Fig	D' (h6)	Tolerance	D ₂	ℓ ₁	K ₁ (Roundness)	t'	Tolerance	b' (key) (h9)	Tolerance	h' (key) Tolerance	ℓ ₅ (key)	ℓ ₆	ℓ ₇	ℓ ₈	*S ₁	*ℓ ₉	
-	6060	6060DA 6070DA	F-29	12		17	25	0.5	2.5		4		4	18					-	-
-	6065	6065DA 6075DA	F-29	12		17	25	0.5	2.5		4		4	18	3		22		-	-
-	6070	6090DA 6100DA 6120DA 6130DA 6140DA	F-29	12		17	25	0.5	2.5		4		4	18					-	-
-	6075	6095DA 6105DA 6125DA 6135DA 6145DA	F-29	12		17	25	0.5	2.5		4		4	18					-	-
6070SK	6080	-	F-29	12		17	25	0.5	2.5		4		4	18					-	-
6075SK	6085	-	F-29	12		17	25	0.5	2.5		4		4	18					-	-
6080SK	6090	6120DB 6130DB 6140DB 6160DA 6170DA	F-29	12		20	25	1	3		5		5	16					-	-
6085SK	6095	6125DB 6135DB 6145DB 6165DA 6175DA	F-29	12	0	20	25	1	3		5		5	16					-	-
6090SK	6100	6130DC 6140DC 6160DB 6170DB 6180DA	F-29	15	-0.011	20	25	1	3		5	0	5	16	3.5		21		-	-
6095SK	6105	6135DC 6145DC 6165DB 6175DB 6185DA	F-29	15	-0.011	20	25	1	3	+0.1	5	0	5	16					-	-
-	610H	-	F-29	15	0	20	25	1	3	0	5	-0.030	5	16	3.5	1			-	-
6100SK	6110	-	F-29	15		20	25	1	3		5		5	16					-	-
6105SK	6115	-	F-29	15		20	25	1	3		5		5	16					-	-
6110SK	6120	6160DC 6170DC 6190DA	F-32	18		32	35	-	3.5		6		6	25			28		-	-
6115SK	6125	6165DC 6175DC 6195DA 6205DA	F-32	18		32	35	-	3.5		6		6	25			28		-	-
-	612H	-	F-32	18		32	35	-	3.5		6		6	25			28		-	-
-	6130	6180DC 6190DB	F-32	22		38	40	-	3.5		6		6	32					-	-
-	6135	6185DB 6195DB 6205DB 6215DA 6255DA	F-32	22		38	40	-	3.5		6		6	32					-	-
-	6140	-	F-32	22	0	38	40	-	3.5		6		6	32			35		-	-
-	6145	-	F-32	22	0	38	40	-	3.5		6		6	32			35		-	-
-	614H	-	F-32	22	-0.013	38	40	-	3.5		6		6	32			35		-	-
-	6160	6215DB	F-31	30		70	45	-	4		8	0	7	45				M10	20	
-	6165	6215DB 6235DA 6245DA	F-31	30		70	45	-	4		8	-0.036	7	45					-	-
-	616H	-	F-31	30		70	45	-	4		8	-0.036	7	45					-	-
-	6170	-	F-32	35		70	55	-	5		10		8	50				M12	25	
-	6175	6255DB 6255DA	F-32	35		70	55	-	5		10		8	50				M12	25	
-	6180	-	F-32	40	0	70	65	-	5		12		8	63				M16	30	
-	6185	6235DB 6245DB	F-32	40	-0.016	70	65	-	5		12		8	63				M16	30	
-	6190	-	F-31	45		82	70	-	5.5		14	0	9	70				M16	30	
-	6195	6255DB 6265DA 6275DA	F-31	45		82	70	-	5.5	+0.2	14	0	9	70				M16	30	
-	6205	-	F-31	45		82	82	-	5.5	0	14	-0.043	9	82				-	-	
-	6215	-	F-31	50		82	82	-	5.5		14		9	82				-	-	
-	6225	-	F-31	55		90	82	-	6		16		10	82				-	-	
-	6235	-	F-31	60	0	110	105	-	7		18		11	105				-	-	
-	6245	-	F-31	65	-0.019	110	105	-	7		18		11	105				-	-	
-	6255	-	F-31	80		130	130	-	9		22		14	130				-	-	
-	6265	-	F-31	80		130	130	-	9		22	0	14	130				-	-	
-	6275	-	F-32	90	0	140	150	-	9	-0.022	25	-0.052	14	140			152.5		-	-

F TECHNICAL DATA








2. Motor

TECHNICAL
DATA

Motor

Terminal Box Specifications

1. Construction of Terminal Box

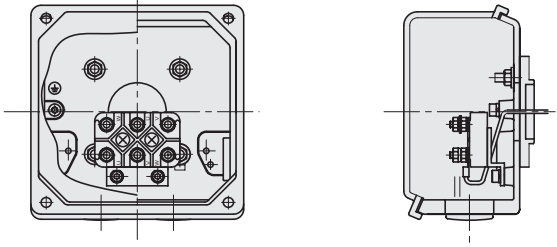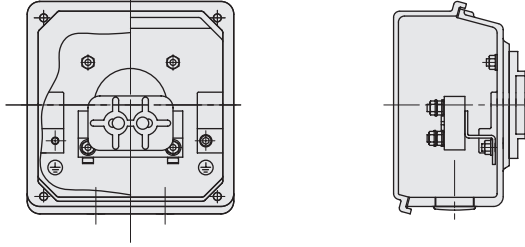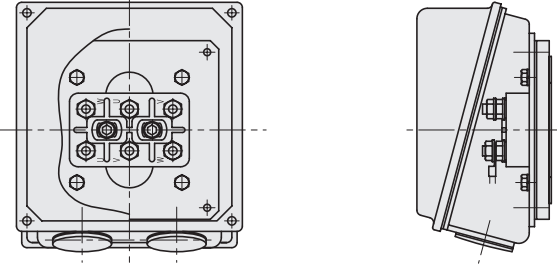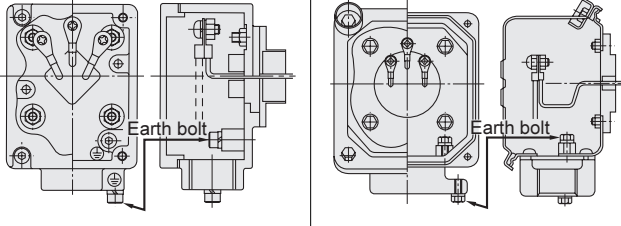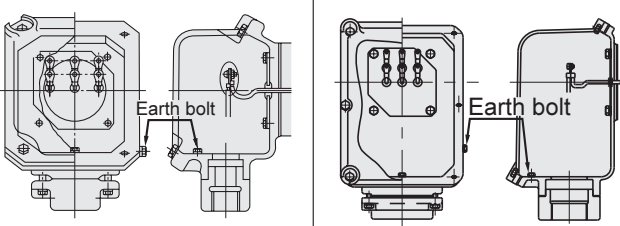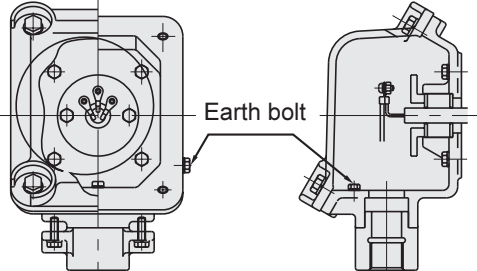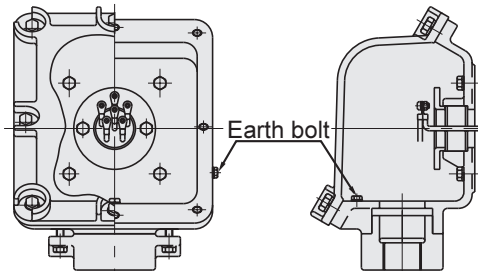
Standard Motors	3-Phase Motor AF Motor 0.1 ~ 5.5kW × 4P 0.1 ~ 3.7kW × 4P		3-Phase Motor AF Motor 7.5 ~ 15kW × 4P 5.5 ~ 11kW × 4P	
				
Standard Motors	3-Phase Motor AF Motor 18.5 ~ 55kW × 4P 15 ~ 55kW × 4P			
				
Increased Safety Motors	0.1 ~ 0.4kW × 4P	0.75 ~ 15kW × 4P	18.5 ~ 37kW × 4P 15 ~ 37kW × 6P	45 ~ 55kW × 4P 45 ~ 55kW × 6P
				
Flame Proof Motors	0.1 ~ 3.7kW × 4P		5.5 ~ 37kW × 4P 15 ~ 37kW × 6P	
				

TECHNICAL DATA

Motor

Terminal Box Specifications

2. Methods for Drawing Lead Wire Outside of Terminal Box.

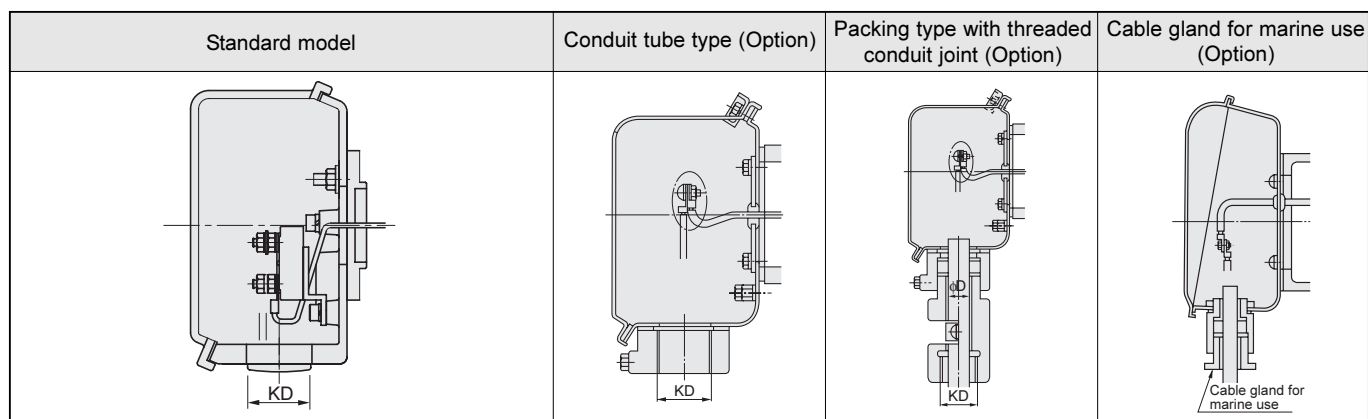

Motor			Standard Model	Option								
				Conduit Tube Type		Packing Type with Thread Conduit Joint				Cable Gland for Marine Use		
Capacity (kW)	3-Phase Motor	AF Motor	P	KD	Standard Size KD	Available Size KD	Standard Size		Available Size		Standard Size	
							Thread KD	Cable Dia. ϕ D	Thread KD	Cable Dia. ϕ D	Thread KD	Cable Dia. ϕ D
0.1	-	-	4	M25	16 (PF1/2)	16 (PF1/2)	22 (PF3/4)	12.5	22 (PF3/4)	10.0~16.5	20c	15a~c
0.2	0.1	-	4	M25								
0.25	-	-	4	M25								
0.4	0.2	-	4	M25								
0.55	-	-	4	M25	22 (PF3/4)	22 (PF3/4) 28 (PF1) 36 (PF1 1/4) Note:1)	28 (PF1)	14.5	28 (PF1)	12.0~19.5	20c	20a~c
0.75	0.4	-	4	M25								
1.1	-	-	4	M25								
1.5	0.75	-	4	M25								
2.2	1.5	-	4	M25								
3.0	-	-	4	M25								
3.7	2.2	-	4	M25	28 (PF1)	28 (PF1)	17.5	22 (PF3/4)	28 (PF1)	12.0~16.5	25c	20a~c
5.5	3.7	-	4	M32								
7.5	5.5	-	4	M32	28 (PF1)	28 (PF1)	36 (PF1 1/4)	19.5	36 (PF1 1/4)	12.0~18.7	30a	25a~c
11	7.5	-	4	M32								
15	11	-	4	M32								
15	-	-	6	M40	36 (PF1 1/4)	28 (PF1) 36 (PF1 1/4) 42 (PF1 1/2)	42 (PF1 1/2)	24	28 (PF1)	13.5~19.0	35a	25a~c
18.5	-	-	4	M40								
18.5	-	-	6	M40								
22	15	-	4	M40								
22	15	-	6	M40	54 (PF2)	54 (PF2) 70 (PF2 1/2)	54 (PF2)	29	70 (PF2 1/2)	19.5~28.0	35a	30a~c
30	22	-	4	M40								
30	22	-	6	M50								
37	30	-	4	M50								
37	30	-	6	M50	70 (PF2 1/2)	36 (PF1 1/4) 42 (PF1 1/2) 54 (PF2) 70 (PF2 1/2) 82 (PF3) 92 (PF3 1/2)	70 (PF2 1/2)	34	Note:2)	29.0~45.0	55a	35a~c
45	37	-	4	M50								
45	37	-	6	M50	70 (PF2 1/2)	36 (PF1 1/4) 42 (PF1 1/2) 54 (PF2) 70 (PF2 1/2) 82 (PF3) 92 (PF3 1/2)	70 (PF2 1/2)	44	36 (PF1 1/4)	20.0~22.7	55a	35a~c
55	45	-	4	M50								
55	-	-	6	M63								

The size of the external lead wire opening of the standard Sumitomo motor has been listed.

- Notes: 1. In case of 0.4kW \times 4Pole below(0.2kW \times 4Pole below when AF motor for Inverter), Except for STD KD(PF1/2), dimensions of a terminal box become special.
 2. For the increased safety explosion-proof 45kw \times 4pole motor, the KD dimensions become PF11/4 (36) - PF31/2(92).
 3. Unless otherwise specifically requested, the outdoor type, increased safety explosion-proof motor and for maritime use will be manufactured to the standard dimensions specified above.
 4. Terminal Box below 0.4kW \times 4P is plastic. Steel is also available. Please consult us.

Terminal Box Specifications

3. Mounting Direction of Terminal Box

- The terminal box mounting direction can be changed in units of 90°, but specify the direction according to the following table when placing an order.

Cable port direction	Terminal box mounting position (As viewed from output shaft with motor being horizontal)	
	Left side (N33)	Right side (N34)
Type A (N3A)		
Type B (N3B)		
Type C (N3C)		
Type D (N3D)		

TECHNICAL DATA

Motor

Cable port direction	Terminal box mounting position (As viewed from output shaft with motor being horizontal)	
	Top (N35)	Down (N36)
Type A (N3A)		
Type B (N3B)		
Type C (N3C)		
Type D (N3D)		

Note: Arrow indicates direction of lead wires out of terminal box.

4. Standard Position of Terminal Box and Direction of Lead Wires.

	Horizontal type(Horizontal Slow Speed Shaft)				Vertical type(Vertical Slow Speed Shaft Down)	
	Standard Motor		Brake Motor		Standard Motor	Brake Motor
	3-Phase	AF Motor	3-Phase	AF Motor	3-Phase	AF Motor
Terminal Box Mounting Position	Left side	Left side	Left side	Left side	Left side	Left side
Cable port direction	A	A	A	A	A	A


Terminal Box Specifications

5. Details of Motor Fan Cover Mounting

Refer to the dimensions FA or FB shown below when designing a gearmotor mounting space.

- (1) Dimensions FA:.....Dimensions necessary to remove the fan cover or brake cover without removing the motor from the equipment.
- (2) Dimensions FB:.....Minimum space required for adequate ventilation

Note : 1. It is necessary to remove the gearmotor from the equipment when removing the fan or brake cover.
2. The minimum space when the wall at the back of the motor fan is closed tightly.
3. AF(Inverter) of 30kw or above are a differently ventilated type.

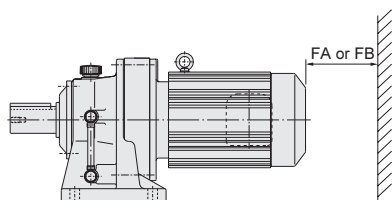


Dimension of FA and FB

Unit: mm

Specification	Without Brake				With Brake			
	3-Phase Motor		AF Motor		3-Phase Motor		AF Motor	
	FA	FB	FA	FB	FA	FB	FA	FB
0.1kW × 4P	-	-	48	20	49	-	61	20
0.2kW × 4P	48	20	48	20	61	20	61	20
0.25kW × 4P	48	20	-	-	61	20	-	-
0.4kW × 4P	48	20	49	20	61	20	93	20
0.55kW × 4P	49	20	-	-	93	20	-	-
0.75kW × 4P	49	20	52	20	93	20	115	20
1.1kW × 4P	52	20	-	-	115	20	-	-
1.5kW × 4P	52	20	56	20	115	20	121	20
2.2kW × 4P	56	20	60	20	121	20	132	20
3.0kW × 4P	60	20	-	-	132	20	-	-
3.7kW × 4P	60	20	60	20	132	20	132	20
5.5kW × 4P	60	20	75	25	132	20	170	25
7.5kW × 4P	75	25	75	25	170	25	170	25
11kW × 4P	75	25	130	30	170	25	220	30
15kW × 4P	130	30	155	30	220	30	367	30
18.5kW × 4P	155	30	170	30	367	30	370	30
22kW × 4P	155	30	170	30	367	30	370	30
30kW × 4P	170	30	140	30	370	30	295	30
37kW × 4P	230	30	140	30	445	30	295	30

6. Dimensions of Terminal Box Mounting Centers



Unit: mm

Specification	Without Brake						With Brake					
	3-Phase Motor			AF Motor			3-Phase Motor			AF Motor		
	X	W	H	X	W	H	X	W	H	X	W	H
0.1kW×4P	35	125	126	59	125	126	70	125	126	91	125	126
0.2kW×4P	59	125	126	59	125	126	91	125	126	91	125	126
0.25kW×4P	59	125	126	-	-	-	91	125	126	-	-	-
0.4kW×4P	59	125	126	97	125	126	91	125	126	140	125	126
0.55kW×4P	97	125	126	-	-	-	140	125	126	-	-	-
0.75kW×4P	97	125	126	100	125	126	140	125	126	162	125	126
1.1kW×4P	100	125	126	-	-	-	162	125	126	-	-	-
1.5kW×4P	100	125	126	105	125	126	162	125	126	168	125	126
2.2kW×4P	105	125	126	127	125	126	168	125	126	199	125	126
3.0kW×4P	127	125	126	-	-	-	199	125	126	-	-	-
3.7kW×4P	127	125	126	127	125	126	199	125	126	199	125	126
5.5kW×4P	127	125	126	143	170	175	199	125	126	238	170	175
7.5kW×4P	143	170	175	143	170	175	238	170	175	238	170	175
11kW×4P	143	170	175	295	170	175	238	170	175	385	170	175
15kW×4P	295	170	175	340	215	233	385	170	175	550	215	233
18.5kW×4P	340	215	233	340	215	233	550	215	233	550	215	233
22kW×4P	340	215	233	340	215	233	550	215	233	550	215	233
30kW×4P	340	215	233	460	215	233	550	215	233	712	215	233
37kW×4P	430	215	233	460	215	233	645	215	233	712	215	233
45kW×4P	430	215	233	-	-	-	-	-	-	-	-	-
55kW×4P	465	215	233	-	-	-	-	-	-	-	-	-

Characteristics for Global Motor

Table F-27 Characteristics of Non-Explosion Proof Motors

(1) 200V Class

Motor Frame Size	Pole Power Output (kW)	4P														
		220V-50Hz					230V-50Hz					220V-60Hz				
		Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)
F-63S	0.10	0.60	235	230	2.3	1420	0.62	261	261	2.3	1430	0.53	220	202	2.1	1700
F-63M	0.20	1.0	210	206	3.8	1410	1.0	231	236	4.0	1420	0.95	186	191	3.5	1690
F-63M	0.25	1.2	182	195	4.2	1380	1.2	202	222	4.4	1400	1.2	153	161	3.7	1640
F-71M	0.40	2.0	200	201	7.3	1410	2.1	221	229	7.8	1400	1.8	188	185	6.6	1680
F-80S	0.55	2.4	182	206	9.2	1410	2.4	200	225	9.6	1420	2.3	164	166	8.6	1680
F-80M	0.75	3.3	211	193	13.1	1420	3.3	217	212	13.8	1430	3.1	189	180	12.3	1720
F-90S	1.1	4.7	215	200	21.7	1420	4.6	236	223	22.8	1420	4.4	189	170	19.9	1690
F-90L	1.5	6.1	204	192	27.9	1420	6.0	226	212	28.9	1430	5.7	196	175	25.5	1700
F-100L	2.2	8.7	203	213	42.1	1420	8.3	231	255	45.0	1430	8.1	207	185	38.0	1690
F-112S	3.0	11.2	205	213	61	1420	11.1	224	237	64	1420	10.8	175	155	54	1720
F-112M	3.7	13.4	219	218	80	1410	17.8	308	340	114	1440	12.9	207	178	70	1700

(2) 400V Class

Motor Frame Size	Pole Power Output (kW)	4P														
		380V-50Hz					400V-50Hz					415V-50Hz				
		Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)
F-63S	0.10	0.34	235	230	1.3	1420	0.36	261	261	1.3	1430	0.37	281	286	1.4	1430
F-63M	0.20	0.61	210	206	2.2	1410	0.62	233	236	2.3	1420	0.63	251	260	2.4	1420
F-63M	0.25	0.70	182	195	2.4	1380	0.70	202	222	2.5	1380	0.70	220	242	2.3	1400
F-71M	0.40	1.2	200	201	4.2	1410	1.2	221	229	4.5	1420	1.3	236	250	4.7	1420
F-80S	0.55	1.4	182	206	5.3	1410	1.4	200	225	5.5	1420	1.4	218	248	5.8	1420
F-80M	0.75	1.9	211	193	7.6	1420	1.9	219	215	8.0	1430	2.0	237	232	8.4	1440
F-90S	1.1	2.7	215	200	12.5	1420	2.7	236	223	13.2	1420	2.7	256	243	14.3	1430
F-90L	1.5	3.5	204	192	16.1	1420	3.5	228	224	17.1	1430	3.6	242	236	17.8	1430
F-100L	2.2	5.0	203	213	24.3	1420	4.8	231	255	26.0	1430	5.0	240	263	26.8	1430
F-112S	3.0	6.5	205	213	35.1	1420	6.4	224	237	37.0	1420	6.2	241	255	35.7	1420
F-112M	3.7	7.8	219	218	45.9	1410	7.5	231	236	46.9	1420	7.7	259	269	51	1430
F-132S	5.5	11.3	215	227	69	1410	11.1	237	256	73	1420	11.0	256	281	76	1430
F-132M	7.5	15.0	228	232	93	1450	14.8	252	261	99	1450	14.8	270	284	103	1450
F-160M	11.0	21.5	231	250	139	1450	21.0	256	282	147	1450	20.8	274	308	154	1450
G-160L	15.0	27.7	241	235	170	1460	26.6	271	265	180	1470	26.0	294	289	188	1470
F-180MG	18.5	34.5	262	277	245	1450	33.1	293	312	261	1450	32.3	319	340	272	1460
F-180MG	22.0	40.8	252	269	280	1450	39.3	281	302	297	1450	38.9	304	328	310	1450
F-180L	30.0	56	218	236	325	1450	54	244	265	345	1450	54	264	286	361	1450
F-200L	37.0	70	256	285	479	1450	66	256	287	446	1460	65	277	311	467	1460
F-200L	45.0	84	251	286	564	1440	81	252	288	538	1450	80	271	310	559	1450

Motor Frame Size	Pole Power Output (kW)	4P				
		440V-60Hz				
		Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)
F-63S	0.10	0.32	300	289	1.4	1730
F-63M	0.20	0.54	268	266	2.4	1720
F-63M	0.25	0.60	232	251	2.6	1700
F-71M	0.40	1.0	256	262	4.6	1730
F-80S	0.55	1.2	224	240	5.9	1720
F-80M	0.75	1.7	247	242	8.4	1740
F-90S	1.1	2.3	257	260	13.6	1720
F-90L	1.5	3.0	250	243	17.5	1740
F-100L	2.2	4.2	248	260	26.2	1720
F-112S	3.0	5.5	238	225	37.0	1720
F-112M	3.7	6.6	246	238	46.4	1720
F-132S	5.5	9.6	254	263	73	1720
F-132M	7.5	12.8	267	271	98	1750
F-160M	11.0	18.4	270	296	145	1750
G-160L	15.0	23.8	275	280	175	1770
F-180MG	18.5	29.6	295	324	252	1750
F-180MG	22.0	38.8	199	216	225	1720
F-180L	30.0	47.8	249	280	334	1740
F-200L	37.0	59	259	306	429	1730
F-200L	45.0	72	255	311	516	1730

Notes: 1. The characteristics of the 4-pole motor with built-in brake is the same as shown in Table F-27 (1) and (2).

2. For the electrical current of the brakes, refer to Table F-31 on Page F-40.

3. Because the values in the above table are subject to change without notice, please consult us if confirmed values are necessary.

Characteristics for Global Motor

Table F-28 Characteristics of AF Motor for Inverters

Motor Frame Size	Pole Power	4P							
		220V-60Hz				380V-60Hz			
	Output (kW)	Frequency (Hz)	Voltage (V)	Rated Current	Speed (r/min)	Frequency (Hz)	Voltage (V)	Rated Current	Speed (r/min)
FA-63S	0.10	60	220	0.85	1765	60	380	0.38	1755
		6.0	34.0	0.75	120	6.0	68	0.37	125
FA-63M	0.20	60	220	1.6	1760	60	380	0.69	1750
		6.0	34.0	1.5	130	6.0	68	0.75	130
FA-71M	0.40	60	220	2.4	1745	60	380	1.1	1725
		6.0	35.0	2.2	115	6.0	70	1.1	115
FA-80M	0.75	60	220	4.0	1755	60	380	1.9	1735
		6.0	31.0	3.9	120	6.0	62	1.9	120
FA-90L	1.5	60	220	6.4	1735	60	380	3.3	1705
		6.0	33.0	6.5	105	6.0	66	3.2	110
FA-100L	2.2	60	220	9.1	1755	60	380	4.7	1740
		6.0	31.0	9.3	140	6.0	62	4.6	135
FA-112M	3.7	60	220	14.0	1750	60	380	7.7	1730
		6.0	30.0	14.8	125	6.0	60	7.4	120
FA-132S	5.5	60	220	20.2	1760	60	380	11.2	1745
		6.0	30.0	21.3	135	6.0	60	10.7	130
FA-132M	7.5	60	220	27.4	1765	60	380	15.2	1750
		6.0	30.0	28.2	145	6.0	60	14.1	145
G-160L	11.0	60	220	38.5	1770	60	380	21.7	1755
		6.0	32.0	39.6	155	6.0	64	19.7	155
F-180MG	15.0	60	220	53	1780	60	380	30.3	1770
		6.0	32.0	53	165	6.0	64	26.3	165
F-180L	22.0	60	220	77	1775	60	380	44.5	1765
		6.0	32.0	79	160	6.0	64	39.4	160
BF-200L	30.0	60	220	100	1780	60	380	58	1770
		6.0	32.0	101	165	6.0	64	51	165
BF-200L	37.0	60	220	123	1775	60	380	72	1765
		6.0	30.0	123	165	6.0	64	62	165

Motor Frame Size	Pole Power	4P			
		415V-60Hz			
	Output (kW)	Frequency (Hz)	Voltage (V)	Rated Current	Speed (r/min)
FA-63S	0.10	60	415	0.40	1760
		6.0	68	0.37	125
FA-63M	0.20	60	415	0.75	1760
		6.0	68	0.75	130
FA-71M	0.40	60	415	1.1	1740
		6.0	70	1.1	115
FA-80M	0.75	60	415	1.9	1745
		6.0	62	1.9	120
FA-90L	1.5	60	415	3.1	1725
		6.0	66	3.2	110
FA-100L	2.2	60	415	4.4	1750
		6.0	62	4.6	135
FA-112M	3.7	60	415	7.2	1745
		6.0	60	7.4	120
FA-132S	5.5	60	415	10.5	1755
		6.0	60	10.7	130
FA-132M	7.5	60	415	14.2	1760
		6.0	60	14.1	145
G-160L	11.0	60	415	20.1	1765
		6.0	64	19.7	155
F-180MG	15.0	60	415	27.8	1775
		6.0	64	26.3	165
F-180L	22.0	60	415	40.7	1770
		6.0	64	39.4	160
BF-200L	30.0	60	415	53	1775
		6.0	64	51	165
BF-200L	37.0	60	415	65	1775
		6.0	64	62	165

Notes: Because the values in the above table are subject to change without notice, please consult us if confirmed values are necessary.

Characteristics for Japan Standard Motor

Table F-29 Characteristics of 6P Motors

(1) 200V Class

Motor Frame Size	Pole	6P														
	Power	200V-50Hz					200V-60Hz					220V-60Hz				
	Output power (kW)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)
F-63M	0.1	0.72	213	200	2.4	940	0.64	194	172	2.2	1120	0.65	240	221	2.4	1140
F-71M	0.2	1.6	296	289	5.8	940	1.3	260	243	5.3	1140	1.4	325	312	6.0	1150
F-71M	0.25	1.7	232	226	5.8	920	1.4	205	190	5.3	1120	1.5	257	247	6.0	1130
F-80M	0.40	2.6	240	235	9.3	930	2.3	215	199	8.7	1100	2.3	265	256	9.7	1130
F-80ML	0.55	3.4	245	257	12.0	920	3.0	220	218	11.1	1100	3.0	274	282	12.4	1120
F-90L	0.75	4.5	240	228	17.8	930	4.0	212	196	16.3	1110	4.0	265	254	18.4	1130
F-90LL	1.1	6.0	260	265	25.3	930	5.3	222	216	23.1	1110	5.2	278	280	26.0	1130
F-100L	1.5	7.7	247	244	36.2	940	7.0	202	191	32.5	1120	6.8	261	247	36.6	1140
F-112M	2.2	(11.1)	(248)	(222)	(62.3)	(950)	(9.9)	(205)	(175)	(54.5)	(1140)	(9.5)	(263)	(226)	(61.5)	(1150)
F-132SS	3.0	(14.9)	(242)	(217)	(82.7)	(950)	(13.4)	(200)	(173)	(72.4)	(1140)	(12.8)	(257)	(223)	(81.7)	(1150)
F-132S	3.7	(17.7)	(235)	(220)	(98.1)	(950)	(16.3)	(190)	(170)	(85.1)	(1140)	(15.3)	(239)	(221)	(96.2)	(1150)
F-132M	5.5	(25.8)	(239)	(232)	(149)	(960)	(23.7)	(190)	(175)	(126)	(1150)	(22.2)	(246)	(228)	(143)	(1160)
F-160M	7.5	30.3	246	254	174	980	28.7	197	213	150	1180	26.8	251	272	165	1180
F-160L	11.0	43.4	245	263	250	970	41.3	194	219	216	1170	38.4	247	280	244	1170
F-180MG	15.0	55	271	232	358	980	55	222	195	308	1180	49.9	276	246	344	1180
F-180L	18.5	71	311	274	500	990	66	258	234	430	1180	62	321	293	480	1190
F-180L	22.0	83	261	230	500	990	79	216	196	430	1180	73	269	246	480	1180
F-200L	30.0	111	269	267	694	960	106	221	228	598	1180	98	275	287	668	1180
F-200L	37.0	137	289	293	912	980	130	237	251	784	1170	120	296	314	878	1170
F-225S	45.0	163	238	244	962	980	158	195	209	818	1170	144	242	262	914	1180
F-250S	55	198	231	242	1146	980	194	188	208	970	1170	176	234	260	1084	1180
F-250M	75	269	271	296	1830	980	261	221	255	1536	1170	239	274	320	1718	1180

(2) 400V Class

Motor Frame Size	Pole	6P														
	Power	400V-50Hz					400V-60Hz					440V-60Hz				
	Output power (kW)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)
F-63M	0.10	0.36	213	200	1.2	940	0.32	194	172	1.1	1120	0.33	240	221	1.2	1140
F-71M	0.20	0.81	296	289	2.9	940	0.64	260	243	2.7	1140	0.69	325	312	3.0	1150
F-71M	0.25	0.87	232	226	2.9	920	0.72	205	190	2.7	1120	0.75	257	247	3.0	1130
F-80M	0.40	1.3	240	235	4.7	930	1.2	215	199	4.4	1100	1.2	265	256	4.9	1130
F-80ML	0.55	1.7	245	257	6.0	920	1.5	220	218	5.6	1100	1.5	274	282	6.2	1120
F-90L	0.75	2.3	240	228	8.9	930	2.0	212	196	8.2	1110	2.0	265	254	9.2	1130
F-90LL	1.10	3.0	260	265	12.7	930	2.7	222	216	11.6	1110	2.6	278	280	13.0	1130
F-100L	1.5	3.9	247	244	18.1	940	3.5	202	191	16.3	1120	3.4	261	247	18.3	1140
F-112M	2.2	(5.6)	(248)	(222)	(31.2)	(950)	(5.0)	(205)	(175)	(27.3)	(1140)	(4.8)	(263)	(226)	(30.75)	(1150)
F-132SS	3.0	(7.5)	(242)	(217)	(41.4)	(950)	(6.7)	(200)	(173)	(36.2)	(1140)	(6.4)	(257)	(223)	(40.85)	(1150)
F-132S	3.7	(8.9)	(235)	(220)	(49.1)	(950)	(8.2)	(190)	(170)	(42.6)	(1140)	(7.7)	(239)	(221)	(48.1)	(1150)
F-132M	5.5	(12.9)	(239)	(232)	(74)	(960)	(11.9)	(190)	(175)	(63.3)	(1150)	(11.1)	(246)	(228)	(71.7)	(1160)
F-160M	7.5	15.2	246	254	87	980	14.4	197	213	75	1180	13.4	251	272	83	1180
F-160L	11.0	21.7	245	263	125	970	20.6	194	219	108	1170	19.2	247	280	122	1170
F-180MG	15.0	27.7	271	232	179	980	27.3	222	195	154	1180	25.0	276	246	172	1180
F-180L	18.5	35.6	311	274	250	990	33.2	258	234	215	1180	31.1	321	293	240	1190
F-180L	22.0	41.4	261	230	250	990	39.5	216	196	215	1180	36.3	269	246	240	1180
F-200L	30.0	56	269	267	347	960	53	221	228	299	1180	48.8	275	287	334	1180
F-200L	37.0	68	289	293	456	980	65	237	251	392	1170	60	296	314	439	1170
F-225S	45.0	82	238	244	481	980	79	195	209	409	1170	72	242	262	457	1180
F-250S	55	99	231	242	573	980	97	188	208	485	1170	88	234	260	542	1180
F-250M	75	135	271	296	915	980	131	221	255	768	1170	119	274	266	859	1180

Notes: 1. Values in parenthesis in the above table is designed value. Consult us for detailed values.

2. Because the values in the above table are subject to change without notice, please consult us if confirmed values are necessary.

Characteristics for Japan Standard Motor

Table F-30 Characteristics of Increased Safety Motors

(1) 200V Class

Motor Frame Size	Pole	4P														
	Power	200V-50Hz					200V-60Hz					220V-60Hz				
	Output (kW)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)
F-63S	0.10	0.69	265	281	2.7	1420	0.60	236	245	2.5	1690	0.62	285	297	2.8	1720
F-63M	0.20	1.2	232	233	4.6	1410	1.1	210	207	4.2	1690	1.1	254	250	4.8	1710
F-71M	0.40	2.3	237	237	9.1	1380	2.0	210	210	8.3	1650	2.0	257	257	9.4	1680
F-80M	0.75	3.9	234	215	16.0	1420	3.4	211	190	15.1	1720	3.3	253	242	16.8	1740
F-90L	1.5	7.0	242	224	34.1	1430	6.3	205	192	31.2	1710	6.0	250	243	34.9	1730
F-100L	2.2	9.6	268	255	52	1430	8.8	229	204	46.9	1700	8.3	282	260	52	1720
F-112M	3.7	15.1	262	236	94	1430	14.2	216	188	83	1710	13.1	264	238	93	1730
F-132S	5.5	22.9	313	286	158	1420	21.1	264	229	139	1700	19.7	325	291	156	1720
F-132M	7.5	29.5	274	261	198	1450	27.4	240	224	175	1750	25.6	292	271	195	1760
F-160M	11.0	41.9	305	297	302	1450	39.5	263	247	265	1740	36.7	322	309	296	1750
G-160L	15.0	53	271	265	360	1460	52	220	222	313	1750	48	275	280	349	1760
F-180LG	18.5	66	293	312	522	1480	65	236	257	450	1780	59	295	324	504	1780
F-180LG	22.0	79	246	262	522	1480	78	199	216	450	1770	70	248	272	504	1780
F-200LG	30.0	105	245	281	706	1470	105	195	231	610	1760	94	245	292	684	1770
F-200L	37.0	128	245	289	857	1470	128	195	241	742	1750	115	245	305	832	1760
F-225S	45.0	154	243	228	985	1470	154	198	193	844	1770	139	246	241	943	1770
F-225S	55	186	267	261	1328	1470	186	217	225	1130	1770	168	269	280	1261	1770

Motor Frame Size	Pole	6P														
	Power	200V-50Hz					200V-60Hz					220V-60Hz				
	Output (kW)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)
F-180LG	15.0	56	271	232	358	980	55	222	195	308	1180	50	276	246	344	1180
F-180L	18.5	72	311	274	500	990	67	258	234	430	1180	63	321	293	480	1190
F-180L	22.0	84	261	230	500	990	79	216	196	430	1180	73	269	246	480	1180
F-200L	30.0	107	252	253	652	980	107	204	212	558	1170	97	256	287	668	1170
F-225S	37.0	136	239	241	793	980	132	196	206	678	1170	121	243	314	878	1180
F-225S	45.0	163	235	245	946	970	163	190	208	809	1170	146	237	262	914	1170
F-250S	55	199	242	257	1184	970	198	196	219	1011	1170	178	244	260	1084	1180

(2) 400V Class

Motor Frame Size	Pole	4P														
	Power	400V-50Hz					400V-60Hz					440V-60Hz				
	Output (kW)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)
F-63S	0.10	0.36	255	261	1.3	1420	0.31	233	224	1.2	1700	0.32	277	289	1.4	1720
F-63M	0.20	0.62	233	236	2.3	1410	0.54	212	202	2.1	1690	0.54	257	266	2.4	1710
F-71M	0.40	1.2	229	229	4.5	1390	1.0	205	201	4.1	1650	1.0	249	262	4.6	1680
F-80M	0.75	1.9	234	215	8.0	1420	1.7	211	190	7.6	1720	1.7	253	242	8.4	1740
F-90L	1.5	3.5	242	224	17.1	1430	3.1	205	192	15.6	1710	3.0	250	243	17.5	1730
F-100L	2.2	4.8	268	255	26.0	1430	4.4	229	204	23.5	1700	4.2	282	260	26.2	1720
F-112M	3.7	7.5	262	236	46.9	1430	7.1	216	188	41.4	1710	6.6	264	238	46.4	1730
F-132S	5.5	11.4	313	286	79	1420	10.5	264	229	70	1700	9.9	325	291	78	1720
F-132M	7.5	14.8	274	261	99	1450	13.7	240	224	88	1750	12.8	292	271	98	1760
F-160M	11.0	21.0	305	297	151	1450	19.7	263	247	133	1740	18.3	322	309	148	1750
G-160L	15.0	26.8	271	265	180	1460	26.1	220	222	157	1750	23.8	275	280	175	1760
F-180LG	18.5	33.1	293	312	261	1480	32.3	236	257	225	1780	29.6	295	324	252	1780
F-180LG	22.0	39.3	246	262	261	1480	38.8	199	216	225	1770	35.1	248	272	252	1780
F-200LG	30.0	52	245	281	353	1470	53	195	231	305	1760	47.2	245	292	342	1770
F-200L	37.0	64	245	289	429	1470	64	195	241	371	1750	58	245	305	416	1760
F-225S	45.0	77	243	222	492	1470	77	198	193	422	1770	70	246	241	471	1770
F-225S	55	93	267	261	664	1470	93	217	225	565	1770	84	269	280	630	1770

Motor Frame Size	Pole	6P														
	Power	400V-50Hz					400V-60Hz					440V-60Hz				
	Output (kW)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)	Rated Current	Torque max.(%)	Starting Torque (%)	Starting Current (A)	Speed (r/min)
F-180LG	15.0	27.9	271	232	179	980	27.3	222	195	154	1180	25.0	276	246	172	1180
F-180L	18.5	36.0	311	274	250	990	33.4	258	234	215	1180	31.3	321	293	240	1190
F-180L	22.0	41.9	261	230	250	990	39.7	216	196	215	1180	36.5	269	246	240	1180
F-200L	30.0	54	252	253	326	980	53	204	212	279	1170	48.4	256	269	313	1170
F-225S	37.0	68	239	241	396	980	66	196	206	339	1170	60	243	258	379	1180
F-225S	45.0	81	235	245	473	970	81	190	208	404	1170	73	237	261	453	1170
F-250S	55	99	242	257	592	970	99	196	219	506	1170	89	244	275	566	1180

*Because the values in the above table are subject to change without notice, please consult us if confirmed values are necessary.

Specification and Constructions of Built-in Brake

Table F-31 Standard Brake Motor Specification

Output Power (kW × 4P)		Brake Type	Standard Torque (N · m)	Moment of Inertia (× 10 ⁻⁴ kg·m ²)	Total Braking Energy (× 10 ³ J)	Motion Delay Time (sec)		Brake Current (A)					
General-Purpose Motors	AF Motor					Standard Braking Action	Fast Braking Action	220V	230V	380V	400V	415V	440V
0.10		FB-01A	1.0	3.5	12	0.15~0.20	0.015~0.02	0.08	0.10	-	-	-	-
0.20/0.25	0.10	FB-02A	2.0	5.5	12			0.10	0.10	-	-	-	-
0.40	0.20	FB-05A	4.0	6.75	12	0.10~0.150	0.01~0.015	0.10	0.10	-	-	-	-
0.55/0.75	0.40	FB-1B	7.5	11.1/13	33	0.20~0.30	0.01~0.02	0.10	0.10	-	-	-	-
1.1/1.5	0.75	FB-2B	15	20.8/23.5	38			0.30	0.30	-	-	-	-
2.2	1.5	FB-3B	22	37.3	45	0.30~0.40	0.01~0.02	0.30	0.30	-	-	-	-
3.0/3.7	2.2	FB-5B	37	81/95.8	235	0.40~0.50		0.60	0.60	-	-	-	-
5.5	3.7	FB-8B	55	125	235	0.30~0.40	0.03~0.04	-	-	0.30	0.30	0.30	0.30
7.5	5.5	FB-10B	75	303	343	0.70~0.80		-	-	0.30	0.40	0.40	0.40
11	7.5	FB-15B	110	410	343	0.50~0.60	0.10~0.15	-	-	0.40	0.40	0.40	0.40
15	11	CMB-20	100	1350	304	0.40~0.50		-	-	1.6	1.6	1.7	1.8
22	15	*1 ESB-220	150	2370	201	-	0.08	0.95	*2				
30	22	*1 ESB-220	200	2572	201	-		0.95					
37	30	*1 ESB-250	250	3205	262	-	0.07	1.15					

*1. Continuous rating applies to both motor and brake of the FB, CMB and ESB brakes, but continuous operation is impossible with vertical and inverted 4P input of the ESB type brake.

*2. ESB type brake comes in a 200V class only. When the power supply is 400V, use a transformer. The capacity of the transformer is 250-300 VA and the secondary voltage is 200-220V.

- The rectifier of the ESB type brake is to be placed separately. Use a special DC power unit (HD-110M3) for the ESB brake. (See p.F-43 of the rectifier.) The DC power unit is made as an indoor type. Install it in a place where it will not be splashed by water.
- Nonasbestos lining is used for the FB brake.
- When greater stopping accuracy is desired or brake is used for lifter, use the fast braking action.
- Low-noise type brakes are also available as an option.
- FB, CMB, and ESB brakes need DC power supply, and the spring braking system (non-electromagnetic braking system) is adopted.


Output Voltage of Rectifier (FB Brake)

Input Voltage	Output Voltage
AC220V	DC99V
AC230V	DC104V
AC380V	DC171V
AC400V	DC180V
AC415V	DC187V
AC440V	DC198V

* Refer to p.F-43 for the output voltage of ESB brake.

Why fast braking circuit shortens braking time.


See Fig.F-33 and Fig.F-34 for differences between standard braking circuit and fast braking circuit. See Fig.F-35 and Fig.F-36 for current curves of standard braking and fast braking.

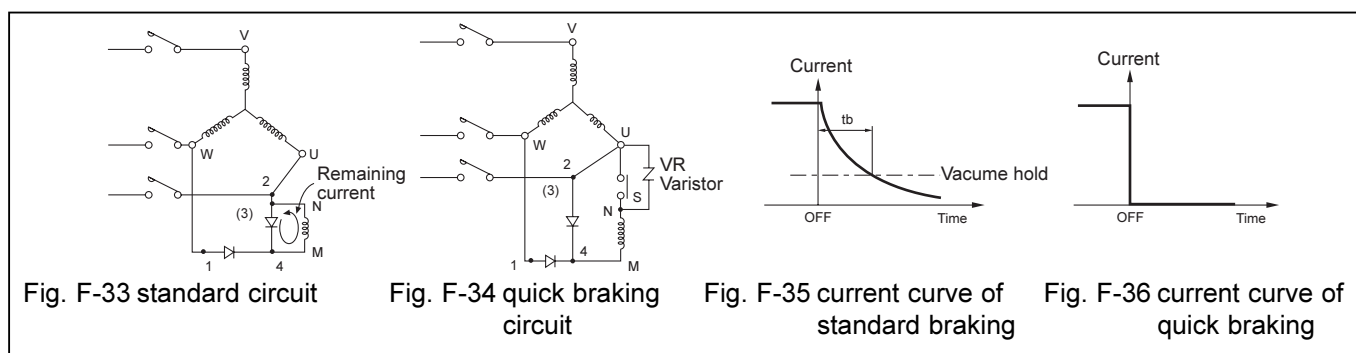

In the standard circuit Shown in Fig.F-33, some current remains after the power is turned off due to the saved energy in the inductance L of brake coil. The current curve is shown in the Fig.F-35. When it is connected to fast braking circuit as Show in Fig.F-34 and S is released at the same time, no current remains as there


is no closed circuit with the brake coil. (See the Fig.F-36) Therefore, it shortens the braking time by t_b in the Fig.F-35. Fast braking circuit is to release all current by ON/OFF of brake coil at the same time with power ON/OFF. (VR varistor must be used to protect the rectifier and connection S.)

Circuit in the rectifier



Specification and Constructions of Built-in Brake


Fig. F-37 FB-01A, 02A, 05A
(FB-01A without Fan)

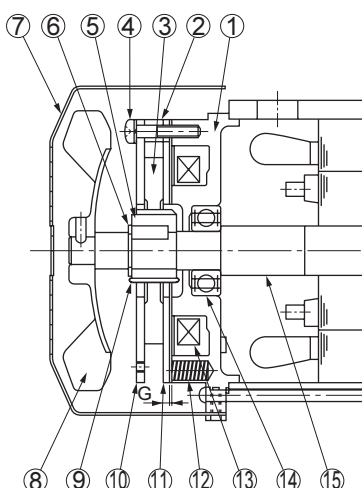

No.	Pats Name
1	Stationary core
2	Spacer
3	Brake lining
4	Assembling bolt
5	Boss
6	Shaft retaining C-ring
7	Cove
8	Fan (except for 0.1kW x 4 Poles)
9	Leaf spring
10	Fixed plate
11	Armature plate
12	Spring
13	Electromagnetic coil
14	Ball bearing
15	Motor shaft


*Brake release unit is available by option.

Fig. F-38 FB-1B, 2B, 3B

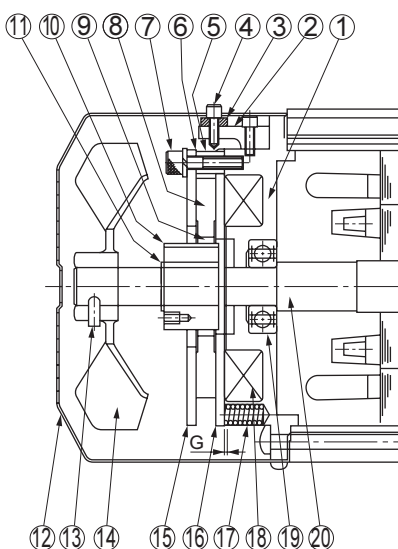

No.	Pats Name
1	Stationary core
2	Release fitting
3	Manual release protection spacer
4	Brake release bolt
5	Spacer
6	Gap adjusting shim
7	Assembling bolt
8	Brake lining
9	Leaf spring
10	Boss
11	Shaft retaining C-ring
12	Cover
13	Fan set bolt
14	Fan
15	Fixed plate
16	Armature plate
17	Spring
18	Electromagnetic coil
19	Ball bearing
20	Motor shaft

Fig. F-39 FB-5B, 8B

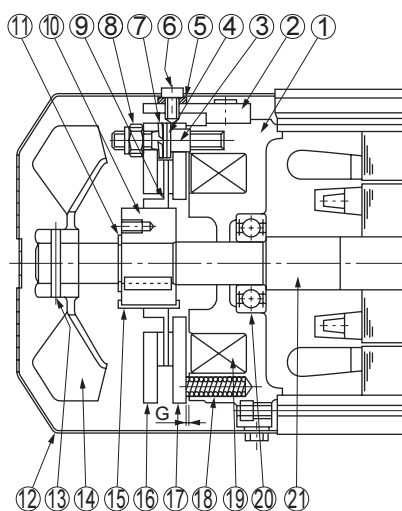


No.	Pats Name
1	Stationary core
2	Release fitting
3	Stud bolt
4	Adjusting washer
5	Manual release protection spacer
6	Brake release bolt
7	Spring washer
8	Gap adjusting nut
9	Brake lining
10	Boss
11	Shaft retaining C-ring
12	Cover
13	Spring pin
14	Fan
15	Leaf spring
16	Fixed plate
17	Armature plate
18	Spring
19	Electromagnetic coil
20	Ball bearing
21	Motor shaft

TECHNICAL DATA

Motor


Specification and Constructions of Built-in Brake

Fig. F-40 FB-10B, 15B

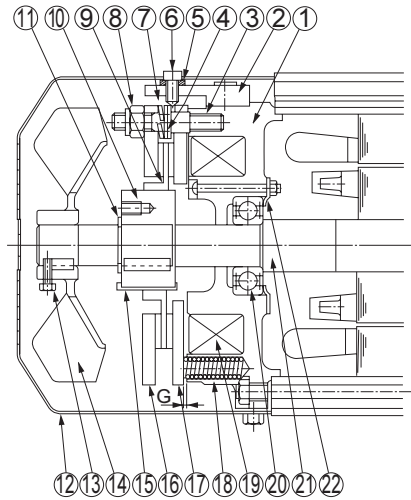

No.	Pats Name
1	Stationary core
2	Release fitting
3	Stud bolt
4	Adjusting washer
5	Manual release protection spacer
6	Brake release bolt
7	Spring washer
8	Gap adjusting nut
9	Brake lining
10	Boss
11	Shaft retaining C-ring
12	Cover
13	Fan set bolt
14	Fan
15	Leaf spring
16	Fixed plate
17	Armature plate
18	Spring
19	Electromagnetic coil
20	Ball bearing
21	Motor shaft
22	Bearing cover

Fig. F-41 CMB-20

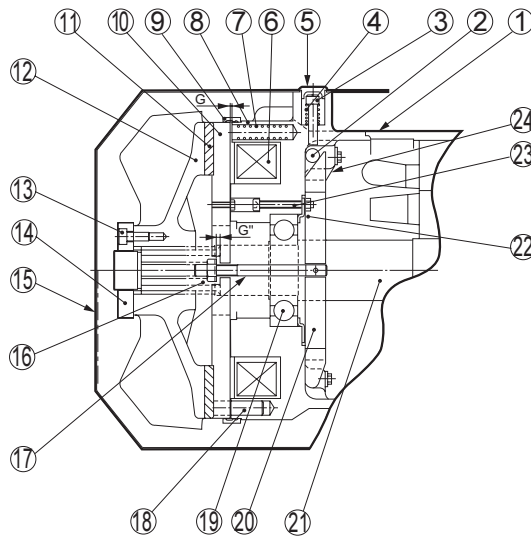


No.	Pats Name
1	Motor
2	Roller
3	Brake release bolt
4	Auxiliary spring
5	Plug
6	Electromagnetic coil
7	Spring
8	Stationary core
9	Dust seal
10	Armature plate
11	Brake lining
12	Brake wheel
13	Bolt
14	Retaining nut
15	Cover
16	U nut
17	Stud bolt
18	Retaining pin
19	Ball bearing
20	Release lever
21	Motor shaft
22	Bearing cover
23	Bearing cover bolt
24	Release lever stopper

TECHNICAL
DATA

Motor


Specification and Constructions of Built-in Brake

Fig. F-42. ESB220, 250

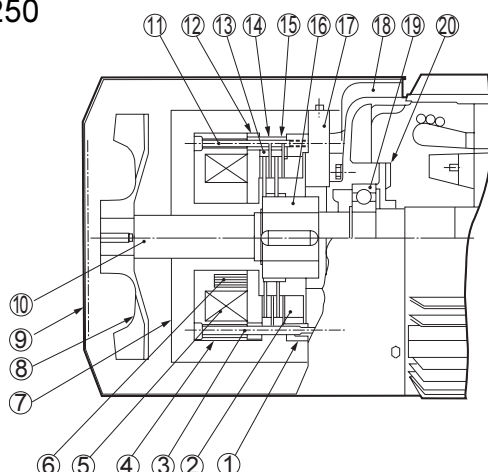


No.	Pats Name
1	Center ring
2	Gap adjusting screw
3	Assembling bolt
4	Field
5	Brake coil
6	Actuating spring
7	Brake cover (not provided for indoor type)
8	Fan
9	Fan cover
10	Shaft
11	Lock bolt
12	Armature
13	Inner disc
14	Outer disc
15	Spacer bushing
16	Hub
17	Brake adapter plate
18	Opposite drive end bracket
19	Opposite drive end bearing
20	Opposite drive end bearing cover

Power Module Model HD-110M3

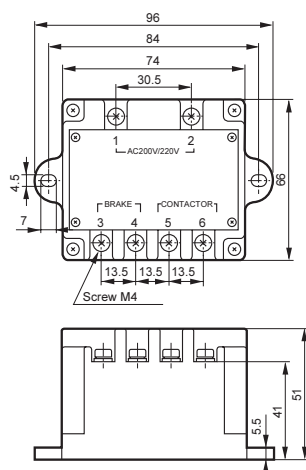

Circuit (Diagram)



Rated input voltage: AC200/220V 50/60Hz

Maximum input voltage: AC240V 50/60Hz

Minimum input voltage: AC170V 50/60Hz

Standard output voltage

Instantaneous voltage: DC180V with AC200V input

Steady voltage: DC90V

Maximum output current: DC1.8A (Steady output)

Overexcitation time: 0.4 to 1.2 sec

Insulation resistance: At 100MΩ or above
(When measured with 1000V megohmmeter)

Insulation with stand voltage: Application of AC2000V for over 1 time

Maximum frequency

Inching(On-time 1.2 sec or less), 8 cycle/min








Constant(On-time over 1.2sec), 30 cycle/min

Ambient temperature: -20°C ~ +60°C

- Note: 1. Take care to avoid dust and water.
2. Transformer is necessary for operation with 400V class power source.
The transformer should have 250 ~ 300VA rating and 200 ~ 220V secondary voltage.

Connection

3-Phase Induction Motor


		Wiring	Connection & Terminal code	Remarks
Direct Start-up				Standard motor under 0.1 - 3.7kW 200V Class 220 - 240V 50Hz 220V 60Hz
				Standard motor 0.1 - 3.7kW 400V Class 380 - 420V 50Hz 440V 60Hz
Start-up	λ - Δ Start-up		<p>Start-up time λ Connection</p>  <p>After full acceleration Δ Connection</p> 	<p>Standard Motor</p> <p>(1) Capacity: more than 5.5kW and more (2) Power Source</p> <p>400V Class 380 - 420V 50Hz 400V 60Hz</p> <p>Note: If other than the above-mentioned voltages, please consult us.</p>

TECHNICAL DATA

Motor

Example of Connection

a. 3-Phase Motor

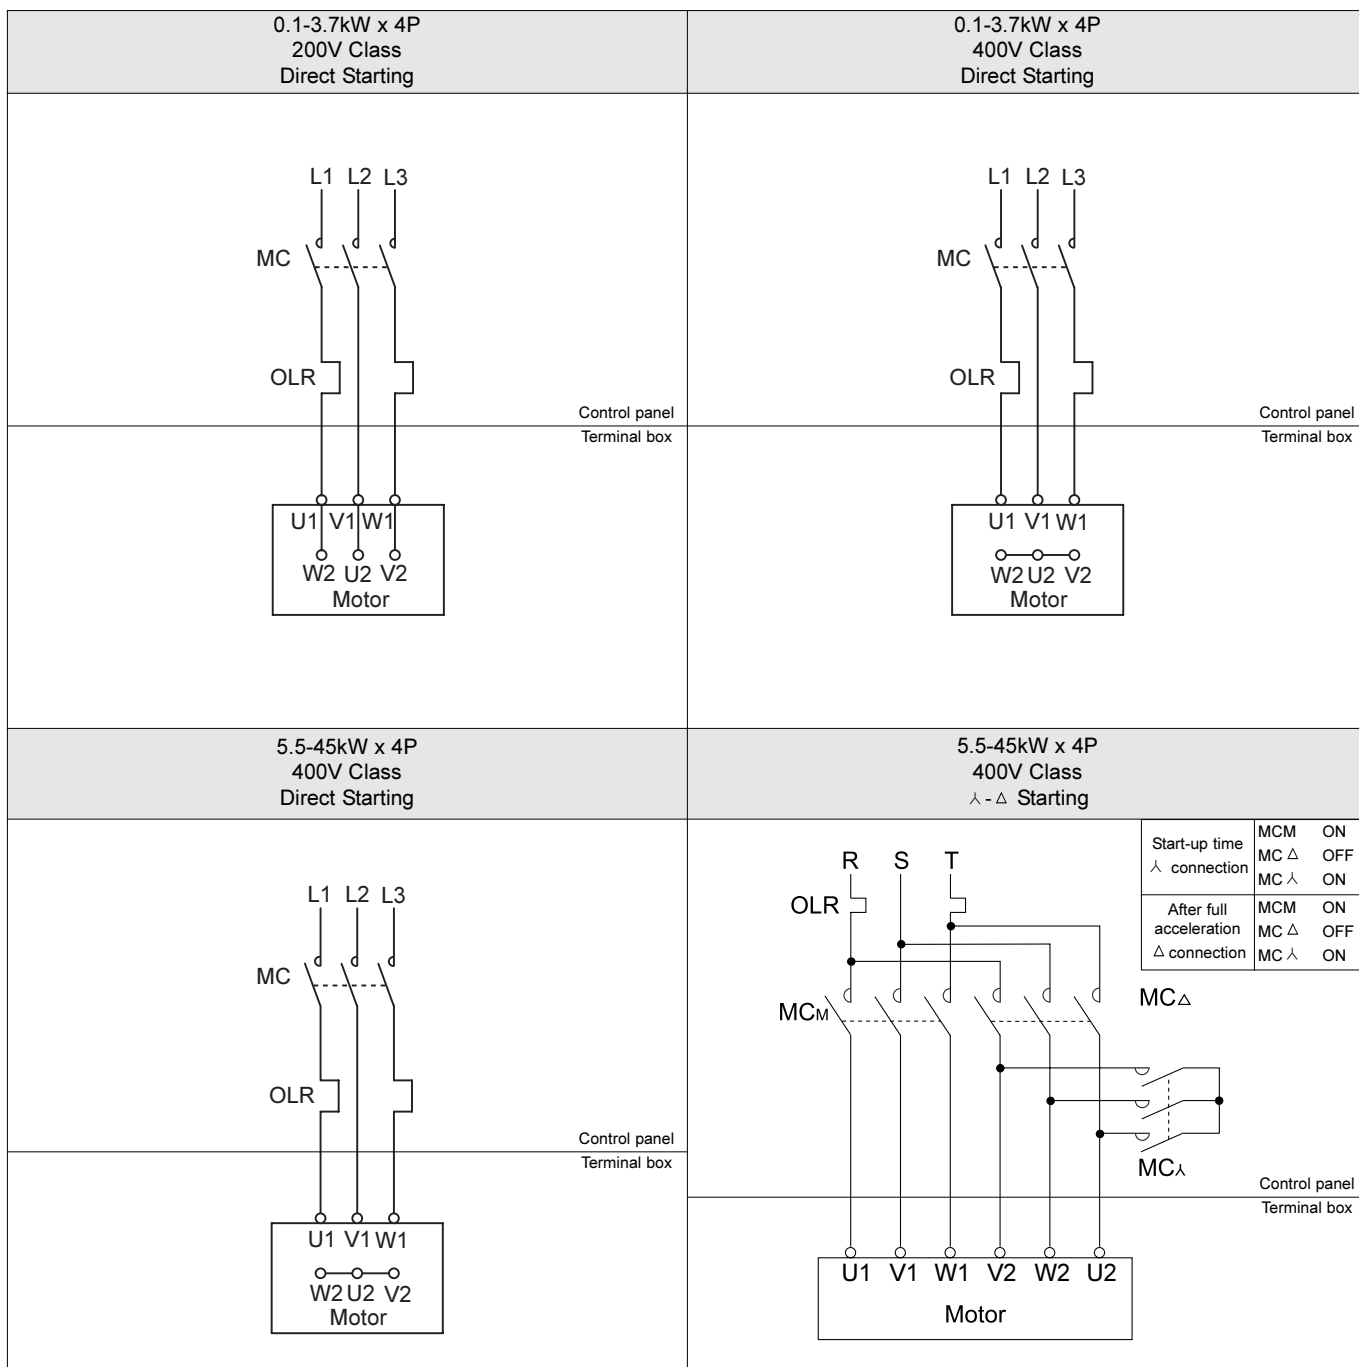

TECHNICAL DATA


Motor

MC : Electromagnetic contactor and
OLR : Overload relay or thermal relay are not supplied by sumitomo.

Example of Connection

b. 3-phase motor

Example of connection for inverter-driving

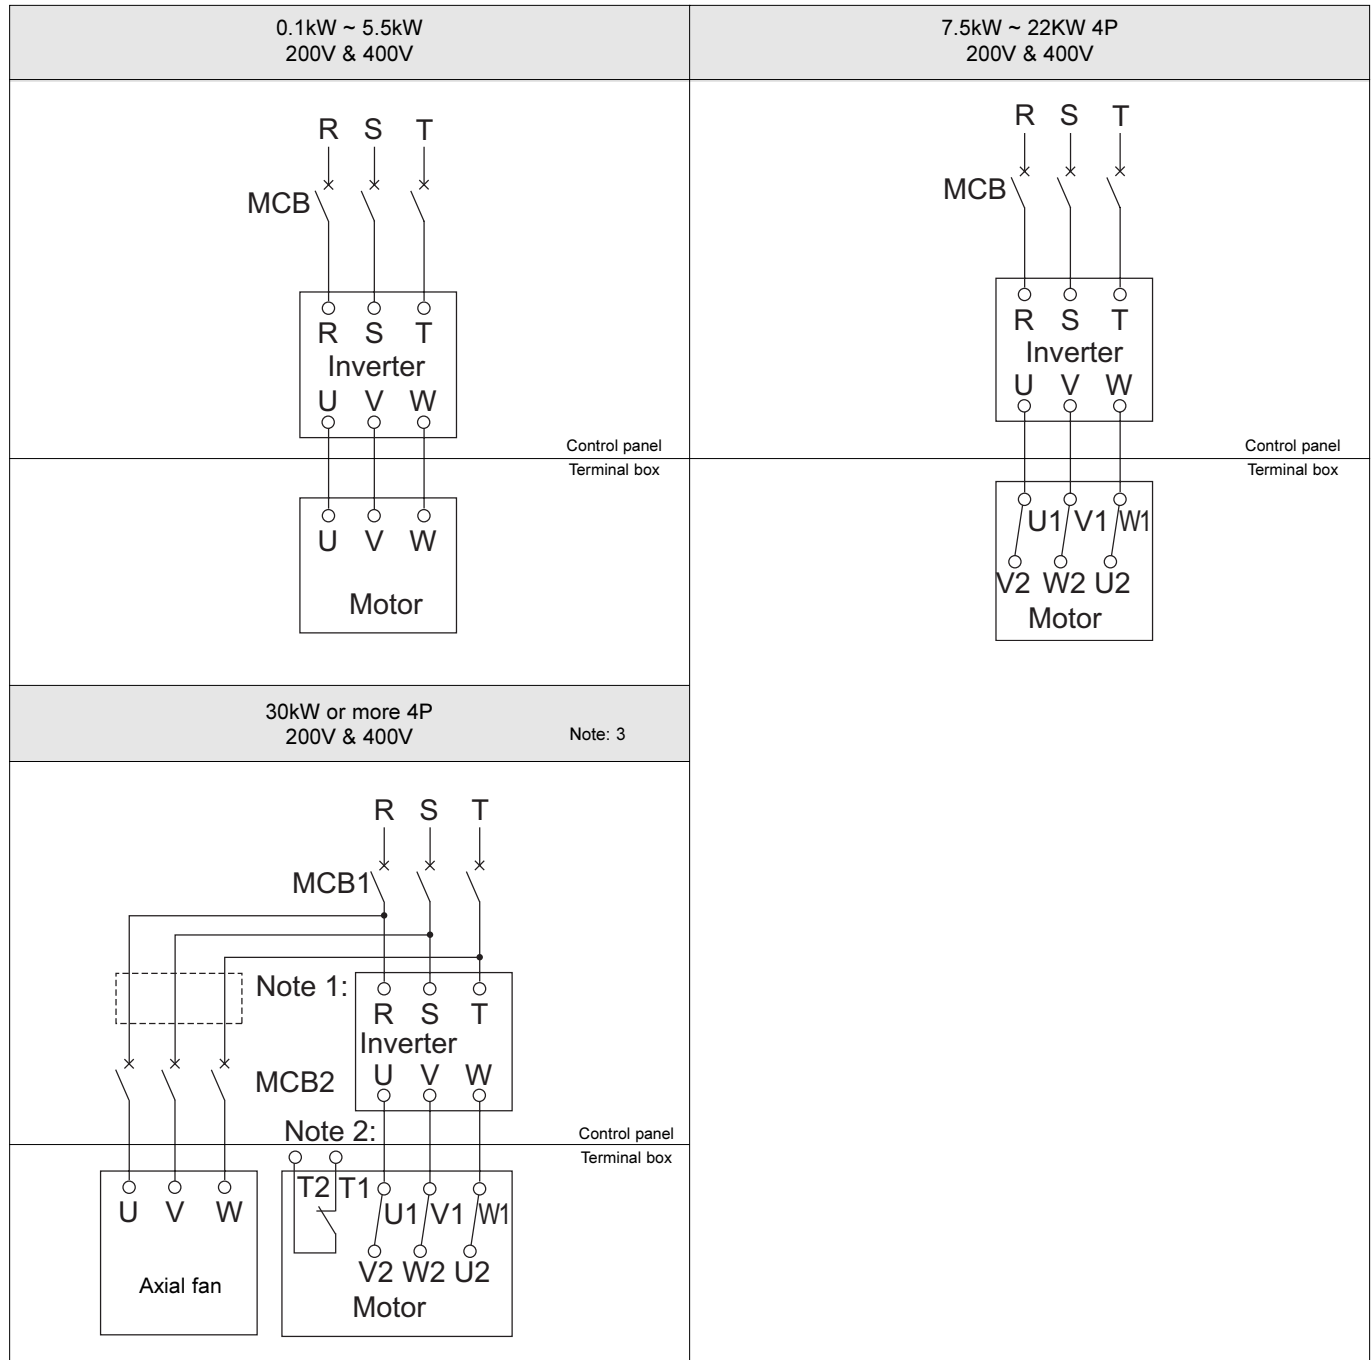

TECHNICAL DATA

Motor

The AF motor is designed for inverter-driving. When the capacity is small, the λ connection is adopted, and when it is intermediate or larger, the Δ connection is adopted.

- λ - Δ change-over operation by commercial power will also be possible.

- Note:
1. The standard voltage of the axial fan is 3 ,200V. Provide a 400/200V transformer for the 400V power supply. Contact us for inquiries about a 400V fan.
 2. Thermostat specifications (For totally enclosed separate ventilation type)
Terminal code: T1 and T2 or P1 and P2
Operating temperature: 135°C (Type F insulation)
Operation: Normally closed (b contact point)
Max. current: 24VDC; 18A; 230VAC ; 13A

Example of Connection


c. 3-Phase Motor with FB Brake for One Way Rotation (0.1-3.7kW)

TECHNICAL
DATA

Motor

Example of Connection

d. 3-Phase Motor with FB Brake for Operating in Both Directions (0.1-3.7kW)

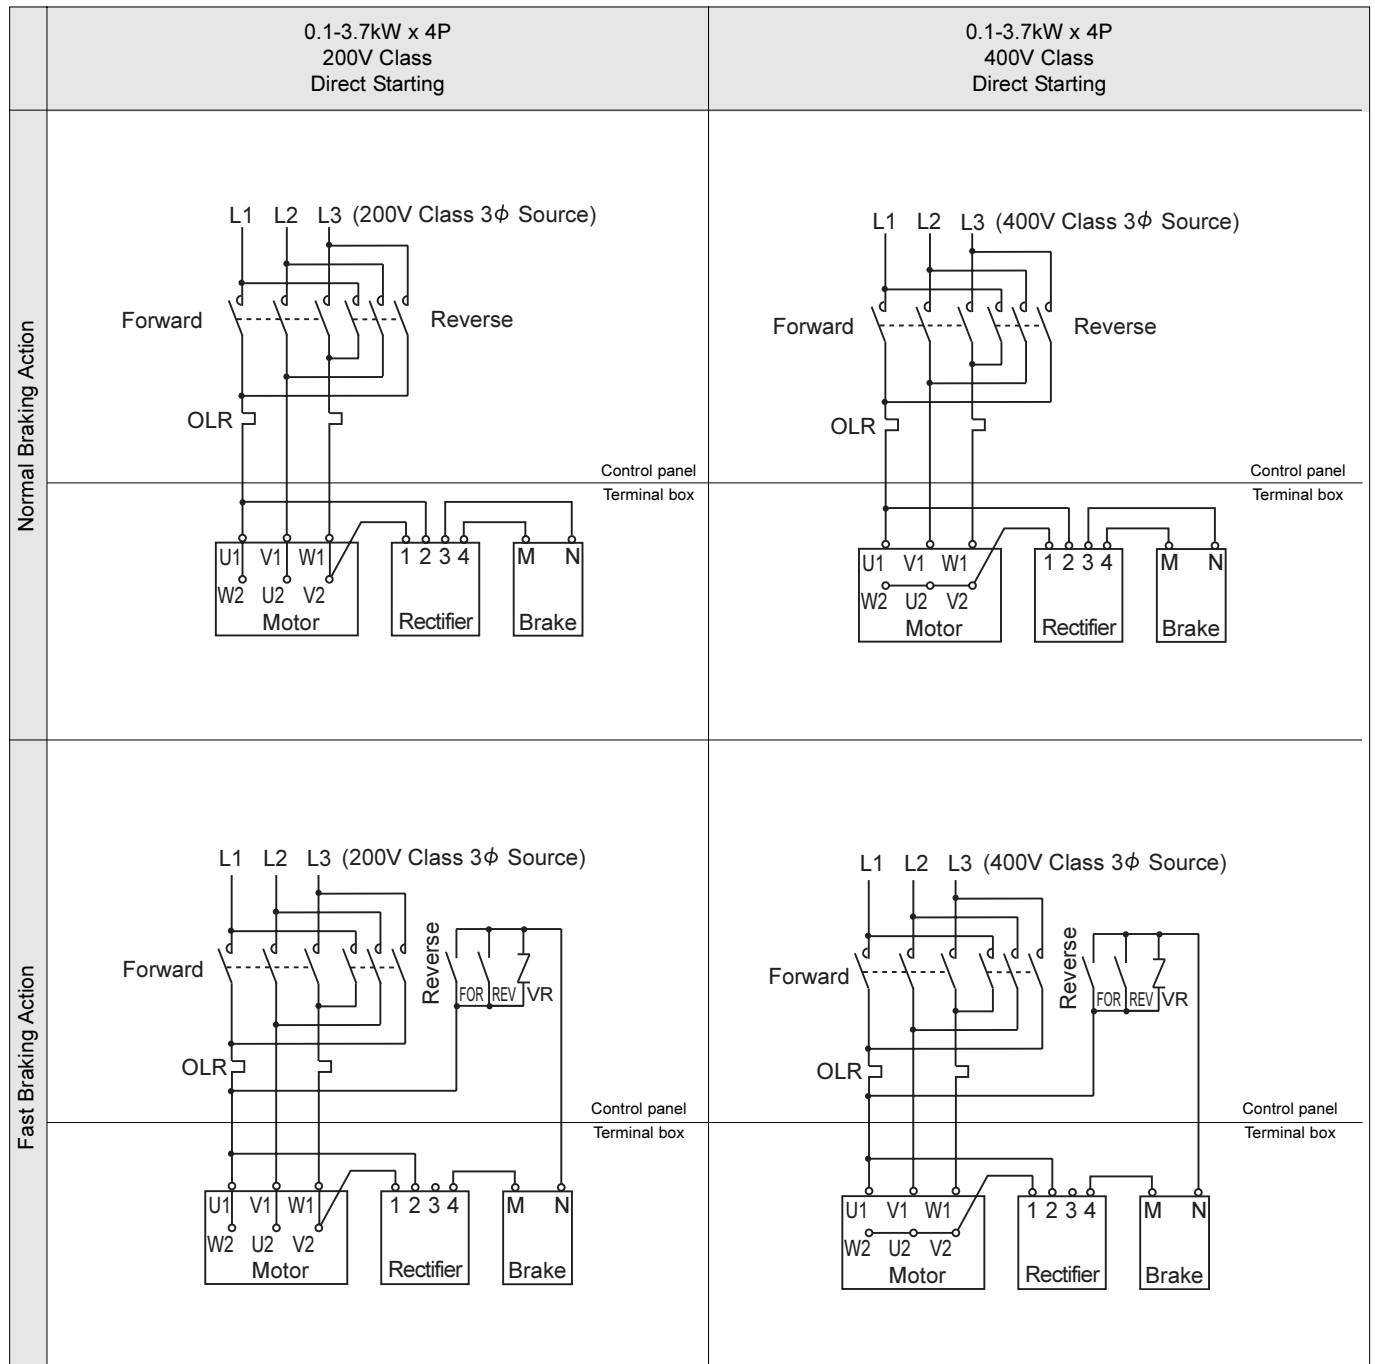

TECHNICAL DATA
Motor

Electromagnetic contactor and OLR: Overload relay are not supplied by Sumitomo.


VR: Varistor is optionally available at Sumitomo.

Rated capacity of varistor	Rated voltage of varistor	AC200V ~ 230V	AC380V ~ 460V
FB-01A,02A,05A	430V ~ 470V	0.2Watt and above	0.4Watt and above
FB-1B	430V ~ 470V	0.4Watt and above	0.6Watt and above
FB-2B,3B,5B	430V ~ 470V	0.6Watt and above	1.5Watt and above

Connection capacity of quick braking circuit is recommended to have more than five times of braking capacity (direct current coil load) of the brake current shown in the page on page F-40.

Example of Connection

e. 3-Phase Motor with FB Brake for One Way Rotation (5.5-11kW)

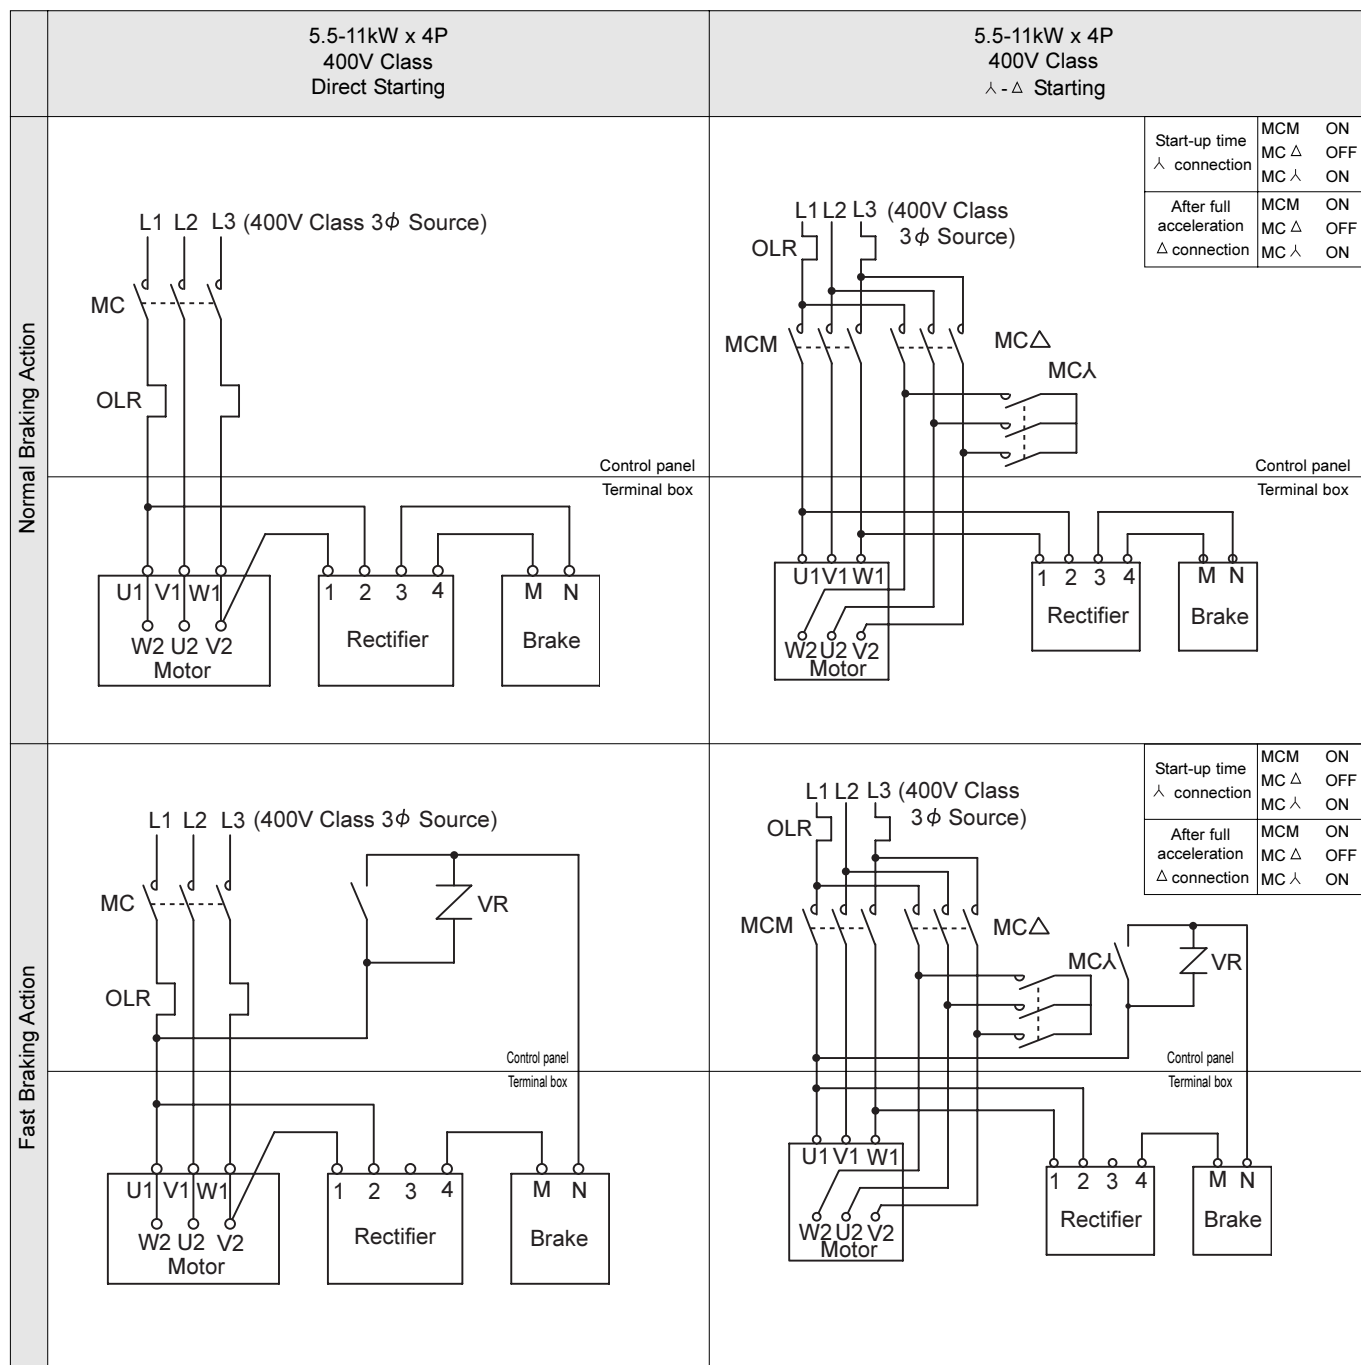


TECHNICAL DATA

Motor

Example of Connection

f. 3-Phase Motor with FB Brake for Operating in Both Directions (5.5-11kW)

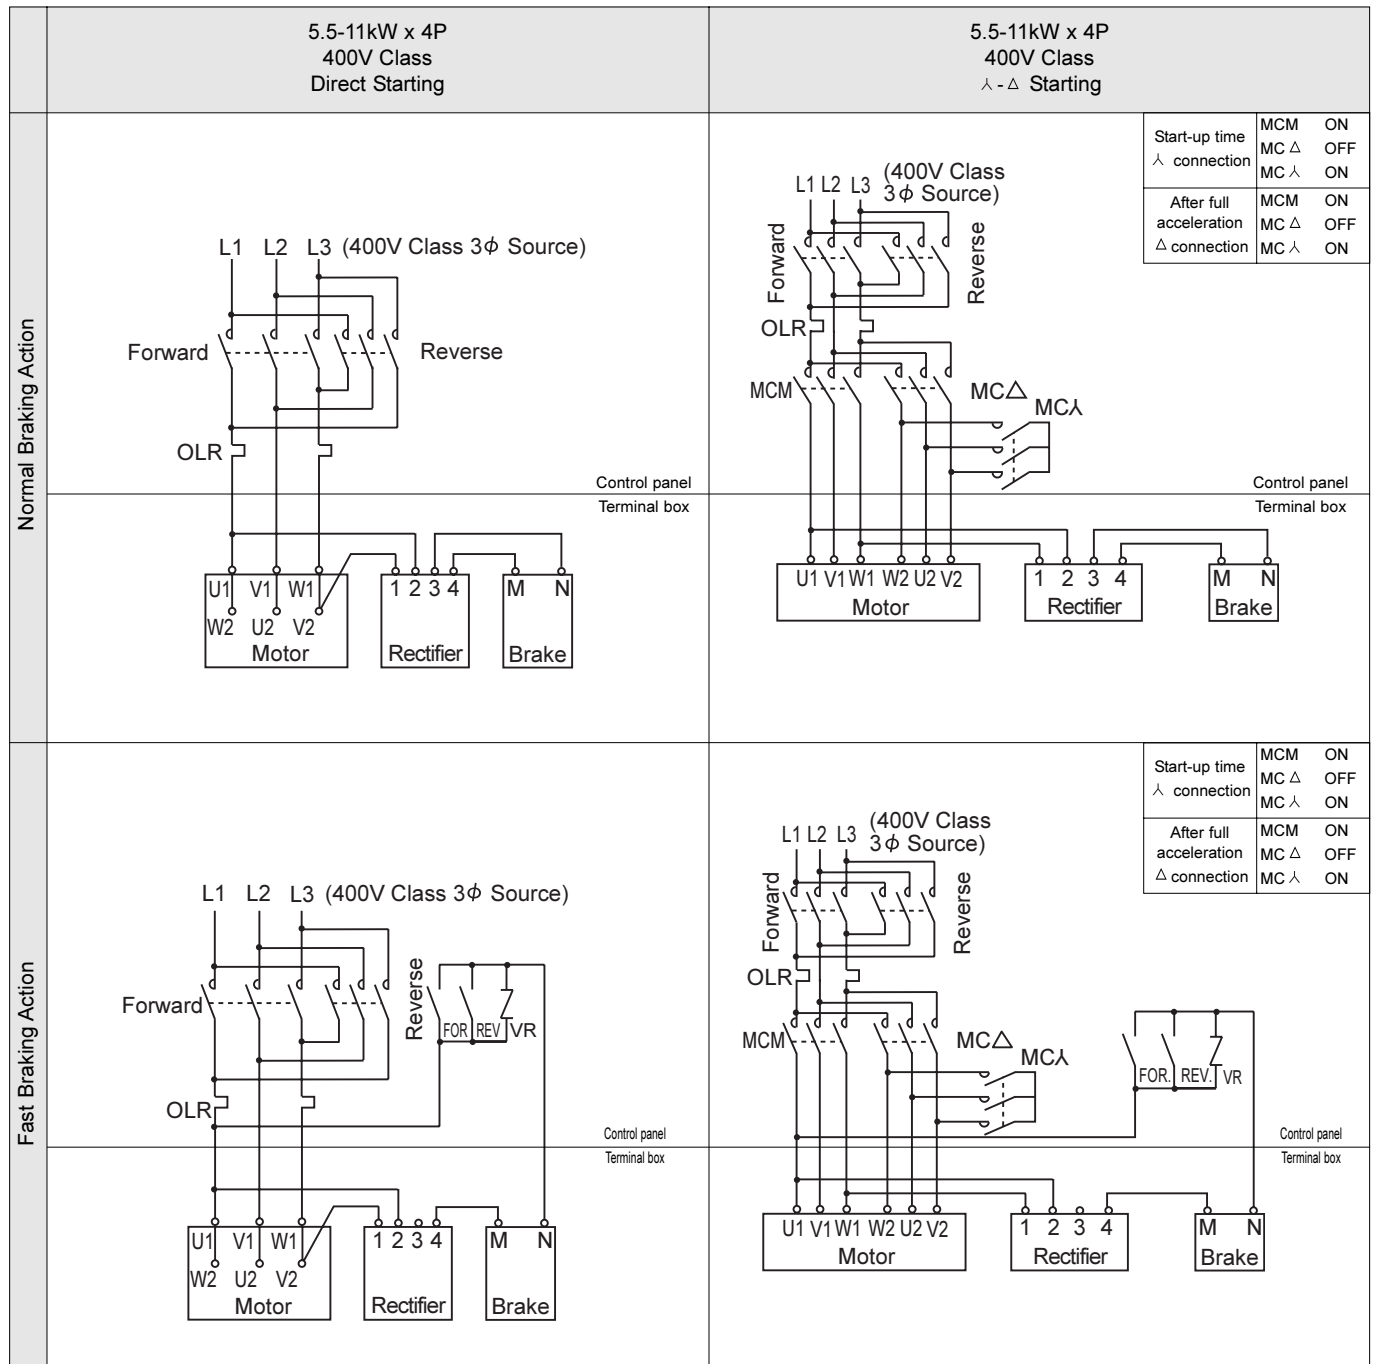

Start-up time	MCM	ON
Δ connection	MC Δ	OFF
	MC Δ	ON
After full acceleration	MCM	ON
	MC Δ	OFF
Δ connection	MC Δ	ON

Start-up time	MCM	ON
Δ connection	MC Δ	OFF
	MC Δ	ON
After full acceleration	MCM	ON
	MC Δ	OFF
Δ connection	MC Δ	ON

TECHNICAL DATA
Motor


Electromagnetic contactor and OLR: Overload relay are not supplied by Sumitomo.
VR: Varistor is optionally available at Sumitomo.

Brake input power	AC200V ~ 230V	AC380V ~ 460V
Rated voltage of varistor	430V ~ 470V	820V
Rated capacity of varistor	FB-8B	0.6Watt and above
	FB-10B, 15B	1Watt and above

Connection capacity of quick braking circuit is recommended to have more than five times of braking capacity (direct current coil load) of the brake current shown in the page on page F-40.

Example of Connection


g. 3-Phase Motor with CMB Brake for One Way Rotation

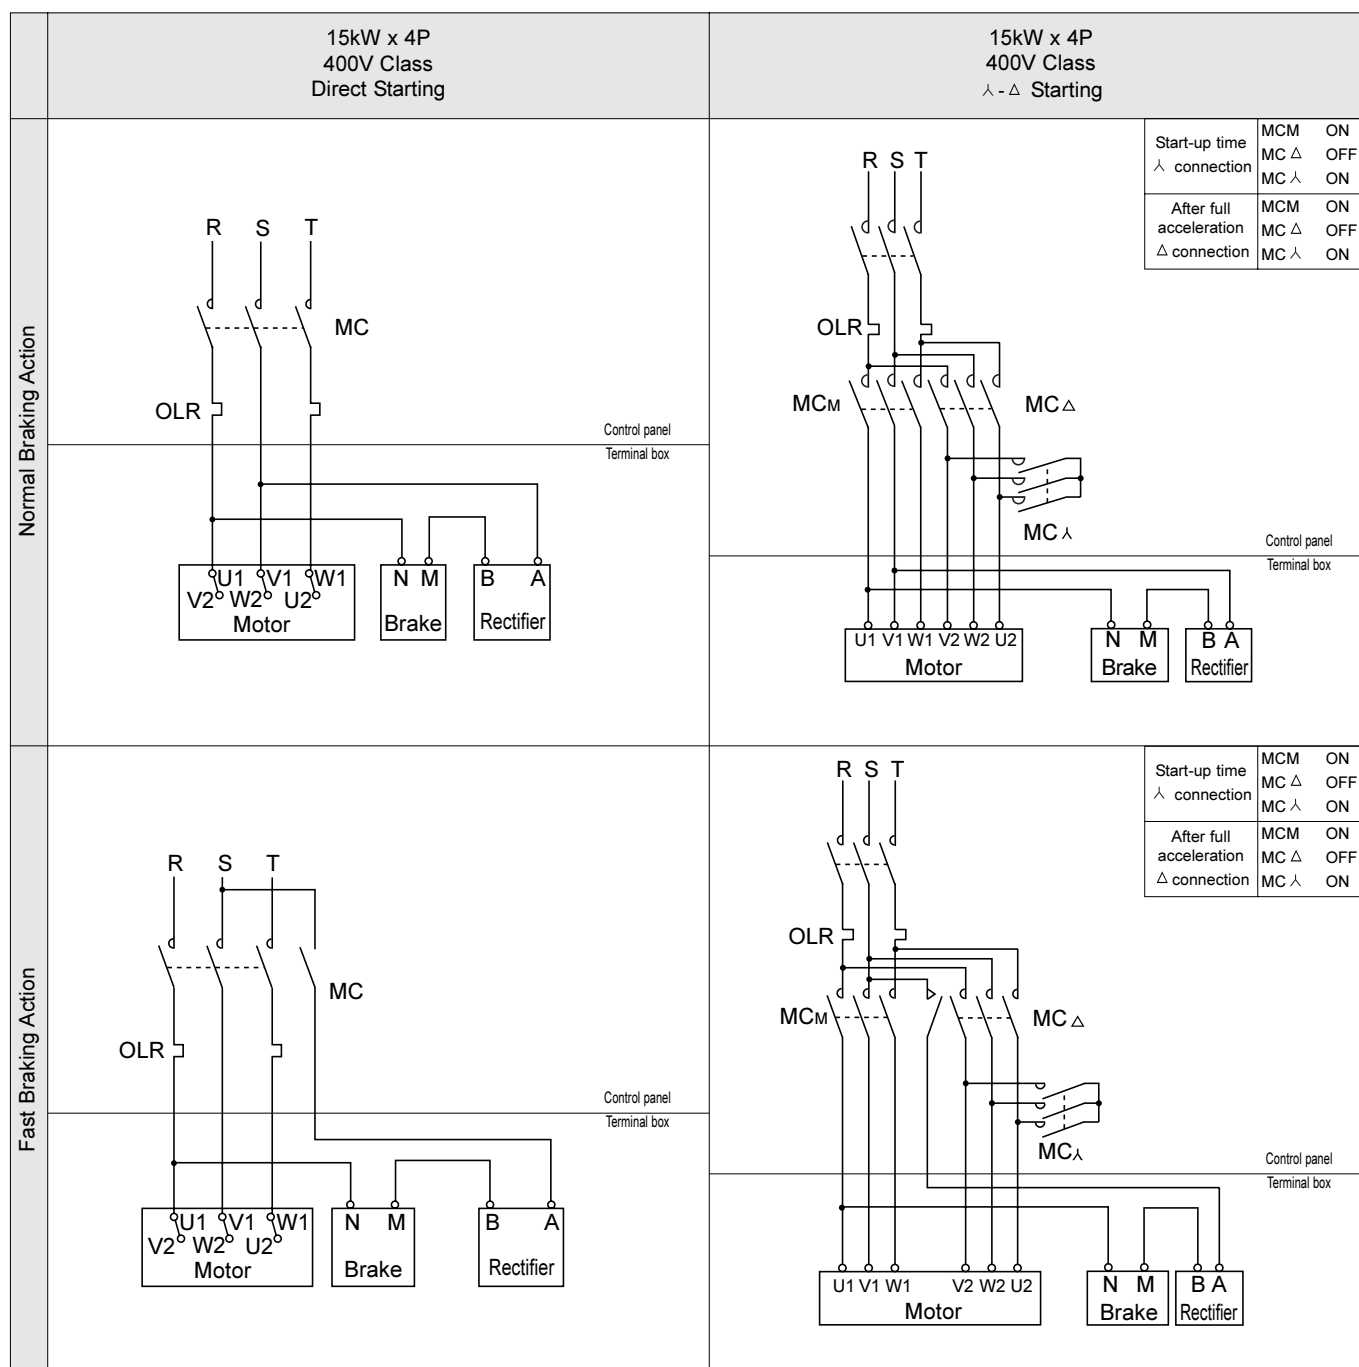

TECHNICAL DATA
Motor

Example of Connection


h. 3-Phase Motor with CMB Brake for Operating in Both Directions

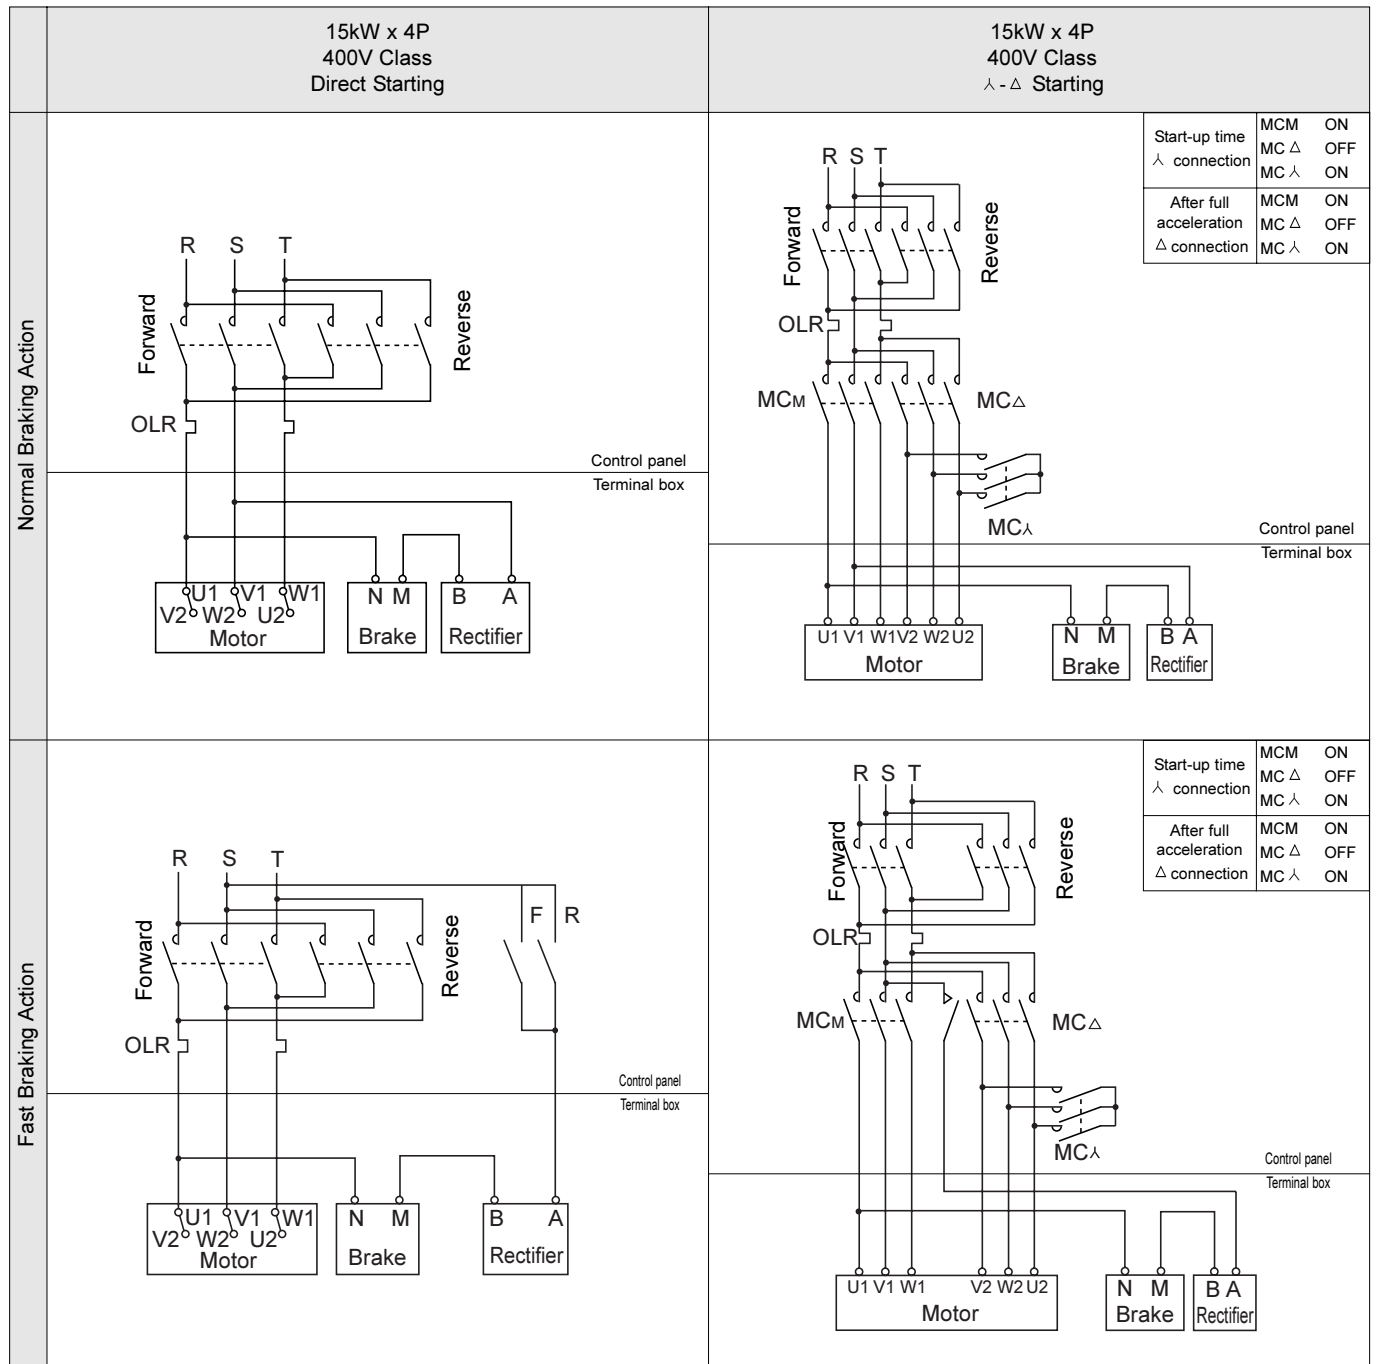

TECHNICAL DATA
Motor

Example of Connection

i. 3-Phase Motor with CMB Brake for One Way Rotation

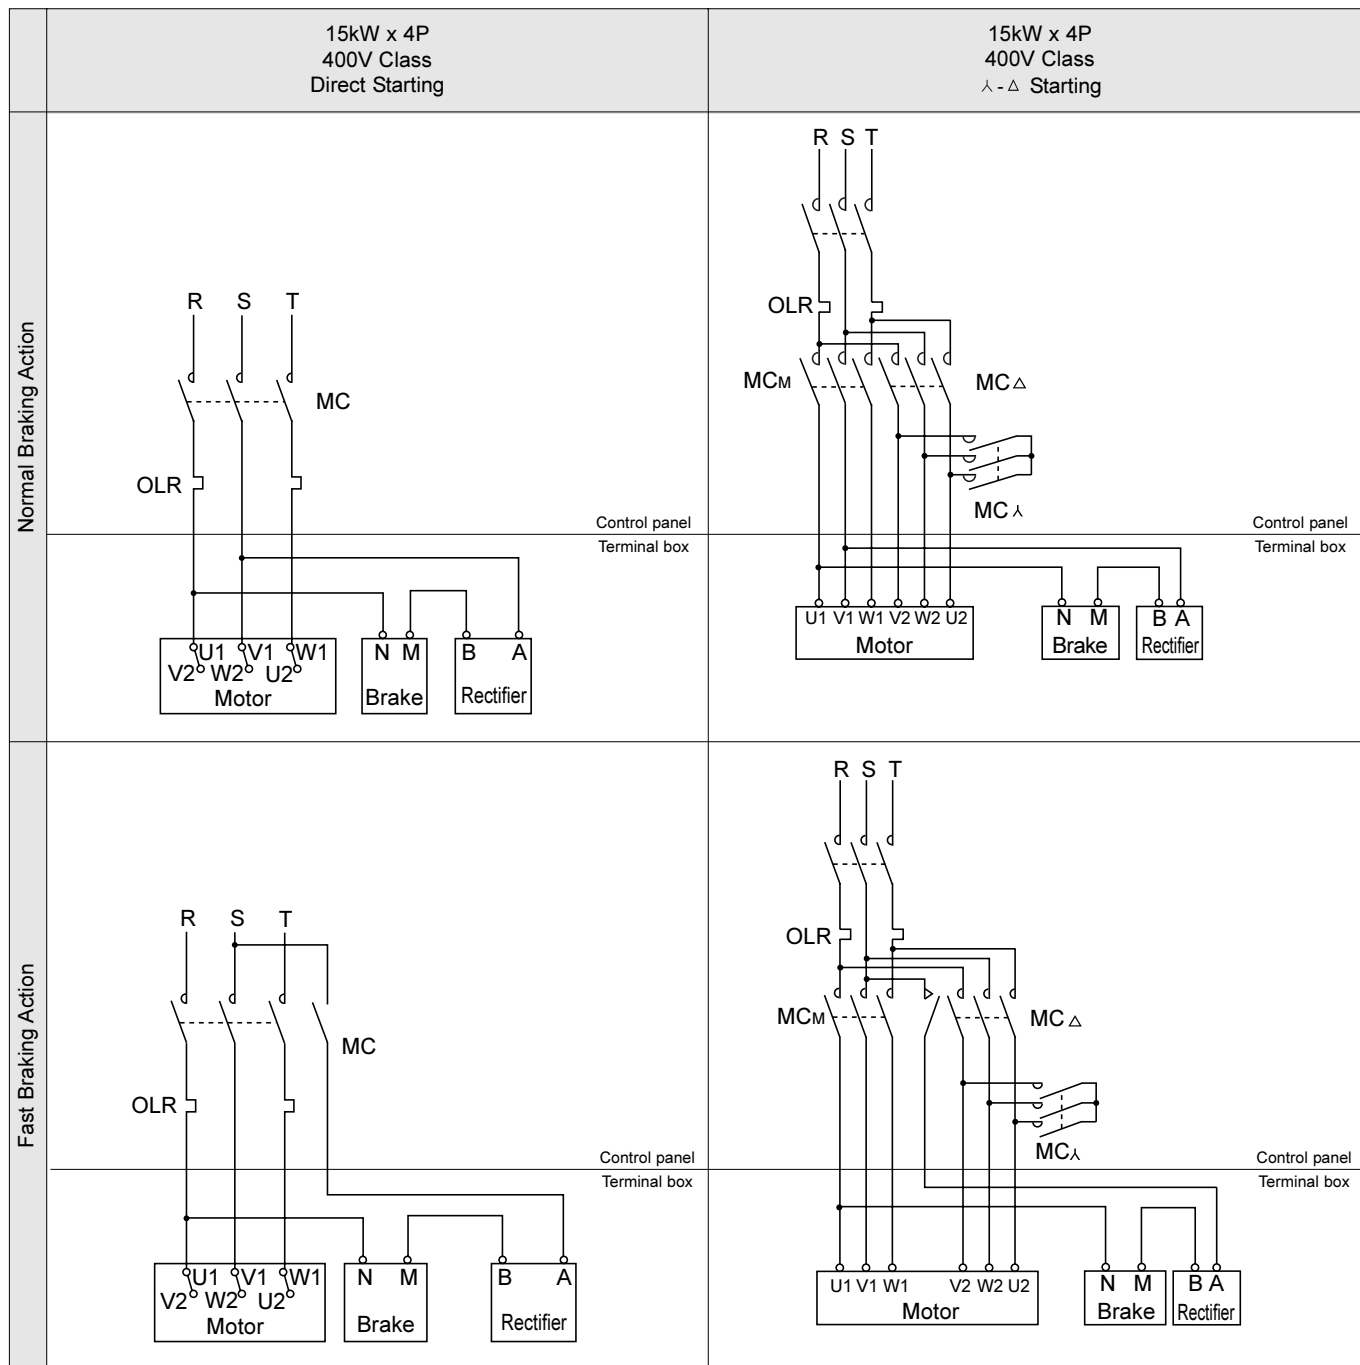


TECHNICAL DATA

Motor

Example of Connection

j. 3-Phase Motor with CMB Brake for Operating in Both Directions

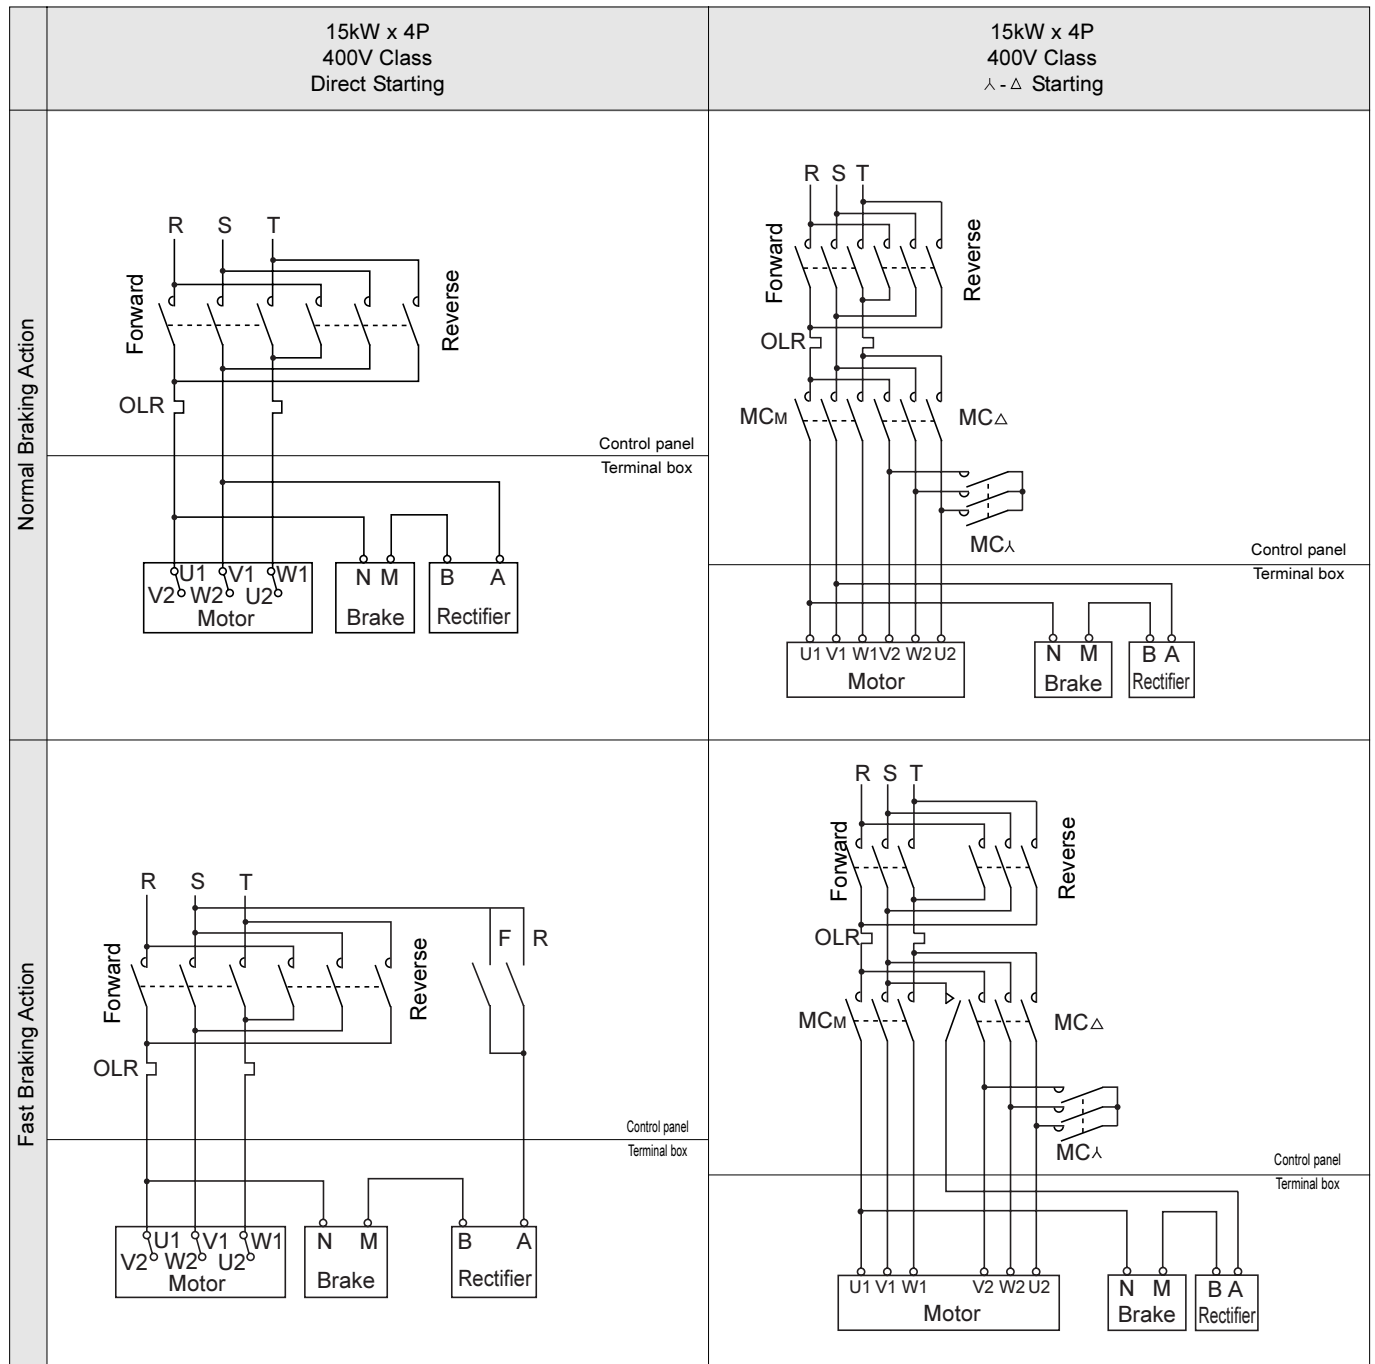

Protection and Cooling

No.1 Symbol : type of protection of humans and solid foreign substances } Classified according to combination (IEC34-1)
 No.2 Symbol : type of protection against water permeation

Protection Method of Motors

No.1 Symbol No.1 type	No.2 Symbol No.2 type	0 Non-protected type	2 Drip-proof type	3 Spray-proof type	4 Splash-proof type	5 Water-jet-proof type	6 Sea-wave-proof type	7 Immersion-proof type	8 Submersible type
0 (Non-protected type)		IP00			×	×	×	×	
1 (Semi-protected type)		IP10	IP12S			×	×	×	
2 (Protected type)		IP20	IP22S	IP23S	IP24	×	×	×	
4 (Totally enclosed type)		×			IP44	IP45			
5 (Dust-proof type)		×			IP54	IP55	IP56		


Notes: 1. × denotes difficulty in forming the combination.
 2. Outlined columns denote the manufacturing range of Sumitomo standard.
 3. Please consult us if operating conditions include splashed water, or rain.

Class of No.1 Symbol

Type	Symbol	Description
Non-protected	0	Constructed without special protection against human contact and penetration of solid foreign substances.
Semi-protected	1	Constructed to prevent inadvertent contact with rotating and conductive parts inside the machine, by hand or other critical parts of human body. Constructed to prevent penetration of solid foreign substances over 50 mm in diameter.
Protected	2	Constructed to prevent contact with rotating and conductive parts inside the machine, by hand or other critical parts of the human body. Constructed to prevent penetration by solid substances over 12mm in diameter.
Totally enclosed	3	Constructed to prevent contact with the rotating and conductive parts inside the machine, by tools, electric wires, etc., with minimum width and thickness over 1mm. Constructed to prevent penetration of solid foreign substances over 1mm diameter. However, water drainage outlet and exhaust outlet may be of Symbol 2 construction.
Dust-proof type	4	Constructed to prevent contact with rotating and conductive parts inside the machine by any foreign object. Constructed for maximum protection against dust particles penetration, but such penetration will not interfere with normal operation.

Class of No.2 Symbol

Type	Symbol	Description
Non-protected	0	Constructed without special protection against water permeation.
Drip-proof	2	Constructed to prevent harmful effect from dripping water falling from within 15° direction from vertical.
Spray-proof	3	Constructed to prevent harmful effect from dripping water falling from within 60° direction from vertical.
Splash-proof	4	Constructed to prevent harmful effect from dripping water falling from any direction.
Water-jet-proof	5	Constructed to prevent harmful effect from spray from any direction.
Sea-wave-proof	6	Constructed to prevent harmful effect from strong spray from any direction.
Immersion-proof	7	Constructed for submersion into water of prescribed depth and time, but not having any harmful effect in spite of water permeation.
Submersible	8	Constructed to assure normal operations under water.

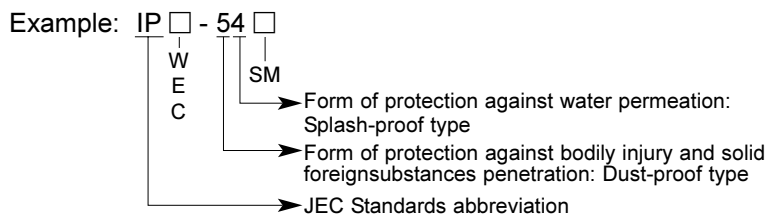

- S: Test of form of protection against water permeation conducted when motor is stopped.
- M: Test of form of protection against water permeation, conducted while motor is operating.
- When no S or M stipulated:
 Test conducted when motor stopped and when operating
- W: Outdoor type (Only Non - protected)
- E: Explosion-proof type
- C: Form of protection against other harmful atmosphere.

Cooling

Enclosure Construction	IEC Standards
Totally enclosed, non-ventilated (TENV)	IC410
Totally enclosed, fan-cooled (TEFC)	IC411
Totally enclosed, Air over (TEAO)	IC416

International Standards and Compliance of Sumitomo Products

UL Standards (Underwriters Laboratories)

UL Standards are established by Underwriters Laboratories Inc. (UL), an independent, not-for-profit product-safety testing and certification organization in the USA. It conducts series of scientific study, research, and testing to prevent harmful effect to human life, fire, and disaster. Although there is no regulation by the Federal Government for manufacturers' compliance, some state and cities mandate them. Using Sumitomo product with UL Standard Certification will represent your reliability, which is highly appreciated in the USA.

Motor	Non-explosion proof single-phase induction motor *1	Non-explosion proof 3-phase induction motor	3-phase induction motor with brake
Power	1/8~1HP × 4P	1/8~60HP × P	1/8~8HP × 4P
Voltage	115V, 230V	208V, 230V, 460V, 575V	
Frequency	60Hz	60Hz	
Thermal class	Class A	*3 Class A (Class B, Class F)	Class F
Ambient conditions	Indoor type *2		


*1 Contact us for manufacturing single-phase motor or motor with brake.

*2 Outdoor types are unavailable.

*3 Contact us for manufacturing insulation Type B and F.

Differences from Sumitomo standard models

- Terminal symbol: 1, 2, 3
- Name plate with UL mark and measurement expressed by units HP
- Opposite rotating direction from the Japanese domestic products
- Copper terminal box
- UL standard motor coil and brake coil

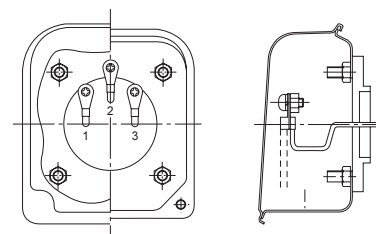

3-Phase indoor terminal box



SM-CYCLO® 3 PHASE INDUCTION MOTOR		UL
HP	P	TYPE
VOLTS		FRAME
Hz		INS. CLASS
AMP		TIME RATING
RPM		SERVICE FACTOR
CODE		MAX AMB °C
SER. NO.		
SUMITOMO MACHINERY CORP. OF AMERICA CHESAPEAKE, VIRGINIA		

UL Nameplate

Remarks

- Motors must be manufactured, modified, and repaired at certified factories.
- Certified motor for inverter (AF Motor) may be manufactured for range 1/8~11HP.

CSA Standards (Canadian Standards Association)

CSA Standards are established by the semiprivate Canadian Standards Association, a not-for-profit membership-based association. Most of the Canadian states requires this CSA certification for its domestically sold electric related products. Some American states evaluate CSA Standards comparable to UL Standards.


Motor	1-phase induction motor *1	3-phase induction motor	3-phase induction motor with brake	High efficiency 3-phase induction motor *1	High efficiency 3-phase induction motor with brake *1
Power	1/8~1HP × 4P	1/8~60HP × 4P	1/8~30HP × 4P	1.5~50HP × 4P	1.5~30HP × 4P
Voltage	115V, 230V	208V, 230V, 460V, 575V		230V, 460V, 575V	
Frequency	60Hz				
Thermal class	Class B (and Class F)				
Ambient conditions	Indoor type *2				

*1 Contact us for manufacturing of single-phase or high-efficiency motor with brake.

*2 Outdoor types are not available.

Differences from Sumitomo standard models

- Terminal symbol: 1, 2, 3 (with Brake type, T1, T2, T3)
- The frame size of a high-efficiency motors are different from standard types.
- Name plate with CSA mark and measurement in HP
- Opposite rotating direction
- Copper terminal box
- CSA standard motor coil



3-Phase indoor terminal box



SM-CYCLO™ 3 PHASE INDUCTION MOTOR		CSA
HP	P	TYPE
VOLTS		FRAME
Hz		M / B INS. CLASS /
M.AMP		TIME RATING
RPM		SERVICE FACTOR
B.AMP		MAX AMB °C
B.TORQUE	FT-LB	ENCLOSURE TE
MANUF. No.		
SM CYCLO OF CANADA, LTD TORONTO, MONTREAL, VANCOUVER		

CSA Nameplate

Remarks

- CSA certified motor is necessary for export to Canada. In addition, high-efficiency motor is necessary for 1 HP and above.
 - Motors must be manufactured, modified, and repaired at certified factories.
 - Because CSA does not certify motors for inverters, our AF Motors is not CSA certified and does not come with the CSA
 - Mark although it complies with the CSA standard.
- NRCan established the energy efficiency act (EEACT) in 1992 and the energy efficiency regulations (EER) in 1995. Additional regulations were applied to gearmotors imported on November 27, 1999 and later. Gearmotor import which do not meet the efficiency standards are now banned under this law. (Subject capacity: 1~200HP, Subject frame: IEC frame size 90 and above, Subject voltage: 600V and below, constant speed motor)


International Standards and Compliance of Sumitomo Products

NEMA Standards (National Electrical Manufacturers Association)

NEMA Standards include numerous standards for electric products established by the National Electrical Manufacturers Association (NEMA) to eliminate misunderstandings between manufacturer and purchaser.

Differences from Sumitomo standard models


- Terminal symbol: 1, 2, 3
- Name plate marked with NEMA DESIGN and measurement in HP
- Opposite rotating direction from the Japanese domestic products
- Copper terminal box
- NEMA standard motor coil

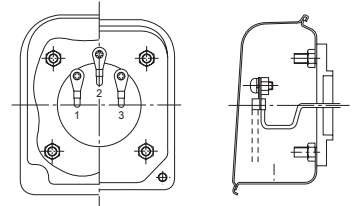

3-Phase indoor terminal box

Remarks

- No approval is required to state NEMA compliance
- NEMA is also applicable for inverter motor (AF motor), but limited to terminal symbols, measurement in HP, rotating direction and terminal box.



NEMA Nameplate

Other Standards

○: Sumitomo standards
△: Manufactured specially on customer's request

Application of International Standards (Example)

Country/Standards	Japan · JIS JEM JEC	International-IEC	UK · BS
Standard output	○	○	△ : 4kW and below ○ : 5.5kW and above
Applicable output frame size	○	-	△
Motor mounting dimension of each frame size	○ Note	○ Note	○ Note
Shaft end dimension	○ Note	○ Note	△ Note
Dimension tolerance of shaft end key and keyway	○ Note	○ Note	△ Note
Thermal class	○	○	○
Lead wire code	○	○	○
Standard rotation direction	○	△	△
Description on nameplate	○	△	△
Characteristic testing method	○	○	△
Standard voltage	200V·220V 400V·440V	△	415V
Standard frequency	50Hz, 60Hz	50Hz, 60Hz	50Hz

IEC- International Electrotechnical Commission.
BS- British Standards.

Note: CYCLO flange dimension is the standard. Consult us for flange dimension for your required compliance standards.

Major Japanese Standards

- | | |
|--|---|
| <p>(1) General rotating electrical machines
JIS C 4004 (1992): General rules for rotating electrical machines
JEC-200 (1993): Rotating machinery in general
JEM 1188 (1969): Rated output values of electric motors</p> <p>(2) General 3-phase induction motors
JIS C 4210 (1983): Low-voltage 3-phase squirrel cage induction motors for general purpose
JIS C4212 (2000): High efficiency low-voltage 3-phase squirrel cage induction motors.
JEC-37 (1979): Induction machines</p> <p>(3) Methods of testing and calculating characteristics
JEC-37 (1979): Induction machines
JIS C 4207 (1995): Calculating method of 3-phase induction motors characteristics</p> <p>(4) Dimensions
JEM 1400 (1991): Dimension of low-voltage 3-phase squirrel cage induction motors for general purpose
JEM 1401 (1991): Dimensions of flange-mounted low-voltage 3-phase squirrel cage induction motors for general purposes</p> <p>(5) Explosion-proof construction
JIS C 0903 (1983): Electrical apparatus for explosive atmospheres in general industries</p> | <p>JIS C 0904 (1983): Test methods on electrical apparatus for explosive gas atmospheres in general industries
JIS C 0905 (1983): Supplementary requirements for construction of electrical apparatus for explosive atmosphere in general industries</p> <p>Recommended practices for explosion-protected electrical installations in general industries (1979)
Rules for authorization of explosion-proof construction of electrical machine tools (1981)</p> <p>(6) Others
JIS C 4003 (1977): Classification of materials for insulation of electrical machinery and apparatus
JEC-147 (1960): Classification of materials for insulation of electrical machinery and apparatus
JEM 1313 (1983): Noise levels for low-voltage 3-phase squirrel-cage induction motors for general purpose</p> <p>Abbreviations: JEC Japanese Electrotechnical Committee Standards
JIS Japanese Industrial Standard
JEM Japan Electrical Manufacturers' Association</p> |
|--|---|

TECHNICAL DATA

Motor

EC Directives and CE Marking

EC Directives are established to for free distribution of products across the borders within the European Union (EU). CE Mark applied on the product indicates their compliance to EC Directives..

Relevant EC Directives and Implementation Timing

The following three directives apply to ordinary machine products.

Details	Subjects	Directive details
EC directives		
Machinery Directive	Aggregates of parts, which are movable (Industrial machines, primarily)	Essential matters related to safety of machines are stipulated. Machines that are electrically dangerous shall fulfill the requirements for low voltage.
Low Voltage Directive	Products driven by power of 50-1,000 VAC or 75-15,000 VDC	Products not conforming to standards cannot be put on the market.
Electromagnetic Compatibility Directive	All types of products that may cause jamming (electromagnetic radiation) or have their functions impeded by nearby radio waves	EMI: Not to cause external electromagnetic interference EMS: To withstand external electromagnetic interference

Transition and Time Limits of CE Marking Implementation for Major Directives

EC Directive	Year	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003		
Machinery Directive 89/392/EEC Original 91/368/EEC Revision I 93/44/EEC Revision II					1/1		1/1										
				Transition		Enforcement											
EMC Directives 89/336/EEC Original 92/31/EEC Revision I				1/1			1/1										
				Transition			Enforcement										
Low Voltage Directive 73/23/EEC Original 93/68/EEC Revision I							1/1		1/1								
							Transition		Enforcement								

TECHNICAL DATA
Motor

Conformity to EC Directive and CE Mark of Our Products

Our induction motor conforms to the Machinery Directive (issued January 1995) and Low Voltage Directive (issued January 1996) of the EC Directives.

EMC Directive (issued January 1996) does not contain statements for induction motors.


CE marking logo shown on nameplates



EC Directives and CE Marking

Standard Specifications of CE Marking Motors

Input power:	0.1kW~4kW : 230/400V 50Hz Dual voltage direct starting 5.5kW or more : 400V 50Hz Δ - Δ Start
Thermal class:	0.1kW~0.4kW : Class E 0.75kW or more : Class B
Rated time:	Continuous
Characteristics:	IEC34-1
Protection:	IP54 (without brake), IP44 (with brake)
Terminal box:	(Material) 5.5kw or less: Aluminum (M25 bolts (P1.5) \times 2pcs) 7.5kw or more: Cast iron (M32 bolts (P1.5) \times 2pcs) (Specification) Terminal plate (six terminals European style) With grounding terminal Conduit tube of M thread
Shaft rotating direction:	Rotating direction is reverse to Japanese standard direction.
Insulation:	Distances between insulated surfaces and spaces conforms to IEC Standards.
External dimensions:	Same as standard except for the terminal box
TÜV Test Report:	Representative model 0.75kW \times 4p, 230V/400V is TÜV certified (Oct 1996) Our CE marking motors are manufactured conforming to TÜV.
Declaration of Conformity:	"Declaration of Conformity" document is necessary for CE marking is available.

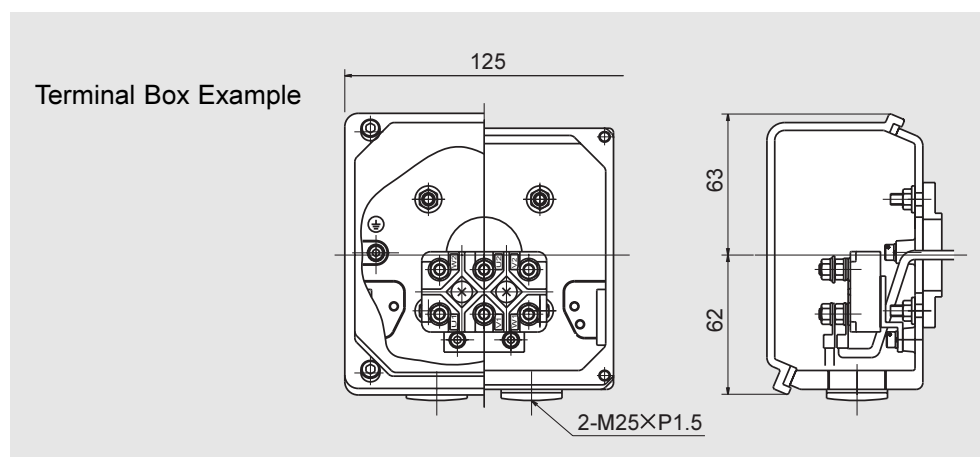

TECHNICAL
DATA

Motor

Manufacturing range of CE Marking Motors

3-phase induction motor

Input power symbol	230/400V dual voltage														400V			
	01	012	018	02	03	04	05	08	1	1H	2	3	4	5	6	8	10	15
KW \times 4P	(0.1)	0.12	0.18	(0.2)	0.25	0.37	(0.4)	0.55	0.75	1.1	1.5	2.2	3	(3.7)	4	5.5	7.5	11
Frame size	F63S		F63M			F71M		F80S	F80M	F90S	F90L	F100L	F112S	F112M		F132S	F132M	F160M

- kW without brackets in the above table indicate standard capacity for Europe. kW within the brackets indicate capacity in Japan and some other countries.
- Standard European kW motors are recommended. Motors of kW within brackets are also available.
3-phase 200V/50Hz, 200V/60Hz, 220V/60Hz
3-phase 400V/50Hz, 400V/60Hz, 440V/60Hz
3-phase 380V/50Hz, 415V/50Hz
Contact us for motors with kW and voltage not shown in the above table.
- Consult us for M bolt (Metric bolt) for conduit tube.

F TECHNICAL DATA

3. Common

TECHNICAL
DATA

Motor

Paint and Rustproof Coating

1. Coating Specifications

Treatment	Kind of painting			Painting specifications			Applied paint		Weather resistance	Submersible	Oil-proof	Acid resistance	Alkal resistance	Heat resistance (°C)	Application
	Classification	Paint of finish coat	Additional leadtime (days)	Type	Layers (µm)	Quality	Brand								
Cast Iron: Near White blast cleaning	Standard	-	0	Under coating	1	Modified alkyd resin	UNIGRAOUND PTC PRIMER							100	Standard under coat
		Acrylic modified phthalic	0	Finish coating	1 (15~30)	Acrylic modified alkyd resin	NEORON #2000		○	×	△	△	△	100	Standard under coat
	Standard export painting	Acrylic modified phthalic	2	Under coating	2 (30~60)	Modified alkyd resin	UNIGRAOUND PTC PRIMER		○	×	△	△	×	100	Models for export
				Finish coating	1 (15~30)	Acrylic modified alkyd resin	NEORON #2000								
	Special painting (including rust-proof and heat resisting painting) one layer of Uniground PTC Primer as the first primer	Modified epoxy	3	Under coating	1 (20~40)	Vinyl modified alkyd resin	NEO-GOSE #500 Red lead primer		○	△	○	△	△	100	Moderate corrosive atmosphere, sea side, outdoor humid atmosphere, chemical plant area, etc.
				Finish coating	2 (30~60)	Acrylic modified alkyd resin	Acron #300								
		Long oil phthalic (synthetic resin type)	7	Under coating	2 (40~70)	Lead rust preventive paint	SD MARINE PRIMER (rust)		○	×	×	△	×	100	Ocean-going vessel & boat, bridge, sea side, outdoor humid atmosphere, etc.
				Finish coating	2 (30~60)	Synthetics resin paint	PENFORTE #600								
		Chloride rubber	10	Under coating	2 (40~70)	Lead rust preventive paint	SD MARINE PRIMER (rust)		○	△	△	○	○	80	Ocean-going vessel & boat, bridge, sea side, outdoor humid atmosphere, etc.
				Second coating	2 (30~60)	Phenol M.I.O paint	SHINTO MIO								
	Finish coating			2 (40~70)	Chloride rubber paint	RUBBER #100									
	Phenol	7	Under coating	2 (40~70)	Lead rust preventive paint	SD MARINE PRIMER (rust)		○	×	△	○	△	100	In-and-out door of acid treating plant or chemical plant, etc.	
			Finish coating	2 (30~60)	Phenol resin enamel	NEW AKNON									
	Heat-proof silver	7	Under coating	1 (20~40)	Lead rust preventive paint	SD MARINE PRIMER (rust)		○	×	×	×	×	120	Heating furnace (120°C), etc.	
			Finish coating	1 (15~30)	Aluminum paint	SILVER TOP (heat resisting)									
	Extra rust-proof painting	Epoxy	10	Under coating	1 (50~60)	Special permeability epoxy aluminum paint	CARBOMASTIC #15		◎	○	○	○	○	150	Chemical contact area, chemical plant, anticorrosion plant, etc.
				Finish coating	3 (30~90)	Polyamide epoxy	NEO-GOSE #200								
		Epoxy	10	Under coating	1 (50~60)	Special permeability epoxy aluminum paint	CARBOMASTIC #15		◎	○	○	○	○	150	Nuclear power plant, etc.
Finish coating				3 (30~90)	Polyamide epoxy	NEO-GOSE #2300CW									
Polyurethane		10	Under coating	1 (50~60)	Special permeability epoxy aluminum paint	CARBOMASTIC #15		◎	○	○	○	○	150	Nuclear power plant, etc.	
			Finish coating	3 (45~90)	Polyisocyanate urethane resin paint	NY POLIN K finish coat									
Extra rustpreventive painting (sand blast undercoating)	Thick film epoxy	12		5 (250~350)	Thick film type modified epoxy resin paint	NEO-GOSE #2300 NTHB		◎	◎	○	○	○	100	Submersible equipment, marine structure, etc.	

TECHNICAL DATA
Common

- Note:
- "Additional leadtime" refers to the number of days required for special coating in addition to standard painting.
 - Standard coating is 6.5PB 3.6/8.2. Coating specification may differ for special coating color.
 - Paint specified above is subject to replacement by comparable product.
 - "**" indicates coating which may fade with sunlight.
 - Consult us when ambient temperature exceeds heat resistance temperature indicated above.
(Heat resistance temperature above is only for the paint, not for the CYCLO® DRIVE.)
 - Consult us when ambient temperature fluctuates between low and room temperature in short time period.
 - Thick film epoxy coating has limited color selections. Consult us for coating other than N1.0 or 10GY6/2.
(Our standard coating 6.5PB3.6/8.2 may not be applied.)

◎○○△: Appropriate
△: Caution necessary for selection
×: Inappropriate

Paint and Rustproof Coating

2. Surface Conditioning

Treatment	Surface condition after treatment	Methods	Standards	
			SSPC	SIS
Class 1 Near white blast cleaning	Surface completely free of mill scales, rust, corrosives, dirt, and other foreign substances. Embedded residues (mill scales, rust, slight smears, or discoloration of oxide substances) are acceptable. However, minimum 95% of the surface area should be visibly clean of any residues. Remaining surface may contain slight discolorations, such as stains.	<input type="radio"/> Near White <input type="radio"/> Blast cleaning <input type="radio"/> Shot blast <input type="radio"/> Sand blast, etc.	SP-10	Sa-2 1/2
Class 2 Power tool cleaning	Surface free of loose mill scales, rust, corrosives, dirt, and other foreign substances. Embedded residues (mill scales, rust, slight smears or discoloration of oxide substances) are acceptable. However, minimum 2/3 of the surface area should be visibly clean of any residues. Remaining surface may contain slight discolorations, such as stains, and residual rust, and coating peelings in pores, for surface with porous corrosion.	<input type="radio"/> Commercial Blast cleaning <input type="radio"/> Power Tool Cleaning <input type="radio"/> Disk sander <input type="radio"/> Wire wheel <input type="radio"/> Grinder, etc.	SP-6 (SP-3)	Sa-2 (St-3)
Class 3 Hand tool cleaning	Surface free of loose scales, rust, coating, oil & grease, dirt, and other foreign substances, with slight metallic luster. The surface should be cleaned with wire brush, scraper, etc.	<input type="radio"/> Hard Tool Cleaning <input type="radio"/> Wire brush <input type="radio"/> Scraper, etc.	SP-2	St-2

(U.S.A. Steel Structural Painting Councils) (SWEEDEN, SVENSK Standard, S.I.S. 055900)

Rustproof Treatment Standards

Our complete products are shipped with following rust proofing treatment.

1. Standard Rustproof Specification

(1) External Rustproof

Our assembled products are shipped with rust proofing oil applied. Check rustproof condition six months after shipment. Reapply rustproof treatment if necessary.

(2) Internal Rustproof


Lubrication	Grease lubricated models	Oil lubrication models
Rustproof period	1 year	6 months
Storage condition	Storage inside general shop or warehouse, with relatively low humidity, dust, extreme temperature fluctuation, corrosive gas, or such.	

2. Rustproof Specification for Export

Consult us for when the item is exported or if more treatment is necessary than standard rustproof treatment. Export rustproof treatment is available.1.

Drive System Formulas (Reference Materials)

1. Speed N (r/min) and Velocity (m/s)




$$V = \pi \cdot D \cdot \frac{N}{60} \text{ (m/s)}$$

π : Circular constant (≈ 3.14)

D: Wheel diameter

2. Torque T (N·m, kgf·m)



[SI Units]
 $T = F \cdot R \text{ (N·m)}$

F: Load (N)
 R: Wheel radius (m)

[Gravitational Units]
 $T = F \cdot R \text{ (kgf·m)}$

F: Load (kgf)
 R: Wheel radius (m)

3. Power P (kW)



[SI Units]

$$P = \frac{F \cdot V}{1000}$$


F: Load (N)
 V: Velocity (m/s)

[Gravitational Units]

$$T = \frac{F \cdot V}{102}$$

F: Load (kgf)
 V: Velocity (m/s)

4. Power P (kW), Torque T (N·m, kgf·m), Speed N (r/min)



[SI Units]

$$P = \frac{N \cdot T}{9550} \text{ (kW)}$$

$$T = \frac{9550 \cdot P}{N} \text{ (N·m)}$$

$$P = \frac{F \cdot V}{1000} \text{ (kW)}$$

$$V = \pi \cdot 2 \cdot R \cdot \frac{N}{60} \text{ (m/s)}$$

F: Load (N)

$$\therefore P = \frac{F \cdot \pi \cdot 2 \cdot R \cdot \frac{N}{60}}{1000} = \frac{2 \cdot \pi}{1000 \cdot 60} \cdot N \cdot F \cdot R \text{ (kW)}$$

$T = F \cdot R$

$$\therefore P = \frac{2 \cdot \pi}{1000 \cdot 60} \cdot N \cdot T = \frac{N \cdot T}{9550} \text{ (kW)}$$

[Gravitational Units]

$$P = \frac{N \cdot T}{975} \text{ (kW)}$$

$$T = \frac{975 \cdot P}{N} \text{ (kgf·m)}$$

$$P = \frac{F \cdot V}{102} \text{ (kW)}$$

$$V = \pi \cdot 2 \cdot R \cdot \frac{N}{60} \text{ (m/s)}$$

F: Load (kgf)


$$\therefore P = \frac{F \cdot \pi \cdot 2 \cdot R \cdot \frac{N}{60}}{102} = \frac{2 \cdot \pi}{102 \cdot 60} \cdot N \cdot F \cdot R \text{ (kW)}$$

$T = F \cdot R$

$$\therefore P = \frac{2 \cdot \pi}{102 \cdot 60} \cdot N \cdot T = \frac{N \cdot T}{975} \text{ (kW)}$$

Drive System Formulas Reference Materials

5. Acceleration Force F_A (N, kgf)



[SI Units]

$$F_A = m \cdot \alpha = m \cdot \frac{V_2 - V_1 \text{ (N)}}{t_A}$$

$$\alpha = \frac{V_2 - V_1}{t_A}$$

m: Mass (kg)

 α : Acceleration (m/s²) t_A : Acceleration Time (s)

[Gravitational Units]


$$F_A = m \cdot \alpha = \frac{W}{g} \cdot \frac{V_2 - V_1 \text{ (N)}}{t_A}$$

$$\alpha = \frac{V_2 - V_1}{t_A}$$

W: Weight (kgf)

g: Acceleration of gravity ≈ 9.8 (m/s²)m: Mass (kgf·s²/m) α : Acceleration (m/s²) t_A : Acceleration Time (s)

6. Acceleration Torque T_A (N·m, kgf·m)

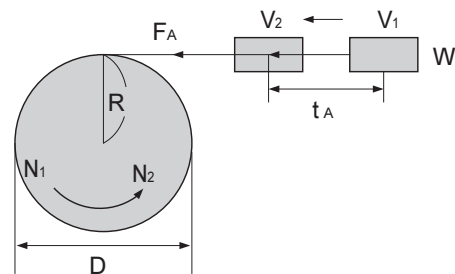

[SI Units]

$$T_A = F_A \cdot R \quad F_A = m \cdot \frac{V_2 - V_1}{t_A}$$

$$V_2 = \pi \cdot D \cdot \frac{N_2}{60} \quad V_1 = \pi \cdot D \cdot \frac{N_1}{60}$$

$$D = 2 \cdot R$$

$$\therefore T_A = m \cdot \frac{\pi \cdot 2 \cdot R}{60} \cdot (N_2 - N_1) \cdot R$$

$$= \frac{2 \cdot \pi \cdot m \cdot R}{60} \cdot \frac{N_2 - N_1}{t_A} \cdot R$$

$$= \frac{m \cdot R^2}{9.55} \cdot \frac{N_2 - N_1}{t_A} \text{ (N·m)}$$

 $m \cdot R^2 = J$ (moment of inertia (kgm²))

$$\therefore T_A = \frac{J}{9.55} \cdot \frac{N_2 - N_1}{t_A} \text{ (N·m)}$$

[Gravitational Units]

$$T_A = F_A \cdot R$$

$$F_A = \frac{W}{g} \cdot \frac{V_2 - V_1}{t_A}$$

$$V_2 = \pi \cdot D \cdot \frac{N_2}{60}$$

$$V_1 = \pi \cdot D \cdot \frac{N_1}{60} \cdot R = \frac{D}{2}$$

$$\therefore T_A = \frac{W}{g} \cdot \frac{\pi \cdot D}{60} \cdot (N_2 - N_1) \cdot \frac{D}{2}$$

$$= \frac{\pi \cdot W \cdot D}{60 \cdot g} \cdot \frac{N_2 - N_1}{t_A} \cdot \frac{D}{2}$$

$$= \frac{W \cdot D^2}{375} \cdot \frac{N_2 - N_1}{t_A} \text{ (kgf·m)}$$

 $W \cdot D^2 = GD^2$ (Flywheel effect (kgm²))

$$\therefore T_A = \frac{GD^2}{375} \cdot \frac{N_2 - N_1}{t_A} \text{ (kgf·m)}$$

7. Synchronized Speed of AC Motor N_0 (r/min)

$$N_0 = \frac{120 \cdot f}{P} \text{ (r/min)}$$

f: Power supply frequency (Hz)

P: Number of motor poles

8. Rated Speed of AC Motor N (r/min)

$$N = N_0 (1 - s) \text{ (r/min)}$$

 N_0 : Synchronized speed (r/min)

s: Slippage

Warranty Standard

Warranty Standard

Warranty period	Warranty for the CYCLOR DRIVE shall be 24 months from the shipment date, limited to new units.
Warranty Condition	<p>In the event that any problem or damage to the Product arises during the "Warranty Period" from defects in the Product whenever the Product is properly installed and combined with the Buyer's equipment or machines, maintained as specified in the maintenance manual, and properly operated under the conditions described in the catalog or as otherwise agree upon in writing between the Seller and the Buyer or its customers; the Seller will provide, at its sole discretion, appropriate repair or replacement of the Product without charge at a designated facility, except as stipulated in the "Warranty Exclusions" as described below.</p> <p>However, if the Product is installed or integrated into the Buyer's equipment or machines, the Seller shall not reimburse the cost of: removal or re-installation of the Product or other incidental costs related thereto, any lost opportunity, any profit loss or other incidental or consequential losses or damages incurred by the Buyer or its customers.</p>
Warranty Exclusions	<p>Notwithstanding the above warranty, the warranty as set forth herein shall not apply to any problem or damage to the Product that is caused by:</p> <ol style="list-style-type: none"> 1. installation, connection, combination or integration of the Product in or to the other equipment or machine that is rendered by any person or entity other than the Seller; 2. insufficient maintenance or improper operation by the Buyer or its customers, such that the Product is not maintained in accordance with the maintenance manual provided or designated by the Seller; 3. improper use or operation of the Product by the Buyer or its customers that is not informed to the Seller, including, without limitation, the Buyer's or its customers, operation of the Product not in conformity with the specifications, or use of lubricating oil in the Product that is not recommended by the Seller; 4. any problem or damage on any equipment or machine to which the Product is installed, connected or combined or on any specifications particular to the Buyer or its customers; 5. any changes, modifications, improvements or alterations to the Product or those functions that are rendered on the Product by any person or entity other than the Seller; 6. any parts in the Product that are supplied or designated by the Buyer or its customers; 7. earthquake, fire, flood, sea-breeze, gas, thunder, acts of God or any other reasons beyond the control of the Seller; 8. normal wear and tear, or deterioration of the Product's parts, such as bearings, oil-seals; 9. any other troubles, problems or damage to the Product that are not attributable to the Seller.